









Route 66 Transportation Study Portland and East Hampton, CT

Existing Conditions Technical Memorandum (DRAFT)

Prepared For:

RiverCOG and the Towns of Portland & East Hampton

August 2018

Executive Summary

1	Introduction	
	1.1 Study Area	1-2
	1.2 Study Team	1-3
	1.3 Study Process	1-4
	1.4 Public Involvement and Outreach	1-5
	1.4.1 Project Committees	1-5
	1.4.2 Public Information Meetings	1- <i>6</i>
	1.4.3 Project Website and Social Media Presence	1- <i>6</i>
	1.5 Route 66 Corridor Improvement Plan (1998 Study)	1-7
2 -	Traffic and Transportation	
	2.1 Roadway Network	2-1
	2.1.1 State Route 66 (Main Street/ Marlborough Street/ Portland-	
	Road/ West High Street/ East High Street)	
	2.1.2 State Route 17A (Main Street)	
	2.1.3 High Street	
	2.1.4 Airline Avenue	
	2.1.5 Portland Shopping Center Driveway	
	2.1.6 Grove Street/ Grandview Terrace	
	2.1.7 State Route 17 (Gospel Lane)	
	2.1.8 Middle Haddam Road (W Junction)/ Payne Boulevard	
	2.1.9 State Route 151 (Middle Haddam Road)/ Depot Hill Road	
	2.1.10 State Route 16 (Middletown Avenue)/ Park and Ride Drive	•
	2.1.11 Maple Street/ North Maple Street/ Old West High Street	
	2.1.12 Main Street/ North Main Street	
	2.1.13 East Hampton Shopping Center Driveway/ Eversource Driv	•
	2.1.14 State Route 196 (Lakeview Street)	
	2.2 InterTraffic Control	
	2.3 Traffic Signs 2.4 Traffic Volumes	
	2.4.1 Historic and Current Daily Traffic Volumes	
	2.4.2 2018 Existing Conditions Peak Hour Traffic Volumes	
	2.4.3 2020 Corridor Conditions Peak Hour Traffic Volumes	
	2.5 Travel Speed	
	2.6 2020 Corridor Conditions Traffic Operations	
	2.6.1 2020 Weekday Morning Peak Hour Operations	
	2.6.2 2020 Weekday Afternoon Peak Hour Operations	
	2.7 2020 Corridor Conditions Optimized Traffic Operations	
	Z.7 ZOZO ODITIADI ODIIAILIOLIS OPLIITIIZGA ITAILIG OPCIALIOLIS	

2.8 Traffic Safety2-33

2.8.1 Collision History	2-33
2.8.2 Bicycle and Pedestrian Crash History	2-35
2.8.3 Portland Road Safety Audit	2-36
2.9 Alternative Travel Modes	2-38
2.9.1 Pedestrian and Sidewalk Infrastructure	2-38
2.9.2 Bicycle Facilities	2-41
2.9.3 Air Line Trail Usage	2-42
2.9.4 Transit Facilities	2-43
2.9.5 Transit Ridership	2-45
2.9.6 MAT Route F Passenger Survey	2-46
2.10 Access Management	2-47
2.10.1 Existing Access Management Conditions	2-47
2.10.2 CTDOT Driveway Design Guidelines	2-50
2.11 Transportation System Condition	2-51
2.12 Existing Site Analysis	2-52
2.12.1 Portland Commercial Center	2-52
2.12.2 Cobalt Village	2-58
2.12.3 East Hampton Commercial Center	2-61
3 Environmental and Natural Resources	
3.1 Surface Water Resources	3-1
3.2 Groundwater Resources	3-2
3.3 Wetlands	3-2
3.4 Floodplains and Stream Channel Encroachment Lines	3-2
3.5 Threatened and Endangered Species	3-3

Tighe&Bond

Figur	e	Page/Follows
1-1	Study Area	1-2
2-1	Study Area Intersections and Traffic Control	2-11
2-2	Route 66 Historical Average Daily Traffic – 1	2-13
2-3	Route 66 Historical Average Daily Traffic – 2	2-14
2-4	2018 Existing Weekday Average Daily Traffic Volumes	2-15
2-5	Directional Peak-Hour Traffic Flow	2-17
2-6	2020 Corridor Conditions Traffic Volumes	2-17
2-7	Travel Speed Observations	2-19
2-8	2020 Corridor Traffic Operations	2-24
2-9	Vehicle Collision History (2015-2018)	2-33
2-10	Vehicle Collision Diagram 1: Main St. at Marlborough St.	2-35
2-11	Vehicle Collision Diagram 2: Route 66 at High Street	2-35
2-12	Vehicle Collision Diagram 3: Route 66 at Route 151	2-35
2-13	Middletown Area Transit (MAT) – Route F	2-44
2-14	Portland Existing Access Management Inventory Map – 1	2-50
2-15	Portland Existing Access Management Inventory Map – 2	2-50
2-16	Portland Existing Access Management Inventory Map – 3	2-50
2-17	Portland Existing Access Management Inventory Map – 4	2-50
2-18	East Hampton Existing Access Management Inventory Map – 1	2-50
2-19	East Hampton Existing Access Management Inventory Map – 2	2-50
2-20	East Hampton Existing Access Management Inventory Map – 3	2-50
2-21	Transportation System Conditions Summary	2-51
2-22	Photo Location Inventory Key Map	2-52
3-1	Wetlands Summary	3-3
3-2	Floodplains Summary	3-3

Table of Contents

Tighe

Bond

Table		Page
2-1	Study Area Signalized Intersections	2-11
2-2	2018 Existing Weekday Average Daily Traffic Volumes Summary	2-15
2-3	2018 Existing Saturday Average Daily Traffic Volumes Summary	2-16
2-4	Travel Speed Observations	2-19
2-5	Study Area Signalized Intersection Operational Summary – 2020 Corridor Conditions – LOS	2-21 & 2-22
2-6	Study Area Signalized Intersection Operational Summary – 2020 Corridor Conditions – Queues	2-23 & 2-24
2-7	Study Area Signalized Intersection Operational Summary – 2020 Corridor Conditions Optimized – LOS	2-29 & 2-30
2-8	Study Area Signalized Intersection Operational Summary – 2020 Corridor Conditions Optimized – Queues	2-31 & 2-32
2-9	Route 66 Collisions – Type	2-34
2-10	Route 66 Collisions – Severity	2-34
2-11	Route 66 Collisions – Study Area Summary	2-35
2-12	Pedestrian and Bicycle Collision Summary	2-35
2-13	Portland RSA Safety Issues and Recommended Improvements	2-37
2-14	MAT Route F – Ridership Summary	2-45

Tighe&Bond

Technical Appendices

- A. Public Information Meeting #1 and #2 Summaries
- B. Route 66 Corridor Improvement Plan (Previously Prepared 1998 Study)
- C. Roadway Functional Classification Maps
- D. Existing Study Area Intersection Traffic Control Signal Plans
- E1. Automatic Traffic Recorder Counts
- E2. Turning Movement Counts
- F1. Capacity Analyses 2020 Corridor Conditions Weekday Morning
- F2. Capacity Analyses 2020 Corridor Conditions Weekday Afternoon
- G1. Capacity Analyses 2020 Corridor Conditions-Optimized Weekday Morning
- G2. Capacity Analyses 2020 Corridor Conditions-Optimized Weekday Afternoon
- H1. Level of Service Comparison Table
- H2. Queue Comparison Table
- I. Collision Data Summary
- J. Connecticut Trail Census 2017 Counts Report
- K. Transit Ridership Survey
- L. Route 66 Corridor Study Demographic and Economic Baseline (RKG Associates)

Section 1 Introduction

The Route 66 Engineering Planning Study is being conducted by the Lower Connecticut River Valley Council of Governments (RiverCOG) on behalf of the Towns of Portland and East Hampton (Towns). The project is funded by the Federal Highway Administration, the Connecticut Department of Transportation (CTDOT) and the Towns; and administered by RiverCOG on their behalf.

The purpose of the study is to develop a comprehensive transportation improvement plan for Route 66, within the study area, and provide a planning document for the Towns, RiverCOG and State to facilitate the identification of funding to support implementation of transportation system improvements to address existing and future needs and deficiencies and support future economic development goals.

The goals and objectives of the plan were identified by the Study Advisory Committee (SAC). The SAC includes members from the following agencies and organizations:

- Town of Portland Staff
- Town of East Hampton Staff
- First Selectwoman of Portland
- Town of Portland Economic Development Commission member
- RiverCOG Staff
- Connecticut Department of Transportation Staff

In addition to the SAC, a Community Advisory Committee (CAC) also advises the study team. The CAC membership is still under development at the time this document was prepared.

The study goals and objectives were identified at the onset of the study through meetings and public input. The goals and objectives include the following:

- Develop cost effective physical transportation system solutions that improve operations to mitigate congestion, address identified safety concerns, and provide guidance on access management issues while accommodating future land use expansion opportunities
- Improve transportation system access and mobility for alternative travel modes including sidewalk and bicycle infrastructure; exclusive pedestrian signalization, accessible sidewalk ramps and push-buttons at intersections; enhanced access and connectivity to the Air Line Trail system; and improve transit access and amenities to provide a complete transportation system that serves the needs for all travelers
- Develop a comprehensive transportation improvement plan that prioritizes and defines implementation time frames to enable the programming and funding of improvements

The study process includes five primary work tasks that are included in the overall scope of the project.

- Data Collection
- Analysis of Existing Conditions
- Analysis of Future Conditions
- Identification and Analysis of Improvement Alternatives
- Final Improvement and Implementation Plan


In addition, a Public Outreach program will be conducted throughout the study process to engage and obtain input from the public. The program includes meetings with the Technical Advisory Committee, the Community Advisory Committee, Public Information Meetings during key points in the study process and meetings with the governing bodies for each of the Towns to seek endorsement of the study recommendations. The Public Outreach program is described in more detail in Section 1.4.

1.1 Study Area

The study area includes approximately eleven-miles of Route 66 in the Towns of Portland and East Hampton. The study area begins at the east end of the Arrigoni Bridge in Portland, continuing north on Main Street before turning east on Route 66 and extending through Portland and East Hampton to the Marlborough town line. The study area includes thirteen signalized intersections, described in Section 2.2. In addition, the Study Area is also inclusive of the Airline Trail corridor, as the study will seek to identify opportunities to improve connectivity and access to the trail system through the two Towns. The study area is illustrated in Figure 1-1.



Route 66 in Portland looking West towards the Arrigoni Bridge

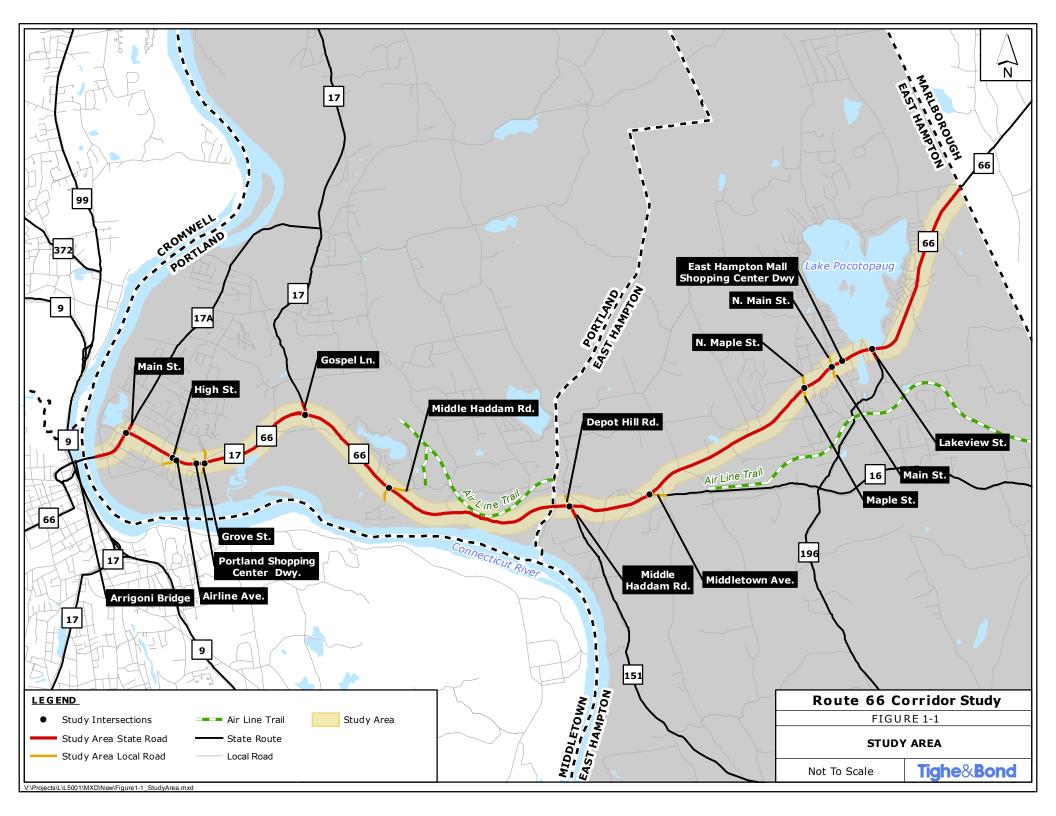

1.2 Study Team

The study team includes representatives from the Towns of Portland and East Hampton, RiverCOG, and CTDOT, in addition to the consultant team. The consulting team includes Tighe & Bond, the prime consultant, and subconsultants VHB, Freeman Companies, and RKG Associates, Inc. Tighe & Bond is providing overall project management, traffic and transportation engineering and is leading the public involvement process. VHB will assist in transportation planning and public involvement. Freeman Companies is tasked in developing landscape and streetscape improvements along the corridor. RKG is responsible for the economic development analysis and future land use portion of the study.

The Towns of Portland and East Hampton are represented by staff from:

- Board of Selectman
- Economic Development Commission
- Planning & Zoning Department
- Police Department

CTDOT staff from the Bureau of Policy and Planning are actively involved in the study through their participation on the Study Advisory Committee. Additionally, CTDOT staff from various other Units will be involved in the review of the findings and recommendations to ensure that the Department's policies and vision for Route 66 is reflected in the final report.

RiverCOG is the Council of Governments for the Towns of Portland and East Hampton and overall project manager for the study. RiverCOG staff are actively participating in the public outreach initiatives in cooperation with the Towns. RiverCOG staff are members on the Study Advisory Committee and Community Advisory Committee. Additionally, RiverCOG is hosting the project website.

In total the study team is comprised of parties at the State, Regional, and Local levels to ensure that the planning activities conducted under this study fit within the overall planning goals at all levels of government.

















1.3 Study Process

The study is following a process defined by RiverCOG. The key elements of the study include:

- Conducting technical analyses and observations of the study corridor to assess existing conditions and identify deficiencies and needs
- Forecasting future travel demand, analyzing future traffic conditions, and identifying potential future areas of concern within the 20-year study horizon
- Identifying economic development opportunities along the study corridor and assessing their effect on the transportation system
- Identifying feasible improvement alternatives to mitigate the effects of future traffic on the corridor
- Seeking opportunities to enhance the overall transportation system to better accommodate all modes of travel
- Conduct a comprehensive public outreach program involving meetings and a project website to obtain public input and feedback

This Existing Condition Assessment Technical Memorandum summarizes the following:

- Review of the existing transportation system and identification of needs and deficiencies
- Observations of traffic volumes, vehicle classifications, and travel speeds within the study area and developing 2020 Corridor Traffic volumes
- Analysis of historical crash data and traffic safety for all travel modes
- Analysis of traffic operations during the weekday morning and weekday afternoon peak hours which are the periods of peak travel demand on the roadway
- Review current multi-modal transportation services and facilities
- Screening of the natural and environmental resources to identify existing resources that may limit the scope and extent of physical improvements
- Identification of areas of concern in the study area, which will be reviewed to determine opportunities for potential improvement

1.4 Public Involvement and Outreach

Community involvement and public outreach is an important initiative of the study. A variety of techniques will be used to inform the public of study findings and to obtain feedback throughout the study process. Residents and businesses in the study area will have ample opportunities to monitor the progress of the study and offer input to the study team to help inform the decisions and recommendations of the study. The goals of the community involvement and public outreach program include:

- Obtain input from the public and project stakeholders on study area issues, concerns, and help identify and frame the study goals and objectives
- Advise the public of the study findings
- Provide the opportunity for the public to educate the study team with local knowledge
- Involve stakeholders and the public in the development and refinement of recommendations that fit the character and future vision of the Towns
- Facilitate reviews by the Town Councils, Boards and Commissions, Businesses, and Residents, leading to a Final Improvement Plan that can be endorsed by the Towns and Region to help guide future transportation system improvements and enhancements.

1.4.1 Project Committees

The study effort will be guided through oversight provided by the Towns of Portland and East Hampton, RiverCOG, and CTDOT. The public outreach initiatives will be facilitated through a Study Advisory Committee and Community Advisory Committee. The following section describes the groups.

1.4.1.1 Study Advisory Committee (SAC)

This committee will provide consistent input and oversight throughout the study process. The committee will be comprised of:

- **Town Representatives**: Staff from the engineering, planning and zoning, public works, and police departments
- **RiverCOG Representatives:** Staff from RiverCOG will participate to ensure that the planning activities meet regional goals and objectives
- CTDOT Representatives: CTDOT Staff from the Division of Policy and Planning will represent the Department on this project and serve as a liaison between the study and other Department Units

SAC meetings are conducted at key milestones of the study process to provide an update on the study progress and obtain guidance on the results, findings, and recommendations of the study. There are four meetings scheduled with this Committee.

The first SAC meeting was conducted on May 31, 2018 to discuss the study tasks, areas of concerns, goals and objectives for the study, and public outreach programs of the study. During the meeting a workshop session where the SAC members identified their key concerns along the study corridor was held. Insight from this meeting is included in this Existing Conditions Report.

1.4.1.2 Community Advisory Committee

The purpose of the Community Advisory Committee (CAC) is to provide a cohesive public outreach process. The CAC is comprised of key project stakeholders and community members that are directly impacted by operations in the study area. The membership of the CAC is still under development at the time this memorandum was published.

1.4.2 Public Information Meetings

In addition to the guidance provided by the SAC and CAC, general public information meetings are conducted throughout the study process... initial public information meetings were held on June 12, 2018, in East Hampton, and June 14, 2018, in Portland. These meetings introduced the study team to the public in each Town and During the meetings, the public provided key concerns and issues, many of which are presented in this memo following the completion of the existing condition Meeting summaries are analysis. provided in Appendix A.



Portland Public Information Meeting June 14, 2018, Portland Library

1.4.3 Project Website and Social Media Presence

RiverCOG has developed a project website that will provide information on the study. The website can be found at the following link:

www.rivercog.org/route66

The website provides study information, meeting information and dates, and access to study publications as they become available.

A Facebook page has also been developed to provide periodic information related to the study progress, meetings, and publications. Access to the page can be found at the following link:

www.facebook.com/Route66CorridorStudy

Tighe&Bond

1.5 Route 66 Corridor Improvement Plan (1998 Study)

The *Route 66 Corridor Improvement Plan* was published in August 1998 by Midstate Regional Planning Agency. The plan looked at the segment of Route 66 that traverses Portland and East Hampton. The goal of the *Route 66 Corridor Improvement Plan* was to analyze existing corridor conditions, project 2020 future traffic patterns, identify problem areas, and develop improvement plans to reduce congestion and improve safety through the corridor. Individual Route 66 Access Management Plans for Portland and East Hampton were also developed to supplement the 1998 plan. The final report from the previously prepared 1998 *Route 66 Corridor Improvement Plan* documents are included in Appendix B.

A number of the proposed improvements identified by the 1998 plan have been implemented during the past 20 years, including:

- The installation of a traffic signal at the intersection of Route 66 and Middle Haddam Road/ Payne Boulevard in Portland
- The addition of dedicated left turn lanes on all approaches at the intersection of Route 66 and Main Street/ North Main Street in East Hampton
- Addition of left turn storage lanes on East High Street near Brooks Plaza in East Hampton
- The realignment of Lakeview Street (Route 196) at Route 66 and the installation of a traffic signal at the intersection in East Hampton

The current study will build upon the 1998 plan. The current planning effort will utilize current data to assess the existing conditions of traffic volumes, safety concerns, and intersection operations. The study will also assess the current and future land use demands on the road network and recommend strategies to improve safety and encourage multi-model travel modes based on the present roadway conditions.

Section 2 Traffic and Transportation

The assessment of existing conditions includes extensive data collection to establish the current condition of the transportation system in the study area. The data has been reviewed and analyzed by the study team. This section describes the assessment of the existing study area transportation system.

2.1 Roadway Network

The primary roadways in the study area were reviewed in the field to observe the condition of the roadway network and identify any deficiencies. These roadways are classified as either Urban Principal (Major) Arterials, Urban Minor Arterials, Urban Collectors or Urban Local Roadways by the Connecticut Department of Transportation (CTDOT). Roadway functional classification were also reviewed based on the Towns' Plan of Conservation and Development (POCD). Both CTDOT and Town POCD functional classification maps are included in Appendix C. Based on the classifications of the study area roadways, a review of roadway characteristics was conducted to determine if deficiencies exist. The following sections summarize the results of the observations for each of the roadways.

2.1.1 State Route 66 (Main Street/ Marlborough Street/ Portland-Cobalt Road/ West High Street/ East High Street)

Connecticut State Route 66 is classified as an Urban Principal Arterial by CTDOT. It is classified as an Arterial Road by the Towns of Portland and East Hampton. The roadway runs west to east through Portland and East Hampton. Route 66 begins in Meriden at the Interstate 691 Junction and terminates at the U.S. Route 6 Junction in Windham.



Route 66 in Portland looking East near Adams Supermarket Plaza



Route 66 in East Hampton looking West near American Distilling, Inc.

Route 66 is a major east-west transportation corridor, serving as the primary access route to residences and commercial areas across the region. There are numerous commercial properties and a number of residences that front Route 66 in the study area.

The section of Route 66 in the study area is approximately 11 miles long. Approximately 5.4 miles of which is located in Portland, and 5.6 miles of which is located in East Hampton. From the Portland town center to the Route 17 junction (approximately 2 miles) the roadway consists of four travel lanes, two in each direction, with a raised median and dedicated left turn lane at major intersections. For the remainder of the corridor, the cross section becomes two lanes, one lane in each direction, and widens to provide exclusive left or right turn lanes at key intersections. Within the study area, Route 66 contains thirteen signalized intersections, which are further described in Section 2.2.



Intersection of Main Street (Route 17A) and Marlborough St (Route 66) in Portland

The posted speed limit on Route 66 varies across the study area. The posted speed limit on Route 66 from the end of the Arrigoni Bridge to Grove Street is 35 miles per hour, increasing to 45 miles per hour from Grove Street to the Portland-East Hampton Town Line. The posted speed limit decreases to 35 miles per hour east of the Portland-East Hampton Town Line to Keighley Pond Road, and increases to 45 miles per hour east of Keighley Pond Road. At Maple Street, the posted speed limit drops to 30 miles per hour, before increasing to 45 miles per hour approximately 0.4 miles east of Old Marlborough Road.

2.1.2 State Route 17A (Main Street)

Route 17A intersects Route 66 at a signalized intersection. Connecticut State Route 17A is classified as an Urban Minor Arterial by CTDOT and an Arterial Road by the town of Portland. Route 17A runs north from Route 66 through Portland, terminating at State Route 17. In the study area the roadway is approximately 62 feet wide with two 11-foot travel lanes in both directions, in addition to a 6-foot and 11-foot shoulder in the northbound and southbound direction, respectively. The southbound approach has a shared through-left lane and a through lane. Route 17A abuts a number of residences and businesses in the study area and provides a regional connection to Route 17. The posted speed limit on Route 17A is 30 miles per hour in the study area.



Intersection of Main Street (Route 17A) and Marlborough St (Route 66) in Portland

2.1.3 High Street

High Street is classified as an Urban Major Collector by CTDOT. The roadway is classified as a Collector Road by the Town of Portland. It runs north from Route 66 (Marlborough Street) to Bartlett Street. The roadway is approximately 40 feet wide with two travel lanes and moderate shoulders. High Street intersects Route 66 at a signalized intersection. High Street provides access to commercial properties near Route 66 and residential areas traveling further north. Valley View School and Portland High School are also located on High Street. The posted speed limit is 30 miles per hour from Route 66 to William Street and 25 miles per hour from William Street to Bartlett Street.

2.1.4 Airline Avenue

Airline Avenue is classified as an Urban Local Road by both CTDOT and the Town of Portland. It runs west from Route 66 to Lower Main Street. Airline Avenue intersects Route 66 at a signalized intersection with a skewed angle approach. A 'Stop Here' sign is present at the stop bar, alerting motorists to come to a complete stop at the stop bar before inching up slowly to make a right turn on red onto Route 66. The roadway width varies from approximately 19 to 21 feet, providing a single travel lane in each direction and no shoulders. Airline Avenue provides access to residences, industrial properties, Brownstone Park, and a marina. The posted speed limit is 25 miles per hour.

2.1.5 Portland Shopping Center Driveway

The Portland Shopping Center Driveway intersects Route 66 at a signalized T-intersection. The driveway provides an exclusive left turn and right turn lane exiting the plaza and a single entering lane. The entrance and exit are separated by a narrow raised island. A secondary unsignalized right-only exit is provided approximately 180 feet west of the signalized driveway. There is no traffic control device at this exit. The driveway serves an approximately 54,000 square foot shopping plaza comprised of a grocery store, gym, and various retail locations.



Portland Shopping Center Driveway, looking South towards Route 66

2.1.6 Grove Street/ Grandview Terrace

Grove Street and Grandview Terrace intersect Route 66 at a signalized intersection. Grove Street is classified as an Urban Local Road by both CTDOT and the town of Portland. It runs south from Route 66 to Riverview Street. The roadway width is approximately 25 feet with no shoulders. Grove Street provides access to residences as well as a marina at the south end of the road. The posted speed limit is 25 miles per hour.

Grandview Terrace is classified as an Urban Local Road by both CTDOT and the Town of Portland. Grandview Terrace runs parallel to Route 66 and intersect Route 66 approximately 0.4 miles to the east. The roadway is approximately 25 feet wide, providing a single travel lane in each direction with no shoulders. Grandview Terrace provides access to residences, including the Grandview Farms development. The private development has no outlet. The posted speed limit is 25 miles per hour.

2.1.7 State Route 17 (Gospel Lane)

Gospel Lane, designated as Connecticut State Route 17, is classified as an Urban Principal Arterial by CTDOT. It is classified as an Arterial Road by the Town of Portland. Route 17 intersects Route 66 at a signalized intersection. It runs north from Route 66 through the Town of Portland, becoming an expressway in the Town of Glastonbury, and terminates at Connecticut State Route 2 outside of the study area providing a north-south commuter route towards Hartford. The roadway is approximately 28 feet wide, with one 12-foot travel lane in each direction and narrow shoulders in the study area. At the intersection with Route 66, Route 17 widens to provide left and right turn lanes turning onto Route 66. Route 17 is a major north-south route, providing access to mostly residential neighborhoods except for a few commercial developments. The posted speed limit is 35 miles per hour.



Route 17 (Gospel Lane) in Portland looking South towards Route 66

2.1.8 Middle Haddam Road (W Junction) / Payne Boulevard

Middle Haddam Road (W Junction) and Payne Boulevard intersect Route 66 at a signalized intersection. Middle Haddam Road is classified as an Urban Collector Road by both CTDOT and the Town of Portland. It runs east from Route 66 in Portland, continuing into East Hampton before turning into Old Middletown Road at Penfield Hill Road. The roadway is approximately 24 feet wide at Route 66 before narrowing to 20 feet, providing a single travel lane in each direction with no shoulders. The posted speed limit is 25 miles per hour.

Payne Boulevard is classified as an Urban Local Road by both CTDOT and the Town of Portland. It runs south of Route 66 and has no outlet. The roadway is approximately 30 feet wide, with a single travel lane in each direction with narrow shoulders. It serves a residential neighborhood and a farm. The posted speed limit is 25 miles per hour.

2.1.9 State Route 151 (Middle Haddam Road) / Depot Hill Road

Route 151 and Depot Hill Road intersect Route 66 at a signalized intersection. Middle Haddam Road, designated as Connecticut State Route 151, is classified as an Urban Collector by both CTDOT and the Town of East Hampton. The roadway runs south from Route 66 through East Hampton and Haddam before terminating at Route 196 in Haddam. The roadway is approximately 25 feet wide, with a single travel lane in each direction and no shoulders. At Route 66, the roadway splits to provide a shared through-left lane that is signal-controlled and a channelized right turn lane that is controlled by a stop sign. These two lanes are separated by a raised island. Middle Haddam Road provides access to a mix of residential and commercial properties. The roadway is a scenic road. The posted speed limit is 35 miles per hour within the study area.




Route 151 (Middle Haddam Road) in Cobalt looking North towards Route 66

Depot Hill Road is classified as an Urban Collector from south of Old Middletown Road, and an Urban Local Road north of Old Middletown Road. It is classified as an Collector Road by the Town of East Hampton. Depot Hill Road runs north through East Hampton and Portland before terminating at Gadpouch Road. The roadway is approximately 25 feet wide, with a single travel lane in each direction and no shoulder. Depot Hill Road provides access to an exclusively residential area. The posted speed limit on Depot Hill Road is 25 miles per hour.

2.1.10 State Route 16 (Middletown Avenue) / Park and Ride Driveway

Route 16 and the Park and Ride Driveway intersect at Route 66 at a signalized intersection. Middletown Avenue, designated as Connecticut State Route 16, is classified as an Urban Minor Arterial by CTDOT and an Arterial Road by the Town of East Hampton. Route 16 runs from Route 66 to the east through East Hampton and Colchester before terminating at State Route 85 in Colchester. The roadway is approximately 24 feet wide, with a single travel lane in each direction. At the intersection of Route 66, Route 16 widens to provide a dedicated right turn lane and shared through-left lane. Route 16 provides access to a mix of commercial and residential developments in addition to serving as a commuter route to Colchester and points south and east via Route 2. The posted speed limit is 50 miles per hour in the study area.

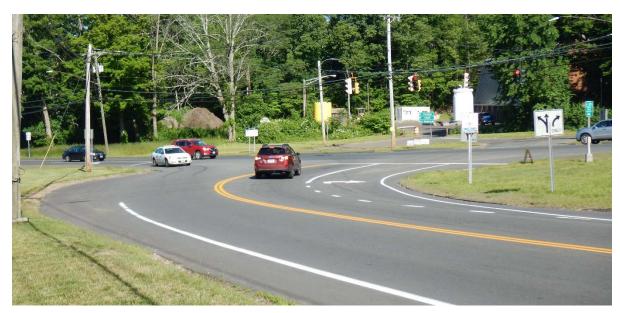

Route 16 (Middletown Avenue) in East Hampton looking North towards Route 66

The Park and Ride Driveway provides access to a commuter parking lot a state highway maintenance facility. The driveway is approximate 28-feet wide and provides a single entrance lane and single exit lane to the Park and Ride.

2.1.11 Maple Street/ North Maple Street/ Old West High Street

Maple Street, North Maple Street, and Old West High Street intersect Route 66 at a signalized intersection. Maple Street is classified as an Urban Local Road by both CTDOT and the Town of East Hampton. The roadway runs south from Route 66 before terminating at Barton Hill Road. Maple Street is approximately 20 feet wide, with a single travel lane in each direction and no shoulders. Maple Street provides access to residential neighborhoods. The posted speed limit on Maple Street is 25 miles per hour.

North Maple Street is classified as an Urban Local Road by both CTDOT and the Town of East Hampton. The roadway runs north from Route 66 for approximately 0.60 miles before ending at a dead end. North Maple Street is approximately 30 feet wide, with a single travel lane in each direction and narrow shoulders. North Maple Street provides access to residential neighborhoods and East Hampton High School. The posted speed limit on North Maple Street is 25 miles per hour.

Old West High Street is classified as an Urban Local Road by both CTDOT and the Town of East Hampton. The roadway runs parallel to Route 66 and the west junction at Route 66 is approximately 0.15 miles away. Old West High Street is approximately 17 feet wide, with a single travel lane in each direction and no shoulders. The roadway provides access to residences and a restaurant. The posted speed limit is 25 miles per hour.

2.1.12 Main Street/ North Main Street

Main Street and North Main Street intersect at Route 66 at a signalized intersection. Main Street is classified as an Urban Minor Arterial by CTDOT and a Collector Road by the Town of East Hampton. Main Street runs south from Route 66 through East Hampton, turning into South Main Street at State Route 16. The roadway is approximately 28 feet wide, with a single travel lane in each direction and narrow shoulders. At the intersection of Route 66, the roadway widens to provide a dedicated left turn lane and shared through-right lane. The Air Line Trail intersects Main Street just south of Barton Hill Road with a trail parking lot located on the east side of Main Street. Main Street provides access to a variety of residential and commercial uses, including restaurants and retail in the Town center. The posted speed limit on Main Street is 30 miles per hour.

North Main Street is classified as an Urban Minor Arterial by CTDOT and a Collector Road by the Town of East Hampton. The roadway runs north from Route 66 to Clark Hill Road, where it turns into Lake Drive. North Main Street approximately 24 feet wide, with a single travel lane in each direction and narrow shoulders. At the intersection of Route 66, the roadway widens to provide a dedicated left turn lane and shared through-right lane. roadway provides access to a



Intersection of Route 66 and Main Street/ North
Main Street in East Hampton

mix of residential and commercial properties as well as access to Lake Pocotopaug. The posted speed limit on North Main Street is 25 miles per hour.

2.1.13 East Hampton Shopping Center Driveway/ Eversource Driveway

The East Hampton Shopping Center Driveway and Eversource Driveway intersect Route 66 at a signalized intersection. The East Hampton Shopping Center Driveway provides two lanes entering the plaza and two lanes exiting the plaza, separated by a raised island. The East Hampton Shopping Center consists of an approximately 75,000 square foot shopping plaza anchored by Stop and Shop, as well as a standalone 3,500 square foot Bank of America. The Eversource Driveway provides a single entrance lane and a single exit lane providing access to the Eversource Area Work Center.



Looking North towards the East Hampton Shopping Center Driveway

The Eversource Driveway provides a single entrance lane and a single exit lane providing access to the Eversource Area Work Center.

2.1.14 State Route 196 (Lakeview Street)

Route 196 (Lakeview Street) intersects Route 66 at a signalized intersection. Route 196 is classified as an Urban Collector by both CTDOT and the Town of East Hampton. Route 196 runs southwest from Route 66 through East Hampton, Haddam and East Haddam before terminating at State Route 151 in East Haddam. The roadway is approximately 28 feet wide, with a single travel lane in each direction and narrow shoulders. At the intersection of Route 66, the roadway widens to provide a dedicated left and dedicated right turn lane. A raised landscaped median island separates the northbound and southbound approaches on Route 196. The posted speed limit is 25 miles per hour in the study area.



Route 196 (Lakeview Street) in East Hampton looking North towards Route 66

2.2 Intersection Traffic Control

Within the study area, Route 66 intersection traffic control is generally signalized at major intersecting roadways and major driveways. Minor roadways and smaller commercial driveways are typically unsignalized with stop control on the side-street approaches. The study area features 13 signalized intersections which are listed in Table 2-1 and illustrated in Figure 2-1.

Seven of the traffic control signals in the study area operate in one of the three time-based coordination systems owned and operated by CTDOT. Each system functions to provide coordination between several intersections to promote efficient traffic operations. One system includes the intersection of Route 66 and Main Street in Portland, which coordinates with the signals on Main Street to the north. Another coordination system includes the Route 66 intersections with High Street, Airline Avenue, Portland Shopping Center Driveway, and Grove Street in Portland. The High Street and Airline Avenue signals operate with one traffic signal controller in a cluster intersection configuration. The cluster intersection operation allows for coordination of side street and main line movements for closely spaced intersections that would not allow efficient progression under separate, coordinated operation. The third system controls the intersections of Route 66 with Main Street and East Hampton Shopping Center Driveway in East Hampton.

The Route 66 intersections with Gospel Lane and Middle Haddam Road in Portland operate with uncoordinated traffic signals. Additionally, the route 66 intersections with Route 151, Route 16, Maple Street, and Lakeview Street in East Hampton also operate with uncoordinated traffic signals.

Traffic signal control settings including coordination system signal settings related to cycle lengths, time of day signal patterns, and traffic control signal phasing information was obtained from CTDOT. These settings were utilized in the traffic model to analyze 2020 Corridor Conditions traffic control signal operations. The results of the analysis are summarized in Section 2.6 – 2020 Corridor Conditions Traffic Operations. Copies of the traffic signal plans for each of the 13 signalized intersections are provided in Appendix D.

TABLE 2-1Study Area Signalized Intersections

Intersection

Route 66 (Marlborough Street) at Route 17A (Main Street) 1,2

Route 66 (Marlborough Street) at High Street 2, 3, 4

Route 66 (Marlborough Street) at Airline Avenue 2, 3, 4

Route 66 (Marlborough Street) at Portland Shopping Center Driveway 3,5

Route 66 (Marlborough Street) at Grove Street / Grandview Terrace 3,5

Route 66 (Portland-Cobalt Road) at Route 17 (Gospel Lane) ⁵

Route 66 (Portland-Cobalt Road) at Middle Haddam Road / Payne Boulevard 5

Route 66 (Portland-Cobalt Road) at Route 151 (Middle Haddam Road) / Depot Hill Road ²

Route 66 (West High Street) at Route 16 (Middletown Avenue) / Park & Ride Driveway 5

Route 66 (West High Street) at Maple Street / North Maple Street / Old West High Street ⁵


Route 66 (West High Street / East High Street) at Main Street / North Main Street 2,6

Route 66 (East High Street) at East Hampton Shopping Center / Eversource Driveway 2, 6

Route 66 (East High Street) at Route 196 (Lake View Street) 2

- 1 Intersections operating under a time-based coordination system on Route 17A
- 2 Intersections include an exclusive pedestrian phase
- 3 Intersections operating under a time-based coordination system on the west end of Route 66
- 4 Intersections operate under one traffic signal controller in a cluster intersection configuration
- 5 Intersections include a concurrent pedestrian phase
- 6 Intersections operating under a time-based coordination system on the east end of Route 66

Currently, 6 intersections in the study area provide pedestrian push button actuated exclusive pedestrian phase, listed in Table 2-1 above. The remaining 7 signalized intersections are equipped with pedestrian push buttons to actuate the minor street (side street) pedestrian clearance time to allow pedestrians to cross Route 66 concurrently with vehicular traffic. Opportunities to improve access and accommodations for pedestrians will be identified as part of this study. Further detail on the existing pedestrian accommodations within the study area is provided in Section 2.9 – Alternative Travel Modes.

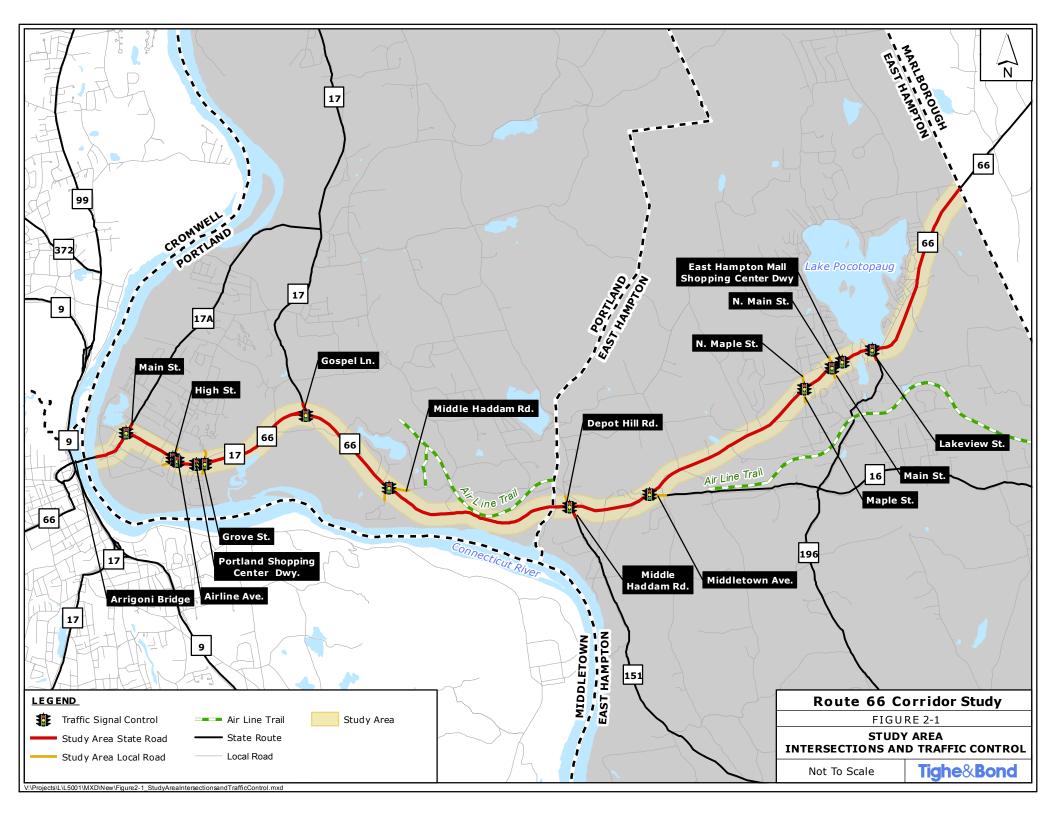

2.3 Traffic Signs

Traffic signs along Route 66 were reviewed to record the traffic control signage and assess the condition of the signs within the study limit. Existing signage in the study area includes the following:

- **Regulatory Signs**: lane-use control signs, stop signs, signs for no parking, traffic signal signs, do not enter signs, no passing signs, keep right signs, and speed limit signs
- Warning Signs: signal ahead signs, curve signs and chevrons, arrows and intersection warning signs, deer crossing warning signs, merge sign, and pedestrian crossing signs
- **Guide & Informational Signs**: town line signs, state property & facility signs, commuter parking and park & ride signs, route markers, and a series of wayfinding signs for park, trail, and attractive destinations

The majority of the signage was observed to be effective at indicating the purpose, compliant with Manual of Uniform Traffic Control Devices (MUTCD) and CTDOT Catalog of Signs standards, and in satisfactory retroreflectivity conditions.

However, there are locations along the study corridor where signs can be installed or improved to enhance roadway safety:

- The current lane merge warning sign at the eastbound four-lane to two-lane transition area east of Gospel Street in Portland is not installed at an appropriate location that meets the design guidelines included in the MUTCD. Additionally, the lane-reduction transition pavement marking isn't provided to guide traffic through the transition area.
- School zone signs and speed limit signs for school zone do not exist in vicinity of Childs Road, where East Hampton Middle School is located along the corridor
- Speed enforcement signs including change of speed limit signs and radar speed signs don't exist and are considered necessary to help regulate travel speeds on the corridor.



Merge sign on Route 66 in East Hampton, looking East



School Crossing sign on Route 66 near East Hampton Middle School

Due to the fact that Route 66 is a State Route, signage along this roadway, as well as on Routes 17, 16 and 151, are owned and maintained by CTDOT. Signage on the local roadways is owned and maintained by the towns in which they are located.

2.4 Traffic Volumes

2.4.1 Historic and Current Daily Traffic Volumes

Available historical traffic volume data was obtained from CTDOT. In addition, a traffic counting program was conducted to supplement the available data. Data sources included:

- CTDOT triennial 24-hour continuous automatic traffic recorder (ATR) data between 2003 and 2015. The most recent count year for the Towns was 2015.
- ATR counts at 14 locations along Route 66 in April and May 2018 as part of the study data collection effort. The raw ATR data is included in Appendix E.

A review of the historic average daily traffic (ADT) volume data collected indicates daily traffic volumes along Route 66 peaked around 2006 before the economic recession and began to decline. In some cases, this decline was significant. Route 66 started to recover in 2012. Volumes have since returned to their approximate levels prior to the recession. Figures 2-2 and 2-3 show the change in average daily traffic at multiple count locations in the study area. Figure 2-4 illustrates the 2018 Weekday Average Daily Traffic Volumes at count locations throughout the study area.

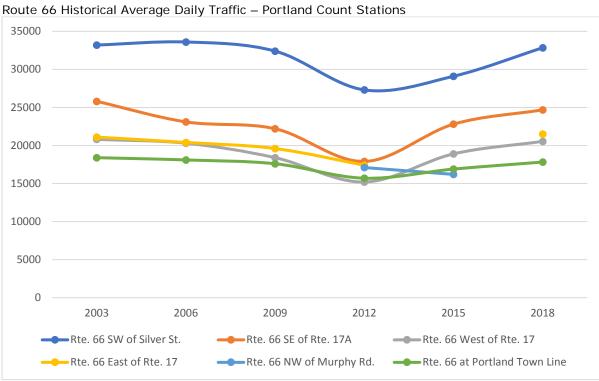


FIGURE 2-2



FIGURE 2-3Route 66 Historical Average Daily Traffic – East Hampton Count Stations

Table 2-2 and Table 2-3 summarizes the weekday and Saturday ADT data, respectively, at select study area locations. Peak hour traffic with directional distributions and the peak hour "K" factor for the morning and afternoon peak periods are also presented on the tables. The "K" factor is calculated by determining the percentage of the total ADT that occurs during the peak hour period and is used to indicate the relative intensity of the peak hour volume with respect to the balance of the average daily traffic.

A review of Table 2-2 indicates weekday ADT volumes of almost 33,000 just east of the Arrigoni Bridge on Main Street. The volume drops to under 25,000 east of Route 17A in the study area. The volumes decrease by just over 5,000 vehicles per day to the east of the Route 16 (Middletown Avenue) intersection. The volumes then steadily increase beyond the intersection of Route 66 and Maple Street, reaching a peak of just over 15,000 vehicles per day at the intersection to the west of Route 196 (Lake View Street) before decreasing to approximately 13,400 vehicles per day at the Marlborough Town Line. The "K" factors of 7-10% suggest that commuter traffic volume is consistent with regional travel routes. The directional distribution along the Route 66 corridor is 0-15% higher westbound in the morning and eastbound in the afternoon.

A review of Table 2-3 indicates a similar trend in Saturday ADT volumes, as compared to the weekday ADT volumes. Traffic volumes east of the Arrigoni Bridge are just over 28,500 vehicles per day. West of Route 17A, the volume drops to about 22,000. East of Route 16 (Middletown Avenue), the volumes bottom out at just over 9,500 vehicles per day. Beyond Route 16, the volumes fluctuate between 10,000 to 13,000, reaching a peak of 13,000 vehicles per day west of Route 196 (Lakeview Street).

TABLE 2-22018 Existing Weekday Average Daily Traffic Volumes Summary

	<u> </u>	Morr	ning Pe	ak Ho	ur	Afteri	noon Pe	eak H	our
	Weekday	Vehicles			"K"	Vehicles			"K"
Location	ADT	Per Hour	Dis	it.	Factor	Per Hour	Dis	it.	Factor
Southwest of Silver Street	32,840	2,125	56%	WB	6.47%	2,755	64%	EB	8.39%
East of Route 17A (Main Street)	24,690	1,830	64%	WB	7.41%	2,085	64%	EB	8.45%
West of Pickering Street	23,960	1,845	66%	WB	7.70%	2,015	63%	EB	8.41%
West of Grandview Terrace	22,055	1,705	68%	WB	7.73%	1,730	53%	WB	7.84%
West of Route 17 (Gospel Lane)	20,540	1,660	69%	WB	8.08%	1,920	73%	EB	9.35%
East of Route 17 (Gospel Lane)	21,510	1,665	68%	WB	7.74%	1,855	65%	EB	8.62%
Portland/ East Hampton Town Line	17,830	1,545	71%	WB	8.67%	1,515	67%	EB	8.50%
East of Route 151 (Middle Haddam Road)	15,830	1,285	69%	WB	8.12%	1,440	67%	EB	9.10%
East of Route 16 (Middletown Avenue)	10,185	830	68%	WB	8.15%	910	62%	EB	8.93%
East of Barton Hill Road	10,835	915	57%	WB	8.44%	995	53%	EB	9.18%
East of Main Street	12,815	945	57%	EB	7.37%	1,105	51%	EB	8.62%
West of Route 196 (Lake View Street)	15,030	1,090	57%	EB	7.25%	1,370	57%	WB	9.12%
Near Paul and Sandy's Too	13,430	1,095	58%	EB	8.15%	1,245	57%	WB	9.27%
East Hampton/ Marlborough Town Line	11,370	885	63%	EB	7.78%	1,010	59%	WB	8.88%

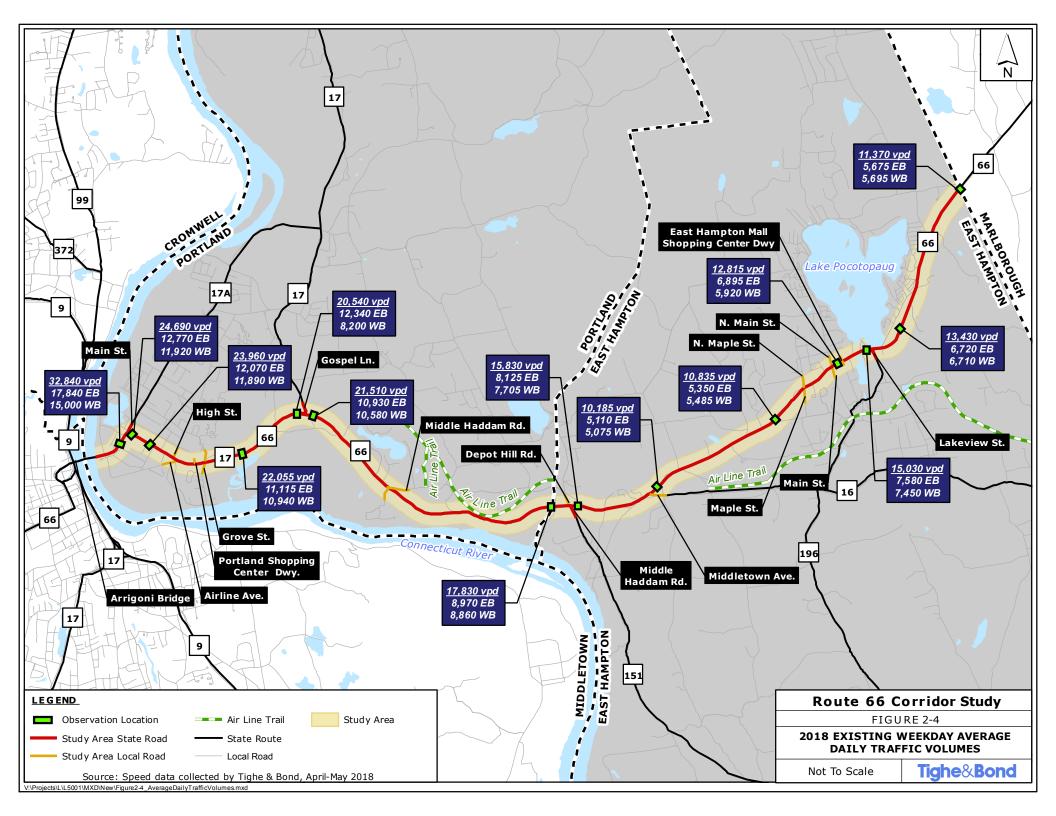


TABLE 2-32018 Existing Saturday Average Daily Traffic Volumes Summary

		Saturday Peak Hour			ır
Location	Saturday ADT	Vehicles Per Hour	Dis	st.	"K" Factor
Route 66					
Southwest of Silver Street	28,625	2,218	58%	EB	7.75%
East of Route 17A (Main Street)	22,145	1,746	53%	EB	7.88%
West of Pickering Street	21,140	1,582	52%	EB	7.48%
West of Grandview Terrace	20,007	1,640	52%	EB	8.20%
West of Route 17 (Gospel Lane)	12,000	1,593	53%	EB	13.28%
East of Route 17 (Gospel Lane)	19,480	1,093	83%	WB	5.61%
Portland/ East Hampton Town Line	17,245	1,380	52%	EB	8.00%
East of Route 151 (Middle Haddam Road)	15,255	1,201	53%	EB	7.87%
East of Route 16 (Middletown Avenue)	9,685	711	54%	WB	7.34%
East of Barton Hill Road	10,350	822	52%	WB	7.94%
East of Main Street	12,870	1,058	54%	EB	8.22%
West of Route 196 (Lake View Street)	13,020	1,124	50%	EB	8.63%
Near Paul and Sandy's Too	12,645	1,033	51%	WB	8.17%
East Hampton/ Marlborough Town Line	10,570	871	50%	EB	8.24%

Historic peak-hour directional trends in the study area were also reviewed to examine if there have been directional shifts in commuter traffic utilizing Route 66. There have not been any major shifts traveling west towards the State Route 9/ Interstate 91 (I-91) corridor or traveling east from I-91. A majority of vehicles travel towards Route 9/ I-91 during the morning commute, and from Route 9/ I-91 during the afternoon commute. Figure 2-5 shows the peak-hour directional traffic volumes between 1991 and 2009 have remained relatively constant.

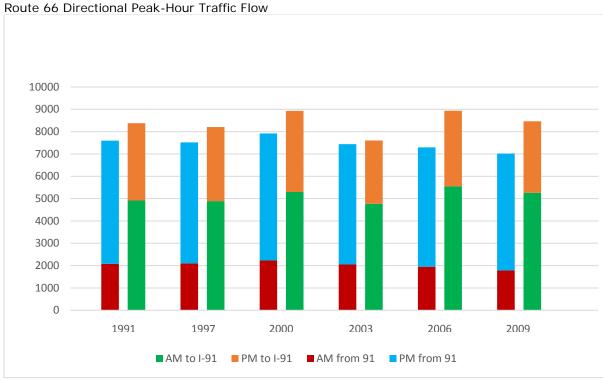


FIGURE 2-5


2.4.2 2018 Existing Conditions Peak Hour Traffic Volumes

Traffic volumes during the weekday morning and afternoon commuter peak hours are higher than other periods throughout the day. Weekday morning (7:00 to 9:00 AM) and weekday afternoon (4:00 to 6:00 PM) peak period intersection turning movement counts were collected at the 13 study intersections on Thursday, April 26, 2018. The intersection turning movement data was analyzed and balanced between closely spaced intersections. The raw turning movement counts are included in Appendix E.

2.4.3 2020 Corridor Conditions Peak Hour Traffic Volumes

In order to establish the 2020 Corridor Peak Hour Traffic Volumes, CTDOT Bureau of Policy and Planning, Portland Economic Development Commission, and East Hampton Planning and Zoning Department were consulted. CTDOT advised that an ambient growth rate of 0.7 percent per year and 1.2 percent per year should be used to estimate the increase in traffic between 2018 and 2020 for the segment within Portland and East Hampton, respectively.

Portland Economic Development Commission staff indicates that the only approved major development in the town of Portland, Brainerd Place, will mostly likely not be occupied by 2020. Meanwhile, based on discussions with the East Hampton Planning and Zoning Department, portions of a few major developments including Edgewater Hills, Skyline Estates, and Dollar General within the town will be occupied by 2020. The site-generated trips for these portions of the developments were estimated and included to develop 2020 Corridor peak hour traffic volumes. The resulting traffic volumes are shown in Figure 2-6 as the 2020 Corridor traffic volumes for the two peak hours, respectively.

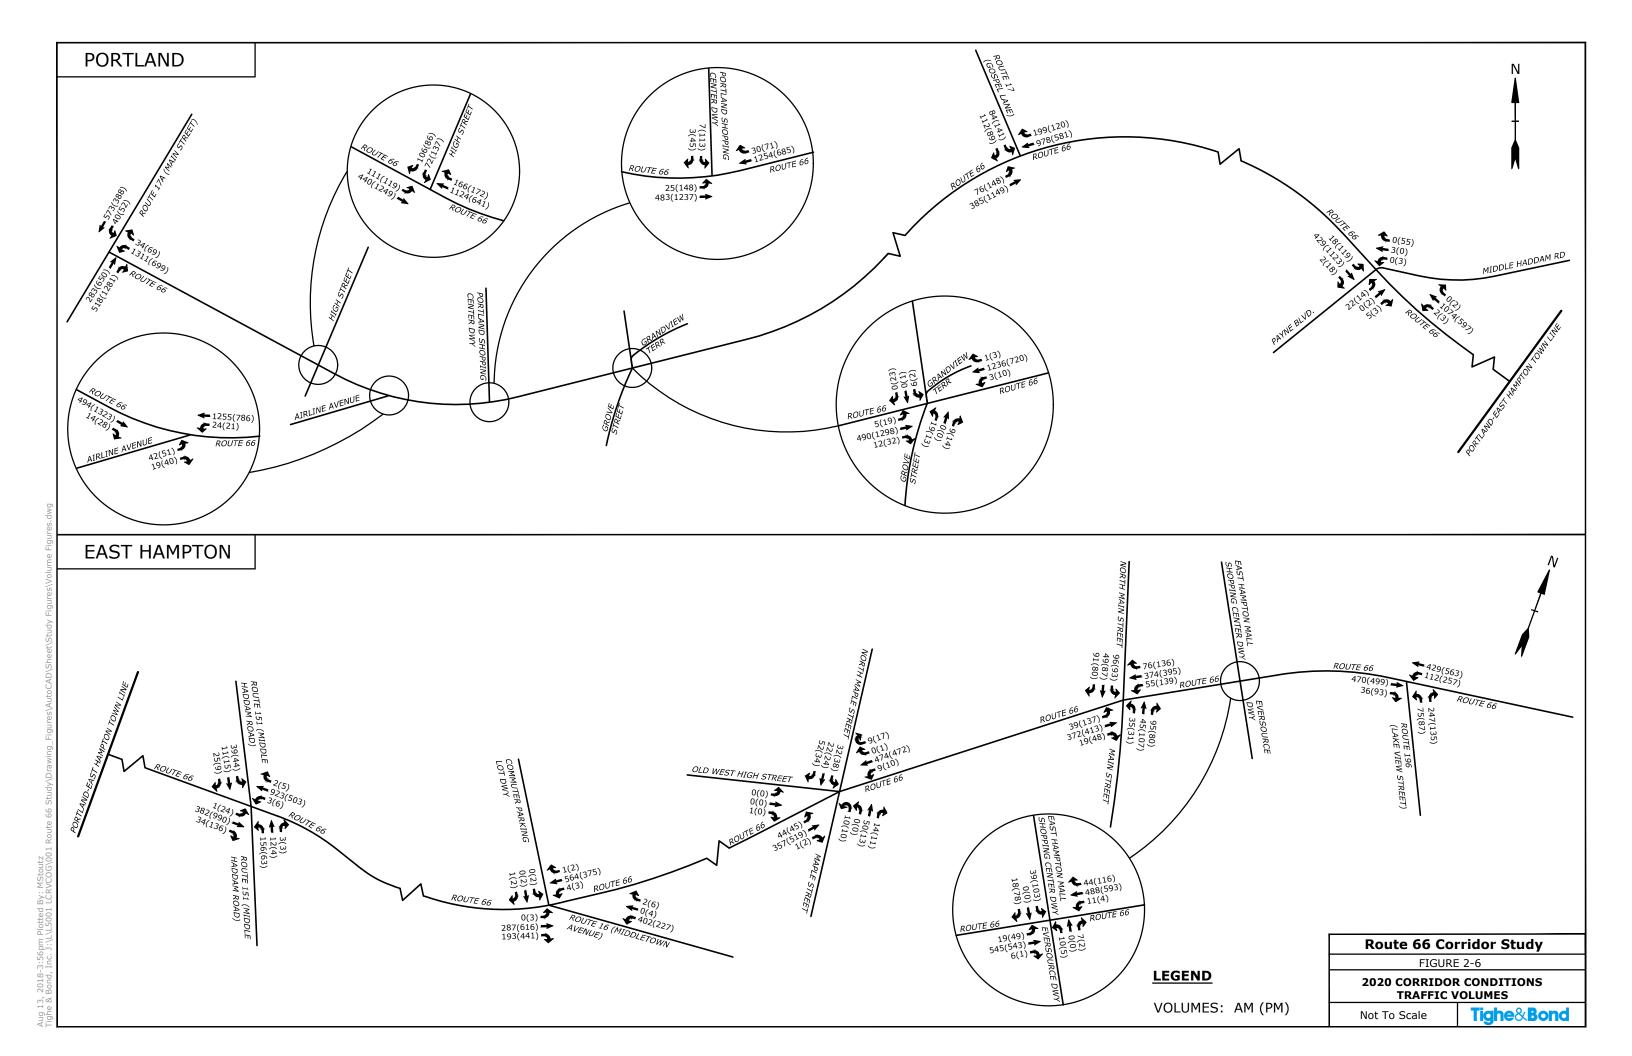

2.5 Travel Speed

Travel speed data was collected along Route 66 in the study area using Automatic Traffic Recorders (ATRs). The data was recorded during April and May 2018. Table 2-4 and Figure 2-7 summarize the results of the speed observations within the study area with average speeds or 85th percentile speeds that exceed the posted speed limit by 10 miles per hour or more highlighted in red. The 85th percentile speed, also known as the operating speed, is the speed at which 85% of all traffic is travelling at or below. Raw speed data is included in Appendix E.

Along Route 66, average travel speeds were higher than the posted speed limit at a number of observation locations. Travel speeds generally increase traveling east on Route 66. The divided nature of the roadway, long spacing between traffic signals, and a number of steep downgrades encourages high travel speeds along much of the corridor. In Portland, between Route 17A (Main Street) and High Street, average speeds are greater than 10 miles per hour over the posted speed limit at each observation locations. From Route 17 (Gospel Lane) to the Portland-East Hampton Town Line, average speeds are greater than 10 miles per hour over the posted speed limit at both observation locations within this segment. East of Route 16, travel speeds increase with the increase in posted speed limit, but remain within 10 miles per hour of the posted speed limit. Average travel speeds decrease significantly east of Maple Street. Travel speeds are lower along this stretch due to the high density of driveways and closer spacing of signals. The 85th percentile speed is over 10 miles per hour of the posted speed at 8 out of the 14 observation locations.

During two public information meetings, residents of Portland and East Hampton expressed concerns with speeding in the study area. In Portland, high speeds have been observed on Route 66 over the Arrigoni Bridge and the segment from the Airline Avenue intersection to Cobalt Village. In East Hampton, speed issues have been noted on Route 66 near the Edgewater Hills development and in the vicinity of Paul & Sandy's Too. Residents have also seen high speeds on cut-through roads including Middle Haddam Road in Portland and Old Marlborough Road in East Hampton. In general, these concerns with high travel speeds have been confirmed with the ATR speed data that has been collected.

TABLE 2-4Travel Speed Observations (MPH)


	Posted Speed	Average Speed		85 th Perce	entile Speed		
Location	Limit	EB	WB	EB	WB		
Southwest of Silver Street	35	38	39	44	44		
East of Route 17A (Main Street)	35	47	40	52	44		
West of Pickering Street	35	41	45	47	52		
West of Grandview Terrace	45	57	54	63	59		
West of Route 17 (Gospel Lane)	45	54	54	60	59		
East of Route 17 (Gospel Lane)	45	56	53	63	58		
Portland/ East Hampton Town Line	35	46	48	52	52		
East of Route 151 (Middle Haddam Road)	35	36	44	46	50		
East of Route 16 (Middletown Avenue)	45	41	38	47	45		
East of Barton Hill Road	45	49	49	54	53		
East of Main Street	30	30	30	36	34		
West of Route 196 (Lakeview Street)	30	40	39	44	43		
Near Paul and Sandy's Too	45	46	46	51	51		
East Hampton/ Marlborough Town Line	45	49	47	54	52		
Red Text indicates 85 th Percentile Speed exceeds Posted Speed Limit ≥ 10mph							

2.6 2020 Corridor Conditions Traffic Operations

Traffic operations were evaluated for the study area intersections during the weekday morning and weekday afternoon peak hours. Capacity and queue analyses were conducted using Trafficware's Synchro plus SimTraffic 10 – Traffic Signal Coordination Software, based on the Highway Capacity Manual (HCM), 6th Edition methodology.

An intersection's qualitative operational condition is described by the HCM in terms of average control delay per vehicle and volume to capacity (v/c) ratio. Average control delay is measured in seconds of delay that occurs at an intersection, per vehicle, due to the traffic control. The v/c ratio is a measurement of the volume of particular traffic movement or approach in comparison with the capacity of the movement/approach. V/C ratios closer to zero represent that the approach has significant capacity remaining while approaches with v/c values approaching or exceeding 1.0 indicates that the approach is near or at capacity and not able to accommodate the traffic flow.

Together the average control delay and v/c ratio are combined to assign a Level of Service (LOS) to a particular intersection or intersection approach movement. LOS is defined by HCM, using average control delay and v/c, to assign letter grades A through F to indicate the efficiency of the traffic control at an intersection. The definitions of the letter grades in terms of average control delay and v/c are provided in the table below.

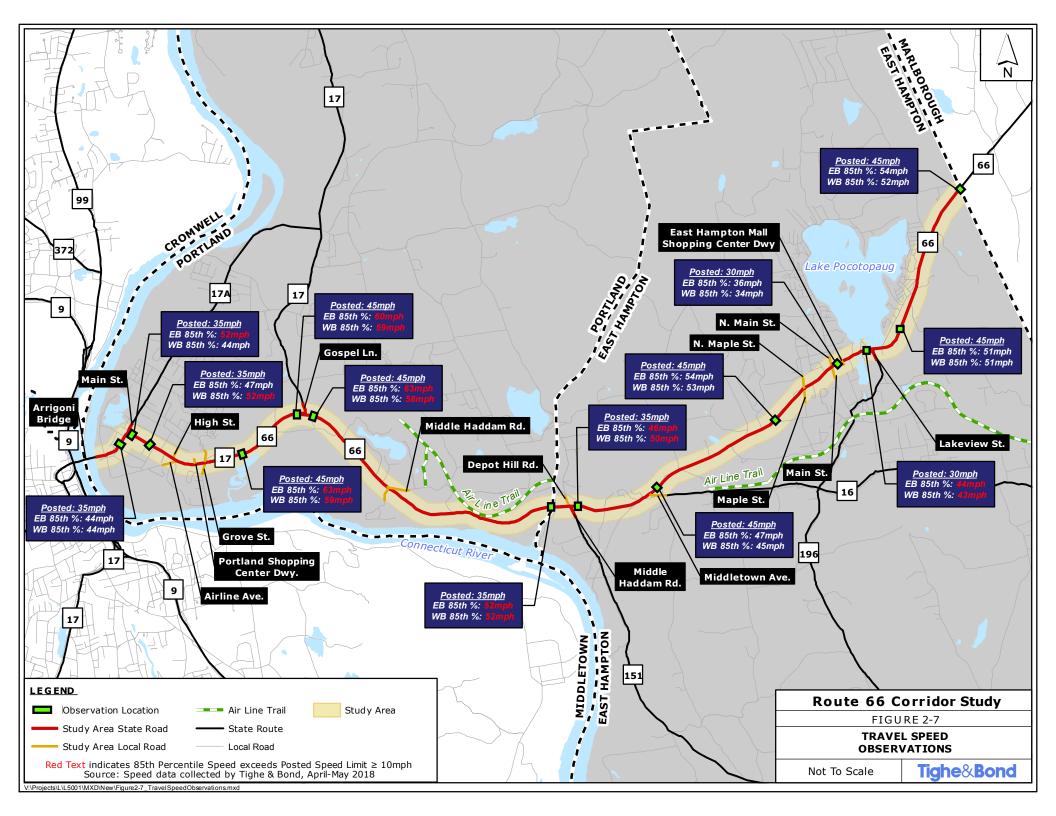

In general intersections that exhibit a LOS A or B are considered to have excellent to good operating conditions with little congestion or delay. LOS C indicates an intersection with acceptable operations. LOS D indicates an intersection that has tolerable operations with average delays approaching one minute. Intersections with Levels of Service E and F are operating with poor or failing conditions and typically warrant a more thorough review and possible improvement to mitigate the capacity issues. Improvements can include geometric, lane use, timing modifications, or different form of traffic control to mitigate the operational issues and reduce average delay. In the context of this planning process, during the analysis of both existing and future conditions, intersections exhibiting LOS E and F will be identified for further analysis and potential improvements to mitigate poor or failing operations.

Level of Service	Signalized Intersection Criteria Average Control Delay (Seconds per Vehicle)	Unsignalized Intersection Criteria Average Control Delay (Seconds per Vehicle)	V/C Ratio >1.00a
Α	≤10	≤10	F
В	>10 and ≤20	>10 and ≤15	F
С	>20 and ≤35	>15 and ≤25	F
D	>35 and ≤55	>25 and ≤35	F
E	>55 and ≤80	>35 and ≤50	F
F	>80	>50	F

Note: aFor approach-based and intersection-wide assessments, LOS is defined solely by control

delay.

Source: HCM2010: Highway Capacity Manual. Washington, D.C.: Transportation Research Board,

2010. Pages 18-6 and 19-2.

In addition to LOS, the HCM methodology also allows for the calculation of queues. Queues are the expected length of vehicles waiting at an intersection due to the delay incurred by the traffic control. The 50th percentile queues, or average queues, are the average number of vehicles expected on an approach at any given time. The 95th percentile, or design queues, are the maximum expected queues on a given approach.

Figure 2-8 and Tables 2-6 to 2-7 summarize the intersection operations in terms of LOS, v/c ratio, and queues at the study area intersections for the 2020 Corridor Conditions. Within the LOS tables, intersections, approaches and/or movements operating at LOS E have been highlighted yellow. Within the queue tables, approaches that exceed available storage have been highlighted in red. Capacity analysis worksheets for 2020 Corridor Conditions are included in Appendix F for the weekday morning and weekday afternoon peak hours.

TABLE 2-5Study Area Signalized Intersection Operational Summary – 2020 Corridor Conditions – LOS

Study Area Signalized	Inters		Operational Weekday Mornir Peak Hour			Corridor Co eekday Afterno Peak Hour	
	Lane Use	LOS	Avg. Delay (s/veh)	v/c	LOS	Avg. Delay (s/veh)	v/c
Fraffic Signal - Route 66 at	Route '	17A (Ma	in Street)				
Overall		В	18.1	0.85	В	17.8	0.86
Route 66	WB	В	19.8	0.85	С	20.7	0.73
Route 66	NBT	С	27.2	0.37	D	39.2	0.83
	NBR	Α	0.7	0.36	Α	7.6	0.86
Route 17A	SB	С	24.9	0.62	В	10.6	0.28
Traffic Signal - Route 66 (M	larlboro						
Overall		Α	7.3	0.67	В	10.6	0.68
Route 66	EBL	Α	6.1	0.38	A	4.2	0.25
	EBT	Α	7.7	0.23	В	11.7	0.61
Route 66	WB	A	4.7	0.67	A	2.7	0.40
High Street	SB	С	25.9	0.60	D	36.6	0.68
Traffic Signal - Route 66 (N	<u>larlboro</u>						
Overall		<u>A</u>	6.3	0.62	A	5.0	0.67
Route 66	EB	A	3.9	0.25	A	4.9	0.67
Route 66	WBL	A	1.2	0.04	A	1.7	0.08
Airline Avenue	WBT NB	A C	6.4 25.7	0.62 0.27	A C	3.3 20.3	0.39 0.31
Traffic Signal - Route 66 (N	1arlboro						
Overall		<u>A</u>	5.2	0.45	B	11.2	0.48
Route 66	EBL	A	1.4	0.07	A	8.6	0.28
Route 66	EBTR	A	0.8	0.16	В	11.5	0.47
Route 66	WBTR	A	6.7	0.45	A D	7.2	0.37
Portland Shopping Center Dr.	SBL SBR	C C	32.3 22.3	0.04 0.02	В	37.7 10.8	0.48 0.18
Traffic Signal - Route 66 (M	<u>larlboro</u>						
Overall	EDI	A	3.6	0.48	A	2.7	0.48
Route 66	EBL	A	0.6	0.01	A	0.7	0.03
	EBT	A	2.0	0.19	A	2.0	0.48
Route 66	WBL	A	1.7	0.00	A	1.8	0.03
Grove Street	WBT	A	4.1	0.48	A	3.6	0.27
Grandview Terrace	NBT	A D	1.4	0.15	A B	1.5	0.14
Statiuview Terrace	SBT	D	35.3	0.05	В	19.3	0.19
Traffic Signal - Route 66 (P	ortland-					12.4	0.40
Overall	EDI	<u>B</u>	11.7	0.62	<u>B</u>	12.4	0.60
Route 66	EBL	D	36.5	0.45	C	34.8	0.48
	EBTR	A B	3.1	0.17	A B	5.5	0.48
Route 66	WBT		13.3	0.62		15.1 3.4	0.39
	WBR SBL	A C	2.6 33.1	0.25 0.40	A D	3.4 42.1	0.16
Route 17 (Gospel Lane)	SBR	В	10.3	0.40	В	42.1 10.1	0.60 0.31
	JDK	ь	10.3	0.40	В	10.1	0.31
Traffic Signal - Route 66 (P	ortland-						0.00
Overall	EDI	A	9.7	0.76	<u>B</u>	12.0	0.82
Route 66	EBL	A	1.9	0.07	A	2.6	0.21
	EBTR	A	3.3	0.30	В	14.6	0.82
Route 66	WBL	A	1.5	0.00	A	2.0	0.01
	WBTR	В	12.5	0.76	A	8.4	0.49
Payne Boulevard	NB	A	1.6	0.15	D	39.6	0.16
Middle Haddam Road	SB	D	43.7	0.02	A	9.7	0.31

TABLE 2-5 (Continued)

Study Area Signalized Intersection Operational Summary – 2020 Corridor Conditions – LOS

			Weekday Mornir Peak Hour	g	w	eekday Afterno Peak Hour	oon			
	Lane Use	LOS	Avg. Delay (s/veh)	v/c	LOS	Avg. Delay (s/veh)	v/c			
Traffic Signal - Route 66 (P	ortland	-Cobalt	Rd/West High S	t) at Rte.	151 (Middle	Haddam Rd)/[Depot Hill			
Overall		С	26.6	0.88	С	22.0	0.92			
Route 66	EB	Α	8.7	0.40	С	24.1	0.92			
Route 66	WB	С	24.6	0.88	Α	5.6	0.41			
Route 151 (Middle Haddam	NBLT	Ε	74.1	0.82	E	69.5	0.58			
Road)	NBR	Α	0.0	0.01	Α	0.0	0.02			
Depot Hill Road	SB	D	45.3	0.42	E	65.9	0.58			
Traffic Signal - Route 66 (West High Street) at Route 16 (Middletown Avenue)/Park & Ride Driveway										
Overall		С	26.2	0.89	В	13.4	0.70			
	EBLT	В	14.0	0.43	В	15.6	0.70			
Route 66	EBR	A	2.5	0.28	A	2.5	0.45			
	WBL	A	9.0	0.01	A	7.7	0.01			
Route 66	WBTR	Ĉ	26.8	0.84	В	10.6	0.42			
	NBLT	D	45.8	0.89	Č	33.3	0.70			
Route 16 (Middletown Ave.)	NBR	A			A					
Park & Pido Drivoway			0.0	0.00	В	0.0	0.01			
Park & Ride Driveway	SB	A	0.0	0.00	В	17.3	0.01			
Traffic Signal - Route 66 (V	Voct Lie	h Stroc	t) at Manla Stra	ot /North	Manla Straa	· /Old Wast High	Stroot			
Overall	vest nig	В	15.4	0.61	B	10.1	0.54			
Route 66	EB	B	12.7	0.55	A	9.0	0.54			
Route 66	WB	В	13.5	0.61	A	7.7	0.45			
Main Street	NB	С	24.6	0.28	С	21.7	0.13			
North Main Street	SB	С	28.5	0.45	С	25.1	0.36			
Old West High Street	SEB	С	29.0	0.00	0	0.0	0.00			
Traffic Signal - Route 66 (E	ast Mai	n St /\/	est Main St) at M	lain Stroo	t /North Mai	n Street				
Overall	ust man	В	18.2	0.56	C	21.7	0.72			
	EBL	A	6.3	0.08	A	8.9	0.32			
Route 66	EBTR	В	14.2	0.42	В	19.3	0.52			
	WBL	A	7.1	0.42	A	5.5	0.32			
Route 66	WBTR	В	18.3	0.10	В	18.9	0.29			
					С					
Main Street	NBL	С	29.0	0.17		26.1	0.13			
	NBTR	С	20.2	0.56	D	41.4	0.72			
North Main Street	SBL	С	32.1	0.34	С	29.1	0.30			
	SBTR	С	22.6	0.50	С	33.8	0.56			
Traffic Signal - Route 66 (E	oct Llial	• C+ \ o	t Fast Hampton	Aall Chan	sina Contor I	Dans /Evereeure	o Dune			
Overall	ast rigi	131.) a A	9.0	0.41	B	13.9	0.61			
Overall	EBL	A	3.7	0.03	A	5.0	0.12			
Route 66	EBT	Ā	9.0	0.03	В	10.2	0.12			
		A			A					
Route 66	WBL		2.0	0.02		3.2	0.01			
F	WBT	Α	6.0	0.41	В	12.7	0.61			
Eversource Driveway	NBT	D	40.3	0.13	C	33.3	0.03			
East Hampton Mall Shopping	SBT	D	45.1	0.30	D	48.9	0.56			
Center Driveway	SBR	Α	0.7	0.09	A	9.8	0.28			
Traffic Signal - Route 66 (E	ast High	Stree	t) at Route 196 (Lake Viev	w Street)					
Overall		В	13.4	0.75	В	15.8	0.80			
Route 66	EB	С	22.6	0.75	С	29.0	0.80			
	WBL	Ä	4.7	0.24	Ä	8.0	0.48			
Route 66	WBTR	A	5.2	0.24	A	4.9	0.42			
	NBL	C	26.9	0.38	Č	31.1	0.42			
Lake View Street	NBR	A	8.8	0.27	A	9.1	0.38			
	NDR	Α	0.0	0.33	А	7.1	0.36			

TABLE 2-6Study Area Signalized Intersection Operational Summary – 2020 Corridor Conditions – Queues

				/ Morning Hour		Afternoon Hour
	Lane Use	Available Storage	Avg. Queues	Design Queues	Avg. Queues	Design Queues
Traffic Signal - Route 66	at Rou	te 17A (Main s	Street)			
Route 66	WB	>500	355	444	181	196
Route 66	NBT	510	65	101	167	#252
Route 66	NBR	>500	0	0	0	#20
Route 17A	SB	510	132	186	56	100
Traffic Signal - Route 66	(Marlbo	orough Street) at High Street			
Route 66	EBL	225	9	m25	12	m21
	EBT	>500	44	88	193	m318
Route 66	WBT	150	31	67	0	25
High Street	SB	>500	49	106	91	151
raffic Signal - Route 66	(Marlbo	orough Street) at Airline Aver			
Route 66	EB	145	21	33	56	68
Route 66	WBL	175	1	m3	1	m3
toute ou	WBT	>500	190	71	23	39
Airline Avenue	NB	>500	20	52	24	60
raffic Signal - Route 66) at Portland Sh			
Route 66	EBL	350	1	6	35	m76
	EBTR	>500	0	35	211	387
Route 66	WBTR	370	0	437	101	173
ortland Shopping Center [SBL	155	3	15	54	98
ortiana Shopping Center L	SBR	155	0	8	0	27
raffic Signal - Route 66	(Marlbo	orough St/Por	tland-Cobalt Rd) at Grove Street	/ Grandview Terra	ace
Route 66	EBL	125	1	0	1	m1
toute oo	EBTR	370	22	35	127	55
Route 66	WBL	150	0	1	1	3
toute 66	WBTR	>500	95	217	41	99
Grove Street	NB	>500	0	0	0	0
Grandview Terrace	SB	>500	3	15	1	25
Traffic Signal - Route 66	(Portla	nd-Cobalt Roa	nd) at Route 17	(Gospel Lane)		
Route 66	EBL	200	32	75	68	134
toute ou	EBT	>500	21	42	98	175
Route 66	WBT	>500	138	268	95	152
TOUTE OF	WBR	200	0	33	0	29
Pourto 17 (Cospol Lors)	SBL	>500	35	81	69	126
Route 17 (Gospel Lane)	SBR	100	0	43	0	38
raffic Signal - Route 66	(Portla	nd-Cobalt_Roa	nd) at Middle Ha	ddam Road/Payn	e Boulevard	
	EBL	175	2	5	11	20
Pauta //			58	142	343	#1002
Route 66	EBTR	>1500	58	142		
	EBTR WBL	>1500 300	0	1	0	2
						2 247
Route 66 Payne Boulevard	WBL	300	0	1	0	

m: Volume for 95th percentile queue is metered by upstream signal.

^{#: 95}th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.


TABLE 2-6 (Continued)

Study Area Signalized Intersection Operational Summary – 2020 Corridor Conditions – Queues

				Morning Hour		Afternoon Hour	
	Lane	Available	Avg.	Design	Avg.	Design	
	Use	Storage	Queues	Queues	Queues	Queues	
Traffic Signal - Route 66	(Portla	nd-Cobalt Rd	/West High St) a	at Rte. 151 (Midd	le Haddam Rd)/De	epot Hill Rd	
Route 66	EB	>1500	142	193	612	#1244	
Route 66	WB	>1000	584	789	114	201	
Route 151 (Middle Haddam	NBLT	>500	150	#270	53	102	
•	NBR	65	0	0	0	0	
Depot Hill Road	SB	>500	49	102	50	100	
Traffic Signal - Route 66	(West	High Street) a	nt Route 16 (Mic	dletown Avenue)	/Park & Ride Driv	eway	
Route 66	EBLT	>500	86	133	139	321	
toute 00	EBR	250	0	26	0	38	
Route 66	WBL	125	1	6	0	4	
todic ou	WBTR	>500	216	318	70	165	
Route 16 (Middletown Ave	NBLT	>500	167	#450	66	194	
•	NBR	100	0	0	0	0	
Park & Ride Driveway	SB	75	0	0	1	11	
Fraffic Signal - Route 66	(West	High Street) a	nt Maple Street	North Maple Stre	et/Old West High	Street	
Route 66	EB	>500	74	251	99	205	
Route 66	WB	>500	96	312	80	163	
Main Street	NB	>500	0	0	0	0	
North Main Street	SB	>500	30	108	0	0	
Old West High Street	SEB	>500	0	5	0	0	
Tracffic Clausel Devite //	/F + 1	A-: C+ ()A/+	Main CAN at Main	- C+	in Charact		
Traffic Signal - Route 66	EBL	275	<u>Main St) at Maii</u> 7	21	28	64	
Route 66	EBTR	>500	140	251	181	348	
	WBL	225	16	25	25	m20	
Route 66	WBTR	485	245	359	282	#480	
	NBL	225	16	40	14	33	
Main Street	NBTR	>500	27	77	85	140	
	SBL	175	51	90	48	81	
North Main Street	SBTR	>500	33	91	76	136	
Traffic Signal - Route 66	(East F EBL	ligh Street) a	t East Hampton 2	Mall Shopping Cei m11	nter Dwy/Eversou 7	rce Dwy m19	
Route 66	EBTR	485	135	369	, 126	292	
	WBL	125	135	4	120	3	
Route 66	WBTR	>500	79	224	228	422	
Eversource Driveway	NB	260	11	32	4	16	
3	SBL	140	24	56	62	109	
	SBR	140	0	0	0	37	
East Hampton Mall Shoppir							
	(Feet !	limb Campath -	. Davida 10/ /l -	La Viana Canaca			
Traffic Signal - Route 66	•				216	#470	
Traffic Signal - Route 66 Route 66	EB	>500	143	280	216 27	#479 82	
Traffic Signal - Route 66 Route 66	EB WBL	>500 250	143 10	280 28	27	82	
East Hampton Mall Shoppir Traffic Signal - Route 66 Route 66 Route 66 Lake View Street	EB	>500	143	280			

m: Volume for 95th percentile queue is metered by upstream signal.

^{#: 95}th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.

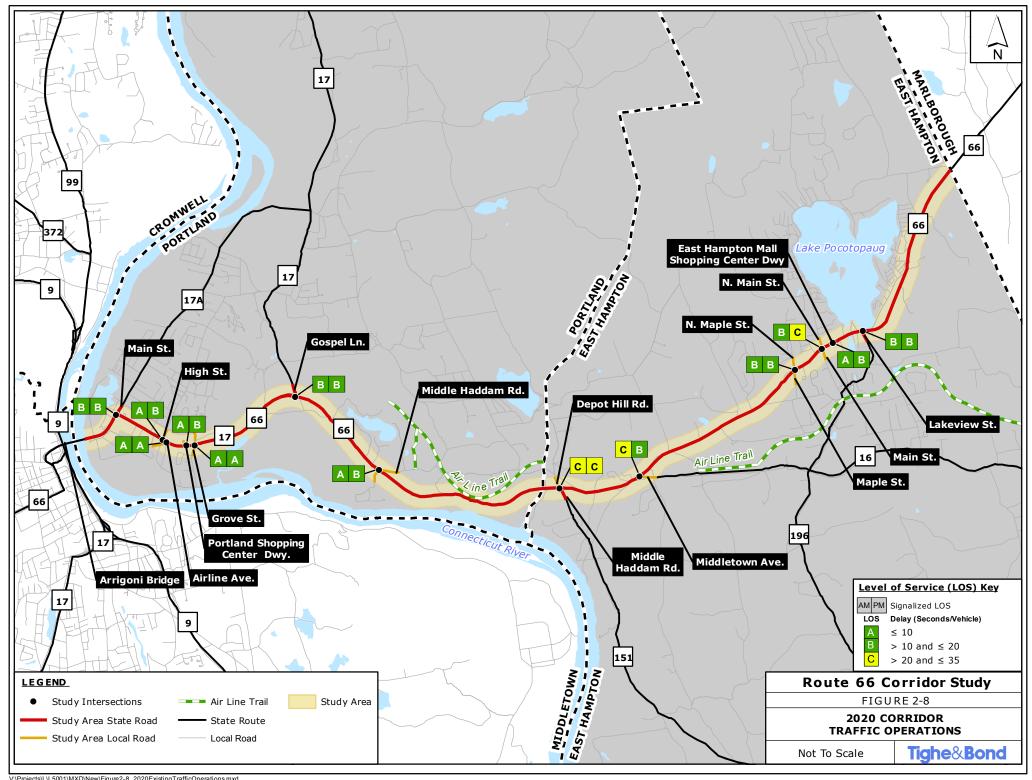

2.6.1 2020 Weekday Morning Peak Hour Operations

During the weekday morning peak hour, all the study area intersections and movements operate at LOS D or better with the exception of the northbound approach of the Route 66 at Route 151 (Middle Haddam Road)/ Depot Hill Road intersection, which operates at LOS E. Throughout the corridor, longer delays occur on several side streets as vehicles attempting to access the corridor from the side streets have to wait through long signal timing splits for Route 66 approaches. Additionally, there are a few intersections on Route 66 with long queues on the eastbound and westbound approaches. The following capacity issues are noted in the analysis:

Route 66 at Route 17A (Main Street)

Oueues of 444 feet on the westbound approach were reported based on the capacity analysis results. Field observations indicate vehicles form a rolling queue platoon up to 2,000 feet on the westbound approach during the weekday morning peak hour. The rolling queue can require 2-3 cycles to travel through the intersection.

Route 66 at Portland Shopping Center Driveway

o A 95th percentile queue of 437 feet and a 50th percentile queue of 0 feet on the westbound shared through-right lane were reported based on the operational analysis results. Given that there is an upstream signal approximately 370 feet to the east at Grove Street, the 95th queue on the westbound approach at the Portland Shopping Center Driveway intersection may not be experienced in many cases due to the upstream metering. Instead, the 50th percentile queue may represent the maximum queue experienced. Field observations indicate only a small number of vehicles may back up on the westbound approach during weekday morning commuter peak hours.

Route 66 at Middle Haddam Road/ Payne Boulevard

The capacity analysis results indicate that the volume for the 95th percentile cycle exceeds capacity and the 95th percentile queue exceeds 920 feet on the westbound shared through-right approach. Synchro software is developed to simulate up to two complete cycles of 95th percentile traffic to account for the effects of spillover between cycles. In reality, heavy traffic may spill over among more than two complete cycles during weekday commuter peak hours. Field observations indicate vehicles on the westbound approach may back up to the Citgo Gas Station Driveway, approximately 3,400 feet to the east during weekday morning peak hour.

Route 66 at Route 151 (Middle Haddam Road) / Depot Hill Road

- LOS E operation on the northbound shared through-left approach with a v/c ratio of 0.82 and delays of approximately 74 seconds per vehicle.
- Significant queuing approaching the intersection at approximately 790 feet for the westbound approach. Rolling queues longer than 790 feet that form a vehicle platoon have been observed in the field during weekday morning commuter peak hour.

Route 66 at East Hampton Mall Shopping Center Driveway

Delays of approximately 45 seconds on the southbound shared through-left approach due to a short green time splits during each cycle for the side streets at the intersection.

2.6.2 2020 Weekday Afternoon Peak Hour Operations

Similar to the traffic operation during weekday morning peak hour, the weekday afternoon peak hour's most significant deficiency occurs at the northbound and southbound approaches of the Route 66 at Route 151 (Middle Haddam Road)/ Depot Hill Road intersection, which operate at LOS E. However, the remaining study intersections and movements all operate at acceptable LOS D or better. Minor delays on side street approaches exist during the afternoon peak hour throughout the corridor. As was the case during the morning peak hour, there are a few intersections on Route 66 with long queues on the eastbound and westbound approaches. The following capacity issues are noted from the analysis:

Route 66 at Middle Haddam Road/ Payne Boulevard

o The capacity analysis results indicate that the volume for the 95th percentile cycle exceeds capacity and the 95th percentile queue exceeds 1,000 feet on the eastbound shared through-right approach. As mentioned previously, Synchro only simulates up to two complete cycles of 95th percentile traffic to account for the effects of spillover between cycles, and in reality, heavy traffic may spill over among more than two complete cycles during weekday commuter peak hours.

Route 66 at Route 151 (Middle Haddam Road) / Depot Hill Road

- o LOS E operation on the northbound through/ left and southbound approach.
- Significant queuing exceeding 1,250 feet on the eastbound approach approaching the intersection.

Route 66 at Main Street/ North Main Street

 Queues of approximately 480 feet on the westbound shared through-right lane, nearing the approximately 485-foot available storage before reaching the East Hampton Shopping Center Driveway intersection.

Route 66 at East Hampton Mall Shopping Center Driveway

Delays of approximately 50 seconds per vehicle on the southbound shared through-left approach exiting the supermarket plaza are a result of a 95 second cycle with short green time splits during each cycle for the side streets at the intersection.

2.7 2020 Corridor Conditions Optimized Traffic Operations

The 2020 Corridor Conditions Traffic Volumes were also analyzed with an optimized traffic network where the physical lane geometry remained unchanged but traffic signal timings including the coordination along the corridor was optimized. The purpose of the 2020 Corridor Conditions Optimized traffic analysis is to determine how the existing signalization along the corridor could be adjusted to better process expected traffic without any significant physical improvements.

The optimization process included a review of the coordinated system along Route 66, the coordinated system cycle lengths, and signal phase timing splits at each of the study area intersections to balance delays on the intersection approaches to increase the overall efficiency of the traffic operations. The optimization process was similar to those employed by CTDOT, which monitors state-maintained time-based coordination systems, periodically modifying the signal timing based on current volumes to maintain operational efficiency. A study area minimum cycle length of 60 seconds and maximum cycle length of 120 seconds were utilized during optimization. The optimization of the traffic signal operation included the following:

- Optimization of the phase splits at the time-based coordinated intersections of Route 66 at Main Street, High Street, Airline Avenue, Portland Shopping Center Driveway, and Grove Street. Retain the existing cycle length of 80 seconds at these intersections.
- Optimization of the cycle length and phase splits at the uncoordinated intersections of Route 66 at Gospel Lane (Route 17) and Middle Haddam Road (West Junction), respectively.
- Adjustment of cycle length (decrease from 128.1 seconds to 110 seconds) and optimization of phase splits at the uncoordinated intersection of Route 66 at Depot Hill Road & Route 151 to better balance green time splits between the major corridor and the side road approaches to help mitigate the unacceptable LOS on the side street approaches.
- Optimization of the cycle length and phase splits at the uncoordinated intersections of Route 66 at Middletown Avenue (Route 16) and Maple Street, respectively.
- Adjustment of cycle length (decrease from 95 seconds to 80 seconds) and optimization of phase splits at the time-based coordinated intersections of Route 66 at Main Street/North Main Street and East Hampton Shopping Center Driveway.
- Optimization of the cycle length and phase splits at the uncoordinated intersection of Route 66 at Lakeview Street.
- A study area minimum cycle length of 60 seconds and maximum cycle length of 120 seconds were utilized during optimization.

A summary of the expected traffic operations following optimization is provided in Tables 2-7 and 2-8. Figure 2-8 illustrates the overall signalized intersection LOS on the study area map with the LOS color coded by letter. As shown in Table 2-7, all of the study intersections are expected to operate at acceptable LOS D or better with the timings optimization. Capacity analysis worksheets for the 2020 Corridor Conditions-Optimized traffic network are included in Appendix G for the weekday morning and afternoon peak hours. Tables comparing the 2020 Corridor Conditions and 2020 Optimized Corridor Conditions are provided in Appendix H.

The traffic signal optimization mitigates some of the delay and queues caused by the heavy peak traffic flow along the corridor. Overall intersection LOS at select intersections during the peak periods are improved to acceptable levels.

TABLE 2-7Study Area Signalized Intersection Operational Summary – 2020 Optimized Corridor Conditions – LOS

Study Area Signalized I			Weekday Mornir Peak Hour	-	-	eekday Afterno Peak Hour	
	Lane Use	LOS	Avg. Delay (s/veh)	v/c	LOS	Avg. Delay (s/veh)	v/c
Traffic Signal - Route 66 at	Route	17A (Ma	in Street)				
Overall		В	17.4	0.87	В	17.9	0.86
Route 66	WB	В	19.1	0.87	С	29.6	0.74
Route 66	NBT	С	29.3	0.42	С	29.5	0.68
	NBR	Α	0.7	0.36	A	7.6	0.86
Route 17A	SB	С	22.4	0.59	В	10.3	0.28
Traffic Signal - Route 66 (N	/larlboro						
Overall		<u>A</u>	6.4	0.67	<u>B</u>	11.9	0.67
Route 66	EBL	Α	6.4	0.38	A	4.2	0.25
Davita //	EBT	A	7.5	0.22	В	12.2	0.61
Route 66	WB	A	3.6	0.67	A	6.0	0.41
High Street	SB	С	24.2	0.59	D	35.3	0.67
Traffic Signal - Route 66 (N	1arlboro						
Overall		<u>A</u>	10.0	0.62	A	8.3	0.67
Route 66	EB	Α	3.7	0.25	Α	5.1	0.67
Route 66	WBL	Α	1.5	0.04	A	7.2	0.08
A lattice of Assessment	WBT	В	11.9	0.62	В	12.4	0.39
Airline Avenue	NB	С	25.9	0.27	С	20.4	0.31
Traffic Signal - Route 66 (N	1arlboro	ugh Stre	eet) at Portland	Shopping (Center Drive	eway	
Overall		Α	6.4	0.45	Α	8.9	0.48
Route 66	EBL	Α	4.1	0.07	Α	3.8	0.28
	EBTR	Α	3.1	0.16	Α	3.1	0.47
Route 66	WBTR	Α	7.5	0.45	В	14.9	0.37
Portland Shopping Center Dr.	SBL	С	32.3	0.04	D	37.9	0.48
	SBR	С	22.3	0.02	В	10.7	0.18
Traffic Signal - Route 66 (N	1arlboro	ugh St/	Portland-Cobalt	Rd) at Gro	ve Street/	Grandview Ter	race
Overall		Α	3.2	0.48	Α	7.1	0.48
Route 66	EBL	Α	0.6	0.01	Α	2.7	0.03
Noute 66	EBT	Α	0.6	0.19	Α	8.9	0.48
Route 66	WBL	Α	1.7	0.00	Α	1.8	0.03
	WBT	Α	4.1	0.48	Α	3.6	0.27
Grove Street	NBT	Α	1.4	0.15	Α	1.5	0.14
Grandview Terrace	SBT	D	35.3	0.05	В	19.3	0.19
Traffic Signal - Route 66 (P	ortland	-Cobalt I	Road) at Route	17 (Gospel	Lane)		
Overall		В	13.4	0.75	В	10.9	0.50
Pouto 66	EBL	С	27.7	0.41	С	27.0	0.50
Route 66	EBTR	Α	3.7	0.18	Α	5.9	0.49
Route 66	WBT	В	17.9	0.75	В	15.0	0.46
Route 66	WBR	Α	3.3	0.29	Α	4.2	0.19
Doute 17 (Cospellane)	SBL	С	23.5	0.35	С	26.1	0.48
Route 17 (Gospel Lane)	SBR	Α	8.2	0.36	Α	7.4	0.27
Traffic Signal - Route 66 (P	ortland	-Cohalt I	Road) at Middle	Haddam D	nad/Payre	Roulevard	
Overall	or tiariu	B	10.0	0.75	B	12.7	0.84
	EBL	A	2.1	0.73	A	2.7	0.22
Route 66	EBTR	A	3.4	0.07	В	15.6	0.22
	WBL	A	1.5	0.00	A	2.0	0.04
Route 66	WBTR	В	13.0	0.75	Ä	9.0	0.51
Payne Boulevard	NB	A	1.0	0.73	D	36.8	0.15
Middle Haddam Road	SB	C	34.7	0.12	A	7.2	0.13
dao ridddain Rodd	JD		J+.1	0.02	A	1.4	0.27

TABLE 2-7 (Continued)

Study Area Signalized Intersection Operational Summary – 2020 Optimized Corridor Conditions – LOS

			Weekday Mornin Peak Hour	-	•	eekday Afterno Peak Hour	
	Lane Use	LOS	Avg. Delay (s/veh)	v/c	LOS	Avg. Delay (s/veh)	v/c
Traffic Signal - Route 66 (F	ortland-	-Cobalt	Rd/West High St	t) at Rte.	151 (Middle	Haddam Rd)/[Depot Hill
Overall		С	31.2	0.95	C	22.5	0.93
Route 66	EB	В	10.9	0.43	C	26.6	0.93
Route 66	WB	D	36.6	0.95	Ā	6.2	0.41
Route 151 (Middle Haddam	NBLT	D	55.0	0.78	D	54.8	0.56
Road)	NBR	Ā	0.0	0.01	Ā	0.0	0.01
Depot Hill Road	SB	C	25.6	0.33	D	46.6	0.50
•							
Traffic Signal - Route 66 (V	Vest Hig						
Overall	FDI T	<u>C</u>	27.2	0.88	B	13.0	0.72
Route 66	EBLT	В	15.8	0.44	В	15.2	0.70
	EBR	Α	3.1	0.29	A	2.6	0.46
Route 66	WBL	В	11.5	0.01	Α	7.3	0.01
	WBTR	С	31.3	0.86	В	10.2	0.43
Route 16 (Middletown Ave.)	NBLT	D	41.3	0.88	С	32.0	0.72
Rodic To (MiddletoWTTAVe.)	NBR	Α	0.0	0.00	Α	0.0	0.01
Park & Ride Driveway	SB	Α	0.0	0.00	В	13.7	0.01
Traffic Signal - Route 66 (V	Vest Hin	h Stree	et) at Manle Stree	et/North	Manle Street	/Old West High	Street
Overall		В	14.7	0.56	В	10.3	0.56
Route 66	EB	В	12.3	0.50	A	9.8	0.56
Route 66	WB	В	13.4	0.56	A	8.3	0.47
Main Street	NB	C	21.7	0.28	В	17.4	0.13
North Main Street		C			C		
	SB		25.4	0.45		21.1	0.36
Old West High Street	SEB	С	22.0	0.00	0	0.0	0.00
Traffic Signal - Route 66 (E	ast Mai	n St/W	est Main St) at M	ain Stree	et/North Mai	n Street	
Overall		В	14.8	0.51	В	18.9	0.68
	EBL		6.6	0.09	B	10.0	0.38
Route 66	EBTR	В	15.5	0.46	c	20.2	0.58
	WBL	A	3.3	0.11	A	6.2	0.33
Route 66	WBTR	В	12.2	0.51	В	15.6	0.68
	NBL	C	22.8	0.14	C	20.8	0.00
Main Street							
	NBTR	В	15.9	0.50	С	33.4	0.66
North Main Street	SBL	С	26.1	0.33	С	23.9	0.30
	SBTR	В	17.5	0.46	С	24.1	0.46
Traffic Signal - Route 66 (E	ast High	n St.) a	t East Hampton N	/lall Shop	ping Center I	Dwy/Eversource	e Dwy
Overall		Ā	8.5	0.40	В	12.2	0.59
Route 66	EBL	Α	3.7	0.03	Α	4.3	0.11
route oo	EBT	Α	8.5	0.40	Α	8.2	0.41
	WBL	Α	2.3	0.02	Α	3.5	0.01
Route 66	WBT	Α	6.2	0.40	В	12.4	0.59
Eversource Driveway	NBT	С	32.9	0.12	C	27.1	0.03
East Hampton Mall Shopping	SBT	Ď	36.3	0.26	Ď	39.5	0.51
Center Driveway	SBR	A	0.5	0.20	A	6.4	0.25
Center Briveway	OBIC	- / (0.0	0.07		0.1	0.20
Traffic Signal - Route 66 (E	ast High						
Overall		В	12.6	0.75	В	13.5	0.78
Route 66	EB	С	20.8	0.75	С	23.1	0.78
Route 66	WBL	Α	4.9	0.26	Α	9.2	0.55
Noute ou	WBTR	Α	5.3	0.39	Α	4.9	0.44
Lake View Street	NBL	С	23.5	0.27	С	25.8	0.30
Lake VIEW Street	NBR	Α	8.4	0.53	Α	8.1	0.35

TABLE 2-8Study Area Signalized Intersection Operational Summary – 2020 Optimized Corridor Conditions – Queues

				/ Morning Hour	•	Afternoon Hour
	Lane Use	Available Storage	Avg. Queues	Design Queues	Avg. Queues	Design Queues
Traffic Signal - Route 66	at Rou	te 17A (Main	Street)			
Route 66	WB	>500	394	357	213	150
Route 66	NBT	510	67	105	155	214
Roule 66	NBR	>500	0	0	0	#20
Route 17A	SB	510	128	178	55	98
Traffic Signal - Route 66						
Route 66	EBL	225	9	m25	12	m21
	EBT	>500	43	88	193	m334
Route 66	WBT	150	11	40	53	59
High Street	SB	>500	44	101	88	148
Traffic Signal - Route 66	(Marlb	orough Stree	t) at Airline Aver	nue		
Route 66	EB	145	21	33	55	68
Route 66	WBL	175	4	m0	2	m17
route oo	WBT	>500	313	2	53	196
Airline Avenue	NB	>500	20	52	24	60
Traffic Signal - Route 66	(Marlb	orough Stree	t) at Portland Sh	opping Center Dri	veway	
Route 66	EBL	350	1	0	9	m31
Route 66	EBTR	>500	0	130	43	110
Route 66	WBTR	370	0	455	154	242
Portland Shopping Center	, SBL	155	3	15	54	98
	SBR	155	0	8	0	27
Traffic Signal - Route 66	(Marlb	orough St/Po	ortland-Cobalt Ro	l) at Grove Street	/ Grandview Terra	ace
Davida //	EBL	125	0	1	3	m4
Route 66	EBTR	370	5	10	270	357
D-1:4- //	WBL	150	0	1	1	3
Route 66	WBTR	>500	95	217	41	99
Grove Street	NB	>500	0	0	0	0
Grandview Terrace	SB	>500	3	15	1	25
Traffic Signal - Route 66	(Portla	nd-Cobalt Ro	ad) at Route 17	(Gospel Lane)		
	EBL	200	23	60	44	99
Route 66	EBT	>500	20	41	84	160
	WBT	>500	131	#280	76	131
Route 66	WBR	200	0	34	0	29
	SBL	>500	25	61	44	88
Route 17 (Gospel Lane)	SBR	100	0	36	0	30
Traffic Signal - Route 66	(Portla	nd-Cohalt Po	nad) at Middle ⊔a	ddam Road/Payn	e Boulevard	
	EBL	175	1	5	11	21
Route 66	EBTR	>1500	0	148	343	#977
	WBL	300	0	146	0	# <i>911</i>
Route 66	WBTR	>1000	0	#848	156	250
Payne Boulevard						
3	NB	>500	0	0	9	32
Middle Haddam Road	SB	>500	1	10	0	19

m: Volume for 95th percentile queue is metered by upstream signal.

^{#: 95}th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.

TABLE 2-8 (Continued)

Study Area Signalized Intersection Operational Summary – 2020 Optimized Corridor Conditions – Queues

				/ Morning Hour	Weekday Afternoon Peak Hour		
	Lane Use	Available Storage	Avg. Queues	Design Queues	Avg. Queues	Design Queues	
		•					
Traffic Signal - Route 66	(Portla	nd-Cobalt Rd	/West High St) :	at Rte. 151 (Midd	le Haddam Rd)/D	epot Hill Rd	
Route 66	EB	>1500	121	231	577	#1067	
Route 66	WB	>1000	494	#923	108	198	
	NRI T	>500	102	171	39	82	
Route 151 (Middle Haddar	NBR	65	0	0	0	0	
Depot Hill Road	SB	>500	29	67	36	80	
Fraffic Signal - Route 66	Most	Lliah Stroot) a	et Bouto 16 (Mir	ddlotown Avonuo)	/Park & Rido Driv	OWOW	
rranic signal - Route 66	EBLT	>500	97	155	135	265	
Route 66	EBR	250	0	32	0	36	
	WBL	125	1	32 7	0	4	
Route 66	WBTR	>500	245	#385	68	134	
	NRI T	>500	183	#352	62	#161	
Route 16 (Middletown Ave	NBR	100	0	#352 0	0	#161 0	
Park & Ride Driveway	SB	75	0	0	1	8	
				•			
Traffic Signal - Route 66							
Route 66	EB	>500	72	233	99	209	
Route 66	WB	>500	92	#306	80	164	
Main Street	NB	>500	0	0	0	0	
North Main Street	SB	>500	0	0	0	0	
Old West High Street	SEB	>500	0	0	0	0	
Traffic Signal - Route 66	(East N	Main St/West	Main St) at Mai	n Street/North Ma	ain Street		
Route 66	EBL	275	7	19	31	55	
todic oo	EBTR	>500	136	227	195	286	
Route 66	WBL	225	9	6	8	m42	
toute oo	WBTR	485	162	302	233	182	
Main Street	NBL	225	13	34	10	30	
vidiri Sti eet	NBTR	>500	22	68	78	126	
North Main Street	SBL	175	40	77	35	72	
NOT LIT IVIAILI SLIEEL	SBTR	>500	24	76	47	118	
Traffic Signal - Route 66	(East F	ligh Street) at	t East Hampton	Mall Shopping Cer	nter Dwy/Eversou	ırce Dwv	
	EBL	225	1	m10	7	m12	
Route 66	EBTR	485	69	353	112	215	
Davida ()	WBL	125	1	4	1	3	
Route 66	WBTR	>500	78	225	216	416	
Eversource Driveway	NB	260	9	27	3	13	
•	SRI	140	20	49	51	94	
East Hampton Mall Shoppi	r SBR	140	0	0	0	26	
Traffic Signal - Route 66	(East F	ligh Street) at	t Route 196 (I ສ	ke View Street)			
Route 66	EB	>500	132	228	179	#349	
Pouto 66	WBL	250	10	23	27	59	
Route 66	WBTR	>500	50	89	73	123	
	NBL	170	21	59	30	68	
Lake View Street							

m: Volume for 95th percentile queue is metered by upstream signal.

^{#: 95}th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.

2.8 Traffic Safety

Historical motor vehicle collision data for the study area was collected from University of Connecticut Crash Data Repository for the latest three-year period of available data between January 1, 2015 and December 31, 2017. Summaries and details of the collision history at each individual intersection are included in Appendix I. Figure 2-9 shows a graphical summary of the collisions and collision rates along the corridors and at the study area intersections. Further details for select intersections with high collision rates are provided in the following sections.


2.8.1 Collision History

Table 2-9 summarizes the number and type of collisions recorded along Route 66 within the study area from 2015 through 2017. During this three-year period, 455 crashes were reported. Rear-end type collisions accounted for just over half of the total number of collisions with 236 crashes (52%) recorded. The second most common type of collision was angle with 78 crashes (17%), fixed object with 60 crashes (13%), and sideswipe, same direction with 26 crashes (6%). The remaining collision types accounted for 5% or less of the total number of crashes.

Four fatalities occurred over the three-year collision history. The first occurred when a vehicle exiting a private driveway west of Sand Hill Road at Route 66 collided with a motorcycle, causing the motorcycle to hit the guardrail. The second fatality was caused by a vehicle colliding with a tree west of the intersection of Route 66 and Grandview Terrace. The third fatality occurred when a person fell from his motorcycle traveling westbound on Route 66 near 78 Marlborough Street. The fourth fatality was the result of a head-on collision that took place near the Portland-East Hampton Town Line. A total of 10 crashes (2%) resulted in an injury, while the remaining 442 collisions (97%) resulted in property damage only. Table 2-10 summarizes the collision severity data along Route 66.

Table 2-11 summarizes the Route 66 collisions by study area intersection. In general, collisions were defined as occurring at an intersection if occurring within approximately 200 feet of the intersection mile post. Additionally, engineering judgement was used on a case by case basis to determine if the collision should be classified under a specific intersection. As shown in Figure 2-10, the intersection of Route 66 at Route 17A (Main Street) experienced the most collisions with 38 crashes (13 crashes per year). The intersection of Route 66 at High Street and Route 66 at Route 151 (Middle Haddam Road)/ Depot Hill Road experienced 18 and 17 collisions (6 crashes per year), respectively, as shown in Figures 2-11 and 2-12, respectively. The remaining study area intersections experienced lower collision rates.

A review of the collision rates along the Route 66 segments between the intersections shows that the majority of the segments have typical rates for an urban, principal arterial roadway. The Route 66 segment between the East Hampton Mall Shopping Center Driveway and Route 196 (Lake View Street) intersections experiences a high collision rate, likely due to collisions caused by the high number of driveway access points for businesses along the segment.

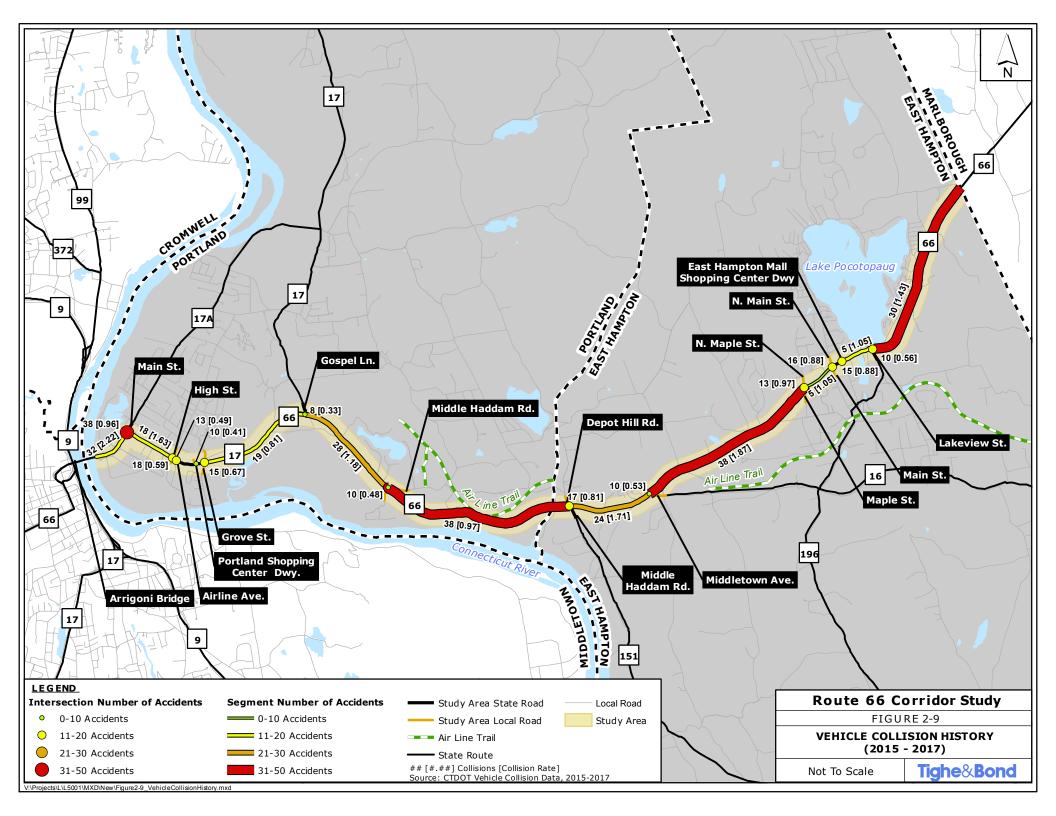

The area west of the study area on Route 66, beyond the Arrigoni Bridge was reviewed separately as part of the collision analysis. The segment between the western limit of the study area and the Spring Street intersection in Middletown exhibits a high crash rate, affecting downstream traffic operations in the study area on Route 66. This segment experienced 59 collisions (20 crashes per year). Rear end accounted for just under half of the collisions along this segment with 26 crashes (44%). The second and third most common type of collisions in this segment were fixed object with 12 crashes (20%) and sideswipes with 9 crashes (15%). The remaining collision types accounted for 5% or less of all collisions on this segment.

TABLE 2-9Route 66 Collisions – Type

		% of Total			
Collision Type	2015	2016	2017	Total	Collisions
Rear-End	76	86	73	235	51.80%
Angle	21	34	23	78	17.20%
Fixed Object	21	16	23	60	13.20%
Sideswipe, Same Direction	9	9	8	26	5.70%
Animal	2	9	7	18	4.00%
Other Non-Fixed Object	4	3	2	9	2.00%
Overturn/Rollover	0	3	3	6	1.30%
Other Non-Collision	3	2	1	6	1.30%
Head-On	2	0	2	4	0.90%
Sideswipe, Opposite Direction	2	2	0	4	0.90%
Bicycle	1	2	0	3	0.70%
Backing	0	2	1	3	0.70%
Pedestrian	0	1	0	1	0.20%
Other	0	0	1	1	0.20%
Jacknife	0	0	0	0	0.00%
Not Applicable	0	0	0	0	0.00%
TOTAL	143	168	144	454	100%

TABLE 2-10Route 66 Collisions – Severity

		% of Total			
Severity	2015	2016	2017	Total	Collisions
Property Damage Only (PDO)	140	163	139	442	96.90%
Injury	2	4	4	10	2.20%
Fatal	1	2	1	4	0.90%
TOTAL	143	169	144	456	100%

TABLE 2-11Route 66 Collisions – Study Area Intersection Summary

	Nu	ımber of	ns	% of	
Study Area Intersection	2015	2016	2017	Total	Total Collisions
Route 66 at Route 17A (Main Street)	6	19	12	37	8.1%
Route 66 at High Street	4	4	10	18	4.0%
Route 66 at Airline Avenue	5	6	2	13	2.9%
Route 66 at Portland Shopping Center Driveway	4	2	5	11	2.4%
Route 66 at Grove Street/ Grandview Terrace	4	6	5	15	3.3%
Route 66 at Route 17 (Gospel Lane)	4	1	3	8	1.8%
Route 66 at Middle Haddam Road/ Payne	2	7	1	10	2.2%
Route 66 at Route 151 (Middle Haddam Road)/ Depot Hill Road	10	3	4	17	3.7%
Route 66 at Route 16 (Middletown Avenue)	1	6	3	10	2.2%
Route 66 at Maple Street/ North Maple Street	3	7	3	13	2.9%
Route 66 at Main Street/ North Main Street	4	9	4	17	3.7%
Route 66 at East Hampton Mall Shopping Center	5	7	3	15	3.3%
Route 66 at Route 196 (Lake View Street)	2	2	6	10	2.2%
TOTAL	54	79	61	194	43%


2.8.2 Bicycle and Pedestrian Crash History


The crash data from the study area was reviewed for crashes caused by or involving bicyclists and/or pedestrians. The data, summarized in Table 2-12 revealed that four direct collisions with pedestrians or bicyclists occurred within the study area.


TABLE 2-12Pedestrians and Bicyclists Collisions Summary

Date	Туре	Location	Contributing Factor	Injury	
9/4/2015	Bicycle	Route 66 at Arrigoni Bridge (EB approach)	Unknown	Possible Injury	
3/27/2016	Bicycle	Route 66 at Maple Street	Unknown	Suspected Minor Injury	
5/25/2016	Bicycle	Route 66 at Mallard Cove	Unsafe Use of Highway By Bicyclist	None	
9/4/2016	Pedestrian	Route 66 at North Main Street	Work Zone	Suspected Serious Injury	

Due to the limited number of incidents, no pattern is discernable that would suggest a specific safety hazard within the study area. However, the study area is lacking in bicycle and pedestrian facilities which exposes users to crash risk.

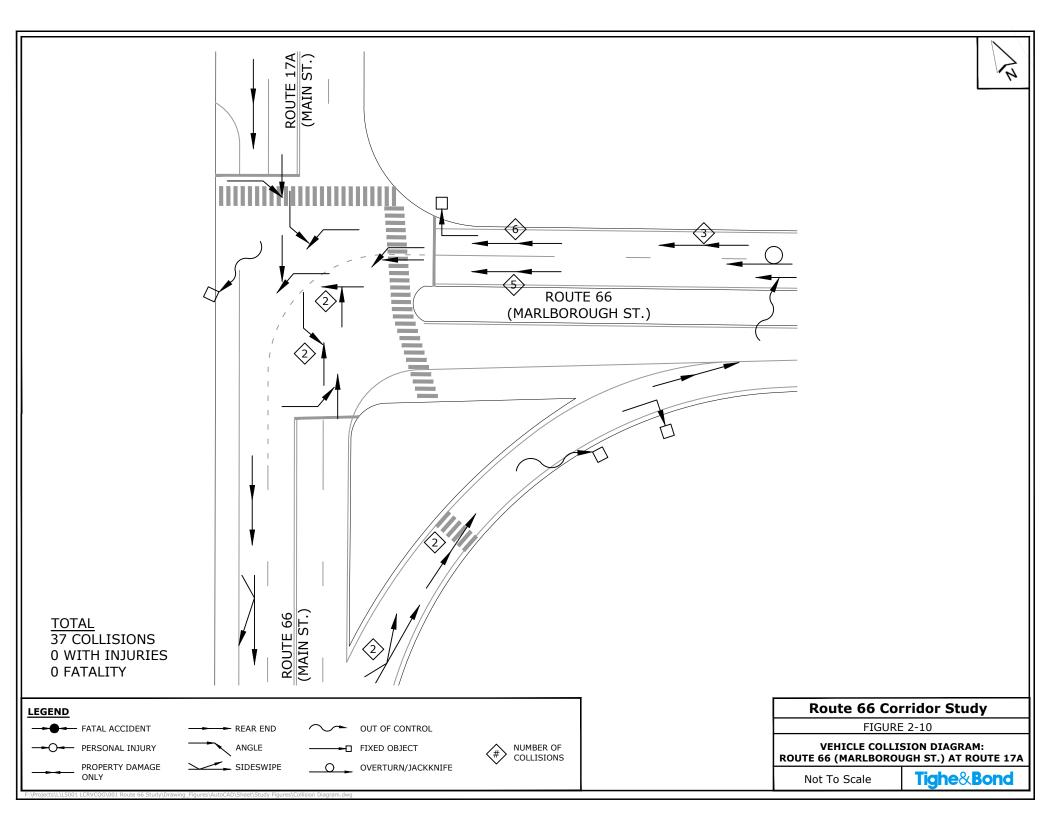

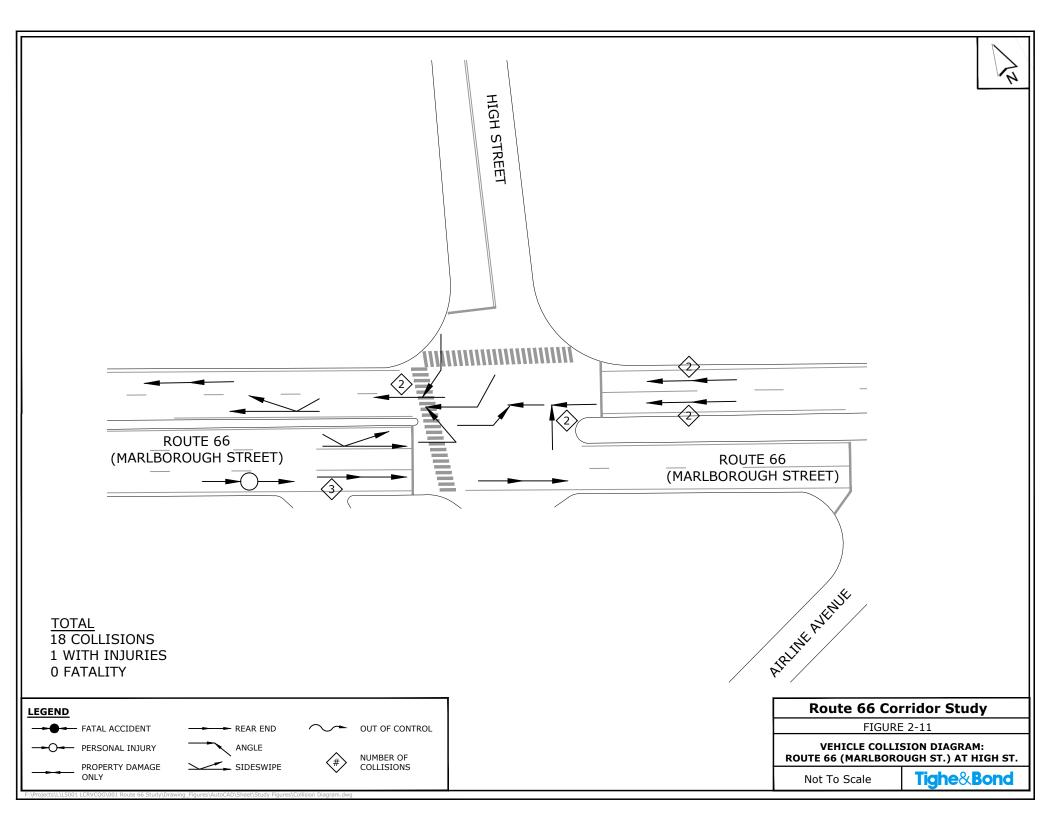

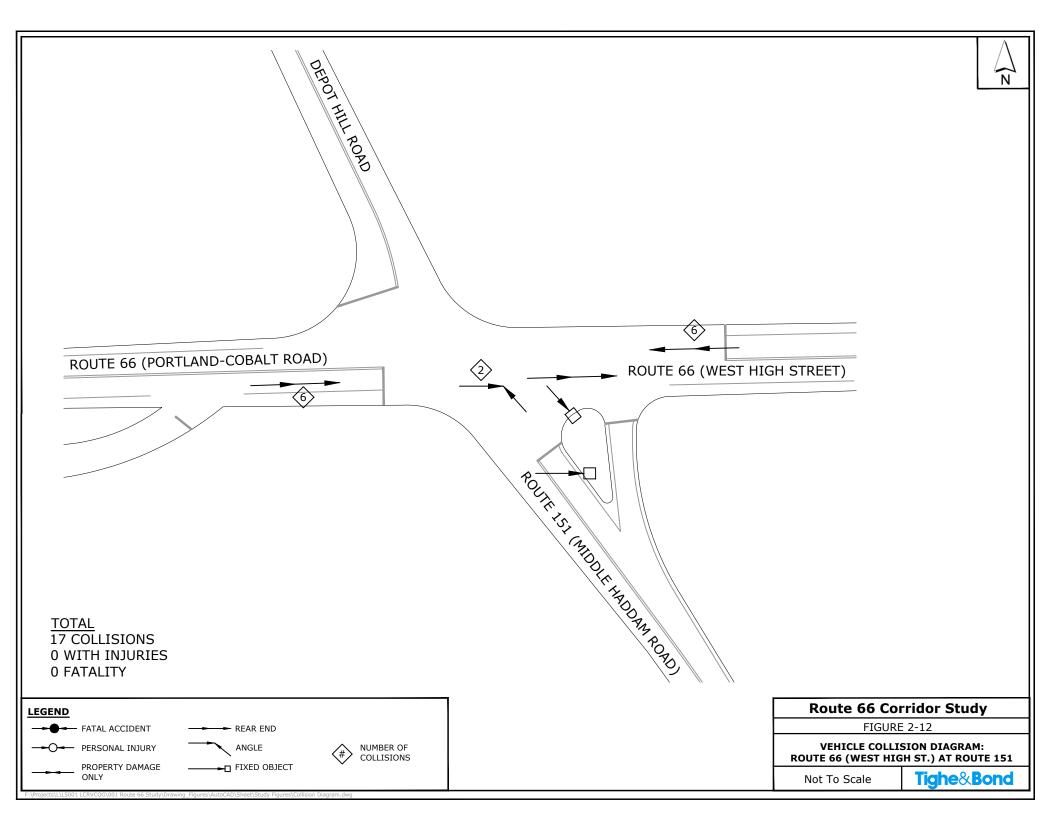

2.8.3 Portland Road Safety Audit

A Road Safety Audit (RSA) was conducted for the Town of Portland in June 2016 under the assistance of CTDOT's Community Connectivity Program. A RSA is a process that identifies safety issues and counter-measures to help improve safety of all road users, including pedestrians and bicyclists. A RSA typically includes a Pre-Audit Meeting, to review the objective and information relative to the RSA location, a Field Audit, to walk the area and conduct a safety evaluation of the location, and a Post-Audit Meeting, to identify safety concerns and develop recommendations for improvements. Upon completion of these tasks, a detailed RSA report documents the safety issues and identifies short-term and long-term recommendations for safety improvements.

The Portland RSA location is along Main Street (Route 17A) at Route 66 intersection and near Arrigoni Bridge, which is recognized as a high-collision location based on UConn Connecticut Crash Data Repository. During the RSA process, the following safety issues and recommendations for improvements were developed for this area in Portland, as summarized in Table 2-13.

TABLE 2-13Portland RSA Safety Issues and Recommended Improvements

Safety Issues	Recommended Improvements	Implementation	
There is overgrown vegetation at the northeast corner of the intersection blocking the pedestrian push button and the town's welcome sign	Trim overgrown vegetation at the intersection of Main Street and Route 66 to increase visibility	Short-Term	
Vehicles entering the Village Center area from the Arrigoni Bridge travel fast because of the curve and downhill slope of the bridge	Coordinate with neighboring towns to share radar speed control signs to enforce vehicle speeds on the Arrigoni Bridge; Potential parking police cruiser on the triangular channelizing island at the intersection to reduce vehicle speeds entering the Village Center area	Short-Term	
	Evaluate feasibility of installing traffic signal near the Arrigoni Bridge ramp	Long-Range	
Vehicles traveling north have a hard time turning left into Quarry Heights because the signal doesn't have a dedicated green arrow; The southbound lane also blocks this driveway due to the location of the stop bar; Emergency vehicle access is a challenge	Move the stop bar further back before the entrance to Quarry Heights for southbound traffic; Consider adjusting traffic signal to include a green arrow phase for vehicles turning left into Quarry Heights	Medium-Term	
The crosswalk at the Arrigoni Bridge and Lower Main Street	Install advanced warning signs ahead of crosswalks	Short-Term	
is located on a curve and slope and has limited visibility for both pedestrians and motorists	Realign crosswalk at Lower Main Street near the Arrigoni Bridge to improve visibility; Evaluate feasibility of a pedestrian bridge near Arrigoni Bridge	Long-Range	
Numerous driveways along Main Street contribute to conflicting turning movements and traffic flow	Evaluate developing access management plan to consolidate commercial driveways on Main Street and Route 66	Long-Range	
Pedestrian signals for Main Street crosswalk are not ADA compliant and there are no pedestrian signals for Route 66 crosswalk at the intersection	Upgrade all pedestrian crossings to be ADA compliant including tactile warning strips and pedestrian countdown and audible signals; Potential pedestrian signals and push buttons for Route 66 crossings at the intersection	Medium-Term	

2.9 Alternative Travel Modes

Route 66, from west to east within the study area, features a suburban commercial area from Arrigoni Bridge to Portland Shopping Center Plaza in Portland, a rural setting traversing to the east within the Towns of Portland and East Hampton, including the area of the corridor referred to as the 'Ledges', a suburban commercial area from Maple Street to Old Marlborough Road in East Hampton, and another rural area traveling east to the Marlborough Town Line.

Pedestrian facilities are present at the cohesive village centers within the Towns of Portland and East Hampton, respectively. Sidewalks, crosswalks, pedestrian signals, and sidewalk ramps are provided in these areas. However, sidewalk gaps still exist resulting in a disconnected sidewalk network. Pedestrian facilities and amenities are non-existent in the relatively rural areas along the corridor.

On-street bicycle facilities are not available along the corridor. The primary bicycle facility within the study area is the Air Line Trail, a non-motorized recreational facility connecting Portland and East Hampton to Thompson, CT. In Portland, a newly opened segment of the Air Line Trail currently runs from the YMCA Camp Ingersoll to the Portland-East Hampton Town Line. The Airline Trail runs from Aldens Crossing east through East Hampton and into Colchester and points east. Air Line Trail extension to connect the Towns of Portland and East Hampton has been proposed and the property negotiation and purchase is underway.

Bus transit service in the study area is provided by Middletown Area Transit (MAT) Route F. Bus stops or waiting areas are not designated along the bus route. Rather, the bus driver will stop and service passengers waiting along the route. Bus schedule information isn't easily accessible. The lack of bus stop amenities within the study area acts to discourage, rather than encourage bus transit usage in the area.

2.9.1 Pedestrian and Sidewalk Infrastructure

Route 66 abuts commercial and residential properties along the corridor in a low to moderate density suburban setting within the study area. Although the majority of Route 66 in the study area has been designed to prioritize the automobile and is uninviting to walking activities, pedestrian infrastructure including sidewalks, crosswalks, ramps, and pedestrian signals are present in the village center areas within the towns of Portland and East Hampton.

Generally, sidewalks have been recognized to be vital in pedestrian environment by delineating a safe zone for pedestrians to walk between destinations and providing a sense of community. Crosswalks at major intersections provide pedestrians a safe area to cross streets and a continuous pathway to key destinations. Additionally, pedestrian signals provide safety enforcement for pedestrian crossings by separating crossing pedestrians from conflicting vehicular movements. The inventory of existing pedestrian infrastructure along the study corridor is summarized below:

Town of Portland

- Sidewalks are present along both sides of Route 66/Route 17 between the Arrigoni Bridge and the intersection of Main Street and Marlborough Street. Traveling to the east along Route 66, sidewalks are provided along the north side of the corridor between Main Street and the western driveway of Portland Shopping Center. An offroad walking path is provided connecting the eastern portion of the Portland Shopping Center Plaza and the residential neighborhood located at the north end of Johnson Farm Road. The sidewalks west of High Street are in fair condition while some portions of the sidewalks east of High Street have deteriorated. Sidewalks are not provided east of Grove Street along the study corridor in the Town of Portland.
- Marked crosswalks. sidewalk ramps with warning strips, and pedestrian signals are provided on the north leg and east leg of the intersection of Main Street and Marlborough Street. Concrete sidewalk is present within channelized right-turn island to provide continuous sidewalk on the east leg of the intersection. The traffic signal at the intersection provides exclusive



Crosswalk at the intersection of Route 66 and Route 17A (Main Street)

pedestrian phase upon the actuation of pedestrian push buttons.

• A mid-block crosswalk is present approximately 500 feet east of Main Street connecting the proposed Brainerd Place Development driveway to the existing sidewalk on the north side of Route 66. A pedestrian refuge island is provided in the raised median. Pedestrian crossing signs and pedestrian crossing ahead warning signs are installed at and in the vicinity of the mid-block crosswalk, respectively. However, this marked crosswalk is installed without other substantial measures such as pedestrian beacons or ADA compliant sidewalk ramps. Once the Brainerd Place offsite improvements are determined, consideration of pedestrian facilities in this section of the study area will be reevaluated.

- Crosswalks and pedestrian signals exist on the west leg and north leg of the intersection of Route 66 at High Street. Pedestrian crossing is provided via an exclusive pedestrian phase. ADA compliant sidewalk ramps are lacking at the intersection.
- Similarly, crosswalks and pedestrian signals exist on the east leg of the intersection of Route 66 at Airline Avenue with pedestrian crossing provided via an exclusive pedestrian phasing. ADA compliant sidewalk ramps are not provided at this intersection.
- Traveling east from Grove Street to the Portland-East Hampton Town Line within the Town of Portland features a rural setting and lacks destinations that would attract pedestrian activities. Pedestrian infrastructure including sidewalks,




Non-compliant ADA pedestrian accommodations at the intersection of Route 66 and Airline Avenue

crosswalks, and pedestrian signals are not provided along this segment. Greenlight push buttons are provided on both sides of the corridor to allow pedestrians to cross with the green light at the signalized intersections in this area.

Town of East Hampton

- The Route 66 corridor continues its rural setting from the Portland-East Hampton Town Line through Cobalt Village to approximately Maple Street within the Town of East Hampton. Pedestrian infrastructure is not provided except push buttons at the traffic signals that allow pedestrians to cross concurrently with vehicular with the green light at the signalized intersections along this segment of the corridor.
- A crosswalk is provided on Route 66 at the unsignalized Childs Road intersection in the vicinity of East Hampton Middle School. School crossing signs are present in both directions on Route 66.
- Sidewalks begin near Maple Street, continuing east toward the commercial center in East Hampton. Sidewalks are continuously provided along the south side of the road between Maple Street and Erlandson Drive. Along the north side of the road, sidewalks are provided between North Main Street and the west junction of Old Marlborough Road with gaps existing between American Distilling & Manufacturing and Lakeview Street. Route 66 is constrained at the bridge crossing in front of American Distilling & Manufacturing, limiting the available width to add a sidewalk. Furthermore, it is the town and property owners' responsibility to maintain sidewalks along a state route, so developers are often reluctant to install sidewalks or infill sidewalk gaps along the site frontage, particularly if the town regulations on sidewalks in commercial zones are not clearly designated.

- Crosswalks and sidewalk ramps are provided on the north and east leg of the intersection of Route 66 at Maple Street. There are green light push buttons on both sides of Route 66 that allow pedestrian to cross with the green light at this intersection.
- Marked crosswalks, pedestrian signals, and ADA compliant sidewalk ramps are provided on all four legs of the intersection of Route 66 at Main Street/North Main Street. Pedestrian crossing is provided via an exclusive pedestrian phasing.
- Crosswalks, pedestrian signals, and sidewalk ramps with warning strips are provided on the west leg of the intersection of Route 66 at East Hampton Shopping Plaza driveway. Exclusive pedestrian phasing is provided at this intersection to facilitate pedestrian crossing.
- Similarly, marked crosswalks, pedestrian signals, and ADA compliant sidewalk ramps are provided on all three legs of the intersection of Route 66 at Lakeview Street. Pedestrian crossing is provided via an exclusive pedestrian phasing at this intersection.

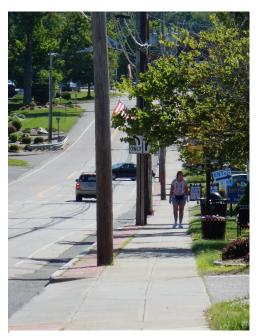

Route 66 in East Hampton looking East near the East **Hampton Town Hall**

Pedestrian infrastructure is not provided between Erlandson Drive and the East Hampton-Marlborough Town Line. Paul's & Sandy's Too and the proposed Edgewater Hill development along this segment are considered to be attractive destinations for pedestrian activities. The lack of pedestrian facilities in this area contributes to an unwelcoming environment to those on foot in this area.

2.9.2 Bicycle Facilities

There are currently no separated bike routes, "shared the road" signage, or facilities for bicyclists along the Route 66 corridor. The Air Line Trail, a shared-use non-motorized recreational trail, is the only bicycle facility within the study area.

As previously noted, the Air Line Trail is currently open from the YMCA Camp Ingersoll to The Portland-East Hampton Town Line in Portland. In East Hampton, the trail begins at Aldens Crossing near Route 16, extending east though the study area. Beyond the study area, the trail continues northeast through the eastern portion of Connecticut and extends into Massachusetts.

Air Line Trail extension projects have been planned to connect Portland and East Hampton. The Town of East Hampton is working with the Connecticut Department of Energy and Environmental Protection (CT DEEP) to extend the Air Line Trail from its current termination point at Alden Crossing to Depot Hill Road at the Portland Town Line. project is currently held up by complications related to a wetland issue but expected to be resolved soon. In Portland, potential trail routes include the possible use of Route 66 as well as private property such as the Old Railroad Depot



Air Line Trail access at Old Middletown Road in Portland

Station. Possible extensions seek to link its current termination point at YMCA Camp Ingersoll to the Arrigoni Bridge, Portland Riverfront Park, the City of Middletown and a possible future trail north along the Connecticut River.

2.9.3 Air Line Trail Usage

"Ridership" counts have been collected on the Air Line Trail in East Hampton as part of the Connecticut Trail Census project. A permanent infrared (IR) counter was installed just northeast of Cranberry Bog on Air Line Trail in East Hampton. It has been continuously collecting data since November 2016.

The 2017 counts and indicate that a total of 62,415 uses or trips were recorded on the trail in 2017 with an average daily count of 171 uses.

The heaviest monthly use of the trail occurred in June 2017, with a total of 8,100 trips. Between the months of April and October 2017, approximately 83% of total 2017 uses were recorded.

Generally, heavier use occurred on the weekends than during the week. Based on the 2017 ridership count report, approximately 15,523 trips (25%) and 11,792 trips (19%) occurred on Sundays and Saturdays, respectively. The trail uses during the week are evenly split between Mondays and Fridays. Most trail use (97.9%) took place between 7am and 8pm.

The Connecticut Trail Census 2017 Counts Report is included in Appendix J of this report.

2.9.4 Transit Facilities

The towns of Portland and East Hampton are currently served by Bus Route F operated by Middletown Area Transit (MAT). The bus route and stop locations are illustrated on Figure 2-13. This service connects Portland and East Hampton to downtown Middletown and other bus connections.

Route F – Portland/East Hampton buses run from 5:45 a.m. to 5:45 p.m. Monday to Friday




Air Line Trail looking west in Portland

and from 9:15 a.m. to 4:45 p.m. on Saturdays. Route F does not operate on Sundays.

On weekdays, Route F buses run every hour from 5:45 a.m. to 8:45 a.m., at 12 p.m., and every hour from 3:45 p.m. to 5:45 p.m. for a total of 8 trips. On Saturdays, Route F buses run every 90 minutes from 9:15 a.m. to 11:45 a.m. in the morning and from 2:15 p.m. to 4:45 p.m. in the afternoon for a total of 4 trips.

Bus stops, shelters, waiting areas, and bus stop signage are not present along the entire bus route. Buses along the corridor stop to pick up passengers at sporadic locations, causing potential safety concerns for riders and vehicles in the area.

FIGURE 2-13

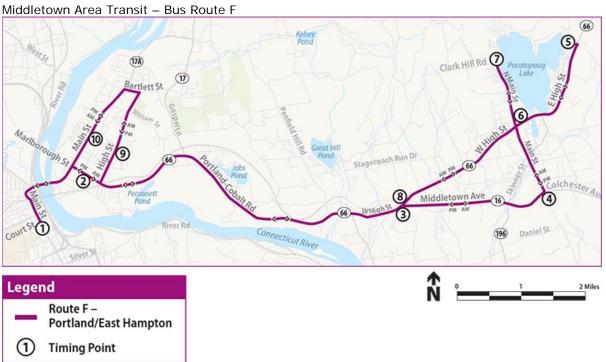

The Towns of Portland and East Hampton both participate in a regional dial-a-ride service for the elderly and disabled, operated by MAT. Eligible persons can schedule trips for medical, shopping, educational, and recreational purposes. It is anticipated that the elderly population will increase in both towns and the transit usage demand may increase

as the age composition of the community changes.

A Park and Ride lot with 27 parking spaces is provided at the intersection of Route 66 Route 16 in Hampton. The Park and Ride commuter lot helps to facilitate ridesharing to reduce transportation costs, roadway congestion, and air pollution. A field visit of the indicates that the existing park and ride lot is very lightly utilized.



Park & Ride Lot at Route 66 and Route 16 (Middletown Avenue) in East Hampton

2.9.5 Transit Ridership

Ridership data was collected for three consecutive weekdays (Monday July 30, 2018 – Wednesday August 1, 2018) and Saturday (August 11, 2018) by MAT. The ridership data indicates that transit ridership on Route F that serves the project area is light. There was an average of 26 boardings each weekday and 7 boardings on Saturday.

The most popular locations for boarding include the Downtown Middletown Terminal with an average of 17 boardings per weekday. The most popular locations for alighting (passengers dropped off by bus) include the Downtown Middletown Terminal, Marlborough Street in Portland, and Food Bag on Route 16 in East Hampton.

Table 2-14 summarizes the transit usage within the study area. Day to day ridership and bus stop usage could vary. Because this analysis is limited to three weekdays and one Saturday, it provides only a "snap shot" of typical usage based on MAT's ridership data collection.

TABLE 2-14Middletown Area Transit – Route F – Boardings and Alightings Summary

Due Sten	Weekday (Average)			Saturday		
Bus Stop	Boardings	Alightings	Total	Boardings	Alightings	Total
Downtown Terminal (Departure)	17.0	11.3	28.3	5	2	7
Marlborough Street	2.3	6.3	8.7	0	1	1
Route 16/Route 66	1.0	0.3	1.3	0	0	0
Food Bag - Route 16	2.7	1.7	4.3	1	0	1
Clark Hill Road/North Main Street	0.3	5.3	5.7	1	3	4
Route 16/Route 66	1.7	0.7	2.3	0	1	1
Greystone Manor	0.3	0.3	0.7	0	0	0
Portland Convalescent	0.7	0.0	0.7	0	0	0
Total	26	26	52	7	7	14

In addition to the ridership data previously discussed, RiverCOG has recently published a draft report of the *Lower Connecticut River Valley Regional Bus Ridership Study*. Ridership data was collected from April to July 2017. According to the report data, MAT Route F averaged 59 passenger trips per day on the weekdays, and 15 passenger trips per day on Saturdays. This translates to an average of 9.7 passengers per hour during the week and 4.3 passengers per hour on Saturday. Based on the findings, RiverCOG has recommended that Route F be considered for on-demand service due to the relatively low number of passengers. The elimination of the route shall not be considered, as Route F provides a vital service to the Towns of Portland and East Hampton serving as the only option for transit service in each town.

2.9.6 MAT Route F Passenger Survey

As part of the study, Tighe & Bond developed a passenger survey in collaboration with MAT and the study committee to better understand the existing system and passenger experience on Route F. The survey included a total of 8 questions intended to identify needs and deficiencies relating to the frequency of service, bus stop locations and amenities, reliability, and access to bus schedule information. The questions were mostly multiple choice and collected information regarding origin and destination of trips, purpose of trips, and suggestions on how to improve bus services. The passenger survey results are included in Appendix K.

The survey was administered by MAT staff onboard 24 circulatory bus routes during the peak commute hours of 6:45 a.m. to 9:45 a.m. and 3:45 p.m. to 5:45 p.m. between Wednesday, July 11, 2018 and Friday, July 13, 2018. A total of ten passengers participated in the survey and provided answers to the survey questions.

Trip Origin and Destination

Based on the survey results, 70% of those surveyed used Route F bus service five or more days a week, 10% used it three to four days a week, while 20% used it one to two days a week.

Forty percent of those surveyed were picked up or dropped off at the Portland Terminal located at 340 Main Street in Portland. The rest were picked up or dropped off at various locations along Bus Route F, including Middletown Bus Station; Portland Convalescent, Ferry Lane, Riverdale Motel, Butler Construction, and Dunkin Donuts in Portland; Food Bag on Route 16, North Maple Street, 140 East High Street, Dunkin Donuts, and McDonald's in East Hampton. Twenty percent of those surveyed didn't specify their pickup or drop-off locations.

Eighty percent of those surveyed walked to and from their pickup and drop-off locations. The remaining 20% rode a different bus to Bus Route F bus stop locations.

Trip Purpose

Work related trips accounted for 60% of the passengers surveyed with morning rides occurred between 5:45 a.m. and 8 a.m. and afternoon rides occurred between 3:45 p.m. and 4:30 p.m. The rest of the trips included grocery shopping, medical service, and others.

Passenger Suggestions

Of the passengers who completed the survey, 90% were extremely satisfied or satisfied with the bus service on F Route. Ten percent answered "neutral" to the question. Additionally, suggestions provided by passengers to improve the bus service are summarized below:

- More bus frequency (30%)
- Bus stop facilities (20%)
- Cost (20%)
- Onboard comfort (20%)
- Access to information (10%)
- On-board assistance for old people with food carriage or kids with strollers (10%)

2.10 Access Management

Access management is the process of overseeing access to land development while simultaneously preserving the flow of traffic on the surrounding roadway system in terms of safety and capacity. Access management focuses on safety of travel and minimizing conflict points (locations where vehicles can cross paths) to maintain the smooth flow of traffic along a roadway. Maintaining smooth traffic flow can, in turn, reduce the need for roadway widening induced by growing congestion. Access design characteristics of a roadway that directly impact traffic flow and safety include the location, spacing, and design of access drives entering the roadway as well as location of signals, medians, and turn lanes.

The assessment of existing access management for this study included a field review of the existing driveways to identify multiple driveways within close proximity, driveways in excess width, and redundant driveways along the study corridor. Furthermore, driveway design guidelines available for State highways are reviewed and summarized in this document to facilitate the evaluation of current access management and development of subsequent access management plans for this study.

2.10.1 Existing Access Management Conditions

In general, Route 66 abuts suburban and rural communities with a cohesive village center along the corridor in each town. The evaluation of access management conditions for this study focuses on the central business area from Main Street to Gospel Lane in Portland and from Maple Street to Lakeview Street in East Hampton, respectively.

Town of Portland - Main Street to Gospel Lane

The Route 66 segment between Main Street and Gospel Lane in Portland is approximately 2 miles long. Route 66 within this segment consists of two travel lanes in each direction, separated by a raised median, and widens to include dedicated turn lanes at major intersections and driveways. There are 6 signalized intersections, 7 side streets, and approximately 75 private driveways within the segment. Developments along this stretch from west to east include Rite Aid, Burger King, a dozen small but densely spaced residential homes, auto sales, Cumberland Farms, Subway, Farrell's, Adams Market, NAPA Auto Parts, Family Dollar, Portland Veterinary Hospital, Dental office, True Value Hardware store, Dairy Queen, among others. Sidewalks are provided from Main Street to the Portland Shopping Center Driveway along the north side of the corridor only. Crosswalks and pedestrian signals are generally non-exist along this segment. A driveway inventory map was created to illustrate the location, spacing, access restriction, redundancy, and connection of existing driveways within this segment, as shown on Figures 2-14 to 2-17.

The following observations were made to assess existing driveway access along the segment:

- The raised median within the segment helps regulate driveway access and circulation while significantly reducing vehicular conflicting points and crashes at the driveway locations.
- Exclusive left turn lanes along the corridor are provided at some driveway locations, resulting in reduction of vehicle conflicts and rear-end collisions in the immediate vicinity of these driveways. These median breaks also facilitate access to side streets from Route 66 facilitating local circulation and access.

- A number of properties have multiple full-access driveways, which result in potential conflicts on the roadway.
- Some driveways are located within 25 feet of a major intersection, making the driveway access challenging and a safety concern.
- A number of driveways are closely spaced at adjacent properties, which generates confusion for travelers unfamiliar to the area as well as for drivers accessing and egressing from closely spaced driveways.
- Many driveways are poorly delineated and the pavement is in poor condition or nonexistent.



Route 66 in Portland looking north near the Gulf Gas Station

Town of East Hampton - Maple Street to Lakeview Street

The Route 66 segment between Maple Street and Lakeview Street (Route 196) in East Hampton is approximately 0.84 miles long. Route 66 within this segment consists of two travel lanes west of Main Street and two lanes with a centered back-to-back left-turn lane between Main Street and American Distilling. There are 4 signalized intersections, 5 side streets, and approximately 51 private driveways within the segment. Developments along this stretch from west to east include church, butcher shop, houses, offices, car wash, hair salon, banks, Stop & Shop, Eversource Energy area work center, East Hampton Police Department, Dunkin' Donuts, Ace Hardware, Rite Aid, Citgo Gas Station, a jewelry store, Food Bag, Subway, Belltown Smoke Shop, American Distilling & Manufacturing, Island Coffee Traders, Spirit Shop, and a few small but densely settled residential houses. Sidewalks, crosswalks, and pedestrian countdown signals are generally provided within the segment, but sidewalk gaps exist between Belltown Smoke Shop and Lakeview Street along the north side of the roadway. Continuous sidewalks are provided along the east side of Main Street and the west side of Lakeview Street in the area. A driveway inventory map was created to illustrate the location, spacing, access restriction, redundancy, and connection of existing driveways within this segment, as shown on Figures 2-18 to 2-20.

The following observations were made during a field visit to assess the existing access management along the segment:

- The centered back-to-back left turn lane within the segment helps regulate driveway access entering the properties and reduces vehicle conflicts and rear-end collisions in the immediate vicinity of the driveways.
- Dense and poorly delineated driveways are frequent through this segment.
- A number of properties have multiple full-access driveways, which results in increased number of driveways, confusion to drivers, and potential conflicts on the road.
- Some driveways are closely spaced at adjacent properties, generating confusion to travelers unfamiliar to the area.
- A few small size properties provide front yard parking backing into Route 66, which generates safety concern.
- The driveways at Citgo Gas Station, the jewelry store, and Subway are wide and closely spaced. Vehicles tend to line up alongside one another attempting to enter Route 66 simultaneously, resulting in poor visibility.
- Some poor pavement conditions along the roadway gutter in front of some driveways results in slower entering/existing turning movements which can decrease safety along this segment given all the turning movements that take place.



Route 66 in East Hampton looking East near the East Hampton Town Hall


2.10.2 CTDOT Driveway Design Guidelines


The multiple, uncoordinated, closely spaced access points can be dangerous for motorized and non-motorized travel, disruptive to traffic flow, and increased congestion. Fewer driveways spaced further apart allow for more orderly merging of traffic and present fewer challenges to drivers.


CTDOT established driveway design guidelines in the 2003 Highway Design Manual (Revised February 2013). These guidelines should be reviewed when considering consolidation of redundant driveways and integration of all travel modes in the corridor, as part of the subsequent development of the corridor improvement plan. The primary design standards for driveways along a state route include the following:

- Driveway Alignment Driveways and side streets should preferably be perpendicular to the state highway. All curb cuts and/or roadway intersections on opposite sides of the road should preferably be aligned directly opposite one another.
- Driveway Width Minimum 10 feet for residential driveways and maximum 30 feet for all type of driveways, depending on 1-way or 2-way operation and selected design vehicle template.
- Maximum Driveway Grade 12 percent for residential driveways and 8% for commercial driveways.
- Number of Driveways No more than one combination entrance and exit shall be allowed for any property with frontage of less than 50 feet. Parcels having a frontage from 50 to 100 feet may be permitted two entrances if a minimum of one-third of the total frontage is used to separate driveways.
- Driveway Location No entrance or exit should be constructed at the un-signalized intersection of two State highways, town road, and city street for a distance of 25 feet from the intersection.
- Driveway Spacing Access driveways on the same side of the road should be separated as far apart as is practical, with a minimum separation of 60 feet for residential drives and 120 for commercial drives.
- Driveway Sight Distance All entrances and exits shall be so located that vehicle operators approaching or using them shall have adequate sight distances in both directions along the State highway in accordance with current Department of Transportation geometric design standards. The permit applicant shall stabilize all slopes by loaming and seeding or other method directed by the Permit Inspector.
- Driveway Connections Provide internal circulation among adjoining properties of similar existing or potential use when possible.




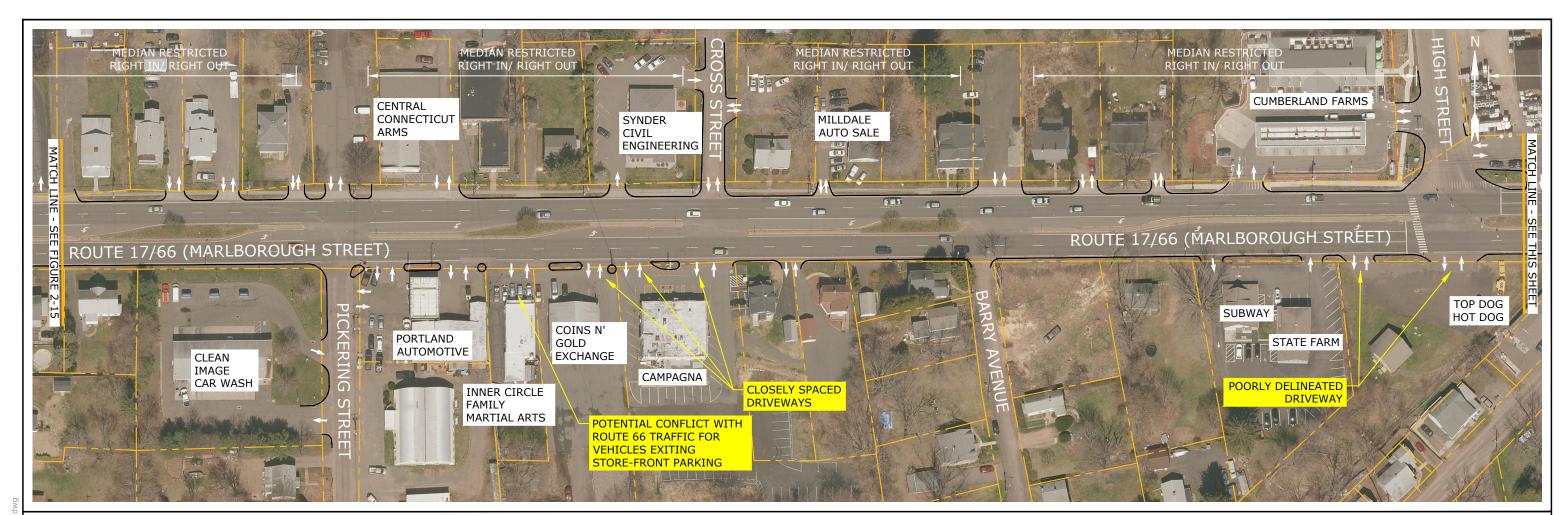


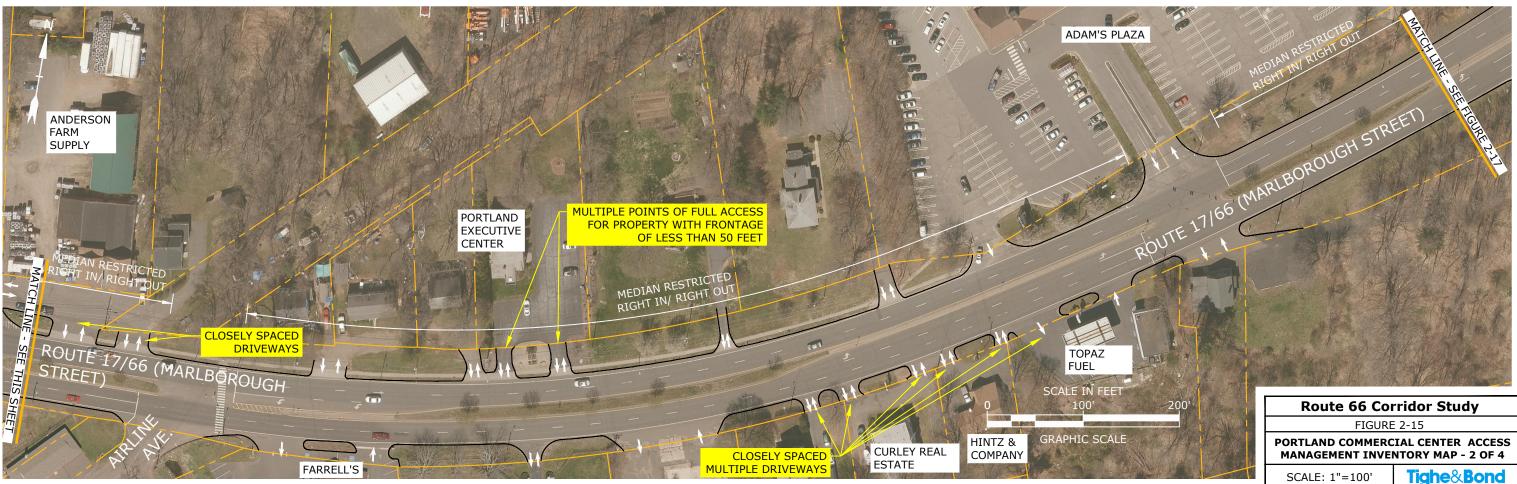

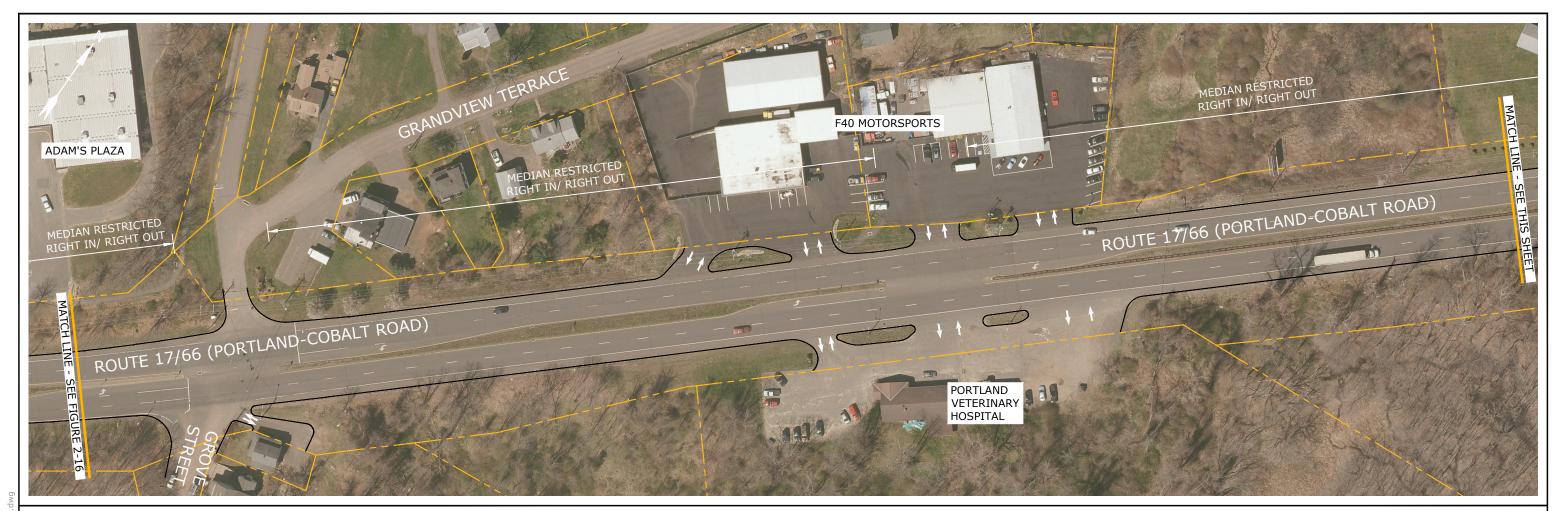



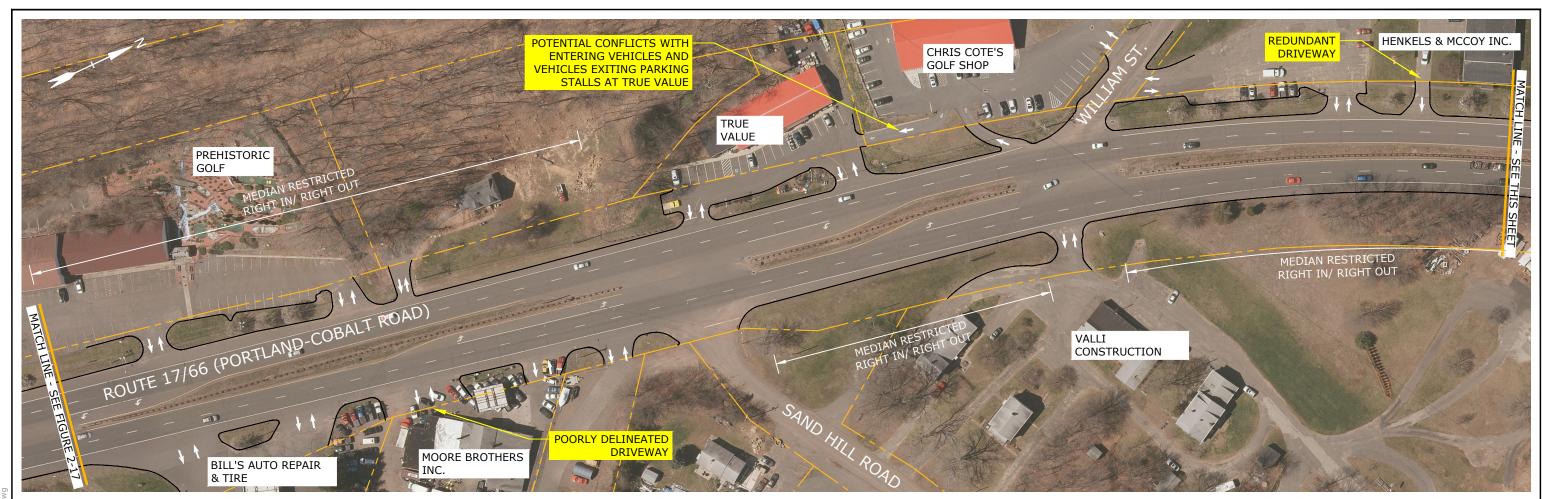

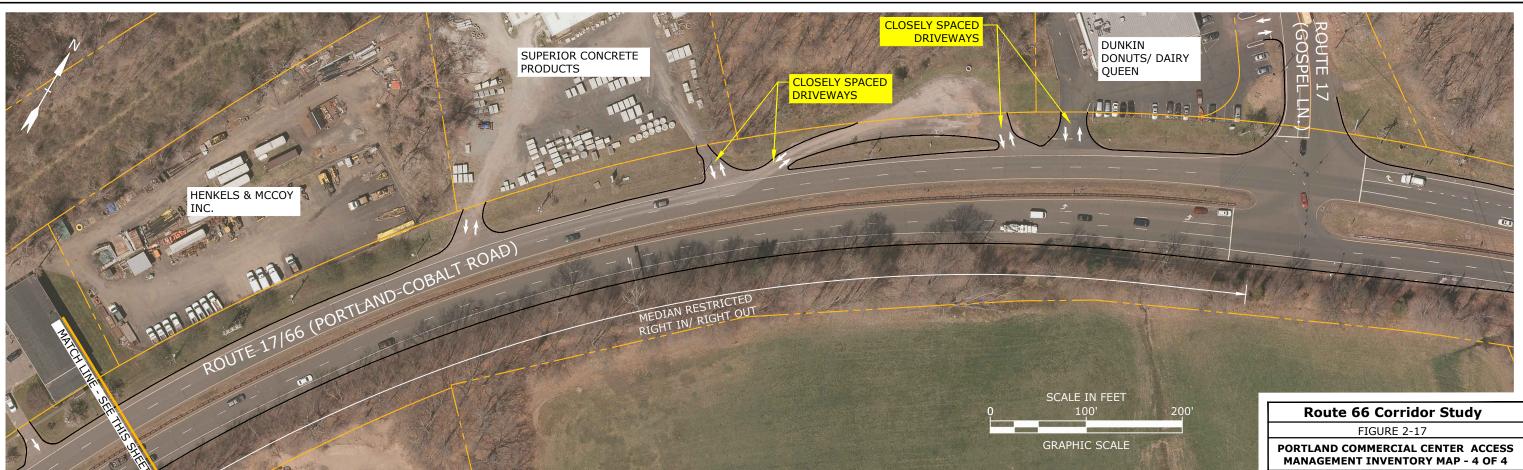


Fighe&Bond

SCALE: 1"=100'

2.11 Transportation System Condition

During data collection, the study team conducted observations of the existing roadway network seeking to identify deficiencies or areas of concern that warrant a more detailed review during subsequent study phases. The major observations are described below with additional information presented graphically in Figure 2-21.

- High travel speeds exist along the Route 66 corridor.
- High collision rates occur at the following intersections:
 - o Route 66 at Route 17A (Main Street)
 - o Route 66 at High Street
 - o Route 66 at Route 151 (Middle Haddam Road)/ Depot Hill Road
- Skewed alignments impact turning movements to and from Route 66 causing safety concerns at the following locations:
 - o Long Hill Road
 - Barton Hill Road
 - Lake Drive
 - Steath Road
 - Sand Hill Road
 - o Old Middletown Road
- Safety concerns in the Ledges area of East Hampton related to travel speeds, limited sight distances, and limited roadway shoulder areas.
- Lack of by-pass/left turn lane and safety concerns at Citgo Gas Station driveway, as well as St. Clement's Castle & Marina driveway during events.
- Substandard merge lane at the eastbound transition from four lanes to two lanes on Route 66 east of Route 17.
- Areas with significant cut-through traffic utilizing local roadways have caused speeding and safety concerns at the following locations:
 - Wolcott Avenue in Portland to avoid Route 66 and Route 17A intersection.
 - William Street Extension as an alternative to Route 17 intersection.
 - Middle Haddam Road in Cobalt as an alternative to Route 66.
- Limited transit usage, accessibility or amenities don't exist within the study area.

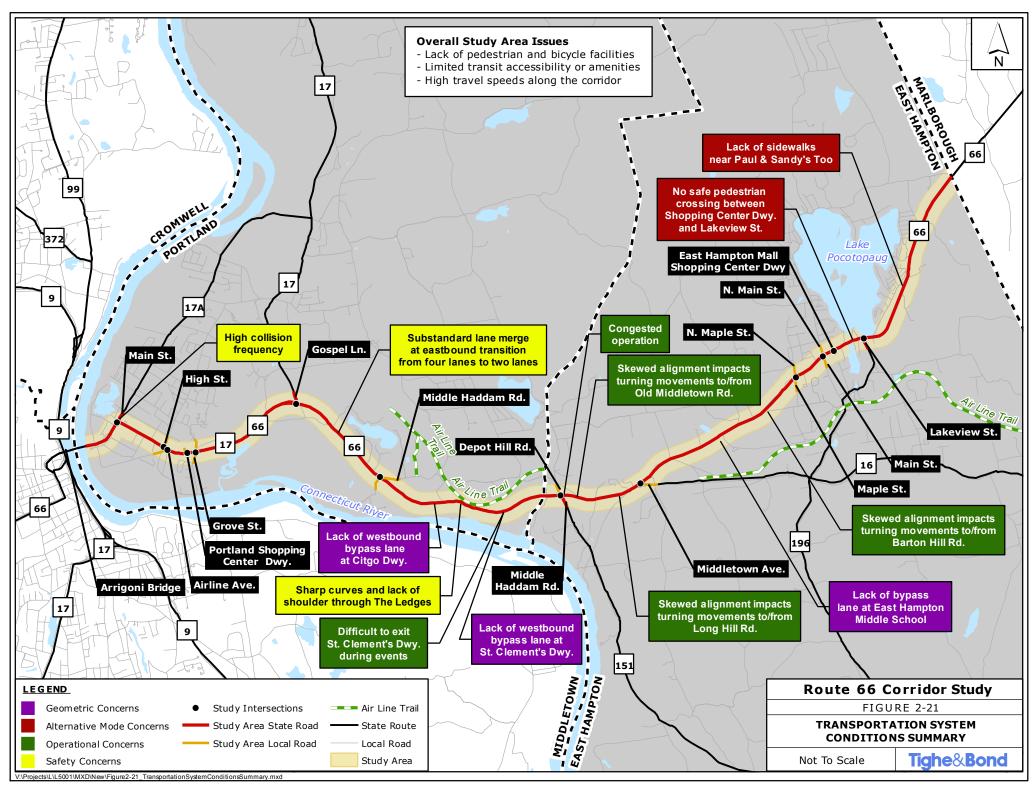

• Lack of pedestrian and bicycle accommodations throughout the study area. Sidewalks are sparse along Route 66 and shoulders are narrow which discourage bicycling and walking.


2.12 Existing Site Analysis

2.12.1 Portland Commercial Center

Portland's commercial center is characterized by business and residential uses in a mix of historic and recent architecture. The gateway into Portland from the Arrigoni Bridge is distinguished by wide pavement, high-speed traffic, and entrance and exit ramps to Lower Main Street, with challenging sight lines and no opportunity to cross Main Street. A large billboard-style gateway sign on the west side of Main Street is difficult to see when entering the gateway from the bridge. Two other welcome signs are located at the intersection of Route 17 and Route 66 but no wayfinding signage directs visitors toward the nearby Brownstone Exploration and Discovery Park or towards parking for the new Airline Rail Trail located east of the commercial center. The sidewalk on the east side of Main Street is set back from the roadway, safely separating pedestrians from vehicles with lawn and street trees. The sidewalk along the west side abuts a street wall of mainly historic two-story architecture occupied by small businesses and punctuated by some new development including a Dunkin' Donuts and gas station. This broad sidewalk features streetscape elements such as ornamental banners and poles, benches, brownstone walls, colored and stamped concrete bands, trash receptacles, and young street trees. There are no provisions for cyclists, formalized bus stops, or on-street parking to support the businesses and off-street parking is limited. Large utility poles with overhead wires located on the east side Main Street and north side of Marlborough Street detract from the view and provide the only source of street lighting. The intersection of these streets is marked by an exclusive right turn onto Marlborough Street with a landscaped island which provides some refuge for pedestrians crossing Marlborough Street. In contrast to Main Street, a grass and tree lined median along Route 66 breaks up the wide road and reduces the scale, calming traffic and making a more comfortable pedestrian experience. The median width is reduced to allow for left turn lanes at intersecting side streets and the road shoulder is narrow, limiting bicycle access.

On Marlborough Street, a narrow sidewalk connects businesses and homes on the north side. Only one mid-block crosswalk and two corner crossings, at High Street and Airline Ave, connect the north and south sides of the street, but none are ADA accessible and do not connect to sidewalks or formalized bus stops. Most businesses along the north side have controlled access and concrete driveway aprons which aids in protecting pedestrians. Newer businesses, such as Cumberland Farms and Burger King, also have aesthetic features such as brownstone walls and landscaping along the sidewalk although other amenities such as seating, trash receptacles, and bus and bike amenities are lacking. Existing businesses on the south side tend to have wide, undefined driveways and front yard parking. The speed limit increases and the road shoulder widens to the east of Grove Street and Johnson Farm Road, providing space for bicyclists.

The locations of the following photos in Portland are shown on the Photo Location Inventory Key Map, Figure 2-22.

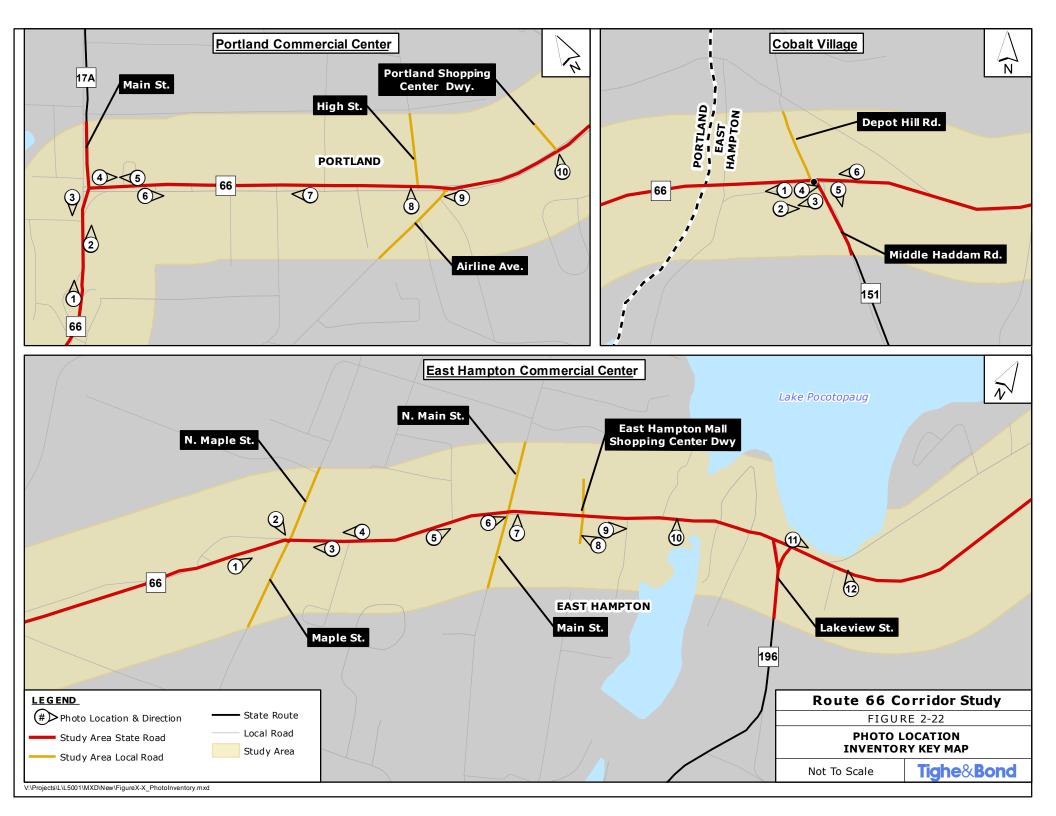

Arrigoni Bridge Gateway Area: Poor sight lines, expansive pavement, lacks human scale



Looking North along Main Street

Photo 2

Wide roadway & overhead utilities dominate streetscape



Looking North along Main Street

Historic architecture and streetscape elements



Looking South along Main Street

Photo 4

Sidewalks on north side only; narrow width



Looking East along Route 66 near Main Street

Commercial property with human scale streetscape elements



Looking West along Route 66 near Main Street

Photo 6

Midblock crossing with signage, pavement markings, & refuge island but no flashing beacon or accessible ramps



Looking East along Route 66 in Portland

Excessive wide curb cuts; lack of pedestrian amenities



Looking West along Route 66 near Pickering Street

Photo 8

Non-compliant pedestrian crosswalks



Looking North towards Route 66 at High Street

No sidewalk along south side; narrow shoulder limits bicycle access



Looking West on Route 66 at Airline Avenue

Photo 10

Signaled intersection lacks pedestrian crossing & bus provisions



Looking East on Route 66 at the Portland Shopping Center

2.12.2 Cobalt Village

Cobalt is the western gateway to East Hampton. It is a dominantly residential area marked by small businesses, a gas station, post office, and fire House at the intersection of West High Street (Highway 66), Middle Haddam Road (Highway 151; a designated scenic road), and Depot Hill Road; just over the town line into East Haddam. This rural commercial center consists of a signaled intersection without sidewalks, defined curb cuts, crosswalks, or other streetscape amenities and lacks human scale. Middle Haddam Road is split by a bituminous island to allow right turning traffic to meet West High Street at a right angle. This traffic island, along with the wide driveway entrances and front parking lots, creates a gateway dominated by pavement. State wayfinding and road signage direct vehicles to nearby towns and Hurd State Park. A historic home which has been adaptively re-used as a doll store marks the southwest corner and further east an old gas station has been converted to a pizzeria with outdoor seating. There are no formalized bus stops or provisions for bicyclists.

The locations of the following photos in Cobalt are shown on the Photo Location Inventory Key Map, Figure 2-22.

Photo 1

One of many skewed intersecting roads with difficult sight lines



Looking West along Route 66 near Middle Haddam Road

Vehicle / pavement dominated gateway



Looking East along Route 66 at Middle Haddam Road

Photo 3

Adaptive reuse of historic architecture enhances sense of place



Looking West from Middle Haddam Road

Intersection lacks pedestrian crosswalks & ramps; bituminous islands & excessive pavement lack visual interest



Looking East along Route 66 at Middle Haddam Road

Photo 5

Unorganized front yard parking



Looking Southeast from Middle Haddam Road

Excessive pavement; lacks visual & pedestrian amenities



Looking West on Route 66 towards Middle Haddam Road

2.12.3 East Hampton Commercial Center

East Hampton's commercial center begins upon a steep ascent up West High Street (Highway 66) to the intersection of Maple Street. This western gateway is signified by St. Patrick Church, cemetery, and historic residences adaptively re-used as small businesses. Pavement dominates the northeast corner at this 5-way intersection. There is a traffic and pedestrian signal and crosswalk striping, but not all corners have accessible curb ramps. East Hampton High School is accessed to the North by a narrow bituminous walk adjacent to the west side of N. Maple Street.

Sidewalks line the south side of West and East High Street (Highway 66) from Maple Street to just east of Lakeview Street. On the North Side of the street, sidewalks connect businesses between North Main Street to the Rite Aid driveway and begin again between Lakeview Street and Old Marlborough Road. The shoulder width varies with limited provisions for bicyclists. East of Main Street, the shoulder narrows to accommodate center turn lanes which continue to Lake View Street. A cyclist was observed on the north sidewalk near Stop and Shop. Pedestrian amenities such as seating areas with benches and trash receptacles have been installed in front of the Town Hall and Classic Auto on the south side of the street and the furnishings match the ones found in East Haddam Village Center.

Opportunities to cross West High Street are limited to the signaled intersections of Main Street, Lakeview Street, and the entrance to Stop and Shop. Each of these intersections is complete with crosswalks and accessible curb ramps. Sidewalks with a colored concrete band and unique scoring pattern along the south side are associated with recent streetscape improvements. Gaps in sidewalks on the north side impede safe circulation and overall pedestrian connection to adjacent residential areas is lacking. The Street is lit from cobra-heads on utility poles along the south side of the street.

Town wayfinding signage is located throughout the commercial center and Village Center, directing to schools, services, and recreation within East Hampton. The best views of Lake Pocotopaug can be observed driving down Lakeview Street, but it can also be seen from either direction down East High Street just east of the Lakeview Street intersection. On the north side, wayfinding signage, road signage, utility poles, and vegetation obscure a sign for the lake and the view beyond. The speed limit increases entering and exiting the central commercial area.

The locations of the following photos in the East Hampton Commercial Center are shown on the Photo Location Inventory Key Map, Figure 2-22.

Photo 1

Gateway signage & steep slope approaching commercial center



Looking East along Route 66 near Maple Street

Signaled intersection lacks pedestrian crossing & bus provisions



Looking Southeast at Route 66 and Maple Street

Photo 3

Overhead utilities dominate; misshapen trees. Flags on utility poles are a repetitive element throughout East Hampton.



Looking West along Route 66 near Maple Street

Sense of place enhanced by historic elements



Looking West along Route 66 near Gov. Bill O'Neill Drive

Photo 5

Sidewalks on South side. Wide shoulders provide room for cyclists.



Looking East along Route 66 near Laurel Glen Drive

Town standard wayfinding signage



Looking East along Route 66 at Main Street

Photo 7

Recent streetscape improvements provide safe pedestrian crossing



Looking East along Route 66 at Main Street

Narrow shoulders inadequate for cyclists; concrete driveway ramps emphasize pedestrian way



Looking West along Route 66 at the Eversource Driveway

Photo 9

Streetscape amenities provide visual interest & enhances walkability



Looking East along Route 66 at the East Hampton Town Hall

Front yard parking backs into the road; gap in sidewalk on north side



Looking North from Route 66 near Mallard Cove

Photo 11

Safe pedestrian crossing at signaled intersection; however, lacks continuous walk on north side



Looking East along Route 66 at Lakeview Street

Lake Pocotopaug: visual & recreational amenity at eastern town center gateway



Looking North towards Lake Pocotopaug from Route 66

Section 3 Environmental and Natural Resources

The study area was screened for the following natural and cultural resources and physical environment features:

- Surface Water Resources
- Groundwater Resources
- Wetlands
- Floodplains
- Threatened and Endangered Species and Critical Habitats

In addition to reviewing aerial images of the study area, current Geographic Information Systems (GIS) data from the Connecticut Department of Energy and Environmental Protection (CTDEEP), and the Towns of Portland and East Hampton were obtained and reviewed during this screening analysis.

3.1 Surface Water Resources

Surface water resources within or near the study area include the Connecticut River, and Pocotopaug Lake, as well as numerous ponds and creeks.

In Portland, the Connecticut River is classified by CT DEEP as Class SB, which designated uses are habitat for marine fish and aquatic life and wildlife, commercial shellfish harvesting, recreation, industrial water supply, and navigation.

The water quality of Pocotopaug Lake in East Hampton is classified by CT DEEP as Class A, which is a designated for potential drinking water supply, fish and wildlife habitat, recreational use, agricultural and industrial supply, and other legitimate uses including navigation. Discharges are restricted form drinking water treatment systems, dredging and dewatering, and emergency and clean water discharges. The water quality of Bevins Pond is classified as Class B water. Designated uses include recreational use, fish and wildlife habitat, and other legitimate uses including navigation. In addition to the restricted discharges for Class A surface water, Class B waters are also restricted to cooling waters and discharges from industrial and municipal wastewater treatment facilities. The 2016 East Hampton Watershed Based Plan finds that the water quality of the Pocotopaug Lake is fully supportive of aquatic life.

3.2 Groundwater Resources

The groundwater in the study area in Portland is classified by the CTDEEP as GB near the Connecticut River and GA or GAA near Pecausett Pond. In East Hampton the groundwater is classified as Class GA or GAA in East Hampton near Pocotopaug Lake.

Class GB designated uses are industrial process water and cooling waters, and presumed unsuitable for human consumption without treatment. Class GAA designated uses are existing or potential public supply of water suitable for drinking without treatment and baseflow for hydraulically-connected surface water bodies. Class GA designated uses are existing private and potential public or private supplies of water suitable for drinking without treatment and baseflow for hydraulically-connected surface water bodies. All groundwaters not specifically classified are considered as Class GA.

3.3 Wetlands

According to the U.S. Army Corps of Engineers (ACOE) 1987 Wetlands Delineation Manual, federal wetlands can generally be defined as areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. The State of Connecticut defines wetlands as land, including submerged land, which consists of any of the soil types designated as poorly drained, very poorly drained, alluvial, and floodplain by the Natural Resources Conservation Services (NRCS).

Based on a review of CTDEEP GIS mapping, as shown in Figure 3-1, poorly drained and very poorly drained soils are located throughout the study area. Additionally, alluvial and floodplain soils are located within the study area. These areas indicate potential for the presence of wetlands, but do not represent delineated wetland areas.

3.4 Floodplains and Stream Channel Encroachment Lines

Floodplains are low-lying areas adjacent to rivers or streams that are inundated periodically by floodwaters. A 100-year floodplain is an area that has a one percent chance of being inundated by floodwaters in a given year, whereas a 500-year floodplain is an area that has a one-five hundredth chance (0.2%) of being inundated by floodwaters in a given year. Floodways are located within floodplains and consist of the river or stream channel plus any portion of the 100-year floodplain which carries stream flows during flood events. Floodplains and floodways are important for storing floodwaters so that adjacent properties and downstream areas are not damaged during flood events. In Connecticut, stream channel encroachment lines (SCELs) are jurisdictional boundaries established by the CTDEEP that generally outline riverine floodplain areas and which may also include portions of 100-year floodplains and floodways.


There are 100-year floodplains and 500-year floodplains within the study area, primarily associated with the Connecticut River and Pocotopaug Lake.


There are no Stream Channel Encroachment Lines within the study area.

3.5 Threatened and Endangered Species

Rare, threatened, and endangered species are protected by federal and state legislation. Information on species designated (listed) as threatened and endangered at the state and federal levels is compiled and made available through the CTDEEP's Natural Diversity Data Base (NDDB).

The CTDEEP NDDB GIS data layer was consulted to determine if there were any records in the study area. Due to the sensitivity of the information, the GIS data layer only depicts approximate locations of protected species, their habitats, and/or significant natural communities. The GIS data review revealed NDDB areas surrounding the Connecticut River in Portland and areas surrounding Pocotopaug Lake in East Hampton.

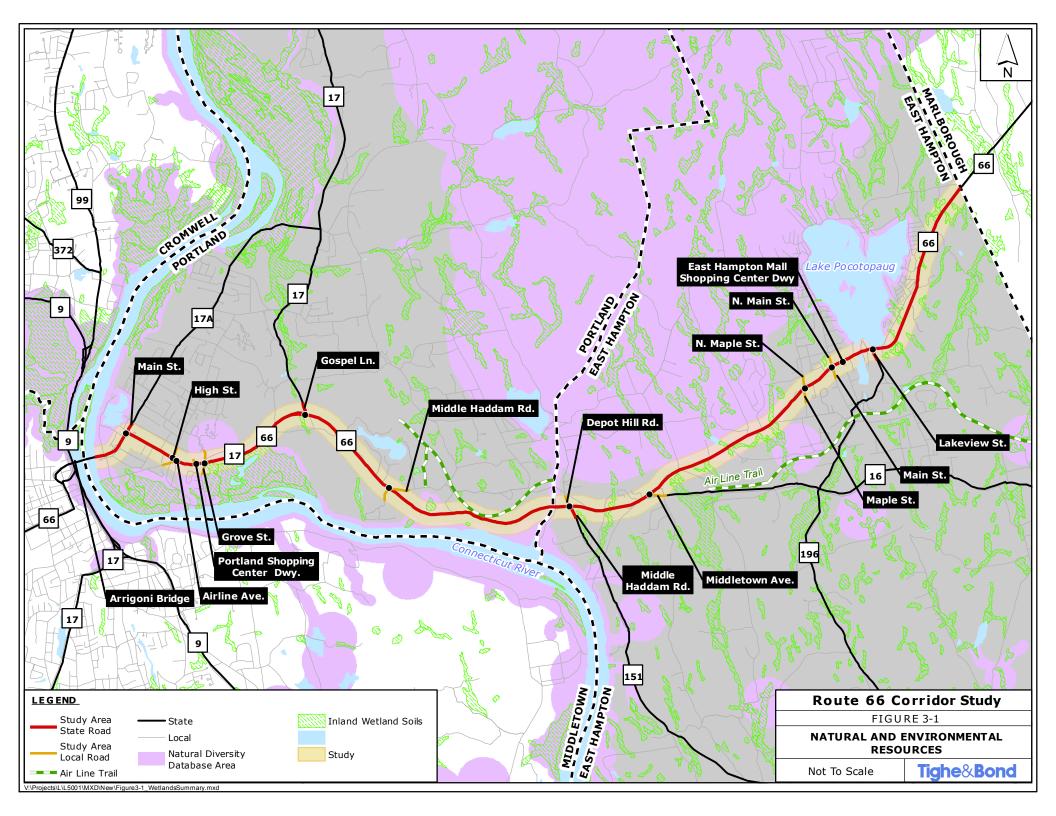

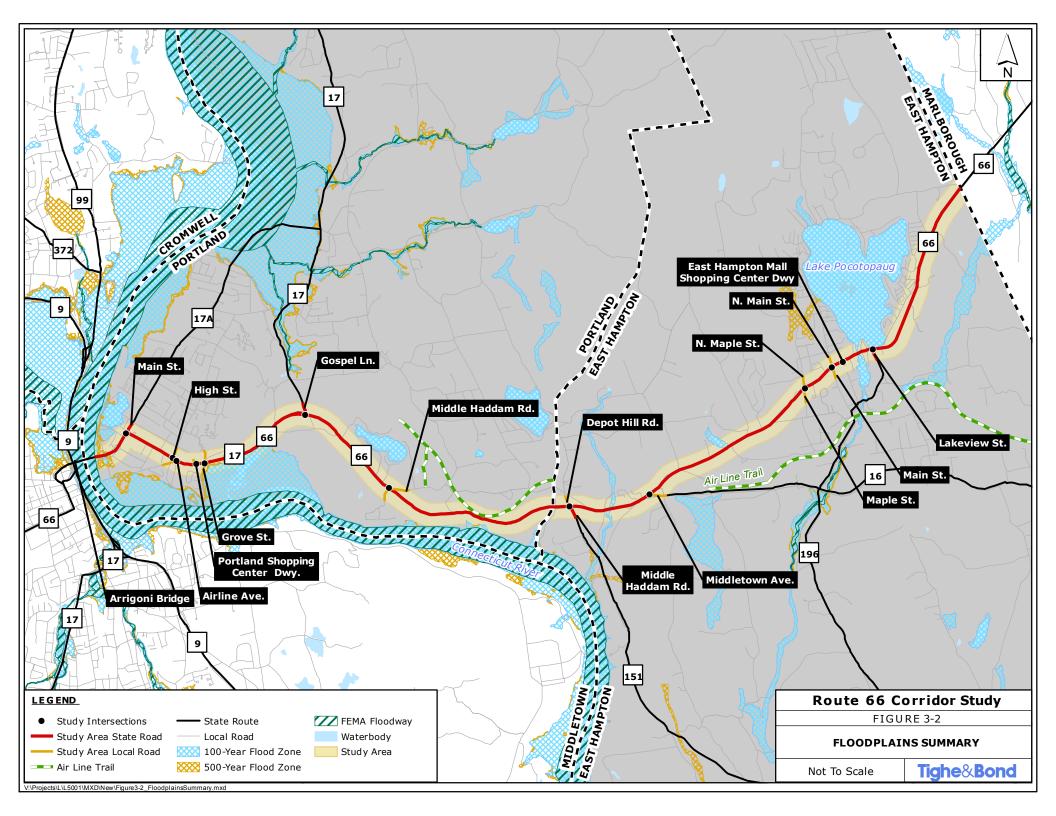


Public Information M	APPENDIX A eeting #1 and #2 Summaries	
	Tighe&Bond	

Route 66 Corridor Planning Study Portland & East Hampton

Public Information Meeting-East Hampton Session



June 12, 2018

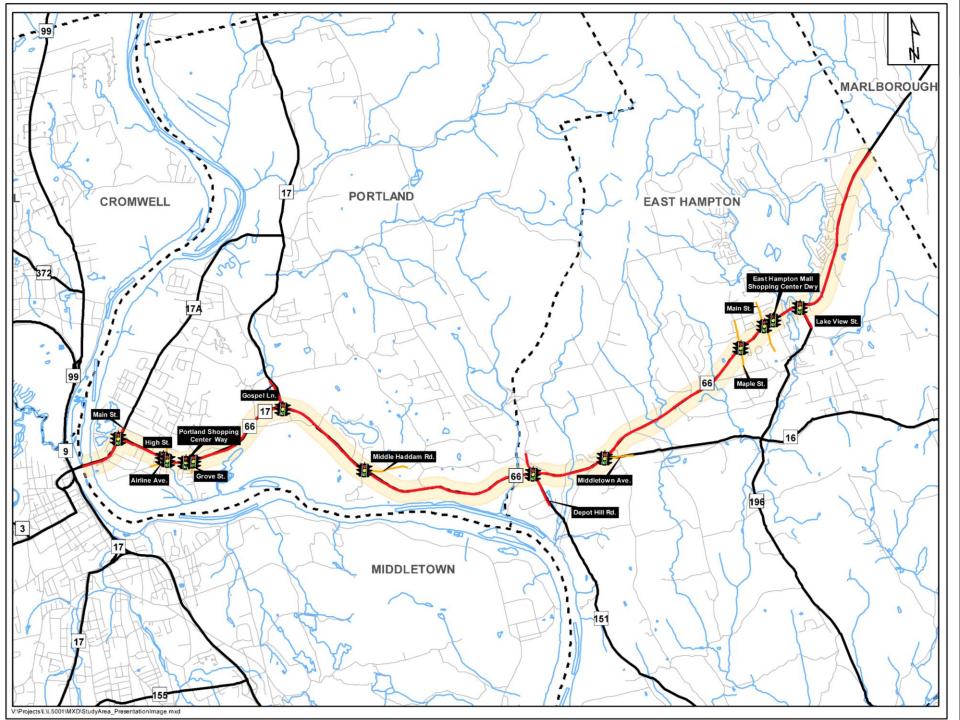

Study Team

Towns of East Hampton and Portland





 Lower Connecticut River Valley Council of Governments (RiverCOG)



Connecticut Department of Transportation (CTDOT)



■ Tighe & Bond (Primary Consultant)



■ Freeman, RKG Associates, VHB (Sub-Consultants)













Project Overview

- Study Administered by RiverCOG for State and Town
- Study Focus
 - Assess Existing and Future Conditions
 - Identify Feasible Transportation Solutions to Mitigate Existing and Future Needs and Deficiencies
 - Provide a Planning Document for Development of a Safe, Efficient Multi-Modal Transportation System
- Comprehensive Public Involvement Program
- Technical Memoranda
- Draft and Final Study Reports







Project Scope

- Data Collection
- Existing Condition Assessment
- **Future Condition Assessment**
- **Improvement Alternatives**
- **Final Report**
- Public Engagement








Public Outreach Initiatives

- **Provides Stakeholders and Public** Information about the Study
- **Critical Component in Planning Process**
- **Study Advisory Committee Meetings (4)**
- **Community Advisory Committee (2)**
- **Public Information Meetings (5)**
- **Town Council Meetings (2 1 per Town)**
- **Techniques**
 - RiverCOG & Towns Websites; Community Facebook **Pages**
 - Bicycle and Recreational Organizations River East Announcements and Articles

 - Other Methods and Techniques (TBD)

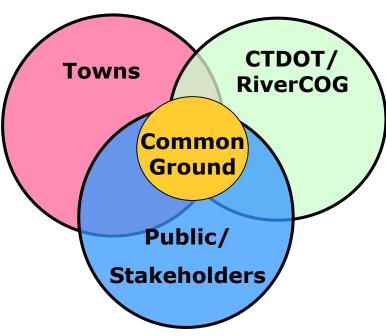





Project Goals & Objectives

- Develop cost effective transportation infrastructure alternatives to improve traffic operations
- Safely accommodate future development opportunities along the corridors
- Provide infrastructure to improve mobility for alternative travel modes
- Improve corridor management;
 Identify strategies including emergency services and enforcement
- Comprehensive transportation improvement plan providing prioritized improvements addressing current deficiencies and future corridor needs









Information Meeting Goals

- Receive Feedback from YOU!
- Begin to Understand Local Issues and Experiences in the Study Area
- Identify Important Issues and Deficiencies to Mitigate
- Develop a Study Vision to Guide the Study Team

Open House

- 3 Learning Stations
 - Station1: Traffic Operations and Safety Issues
 - Station 2: Alternative Travel Bicycle / Pedestrian / Transit
 - Station 3: Land Use and Economic Development
- 15 Minutes at Each Station to Discuss Specific Issues with Study Team
- Opportunity to Provide your Perspective Early in the Study Process

Interactive Session

- Identify Corridor Strengths and Weaknesses
- **Post-it Notes with Brief Summary of Comment**
- Summarize the Results & Key Issues
- **Follow Up Question and Answer with Entire Group**





Station Leaders

■ Station 1: Traffic Operations and Safety

- Jianhong Wang Tighe & Bond
- Matthew Stoutz Tighe & Bond


■ Station 2: Alternative Travel -Bike/Ped/Transit

- Robert Haramut RiverCOG
- Joe Balskus VHB

■ Station 3: Economic Development

- Jeremy DeCarli Town of East Hampton
- Chris Granatini Tighe & Bond

Questions & Discussions

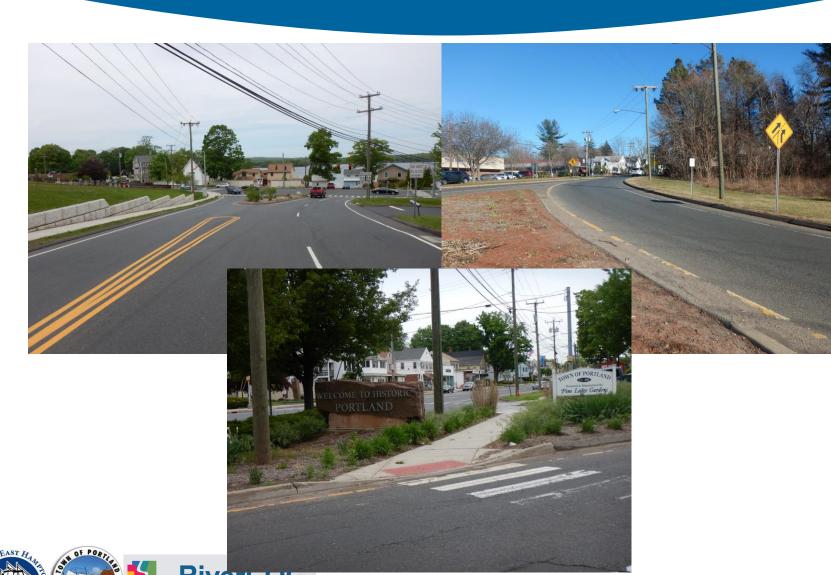

Lower Connecticut River Valley Council of Governments

Route 66 Corridor Planning Study Portland & East Hampton


Public Information Meeting- Portland Session



June 14, 2018

Public Information Meeting Goals

- Receive Feedback from YOU!
- Begin to Understand Local Issues and Experiences in the Study Area
- Identify Important Issues and Deficiencies to Mitigate
- Develop a Study Vision to Guide the Study Team

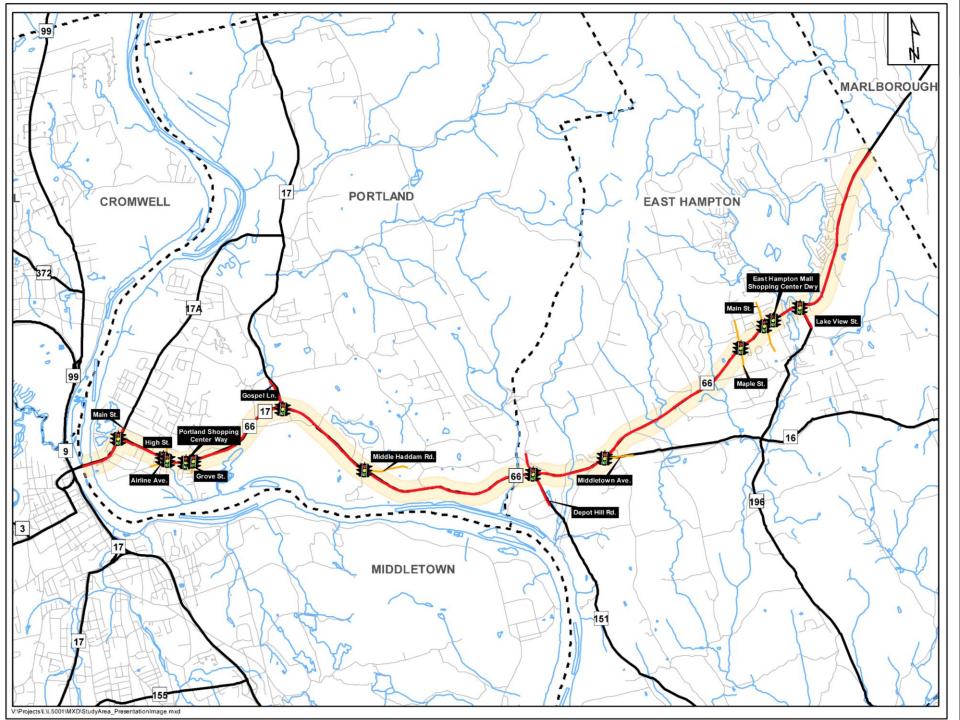

Study Team

Towns of East Hampton and Portland





 Lower Connecticut River Valley Council of Governments (RiverCOG)



Connecticut Department of Transportation (CTDOT)



Tighe & Bond (Primary Consultant)



■ Freeman, RKG Associates, VHB (Sub-Consultants)













Project Overview

- Study Administered by RiverCOG for State and Towns
- Study Focus
 - Identify Feasible & Implementable Transportation Solutions to Mitigate Existing and Future Needs and Deficiencies
 - Provide a Planning Document for Development of a Safe, Efficient Multi-Modal Transportation System
- Comprehensive Public Involvement Program
- Technical Memoranda
- Draft and Final Study Reports







Project Scope

- Data Collection
- **Existing Condition Assessment**
- **■** Future Condition Assessment
- Improvement Alternatives
- **Final Report**
- Public Engagement








Public Outreach Initiatives

- **Provides Stakeholders and Public** Information about the Study
- **Critical Component in Planning Process**
- **Study Advisory Committee Meetings (4)**
- **Community Advisory Committee (2)**
- **Public Information Meetings (5)**
- **Town Council Meetings (2 1 per Town)**
- **Techniques**
 - RiverCOG & Towns Websites; Community Facebook **Pages**
 - Bicycle and Recreational Organizations River East Announcements and Articles

 - Other Methods and Techniques (TBD)

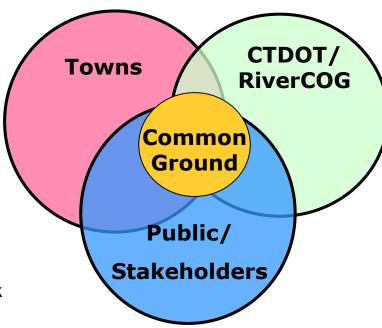





Project Goals & Objectives

- Develop cost effective transportation infrastructure alternatives to improve traffic operations and safety
- Safely accommodate future development opportunities
- Provide infrastructure to improve mobility for alternative travel modes
- Improve corridor management;
 Identify strategies including emergency services and enforcement
- Comprehensive transportation improvement plan with prioritized improvements addressing current deficiencies and future needs







Open House

- 3 Learning Stations
 - Station1: Traffic Operations and Safety Issues
 - Station 2: Alternative Travel Bicycle / Pedestrian / Transit
 - Station 3: Land Use and Economic Development
- 15 Minutes at Each Station to Discuss Specific Issues with Study Team
- Opportunity to Provide your Perspective Early in the Study Process

Interactive Session

- Identify Corridor Strengths and Weaknesses
- **Post-it Notes with Brief Summary of Comment**
- Summarize the Results & Key Issues
- **Follow Up Question and Answer with Entire Group**





Station Leaders

- Station 1: Traffic Operations and Safety
 - Jianhong Wang Tighe & Bond
 - Matthew Stoutz Tighe & Bond
- Station 2: Alternative Travel -Bike/Ped/Transit
 - Robert Haramut RiverCOG
 - Joe Balskus VHB
- Station 3: Economic Development
 - Chris Granatini Tighe & Bond




Questions & Discussions



Lower Connecticut River Valley Council of Governments

	Route (Pr
	66 Cor
	ridor In
	nprove
Tighe &	PENDI ement 1
Bond	Plan

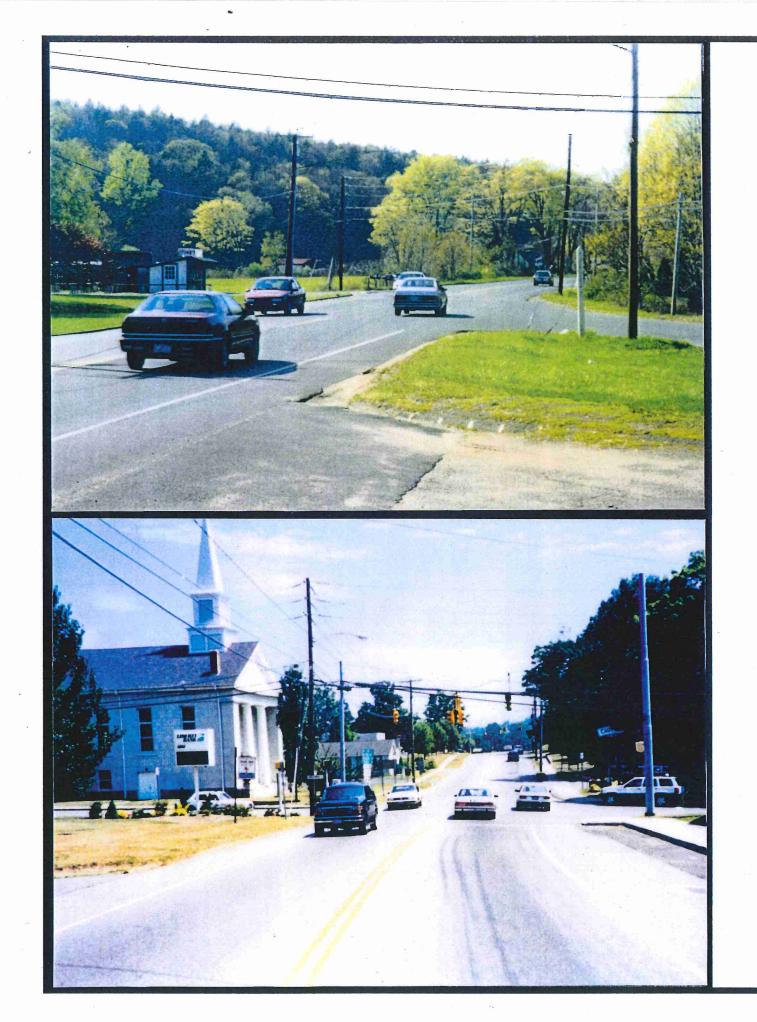

STATE OF CONNECTICUT ROUTE 66 CORRIDOR IMPROVEMENT PLAN

Towns of Portland and East Hampton

Midstate Regional



Planning Agency





AUGUST 1998

PREFACE

In May of 1997, the Midstate Regional Planning Agency (MRPA) contracted with Maguire Group Connecticut, Inc., and its subcontractors Fitzgerald & Halliday, Inc., and VN Engineers, Inc., to carry out a corridor planning study of the Route 66 corridor from the east end of the Arrigoni Bridge near the municipal boundary of Portland west to the East Hampton - Marlborough town line.

The study was funded by the Connecticut Department of Transportation (ConnDOT) and a scope of work was developed similar to a number of other corridor planning studies that were being carried out concurrently in other parts of the state.

The purpose of this corridor study is to develop workable solutions to the problems currently existing in the corridor and those that the corridor will face in the future. These problems include congestion, speeding, and safety deficiencies.

The study was guided by an Advisory Committee comprised of representatives of both communities. The members of the study Advisory Committee are listed below:

Portland	East Hampton
Raymond Carpentino	James Carey
Edward Kalinowski	Robert Drewry
Richard Kelsey	Jeffrey Foran
Barbara Phillips	John Lambert
Nancy Woolhouse-Mueller	Eugene Rame

The study was also heavily guided by input from the public. A variety of public meetings and forums were held throughout the course of the study, and news bulletins were issued regularly to keep the public informed.

Work on the initial corridor tasks got underway in May of 1997. Over the study duration, the consulting team collected and analyzed data, projected future traffic patterns, identified problem areas, evaluated a wide variety of improvement strategies aimed at reducing congestion and improving safety throughout the corridor, and recommended a set of improvements as set forth in this *Corridor Improvement Plan*. In addition, the consulting team developed individual *Route 66 Access Management Plans* for both Portland and East Hampton.

It is intended that this *Corridor Improvement Plan* be utilized by local, regional and state agencies to program and prioritize transportation projects in the corridor. It is hoped also that the Access Management Plans will become valuable tools, especially at the local level, in regulating future development.

This study was funded by the Federal Highway Administration and ConnDOT and the opinions, presented herein, represent those of the consultant and not necessarily those of ConnDOT or the Federal Highway Administration.

TABLE OF CONTENTS

1 The Study Process 2 2 Corridor Conditions 3 3 Improvement Strategies 15 4 Recommended Corridor Improvements 18 LIST OF FIGURES Figure No. Title Page 1 Route 66 Corridor Location Map 4 2a Portland Roadway Characteristics 6
2 Corridor Conditions 3 3 Improvement Strategies 15 4 Recommended Corridor Improvements 18 LIST OF FIGURES Figure No. Title Page 1 Route 66 Corridor Location Map 4
3 Improvement Strategies 15 4 Recommended Corridor Improvements 18 LIST OF FIGURES Figure No. Title Page 1 Route 66 Corridor Location Map 4
4 Recommended Corridor Improvements 18 LIST OF FIGURES Figure No. Title Page 1 Route 66 Corridor Location Map 4
LIST OF FIGURES Figure No. Title Page Route 66 Corridor Location Map 4
Figure No. Title Page 1 Route 66 Corridor Location Map 4
1 Route 66 Corridor Location Map 4
2a Portland Roadway Characteristics 6
2a 1 Ordana Rodaway Characteristics
2b East Hampton Roadway Characteristics 7
3 Average Daily Traffic 8
4 Level of Service Analysis 10
5 Primary Accident Locations 11
6 Targeted Problem Areas 14
Recommended Intersection/Arterial Improvements 19
LIST OF TABLES
Table No. Title Page
1 Key Intersections Selected for Traffic Counts 5
2 Level of Service (LOS) Definitions 5
3 Summary of Contributing Factors for Accidents 12
Future LOS with Recommended Improvements 21
5 Evaluation Matrix for Recommended Physical Improvements 23
6 Summary of Recommendations 27
APPENDICES
Appendix No. Title
A Turning Movement Volumes
A Turning Movement Volumes B Conceptual Plans of Recommended Intersection/Arterial Improvements
C Congestion Management System Strategy Report

Chapter One THE STUDY PROCESS

STUDY PURPOSE

The fundamental purpose for conducting this planning study of the Route 66 Corridor is threefold:

- To plan for future transportation-related expenditures
- To coordinate future land use and development proposals with transportation improvements
- To further the objectives and recommendations set forth in the Midstate Planning Region's *Regional Transportation Plan*.

ADVISORY COMMITTEE

An effective planning process requires a thorough knowledge of growth, development, travel and activities in the corridor and surrounding areas. Input from the residents, business owners, and municipal representatives that may be affected by actions in the corridor is essential. To this end, a representative group of local advisors was asked to participate in the planning process to better ensure that issues of local importance were adequately considered.

At the outset of the study, ten individuals, five representatives from Portland and five from East Hampton, were selected to serve as members of the Route 66 Advisory Committee. The consulting team held meetings with the Advisory Committee at various stages during the planning process to receive their guidance and local insight. All members of the Advisory Committee were involved in their community on a daily basis representing officials, residents, and business owners and therefore had a unique knowledge of community issues, problems and concerns. They were a valuable resource in understanding the character of the communities and in identifying specific elements of concern and specific improvement strategies throughout the course of the study. A total of seven Advisory Committee meetings were held throughout the course of the study.

PUBLIC INVOLVEMENT

The general public, especially residents and business owners along Route 66, as well as daily commuters along the route, have a particular awareness of traffic patterns and problems in the study area. These individuals experience difficult or unsafe roadway conditions on a regular basis and are able to comment on the nature and severity of the situation by time of the day, week or year. Input from the public was an essential part of the corridor study, and several opportunities for participation were scheduled at key points in the study.

Opportunities for public participation included:

Public Information Meetings: Three public forums were held during the course of the study. The first introduced the community to the scope and direction of the study and presented the findings of the existing conditions analysis, including the initial definition of corridor problem areas, which provided a good opportunity for public feedback. The second public meeting presented alternative solutions and requested input from the public as to their preferred options. The final public forum presented the draft corridor improvement plan for public response.

A combined "open house" and brief presentation format was used for the public meetings, providing an opportunity for the public to interact on a one-to-one basis with members of the consulting team and to view graphic materials up-close while also allowing the consulting team to present findings and respond to questions to the group as a whole.

- *Public Bulletins*: Five bulletins providing project updates were prepared and distributed by MRPA at key points throughout the study. The bulletins were mailed to many residents and business owners along Route 66. Additional copies were made available at other locations, at public meetings, and by request.
- **Public Comment Forms**: Pre-printed and pre-addressed forms soliciting and encouraging public comment were distributed at the first public forum. Some of the responses simply indicated an interest in the study while others had very specific comments or requested specific improvements.
- The public was also made aware that telephone calls to members of the consulting team regarding specific corridor issues were welcomed at any point in the study.

STUDY GOALS AND OBJECTIVES

The overall goal of the corridor study is to provide direction for future transportation and land use planning efforts, with a focus on improving both safety and efficiency throughout the Route 66 corridor. Within this general theme, a more defined set of goals was developed with input from the Advisory Committee. Of the fourteen goals stated below, the first three are more general in nature while the latter eleven are somewhat more specific, reflecting the desires of the Advisory Committee.

- Goal 1: Provide a safe and efficient transportation system
- Goal 2: Sustain quality of life
- Goal 3: Be feasible and affordable
- Goal 4: Consolidate and/or control curb cuts; improve access/egress
- Goal 5: Consider frontage roads for access management
- Goal 6: Manage excessive speeds and high volumes

Goal 7: Coordinate local plans/planning efforts to reflect forecasted traffic volumes and capacities

Goal 8: Improve aesthetics and sense of community

Goal 9: Enhance economic opportunity (Portland)

Goal 10: Explore promotion of alternate transportation modes

Goal 11: Develop practical, readable, "user-friendly" documents

Goal 12: Prevent further environmental degradation due to drainage problem (East Hampton)

Goal 13: Coordinate improvements with long-range planning in mind

Goal 14: Develop incident management techniques

STUDY PRODUCTS

The final products of this study are this *Corridor Improvement Plan* and the *Route 66 Access Management Plans* for Portland and East Hampton. In addition, throughout the course of the study, a series of Technical Memoranda were developed for review by the Midstate Regional Planning Agency, the Advisory Committee, and the public. These Technical Memoranda provide a more detailed documentation of the study methodology and findings and are available for perusal at the offices of the Midstate Regional Planning Agency. The four technical memoranda are:

Technical Memorandum No. 1: Existing Conditions and Problem Identification

Technical Memorandum No. 2: Future Conditions/Traffic Forecasts

Technical Memorandum No. 3: Presentation of Alternative Improvement Concepts

Technical Memorandum No. 4: Evaluation of Alternative Improvements

Chapter Two CORRIDOR CONDITIONS

The information and data assembled for this study were compiled from various sources including state, regional and local plans, state and regional agency data, and field investigations. New data was obtained in the form of peak hour traffic counts at 20 key corridor intersections. The base mapping and other information was modified based on field checks and additional data collected by the consulting team or provided as input by the Advisory Committee.

In identifying roadway deficiencies, it is important to look not only at existing traffic volumes and patterns, but also at those volumes and patterns that are expected to occur in the future. This allows evaluation of the conditions that will exist in the corridor in terms of congestion and level of service if no roadway improvements are made.


Future traffic conditions in the corridor were based upon the peak hour traffic counts taken in May and June of 1997 and adjusted utilizing projected traffic forecasts for the year 2020. ConnDOT utilizes a commonly used planning tool to model transportation system demand. From this model, traffic forecasts can be developed from projected variables such as population and employment.

ROADWAY CHARACTERISTICS

Connecticut State Route 66 is a east-west arterial roadway serving the south central part of the state. The study location, as shown in Figure 1, extends from the east end of the Arrigoni Bridge near the municipal boundary of Portland west to the East Hampton - Marlborough town line. The portion of Route 66 under study is approximately 11 miles long and is a two lane roadway for most of its length, though widths vary throughout the corridor. There is an additional traffic lane provided to accommodate turning vehicles at several intersections which typically experience heavy traffic volumes, and in some of the busier areas along the corridor there are four traffic lanes (two in each direction).

The Midstate Region's *Regional Transportation Plan* has identified this portion of the Route 66 corridor as approaching capacity or over capacity. Under current conditions, drivers along the corridor experience frequent delays, especially during peak commuter hours. Several factors contribute to congestion and delays. While overall volumes are a part of the problem, congestion in some areas is caused by inadequate signage or signalization, conflicts with numerous access drives, lack of turning lanes, or poor driveway or side street alignments. Many of these types of congestion factors can be eased by implementing relatively minor physical improvements or access management strategies.

Both towns within the corridor, Portland and East Hampton, are generally characterized as rural communities with low density development. However, there are centers of commercial activity scattered about the towns; Route 66 passes through each town's most developed areas. The historic town centers were located on or near the historic Route 66 alignment. A pattern of development focusing on Route 66 has continued and the corridor, today, remains the primary access route to businesses and community facilities in both Portland and East Hampton as well as the neighboring towns.

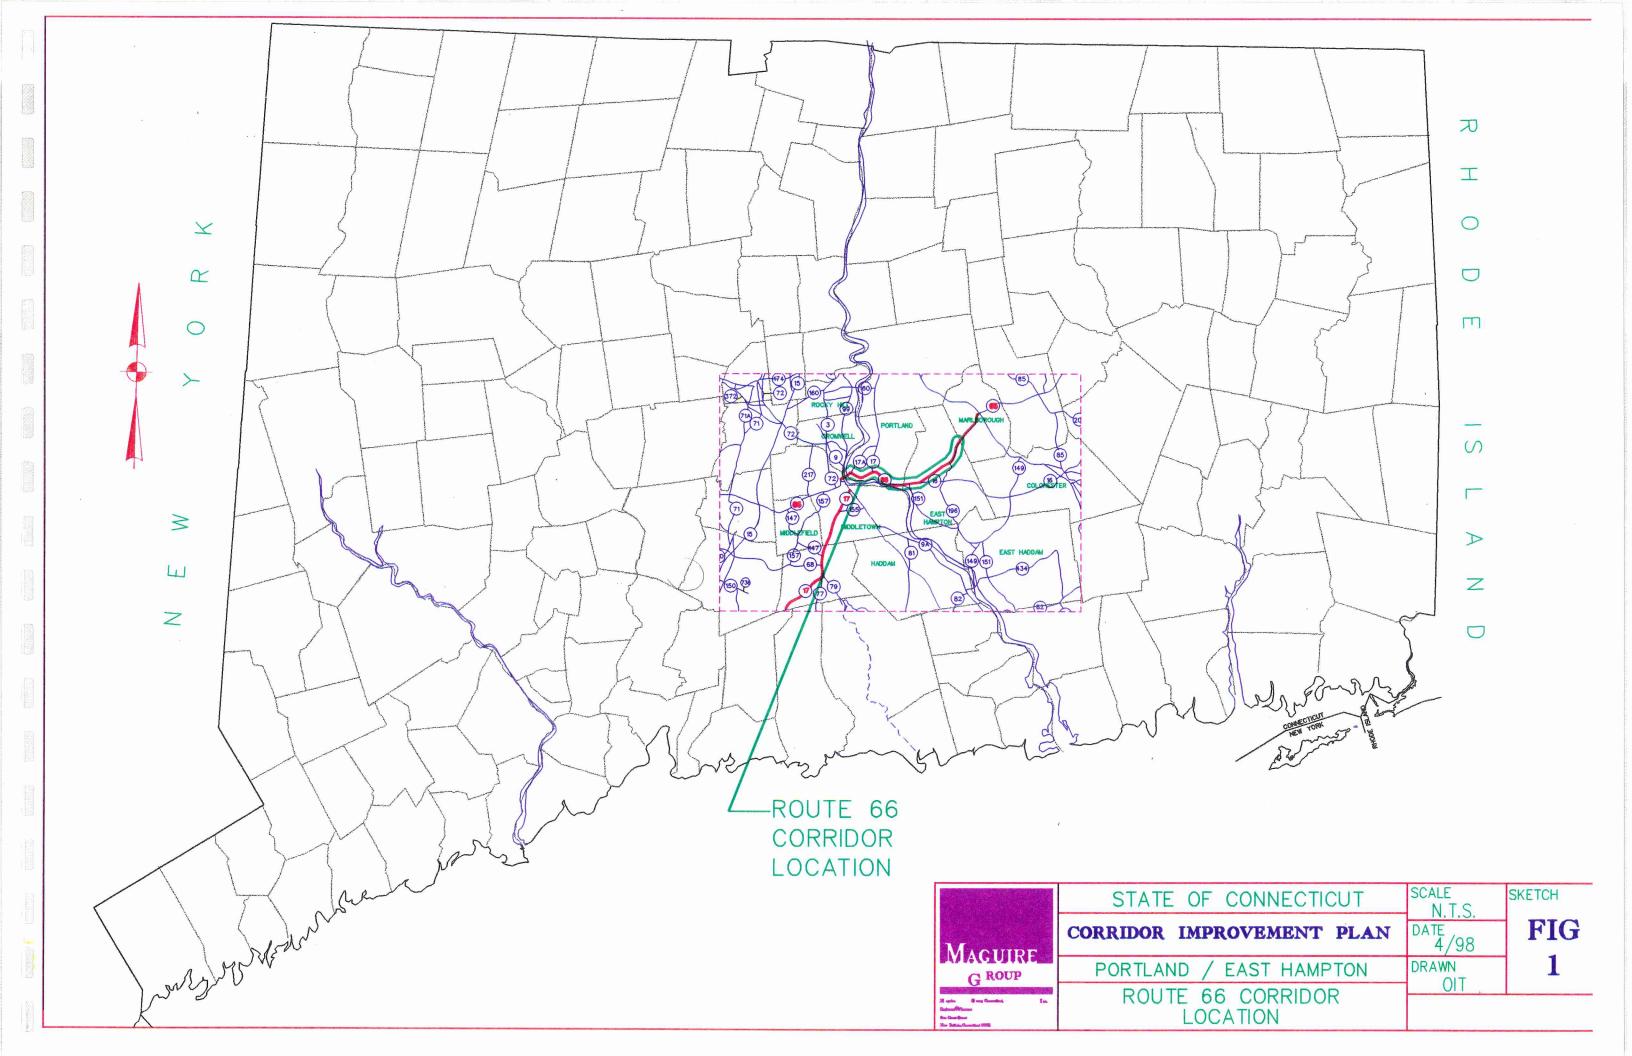

Residences fronting on Route 66 are common throughout the corridor, however, within the developed areas, commercial properties dominate. There are four shopping plazas and a number of other business and commercial operations throughout the entire corridor. Business interests are primarily smaller retail establishments and restaurants. Several institutional and community facilities, such as schools and town halls, are also located along the corridor.

Figures 2a and 2b show the configuration of the roadway as well as roadway characteristics and the location of any traffic control devices.

TRAFFIC FLOW

The characteristics of existing traffic flow along Route 66 can be expressed in a variety of ways, including average daily traffic, peak hour volumes, and level of service. A brief summary of each of these characteristics follows.

Average Daily Traffic (ADT)

Existing average daily traffic (ADT) volumes indicate that average daily traffic in the corridor range from a low of approximately 11,700 vehicles per day just west of North Main Street in East Hampton to a high of approximately 20,900 vehicles per day just east of High Street in Portland. Figure 3 presents the existing average daily traffic volumes along Route 66 in the study area.

Traffic in Connecticut has generally been growing at a rate of between one to two percent per year. This would result in a traffic increase on Route 66 of approximately 30% from the year 1997 to the year 2020.

Average Speed

Average operating speeds along the roadway range from five to fifteen miles per hour above the posted speed limits.

Peak Hour Volumes

Turning movement counts were collected during May and June of 1997 at the twenty key Route 66 intersections listed in Table 1. Appendices A1 and A2 show the a.m. and p.m. peak turning movements counted along the Route 66 corridor. Appendices A3 and A4 give the projected turning movements for the year 2020 as calculated using the ConnDOT model.

Travel Time and Delay

Travel time and delay runs were conducted to determine the average time required to traverse the corridor during peak periods. The travel time and delay runs indicated that during the morning peak period, traffic was generally found to move smoothly with some delays occurring due to red traffic lights. During the evening and Saturday afternoon peak periods, delays were attributed to red stop lights and occasional turning vehicles. These results do not identify a specific problem area, however, intersection capacity and traffic operational improvements along the corridor will improve travel time and delay.

Table 1
Key Intersections Along Route 66 Selected for Traffic Counts

Location	Control	
Portland		
Elmcrest Manor	Unsignalized	
Barry Avenue	Unsignalized	
High Street	Signalized	
Airline Avenue	Signalized	
Portland Plaza	Signalized	
Grove Street	Signalized	
Sand Hill Road	Unsignalized	
Route 17	Signalized	
Middle Haddam Road/Payne Boulevard	Unsignalized	
East Hampton		
Route 151	Signalized	
Keighly Pond Road	Unsignalized	
Route 16	Signalized	
Champion Hill Road	Unsignalized	
North Maple Street	Signalized	
North Main Street	Signalized	
East Hampton Mall	Signalized	
Brooks Plaza	Unsignalized	
Route 196	Unsignalized	
Old Marlborough Road	Unsignalized	
Lake Road	Unsignalized	

Level of Service


A capacity analysis was performed for the twenty key intersections shown in Table 1. The capacity of a transportation facility reflects its ability to accommodate a moving stream of traffic. Capacity of an intersection is defined in terms of level of service (LOS) ranging from A to F. LOS A represents clear traffic flow, while LOS F represents severely congested flow. LOS E and F are considered unacceptable. Level of service analysis is usually carried out for intersections rather than roadway segments, as intersections are generally the constraining feature of a roadway. At intersections, traffic must conflict with traffic entering and exiting the main roadway from side streets and driveways.


Definitions of level of service for signalized intersections are shown below:


Table 2
Level of Service (LOS) Definitions

Level of	
Service	Definition
	Describes assessing with your law dalay on to 5 accords of delay non-vehicle
A	Describes operations with very low delay, up to 5 seconds of delay per vehicle, where most vehicles do not stop.

5

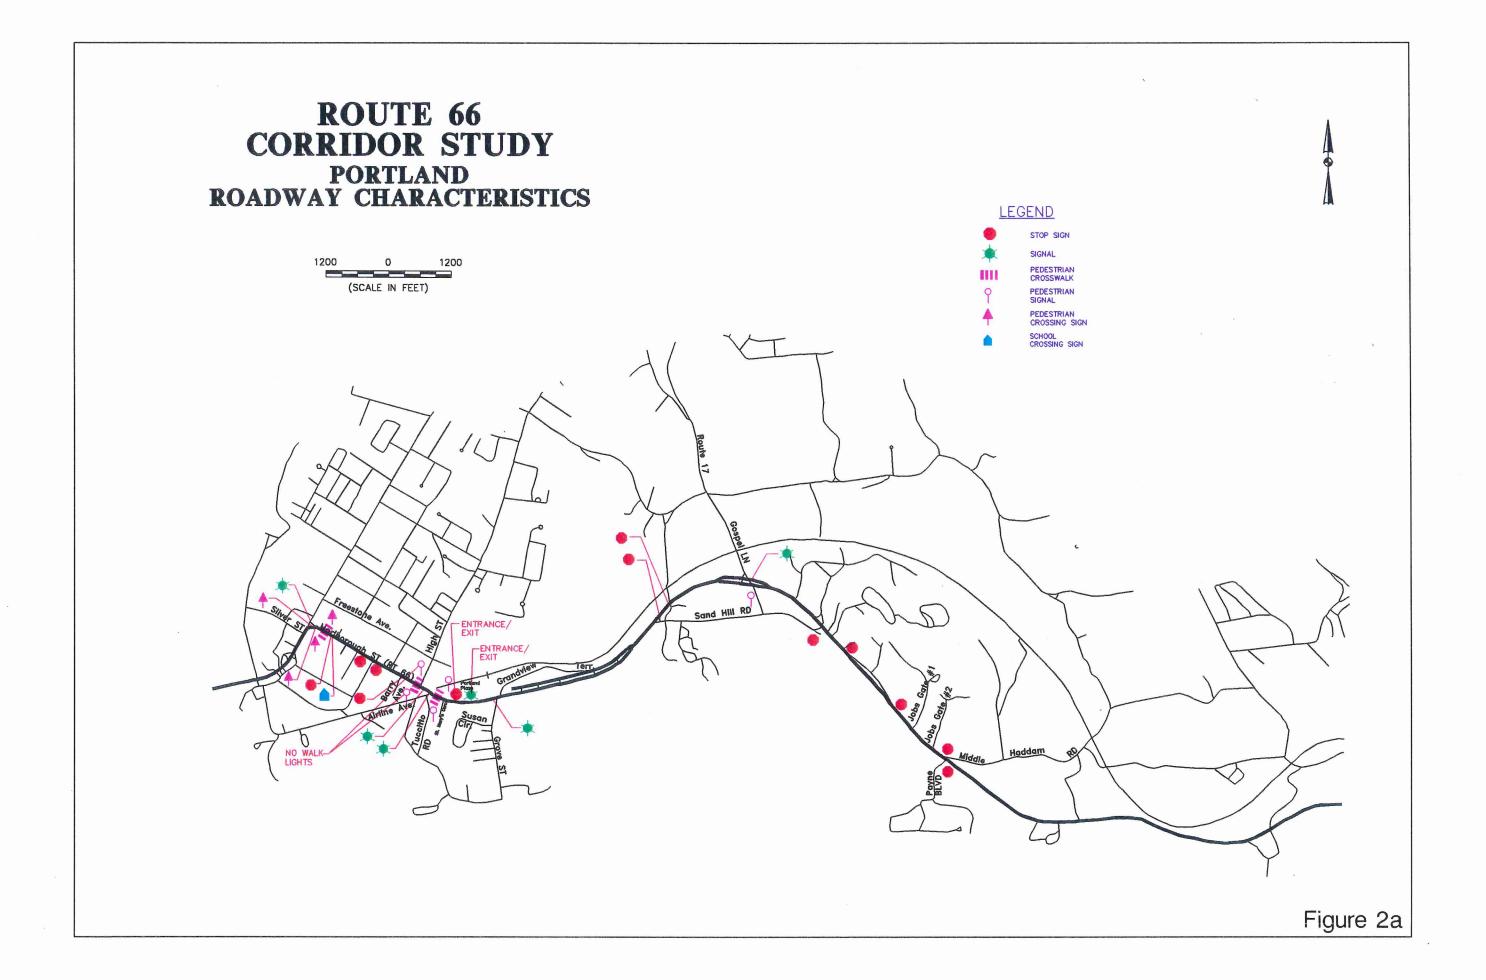

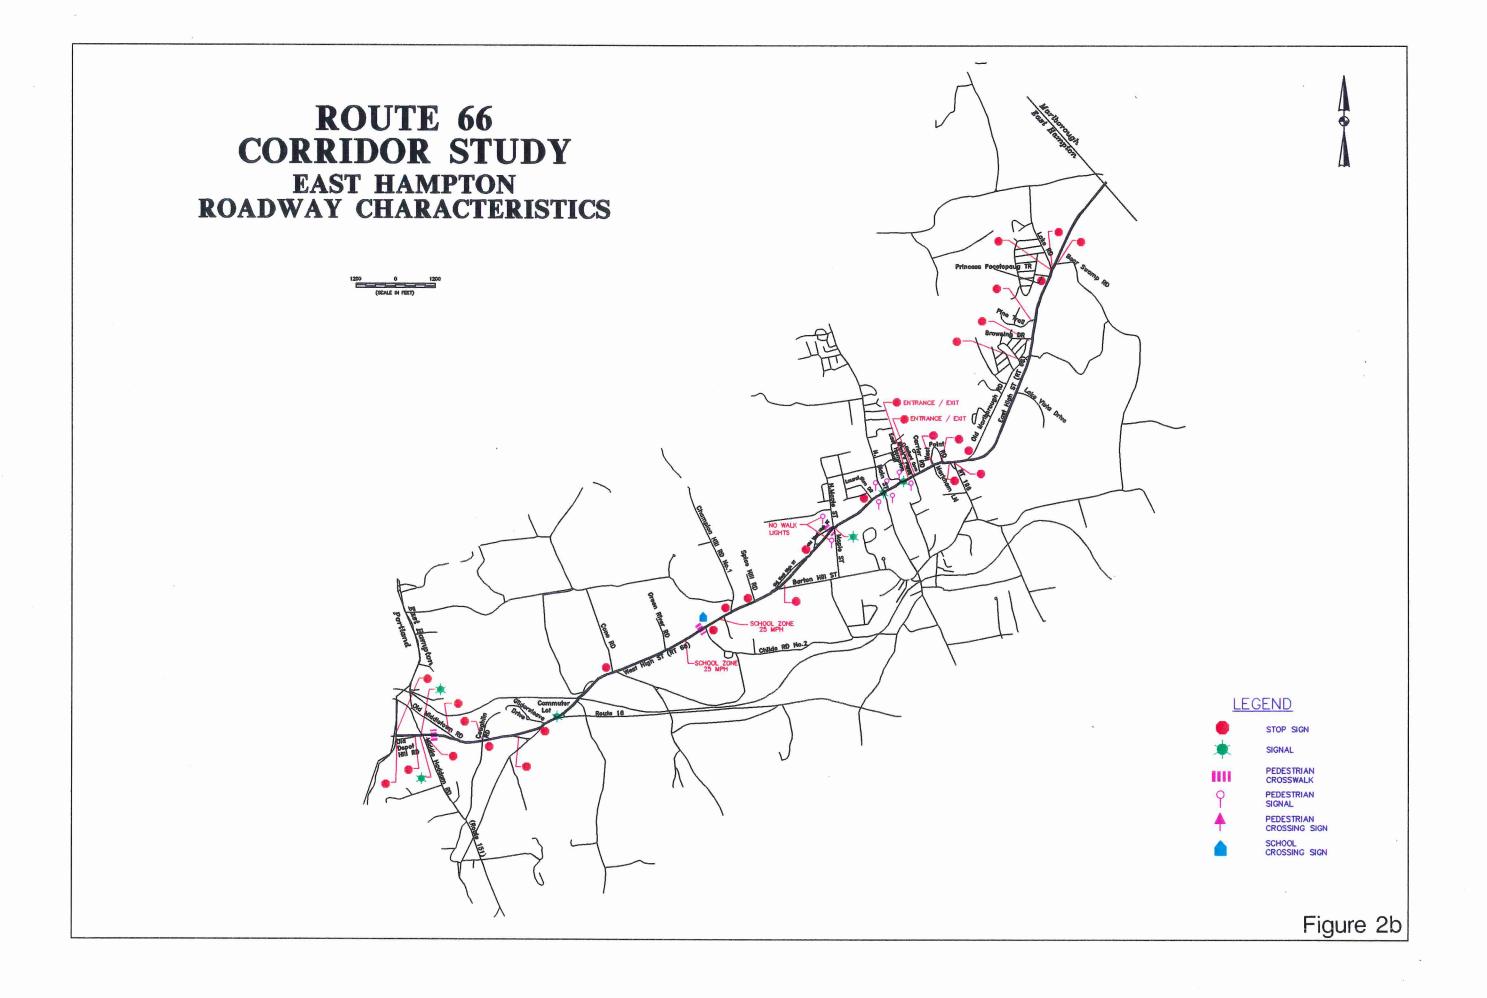

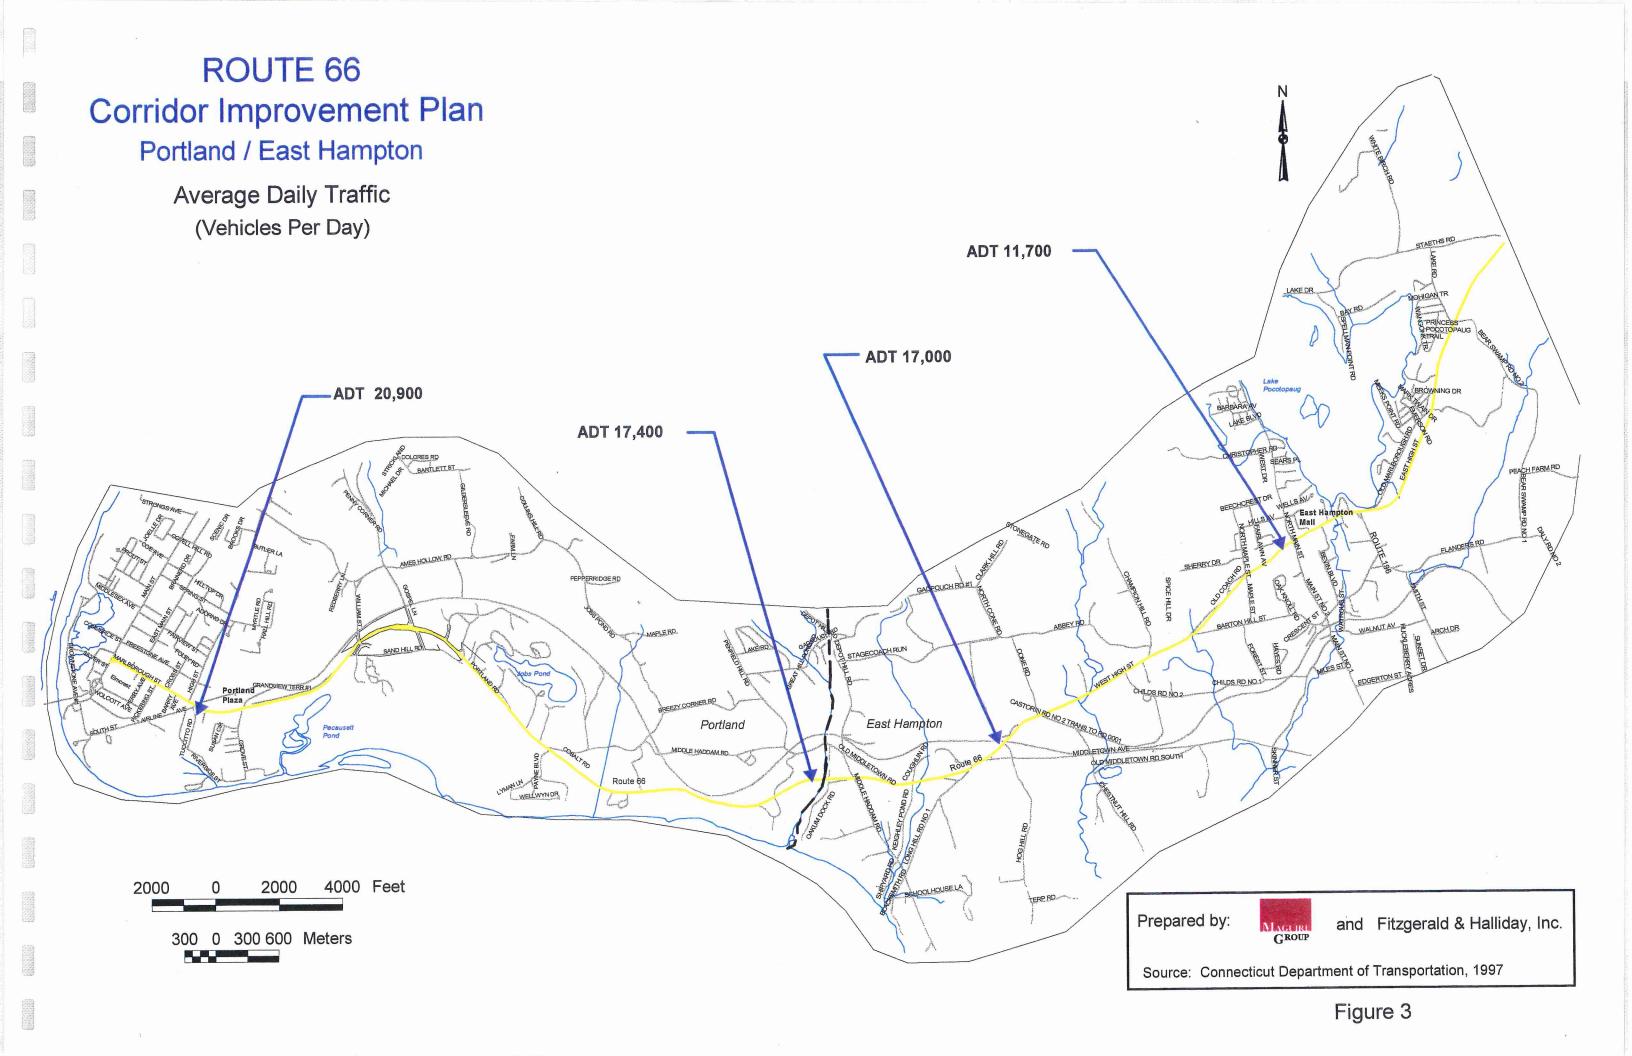

В	Describes operations with delay greater than 5 and up to 15 seconds per vehicle, where vehicles may stop more than with LOS A.
С	Describes operations with delay greater than 15 and up to 25 seconds per vehicle where the number of vehicles stopping is more significant at this level, though many still pass through the intersection without stopping.
D	Describes operations with delay greater than 25 seconds and up to 40 seconds per vehicle, where there is unfavorable progression. Many vehicles stop and congestion is more noticeable.
E	Describes operations with delay greater than 40 and up to 60 seconds per vehicle, with poor progression. This level is the limit of acceptable delay.
F	Describes operations with delay in excess of 60 seconds per vehicle. This level is considered to be unacceptable to most drivers.
*	Describes operations with delay in excess of 60 seconds per vehicle and the volume to capacity ratio is greater than 1.2. This level is also considered to be unacceptable to most drivers.

Source: Highway Capacity Manual, Third Edition, 1994.

Results of the analysis indicate that eight of the twenty intersections analyzed are currently operating at a poor level of service in the morning and/or evening peak periods. The intersections along Route 66 where poor (E, F, or *) levels of service currently exist are listed below and are shown graphically in Figure 4.

Portland	East Hampton
Elmcrest Manor	Keighly Pond Road
Barry Avenue	North Main Street
Sand Hill Road	Brooks Plaza
Middle Haddam Road	Route 196

In general, an intersection currently experiencing a poor level of service under existing conditions will continue to have a poor level of service, or will deteriorate further, if future growth is added and no improvements are implemented. Following the projection of future traffic volumes, a capacity analysis was again performed at the twenty key intersections using the projected p.m. peak hour traffic volumes for the year 2020.

Under current conditions, eight intersections along the corridor were identified as having a poor level of service. Results from the future year 2020 LOS analysis indicate that fourteen of the twenty intersections will have lane movements operating at LOS E, F or * in the evening peak period by the year 2020. Of these fourteen intersections, six are in the Town of Portland and eight are in the Town of East Hampton.

This is an additional six intersections over the eight intersections currently experiencing pool level of service. All of the intersections along Route 66 that are expected to have poor level of service by the year 2020 are listed below:

<u>Portland</u>	East Hampton
Elmcrest Manor Barry Avenue High Street Portland Plaza Sand Hill Road Middle Haddam Road	Route 151 (Middle Haddam Road) Keighly Pond Road Champion Hill Road North Maple Street North Main Street East Hampton Mall Brooks Plaza
	Route 196

TRAFFIC SAFETY

Accident Summary


Accident data along the Route 66 corridor in Portland and East Hampton was obtained from ConnDOT for the most recent available three-year period (1993-1995). The data revealed that 579 accidents occurred along this section of Route 66 during that period. Figure 5 illustrates the higher accident locations in the study area. A summary of accidents and the most frequently cited contributing factors is tabulated in Table 3. The predominant factors were: driver following too close (29%), driver failed to grant right-of-way (19%), and driving too fast for conditions (15%).

As traffic volumes and congestion increase in the future, as seen in the level of service analysis above, the number and rate of accident occurrences can also be expected to increase. In addition to traffic volume, an important factor to note is traffic speed. Excess speed was frequently cited in the above-mentioned accident data.

PEDESTRIAN, BICYCLE and TRANSIT ISSUES

Pedestrian Issues

Pedestrian safety was considered an important factor in evaluating specific intersection alternatives. The majority of the pedestrian problems and concerns are focused in the downtown Portland area, generally from the Arrigoni Bridge to Portland Plaza. Much of the current pedestrian traffic in downtown Portland is generated by residents walking to shopping areas or schools, and by employees of Elmcrest Manor. Sidewalks in this area are limited and in disrepair. Sidewalks in this area also lack continuity and lack in qualities that would promote increased pedestrian use. One of the Portland advisory committee's specific goals is to promote a more pedestrian-friendly downtown area. Some sidewalks have been reconstructed by recently opened businesses, and ConnDot plans to reconstruct sidewalks as part of a scheduled roadway improvement project. Pedestrian safety and circulation was one of the issues that qualified this general area as one of the target areas.

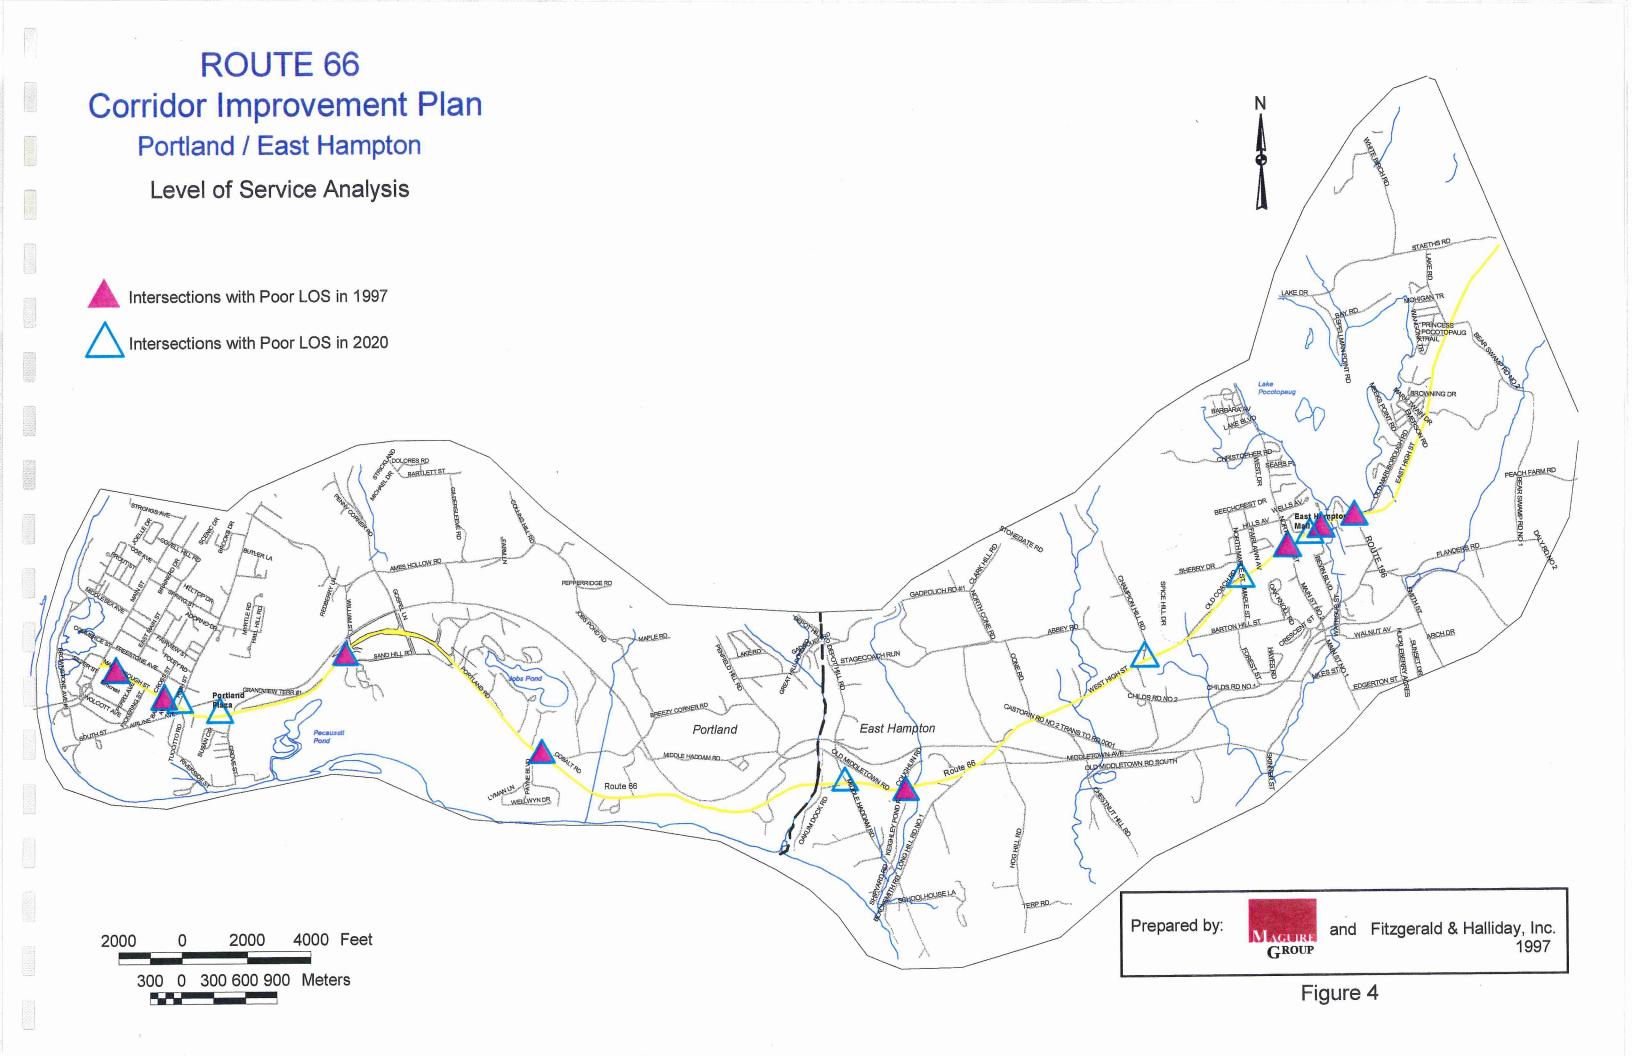

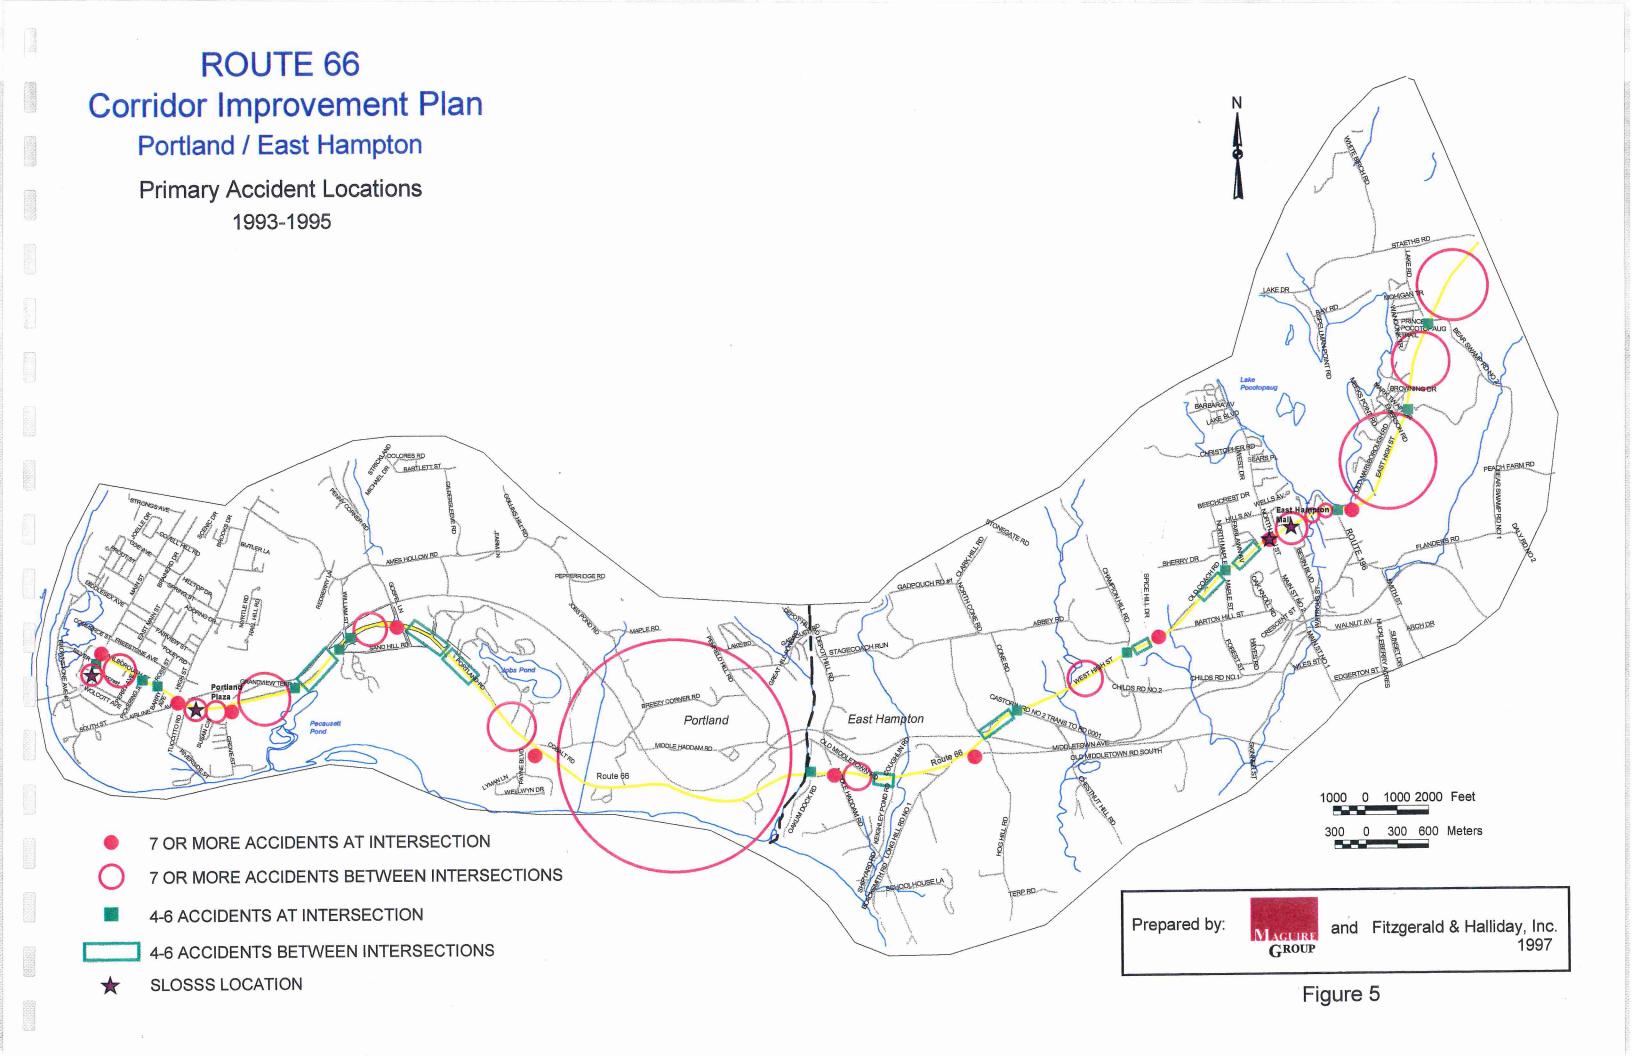


Table 3
Summary of Contributing Factors for Accidents
Along Route 66 in Portland and East Hampton (1993-1995)

		Contributing Factors (%)			
Location of Accidents	# of Accidents	Following Too Close	Driving Too Fast	Failed To Grant Right of Way	Other
On Arrigoni Bridge/Bridge Approach	30	33	23	10	34
Between Arrigoni Bridge and Silver Street	17	18	6	35	41
At Silver Street	6	33	0	50	17
Between Silver Street and Route 17A	_ 5	40	20	20	20
At Route 17A	27	37	37	7	19
Between Route 17A and Perry Avenue	16	25	38	13	76
At Pickering Street	5	20	0	60	20
At Cross Street	5	0	0	100	0
At High Street	12	33	17	17	67
Between High Street and Marlborough Street (Private)	15*	20	40	13	27
At Grove Street/Grandview Terrace (westerly junction)	22	32	18	5	55
Between Grove Street/Grandview Terrace (westerly junction) and Grandview Terrace (easterly junction)	8	0	25	25	50
Between Grandview Terrace (easterly junction) and Sand Hill Road (westerly junction)	6	17 _	50	0	33
At Sand Hill Road (westerly junction)	5	0	20	60	20
At William Street	5	0	20	60	20
Between William Street and Route 17	11	18	18	18	46
At Route 17	13	31	15	23	31
Between Murphy Road (easterly junction) and Middle Haddam Road/Payne Boulevard	14	29	36	0	35
At Middle Haddam Road/Payne Boulevard	7	43	0	14	43
Between Middle Haddam Road/Payne Boulevard and Grist Mill Lane	34	24	21	6	49

		Contributing Factors (%)				
Location of Accidents	# of Accidents	Following Too Close	Driving Too Fast	Failed To Grant Right of Way	Other	
At Grist Mill Lane	5	40	20	0	40	
At Route 151	. 10	40	20	20	20	
Between Route 151 and Old Middletown Road	8	25	0	50	75	
Between Old Middletown Road and Keighley Pond Road	5	40	0	0	60	
At Route 16	7	57	14	29	100	
At Cone Road	6 .	83	17	0	0	
At Champion Hill Road	6	0	17	67	16	
At Spice Hill Drive	7	57	0	14	86	
Between Old West High Street and Maple Street	6	17	0	0	83	
At Maple Street/North Maple Street	6	17	17	33	67	
Between Maple Street and Laurel Glen Drive	5	40	0	0	60	
At Main Street	36	17	3	36	44	
Between Main Street and Carrier Road	29	41	0	31	28	
Between Carrier Road and Markham Lane	9	22	0	33	45	
Between Markham Lane and Route 196	8	50	0	38	12	
At Route 196	6	33	0	17	50	
Between Old Marlborough Road(westerly junction) and Old Marlborough Road(easterly junction)	14	21	14	29	36	
At Old Marlborough Road(easterly junction)	5	40	0	40	20	
Between Browning Drive and Princess Pocotopaug Trail	14	36	7	0	57	
Between Bear Swamp Road and Marlborough Town Line	7	14	14	14	58	

Source: Connecticut Department of Transportation, 1993-1995

Another area of concern cited by residents and members of the Advisory Committee is along the shore of Lake Pocotopaug in East Hampton. Route 66 passes very close to the shore of the lake just west of Old Marlborough Road (west). Pedestrians and Bicyclists must use an insufficient shoulder to complete travel around the lake.

Most of the rest of the corridor has few activities that generate significant pedestrian traffic, and no additional pedestrian issues were noted for these areas by town officials, Advisory Committee members, or others.

School buses pick up and discharge students at many different points along Route 66, and there is some concern about children's safety on this busy roadway. Bus routes are established, however, so that children do not have to cross Route 66. According to school and bus company personnel, safety at bus stops has not been a serious issue.

Bicycle Issues

ConnDOT publishes a Connecticut Bicycle Map which delineates several preferred bicycle routes throughout the state. However, many of these routes have not been specifically designed to accommodate bicycle traffic. Many do not have adequate shoulders or designated bicycle lanes and lack any particular amenities for cyclists. While the map designates portions of Route 66 through the corridor study area as a cross-state bicycle route, it is not particularly cyclist friendly.

Transit Service

The Middletown Transit District (MTD) services both Portland and East Hampton. This transit service provides only a few daily bus runs. Their is one existing designated commuter lot in East Hampton located near the intersection of Route 66 and Route 16.

ENVIRONMENTAL FEATURES

When considering transportation improvements it is necessary to consider the environmental features of the study area which might potentially be impacted by the recommended improvements. Significant historic and natural resources were inventoried along the Route 66 corridor.

Historic and Architectural Resources

Both Portland and East Hampton are rich in historic resources. The historic resources located in close proximity to Route 66 in Portland consist mainly of residential historic houses. The 19th century octagonal houses at 26 and 28 Marlborough Street (Route 66) are listed on the State and National Historic Registers. Elmcrest Manor, also on Marlborough Street, is listed in the State Historic Register. There are a total of 17 buildings in the Portland Route 66 corridor that are listed in the historical survey. In addition, the Main Street area of Portland, adjacent to the corridor study area, contains numerous historic buildings.

East Hampton's numerous historical resources include 63 buildings, predominately residential houses, that have been identified along the corridor area. A historic home located at 5 Hog Hill Road is listed on the State Historic Register. Additionally, there are two districts listed on the National Historic Register that are adjacent to the corridor study area. The Belltown Historic District is located in the center of East Hampton and borders West Main Street (Route 66) at Main Street. The Middle Haddam Historic District is located south of Route 66, at Route 151, and borders the Connecticut River. Another historic feature just outside the study area is the Great Hill Pond Brook Bridge on Middle Haddam Road, north of Route 66 in the Cobalt section of East Hampton. Great Hill Pond Brook is considered by the Connecticut Historical Commission to be archaeologically sensitive.

Natural Resources

Several types of natural resources were identified within the Route 66 corridor. The geology of the area has resulted in the presence of numerous outcrops of highly resistant, metamorphic rock. Relative to Route 66, these features are prominent in Portland between Sand Hill Road and the East Hampton Town line, most notably in the vicinity of St. Clements. There are also a number of water resources along the corridor. Surface water bodies include Pecausett Pond in Portland and Lake Pocotopaug in East Hampton. The Connecticut River and its floodplain are situated along Route 66 in Portland. Streams crossing beneath the roadway include Great Hill Pond Brook in Portland and Mine Brook, Green River, Muddy Gutter Brook, and Pocotopaug Creek in East Hampton. North-south flowing streams are a predominant feature in East Hampton, and often occur within steeply-sloped ravines. Major wetlands located in the Portland Route 66 corridor include Pecausett Meadows, south of Grandview Terrace, and Riverdale, which is listed by the State Department of Environmental Protection as a habitat of special concern. The East Hampton Route 66 corridor contains wetlands associated with the many stream crossings, and also in the vicinity of Lake Pocotopaug.

PROBLEMS AND NEEDS

Following an analysis of existing corridor conditions, augmented by input from the Advisory Committee and the public, several distinct areas in the corridor emerged as particular areas of concern. Some of these areas of concern were originally identified by the Advisory Committee in the course of developing the corridor study goals and objectives and were confirmed by field observation and traffic analysis. These areas of concern were determined to require a more detailed analysis of alternative actions to solve or relieve existing problems.

Seven such areas were identified. Existing conditions at each of the identified areas, as well as many other areas along the corridor, were evaluated in terms of safety, geometrics, pedestrian movement, land use and zoning, level of service, access issues, and other factors. The areas of concern are illustrated in Figure 6 along with a generalized summary of the primary problems or potential problems identified.

It is important to note that areas along the corridor have been identified as having a specific safety or access problem which is also addressed in the plan recommendations. A distinction was made, however,

between areas of concern which have a number of potential alternatives available to address the problem and other deficient areas in the corridor where a more obvious or straight-forward solution is apparent. For example, at the intersection of Route 66 and Champion Hill Road in East Hampton, vehicles entering the traffic flow on Route 66 have a poor line of sight. Volumes at this intersection are low, so signalization is not an option, existing land uses are not a complicating factor, pedestrian activity is extremely low, and there are no other factors that would warrant a detailed analysis of several alternative scenarios. The straight-forward solution in this case, consists of evaluating whether or not a regrading of the intersection is warranted.

Two additional problem areas were added to the improvement plans after the initial alternatives analysis. A fatal accident between the easterly and westerly junctions of Old Marlborough Road ("Belltown curve") in March of this year prompted the inclusion of this area in the alternatives study. Recommendations for this location were finalized after publication of the Draft Corridor Improvement Plan and were presented at the final public information meeting. Recommendations were finalized at the final meeting of the Advisory Committee, and are included in this plan.

The second problem area added after the initial alternatives study is the segment of Route 66 known locally as "the ledges", located between Payne Boulevard and Oakum Dock Road. Along this area the roadway is situated extremely close to bedrock outcrops. Problems encountered in the area include vehicles colliding with the ledge and seepage of water from the rock causing icing in the winter. Since there is little to no shoulder throughout this stretch of road, many incidents require the rerouting of traffic onto Middle Haddam Road. The Advisory Committee has expressed the need for improved emergency access to the area, and many comments were received from the public regarding the hazards. In the event a four-lane widening is not programmed through this stretch of roadway, we have included a recommendation for improvement of the existing condition.

Chapter Three IMPROVEMENT STRATEGIES

The material presented in the previous chapter shows that existing problems within the corridor will be compounded by the year 2020 due to a 30% increase in traffic. In addition to roadway capacity problems, Route 66 will have compounded safety problems due to poor roadway alignments, high vehicular speeds, pedestrian conflicts, and access conflicts.

IMPROVEMENT STRATEGIES

A wide range of improvement strategies could be implemented to address these issues. Broadly stated, the range of alternative transportation improvement strategies includes such diverse courses of action as:

- widening of the roadway through the corridor,
- making intersection improvements to clear sight line or increase capacity and ease traffic flow,
- developing and employing **access management** strategies to better manage future development traffic and ensure that, to the greatest extent possible, the situation is not exacerbated,
- employing or encouraging **travel demand management** techniques to make the most efficient use of the existing roadway by spreading out the peak hour or increasing automobile occupancy rather than increasing the capacity of the existing roadway,
- developing or encouraging alternative modes of travel to make the most efficient use of the existing roadway by decreasing the number of vehicles on the existing roadway,
- developing stricter **land use controls** to manage development and thus slow the growth of traffic in the corridor.

The first two general strategies involve physical improvements to some degree, ranging from minimum roadway construction such as roadway widening strategies to a considerably lesser amount of construction for the intersection improvement option. The other courses of action involve primarily regulatory change, along with incentives to alter existing development or travel patterns.

Each of these strategies has both merits and disadvantages. Each also has proponents and opponents. Some are appropriate and workable in the Route 66 corridor and others are not. A brief discussion of each of the identified strategies follows. It should be noted, however, that these improvement strategies are not mutually exclusive. In fact, some elements of the latter four strategies should be part of the overall "package" of improvements for any corridor planning project, whether or not roadway construction is required.

Roadway Widening

Route 66 in the Portland/East Hampton study area is predominately a two lane arterial except for that portion in the Portland urban district that is four lanes. In order to increase capacity throughout the entire Route 66 corridor, additional lanes are required in each direction. The concept of a four-lane road was initially not included in the alternatives presented to the public. The alternatives focused on more moderate strategies to alleviate congestion and safety problems without proposing major roadway modifications that could change the rural and historic character of the area. However, after noting strong public support for widening Route 66 to four lanes, the Advisory Committee gave further consideration to a number of four-lane options within the segment from Sand Hill Road to the East Hampton town line. It was agreed that widening to four lanes should be included among the alternatives.

Both the Advisory Committee and the public, however, did not favor widening to four lanes within the town of East Hampton. The Reasons for their opposition included: 1) the negative effect it would have on the character of the East Hampton Historic District and on the character of the corridor as a whole; 2) the negative effect it would have on the shore of Lake Pocotopaug; 3) the substantial number of private properties that would be affected along the corridor; 4) opinions expressed that speed rather than congestion is the major problem; and 5) evidence that traffic volumes east of the intersection of Route 66 and Route 16 were not heavy enough to warrant two additional lanes. Based upon these factors, the four-lane alternative was not pursued east of the intersection of Route 66 and Route 16.

In the event a widening does not occur, local residents and business people have requested the addition of wider shoulders in locations where vehicles frequently make turns, but that lack turning lanes.

Intersection Improvements

Perhaps the most appropriate physical improvement strategy for the Route 66 corridor is that of making improvements at selected intersections. These improvements would solve most of the capacity and safety problems in the corridor while at the same time minimizing impacts to businesses, wetlands, cultural resources, and the historic character of East Hampton center. Improving the flow of traffic through intersections can be facilitated by intersection capacity improvements or by traffic operational improvements, as discussed below.

Intersection Capacity Improvements: The level of service analysis indicated that there are fourteen intersections which are currently or soon will be operating at deficient levels of service. Those intersection are listed in the previous chapter.

Consideration was given to a range of potential physical modifications to improve conditions at each of these intersections. Several of the fourteen intersections were viewed as particular problem areas, generally due to the presence of more than one contributing factor. At these locations, a host of specific alternative improvement scenarios were considered to alleviate traffic congestion and improve level of service. Intersection improvements which were considered included lane additions, lane widening, restriping, and corner curve radii modifications. In most cases, the improvement alternatives addressed roadway capacity issues, but in some instances, improvements were considered for safety reasons alone. For each problem intersection, a range of feasible alternatives was evaluated including the no build (leaving the intersection as is), a minor improvement option (involving minimal road reconstruction), and a more major improvement option (usually involving a more significant amount of roadway reconstruction).

Traffic Operational Improvements: Traffic operational improvements can result in moderate improvements in traffic flow at specific intersections or along arterial segments where traffic flow is impeded by several signalized or unsignalized intersections. Such improvements might include changes in signal timing or actuation, coordination of signals, new signalized intersections, or increased storage bay length for turning lanes.

There are several unsignalized intersections within the study area which could be considered for a signal warrant analysis to determine whether or not a traffic signal is needed at those locations based on vehicular and pedestrian volumes, accident experience, delay, and other factors. If additional signals are warranted, a re-evaluation of signal coordination would need to be carried out.

Another means of improving traffic flow is to increase the length of turning lanes to allow all turning vehicles to be removed from the through traffic \overline{l} anes. Often this can be accomplished by restriping or very minor widening.

Access Management

The frequency of traffic accidents is greatest along Route 66 where there are conflicts between land access (driveways and curb cuts) and through traffic. Proper management of these access points can reduce conflicts and the frequency of accidents and can also greatly reduce delay and congestion. Too many driveways at businesses along several sections of Route 66 in both Portland and East Hampton have been allowed to occur. Many properties have two, or even three curb cuts. In many cases it may be possible to reduce the number of curb cuts without limiting a property owner's ability to conduct business.

Detailed access management plans, depicting curb cut closures and consolidation in these areas is presented in separate *Route 66 Access Management Plans* for the municipalities of Portland and East Hampton. In brief, access management is a technique which combines traffic engineering measures with land development regulations to allow adequate access to land use while minimizing conflict between mainline traffic and traffic accessing land uses along the corridor. Some examples of access management techniques might include:

- Combine or relocate existing driveways
- Combine, close or relocate existing medians
- Utilize joint parking facilities
- Utilize frontage and/or backage roads
- Coordinate traffic signals
- Define directional access (e.g., exit only; left turn only; one way; no U-turn, etc.)
- Establish design standards through local regulations

- Adopt access criteria, through zoning, for site development proposals
- Plan for future access to undeveloped parcels.

Travel Demand Management

Travel demand management strategies such as staggered work hours, promoting ridesharing and improving public transit help alleviate congestion during peak hours by increasing vehicle occupancy or spreading out the peak period.

The Middletown Transit District (MTD) operates one bus route in the corridor. Rural Route F serves all of Route 66 in Portland and continues to Lake Vista Apartments just east of the intersection of Route 196 in East Hampton. This is not a fixed-stop route; therefore, stops are made for passengers who signal by waving.

Single occupancy vehicles still dominate the roadways along the corridor. There is one existing commuter lot at the junction of Route 66 and Route 16 in East Hampton; it is, in general, underutilized. The Rideshare Company, the major commuter service company in the Midstate Region, operates vanpools that travel through Portland and East Hampton on Route 66 each work week. These vans originate outside the region and travel to Middletown or Hartford. They do not operate vans with an origin or destination in Portland or East Hampton at this time. Additionally, there are a small number of privately run vanpools and carpools traveling through the corridor.

The Midstate Region is not a "severe" ozone nonattainment area, therefore, volunteer programs which call for the implementation of trip reduction strategies by larger employers are not stressed. Employers in the region have no legal obligation to develop ridesharing or staggered work hour programs for their employees. Nevertheless, efforts could be made to increase ridesharing and bus usage along the corridor.

Alternative Modes of Travel

An important strategy for the Route 66 corridor is that of encouraging modes of travel other than the automobile. Providing for alternative modes of travel such as rail service and bicycle routes could have a positive effect on improving traffic flow. Use of these alternative modes results in removal of vehicles from the roadway. Efforts to encourage individuals to make use of alternative modes more frequently could have a noticeable effect on reducing congestion and easing traffic flow.

Rail Service

According to the 1990 Means to Work Statistics, there is a significant number of Midstate Region residents, including those from Portland and East Hampton, who travel to Hartford for work. One way of relieving congestion along the corridor would be to provide rail service for commuters in the Portland/East Hampton area. The concept of developing the Connecticut Central Railroad to service commuters from central Connecticut to the Hartford area was evaluated, however was not viewed as a feasible alternative. Reasons why rail service is not considered feasible include 1) although there are

plans to reactivate the line from Middletown to Cromwell and extend it to Hartford, regional development for passenger use is not being considered; 2) a spur line for potential users in Portland and East Hampton to Middletown is remote; 3) the freight line from Middletown to Portland operated by the Connecticut Central Railroad ends on the west side of town; and 4) the remainder of the former Penn Central Railroad right-of-way that once traversed Portland and East Hampton and runs parallel to Route 66 in Portland, is no longer in rail service. Based upon these factors, a comprehensive study of potential rail service in the region would have to be initiated to determine if rail service could be a viable alternative mode choice.

Bicycle Travel

Provision of trails outside the roadway network is one way of removing bicycles and other non-motorized forms of travel from Route 66, thereby reducing hazards and curtailing the need to provide such facilities as part of roadway improvements. In the 1980's the State of Connecticut purchased the railroad right-of-way in East Hampton. A new trail was opened in 1997 on this portion of the right-of-way under the Rails to Trails program. In Portland, the former right-of-way was sold to individual owners, and local efforts to promote a rail-trail through Portland have thus far been unsuccessful.

In addition to off-road bicycle facilities, opportunities exist to provide bicycle facilities along Route 66. Reservation of adequate widths to allow for safe bicycle travel can be incorporated into future road widening projects. Since Route 66 has been designated a cross-state bicycle route and regional plans emphasize the importance of providing alternative modes of transportation, further consideration should be given to possibilities for improving facilities for bicycle travel.

Land Use Planning

Route 66 is affected by adjacent activities and surrounding land uses which generate traffic. Continued land development is likely to lead to increased traffic congestion along Route 66 and its feeder streets. Therefore, local planning and zoning efforts have a role to play in controlling the growth within the corridor and surrounding areas that will affect traffic volumes and congestion.

ConnDOT has projected a 1.5% annual increase in traffic along the corridor, which means that by 2020 there will be 30% more vehicles using Route 66 than in 1997. The future of traffic growth in the Route 66 corridor will depend to a large extent on the amount and type of land development which occurs within the municipalities of Portland, East Hampton and in surrounding towns.

The potential for growth in East Hampton is great. Population is expected to increase by 23% by the year 2020. The majority of the town is zoned residential and a substantial area in the eastern part of East Hampton, abutting Route 66, has been specially designated as design development. The portion of land that is undeveloped in East Hampton is 84% of total land. Even though much of this land has limited development potential due to development constraints or open space designation, the management of development is likely to affect future traffic volume in the Route 66 Corridor.

Portland's population is not expected to increase substantially in the next twenty years. A large percentage of land remains undeveloped, but as with East Hampton, most of this land contains

development restrictions. Many of the land parcels along Route 66 are zoned to attract commercial/industrial business. Portland's development, along with growth in surrounding towns, particularly East Hampton, will have a substantial impact on future traffic in the Route 66 corridor.

A variety of measures may be used to manage growth in the residentially-zoned sections of both towns, including purchase of land for preservation of open space, purchase of development rights, transfer of development rights, or increase of minimum lot size.

EVALUATION CRITERIA

In evaluating the improvement alternatives, many factors were considered including both quantitative and qualitative considerations. These factors are:

Cost: The estimated cost of design and construction in 1998 dollars. The cost does not include acquisition costs for property takings or wetland mitigation.

Level of Service (LOS): The future year (2020) level of service that would be realized if the improvement is implemented based on future year traffic volumes.

Traffic Safety: The anticipated change in vehicular and pedestrian safety as a result of the improvement. Speed, intersection geometry, and lighting are among the safety considerations.

Right of Way (ROW) Impacts: The amount of land outside the right of way that will be encroached upon as a result of the improvement. (The cost for compensating the land owner has not been included in the cost at this time).

Historical Resource Impacts: The potential impact to historic resources resulting from the improvement alternative. Numerous buildings along the corridor are listed on the National Register of Historic Places.

Aesthetic Impacts: The impact of the road on the scenic beauty of the area. The beauty can be attributed to both natural and man-made (historic) resources.

Environmental Impacts: The potential for the project to have a negative effect on natural resources (wetlands, water features, ledge outcrops, etc.).

All seven evaluation criteria are important. However, for the purposes of this study, level of service and traffic safety are a primary consideration as they represent the justification for making an improvement. Where level of service and/or safety were not improved, the alternative was not considered. Nevertheless, most of the recommended improvements also avoid or minimize historic and natural resource area impacts.

Chapter Four RECOMMENDED CORRIDOR IMPROVEMENT PLAN

This chapter presents the results of the evaluation process. The recommended improvements presented in this chapter comprise the *Corridor Improvement Plan* for Route 66. The recommended improvements were developed by the consulting team and reviewed and modified by the Midstate Regional Planning Agency, the Connecticut Department of Transportation, and the Route 66 Advisory Committee, with input from the public.

The purpose of this plan is to identify problem areas and evaluate alternative solutions so that informed decisions can be made as to which improvements should potentially be carried forward into design or further study. The recommended improvements are implementable, cost effective, and sensitive to the corridor's environmental and cultural resources.

PHYSICAL AND OPERATIONAL RECOMMENDATIONS

Intersection/Arterial Improvements

As documented in earlier chapters, there are clearly roadway capacity problems within the corridor. During the early phases of this project, specific problem areas were identified and a number of intersections were shown to have existing or projected capacity or safety problems. Presented herein are improvements that will help to alleviate traffic congestion at critical intersections or roadway segments and improve traffic flow and safety along Route 66. They consist primarily of the addition of turning or through lanes, sight line improvements or adjustments to signalization. Traffic or pedestrian signal modifications have been suggested at three intersections that are already signalized. Vehicular and pedestrian safety will also be increased as a result of these improvements. The recommendations are illustrated in Figure 7. Appendix B contains a detailed conceptual layout of each of the physical intersection or arterial improvements. Detailed descriptions of the alternatives evaluated during the corridor study process appear in the *Congestion Management System Strategy Report* (Appendix C).


These recommended improvements would increase the level of service to acceptable operation at most of the key signalized intersections. Table 4 shows the estimated future level of service at those intersections both with and without implementation of the recommended improvements.

Several unsignalized intersections experiencing poor levels of service are hampered by the inability of traffic from the side streets to safely enter the main traffic flow on Route 66 in a timely manner. A recommendation is made to consider a signal warrant analysis at the following intersections:

Portland
Elmcrest Manor
Barry Avenue
Sand Hill Road (West)
Payne Boulevard/Middle Haddam Road

East Hampton
Keighley Pond Road/Coughlin Road
Brooks Plaza
Route 196/Old Marlborough Road

ROUTE 66 CORRIDOR STUDY PORTLAND / EAST HAMPTON

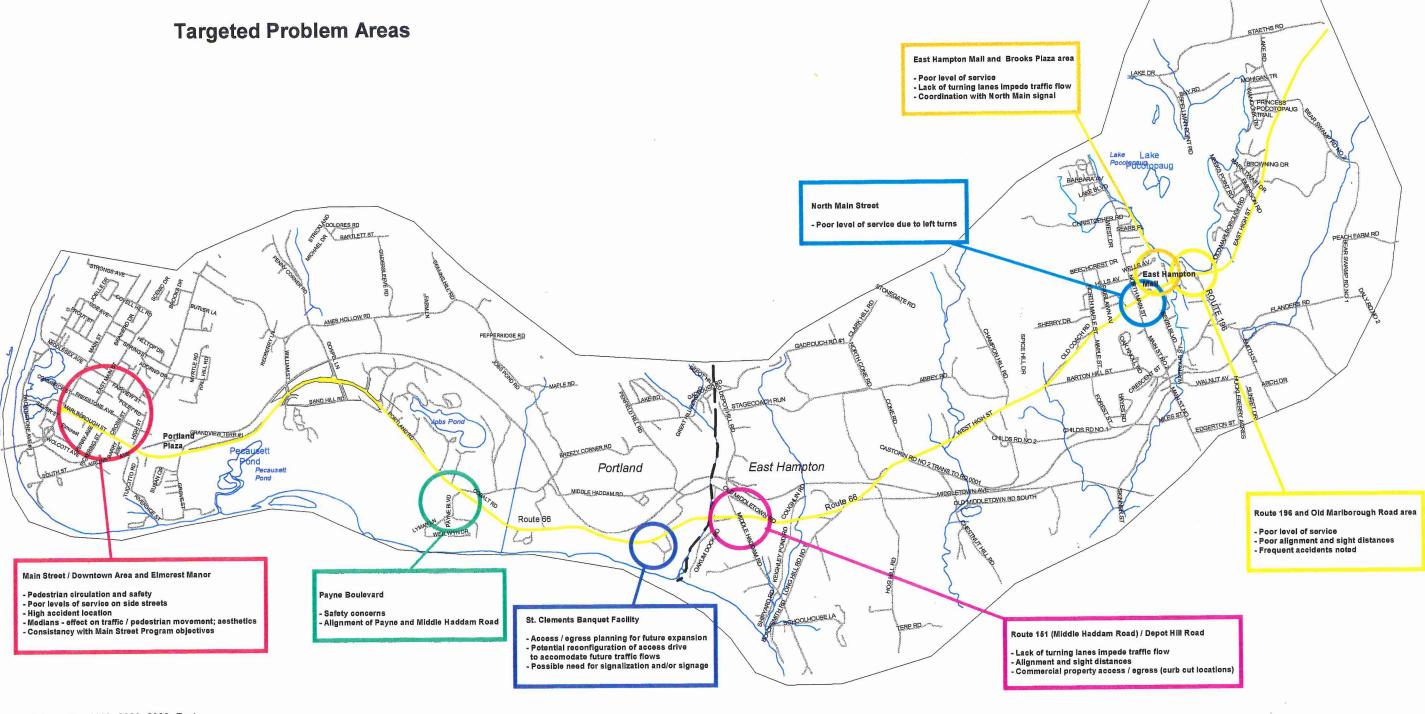

1000 0 1000 2000 3000 Feet 200 0 200 400 600 Meters

PREPARED BY: MAGUIRE GROUP CT, INC.

ROUTE 66 CORRIDOR IMPROVEMENT PLAN Portland / East Hampton

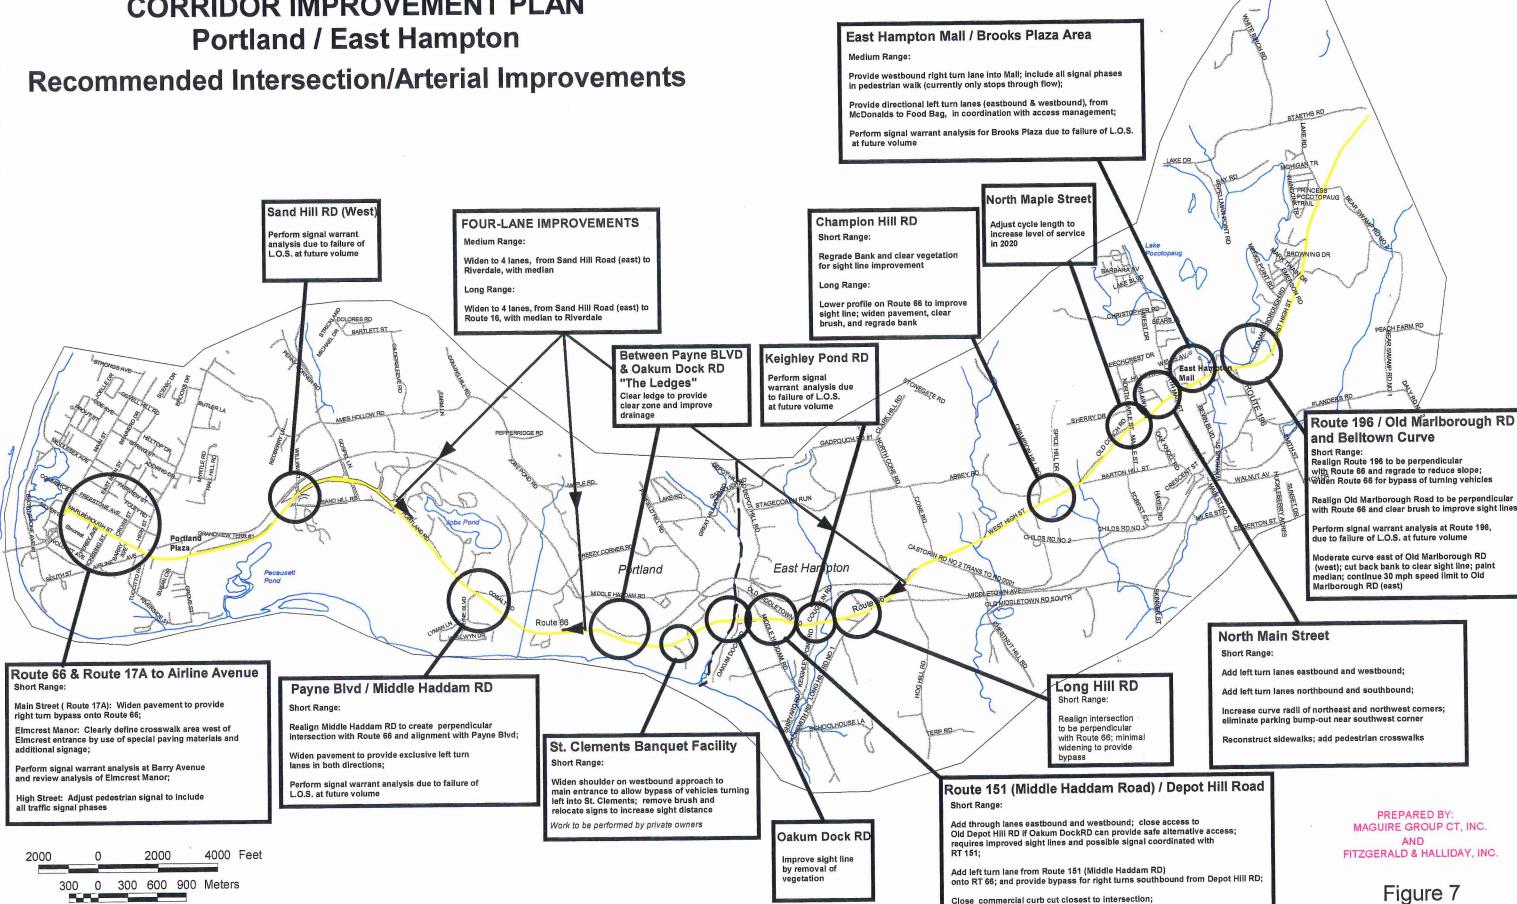


Figure 7

Combine parking lot of pizza restaurant and supermarket

A signal warrant analysis would be the responsibility of the ConnDOT, since Route 66 is a state route.

As mentioned above, comments and suggestions from the Route 66 Advisory Committee, the MRPA, ConnDOT, and the general public were helpful in both establishing and evaluating the alternative improvements. During the evaluation process, an evaluation matrix was prepared showing the effects of each alternative improvement. The results of this matrix for the recommended physical and operational improvements are shown in Table 5, which describes each improvement in terms of its effects on safety, level of service, environmental features, etc.

General Corridor Safety Improvements

In addition to safety improvements suggested for specific intersections or arterial segments, the following recommendations may be applied to the entire corridor:

- Lines of sight should be checked along the length of the corridor and corrected to ensure that a safe sight distance is provided for the prevailing actual speeds traveled.
- Increase in the enforcement of safe speeds as a deterrent to accidents caused by excessive speeding.

Corridor "System" Improvements

In addition to the specific physical and operational improvements recommended above, several additional recommendations are made below for improved operation of the Route 66 corridor. Implementation of some of these improvements would first require completion of a more detailed traffic engineering analysis.

Groups of traffic signals that are spaced within approximately 610 meters (2,000 feet) of one another should be coordinated in the Route 66 corridor. Currently, there are two sets of signals that are presently coordinated by the state. In Portland, they include High Street, Airline Avenue, Portland Plaza, and Grove Street. In East Hampton, North Main Street and East Hampton Mall are coordinated. If future signal warrant analyses indicate the need for additional signals, there are additional opportunities for signal coordination. Signal coordination can be simultaneous or coordinated to operate on a common background cycle for the following sets of signals:

- Portland Main Street/ Elmcrest Manor (future)/Barry Avenue (future)/ High Street/Airline Avenue/Portland Plaza/Grove Street
- Sand Hill Road (West) (future) and RT 17 (Gospel Ln)
- Route 151 and Keighley Pond Road (future)
- East Hampton Mall/North Main/Brooks Plaza (future)/North Maple Street/Route 196 and Old Marlborough Road (future)

RECOMMENDATIONS FOR OTHER MODES

Transit and Ridesharing

One of the recommendations of this *Corridor Improvement Plan* is that efforts be made to increase ridesharing and bus usage along the corridor. According to the 1990 Means to Work Statistics, there is a significant number of Midstate Region residents, including those from Portland and East Hampton, who travel to Hartford to work. If more travelers could be encouraged to use transit, carpool or vanpool, there would be, if not a reduction in traffic along Route 66, then at least a slowing of traffic growth in the corridor.

Clearly, the majority of travelers in the Route 66 corridor are currently driving alone and are likely to continue doing so. There are several categories of trips that might be diverted to other modes, however, particularly longer work trips. Again, it is unlikely that such a diversion could actually decrease traffic volume in the corridor, but an emphasis on these other modes at this point in time could substantially slow the growth of future traffic in the corridor.

Transit: Transit opportunities in the corridor are presently minimal. Some increase in transit service or, possibly, more aggressive marketing of public transit opportunities would be helpful to reduce the percentage of single occupancy vehicles in the corridor. Any improvements would need to be undertaken by Middletown Transit District (MTD), which is the responsible agency for the provision of transit service in the corridor, and in cooperation with Connecticut Transit, the provider of bus service from Middletown to Hartford. Planning for those improvements could be undertaken as part of a short-range transit improvement plan for the MTD service area, or could be a separate, smaller study focussing on the potential for some type of improved commuter service within the corridor and to primary commuter destinations.

Ridesharing: There are several ways to promote ridesharing in the corridor. One is through the expanded activity of a ridesharing broker which would promote ridesharing and match potential commuters. The corridor communities are presently already served by a rideshare broker called The Rideshare Company which publishes a free monthly journal called *The Commuters' Register*. This publication, along with distinctive markings on the *Easy Street* vans used for vanpools, represents the Rideshare Company's most effective means of advertising the service. Another form of promotion has been the placement of signs on key highways which provide The Rideshare Company's phone number.

The Rideshare Company encourages ridesharing and provides matching for interested commuters. *The Commuters' Register* also lists schedules for Connecticut Transit and vanpools for some of the larger employers in the region, such as, Aetna and Pratt & Whitney in the Middletown area. The Rideshare Company operates at least four *Easy Street* vanpools that travel through the Route 66 Portland/East Hampton corridor each work week. These vans originate outside the region and travel to Middletown or Hartford. Currently, there are no *Easy Street* vans operating that have an origin or destination in Portland or East Hampton. There are also several privately run vanpools and carpools, listed in *The Commuters' Register*, originating in Portland or East Hampton with a destination of Hartford. The existing commuter lot, located at the junction of Routes 66 and 16 in East Hampton is underutilized, however, therefore additional commuter lots have not be suggested.

Table 4

Route 66 - Future (2020) Level of Service With Recommended Improvements

Location / Direction	Recommended Improvements	Future (2020) LOS With Improvements
Route 66 & Route 17A		
Northbound	Widen for Bypass	N/A
No Build	No suggested improvements	N/A
Route 66 & Middle Haddam Rd/Payne Blv		
Todas of a madio Haddam Han dyno Div	Without signal	
Eastbound	Add a left turn lane	В
Westbound	Add a left turn lane	C
Northbound	No suggested improvements	F
Southbound	Realign Middle Haddam Road	F
	With signal	
Eastbound	Add a left turn lane	*
Westbound	Add a left turn lane	С
Northbound	No suggested improvements	В
Southbound	Realign Middle Haddam Road	В
Intersection	All improvements indicated above	*
with 4-Lane Concepts	With signal	
Eastbound	Add a left turn lane and a through lane	В
Westbound	Add a left turn lane and a through lane	С
Northbound	No suggested improvements	В
Intersection	All improvements indicated above	В
No Build		
Eastbound	No suggested improvements	В
Westbound	No suggested improvements	С
Northbound	No suggested improvements	F
Southbound	No suggested improvements	F
Route 66 & St. Clement's Banquet Facilit	V	
Westbound	Widen shoulder	N/A
No Build	No suggested improvements	N/A

			- 4					4					
Tak	٦l	e	4	_	C	റ	n	t	1	n	I.	16	d

Location / Direction	Recommended Improvements	Future (2020) LOS With Improvements
Route 66 & Route 151 / Depot	Hill Road	
Eastbound	Add through and left lanes	В
Westbound	Add through and left lanes	Α
Northbound	Adjust signal timing; provide exclusive left turn lane and shared through right turn lane	С
Southbound	Adjust signal timing and add a left turn lane	С
Intersection	All improvements indicated above	В
No Build		
Eastbound	No suggested improvements	*
Westbound	No suggested improvements	Α
Northbound	No suggested improvements	*
Southbound	No suggested improvements	*
Intersection	No suggested improvements	*
Route 66 & Four- Lane Conce	pts	
Short Range and Long Range		
Eastbound	Add through lane with median	N/A
Westbound	Add through lane with median	N/A
No Build		
Eastbound	N/A	N/A
Westbound	N/A	N/A
Route 66 & Champion Hill Roa	ıd	1 - M - M - M - M - M - M - M - M - M -
Long Range		
Eastbound	No suggested improvements	Α
Westbound	Regrade	A
Southbound	Regrade	E
Short Range		
Eastbound	Widen pavement and improve sight lines	Α
Westbound	Widen pavement and regrade	Α
Southbound	Regrade	E
No Build		
East bound	No suggested improvements	Α
Westbound	No suggested Improvements	A
Southbound	No suggested improvements	<u> </u>

	Table 4 - continued	
Location / Direction	Recommended	Future (2020) LOS
_ocation / Direction	Improvements	With Improvements
Route 66 & North Main Street		
Eastbound	Add a left turn lane	С
Westbound	Add a left turn lane	В
Northbound	Add a left turn lane	D
Southbound	Add a left turn lane	D
Intersection	All improvements indicated above	С
No Build		
Eastbound	No suggested improvements	*
Westbound	No suggested improvements	B -
Northbound	No suggested improvements	E
Southbound	No suggested improvements	*
Intersection	No suggested improvements	•
Route 66 & East Hampton Mall/Bro	pok's Plaza Area	
Eastbound	No suggested improvements	В
Westbound	Add a right turn lane at mall	D
Southbound	No suggested improvements	В
Intersection	Improvements indicated above	С
Ne Build		
No Build Eastbound	No suggested improvements	В
Westbound	No suggested improvements	*
Southbound	No suggested improvements	В
Intersection	No suggested improvements	*
Route 66 & Route 196	No suggested improvements	Α
Eastbound	No suggested improvements	C
Westbound Northbound	Realign, regrade and eliminate island	F
Nottribourid	(Calign) Toglado alta ominista Iolana	
No Build		
Eastbound	No suggested improvements	A
Westbound	No suggested improvements	C
Northbound	No suggested improvements	F
I		
Route 66 & Old Marlborough Roa	d	
Eastbound	No suggested improvements	В
Westbound	No suggested improvements	A
Southbound	Realign roadway	С
No Build		
Eastbound	No suggested improvements	В
Westbound	No suggested improvements	Α
Southbound	No suggested improvements	С

2020) LOS					
2020) LOS provements					
TOVEITIETICS					
			6		
С		2			
	•				
В					
D					
D					
С					
	•				
*					
В			án.		
F					
*					
		•			
•		-			
В					
D					
В	•				
С					
_					
B					
*					
В					
*					
Α					
_					
F		-			
I.					
•					
	İ				
Α					
С					
F					
]		•		
	1				
В					
A					
С					
В	-				
Α					
С	,				
	_	,			

Table 5
Evaluation Matrix for Recommended Physical Improvements

Alternative Concepts	Cost Estimate ₁	Level of Service (2020) Change	Traffic Safety	ROW Impacts Preliminary Estimate	Historical Resource Impacts	Aesthetic Impacts	Environmental Impacts	Constructibility	Priority Ranking
		High	Priority / Short Range	e / 1-3 Years				-	
 Route 66 & Route 17A (Main Street) to High Street Widen pavement to provide right turn bypass onto Route 66. Review signal warrant and enhance crosswalk at Elmcrest to provide increased visibility; perform signal warrant analysis at Barry Avenue Adjust pedestrian signal at High Street to include all traffic phases 	\$25,000	not analyzed	relieves peak hour backups/accidents	relocation of utility poles required	none	none	none	minor	High
Route 66 & Sand Hill Road (West) • Perform traffic signal warrant analysis	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Route 66 & Payne Boulevard / Middle Haddam Road Realign intersection to be perpendicular Add left turn lanes eastbound and westbound Perform signal warrant analysis	\$330,900	no change (without signal)	improves safety of turning movements	370 sq.m (4,000 sq.ft.)	none	minimal	minor	major	High
 Route 66 & St. Clement's Banquet Facility Widen shoulder westbound to allow bypass of vehicles turning left into St. Clements; remove brush and relocate signs to increase sight distance Note: To be performed by private owners 	\$40,000	not analyzed	through traffic able to pass turning vehicles	0	none	none	possible outcrop removal	minor	High
Route 66 & Route 151 / Depot Hill Road Add through and left turn lanes eastbound and westbound Add left turn lanes northbound and southbound Modify curb cuts southeast of intersection Close access to Old Depot Hill Road and clear sight line at Oakum Dock	\$1,585,000 2	Improves: * to B intersection	significant improvement	0	moderate	moderate	reconstruction of culvert; fill/retaining wall, wetland impact	major	High
Route 66 & Keighley Pond Road • Perform traffic signal warrant analysis	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Route 66 & Long Hill Road Realign intersection to be perpendicular Widen Route 66 slightly to provide bypass of turning vehicles	\$165,000	not analyzed	improved geometrics	town acquisition	none	none	possible wetland/ drainage disturb., culvert construction	moderate	High
Route 66 & Champion Hill Road Regrade Bank and clear vegetation for sight line improvement	\$cost of regrade	no change likely	improve sight line	none	minimal	minor	possible drainage alteration	minor	High
Route 66 & North Main Street / Main Street • Add left turn lanes eastbound and westbound • Add left turn lanes northbound and southbound • Increase curve radii on corners, eliminate parking bump-out • Reconstruct sidewalks; add crosswalks	\$550,000	Improves: F to C	reduce accident potential	potential minor impact	minimal	minimal	none	major	Moderate

Route 66 & Route 196 / Old Marlborough Road and Belltown Curve Realign both intersections to be perpendicular with Route 66 Regrade RT 196 to reduce slope Clear brush at Old Marlborough Road to increase sight line Widen Route 66 slightly to provide bypass of turning vehicles and sufficient shoulder for pedestrian travel along shore of lake Perform signal warrant analysis, including feasibility of signal warning light for westbound approach Moderate curve east of Old Marlborough Road (west) Clear line of sight by cutting back bank along curve Add painted median on curve to separate opposing traffic Continue 30 mph speed zone from Town Center to Old Marlborough Road (east)	\$240,000 \$560,000	no change	improve sight line/ reduce accident potential improve sight line/ reduce accident potential	0 (easements required)	none	none	temporary construction impacts; possible drainage alteration; opportunity for improvement to roadway drainage	moderate	High
		Medium	Priority / Medium Ran	ge / 5-10 years			<u>-</u>		
Route 66 & 4-Lane with median • Widen Route 66 to 4 lanes with median from Sand Hill Rd.(east) to east of Riverdale; includes provisions for bicycle and pedestrian safety	\$4.06 million 2	not analyzed as a whole	relief of peak hour traffic backups, accidents & difficulty entering traffic	1,900 sq.m - (20,500 sq.ft.) 3	none	moderate	removal of vegetation; possible wetland disturbance	major	Moderate (short term)
Route 66 & "The Ledges"Between Payne Boulevard and Oakum Dock Road • Cut back rock ledge to provide shoulders, clear zone and drainage	\$1.79 million	no change	improve sight lines and winter road conditions; Provide clear zone for errant vehicle recovery	0	none	minimal	some removal of outcrop	major	Moderate
Route 66 & North Maple Street • Adjust traffic signal cycle length to improve 2020 level of service	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
 Route 66 & East Hampton Mall / Brook's Plaza Area Provide westbound right turn lane into Mall; include all traffic signal phases in pedestrian signal Provide directional left turn lanes in coordination with access management Perform signal warrant analysis 	\$21,000	Improves: F to D	slight improvement	0	none	none	none	minor	Moderate
		Low 1	Priority / Long Range /	15-20 years	-				
 Route 66 & 4-Lane with median Widen Route 66 to 4 lanes from Sand Hill Rd.(east) to Route 16, with median to Riverdale; includes provisions for bicycle and pedestrian safety 	\$\$16-20+ million 2	not analyzed as a whole	relief of peak hour traffic backups, accidents & difficulty entering traffic	4,080 sq. m. (44,000 sq. ft.)4	minimal-moderate	major- significantly changes character of area	wetland/stream disturbance, ledge removal, tree removal, fill	major	Low
Route 66 & Champion Hill Road • Lower profile of Route 66 and widen slightly, to improve sight line	\$320,000	no change likely	improve sight line all directions	potential minor impact with easements	none	minimal, possible loss of stone wall & fence	possible drainage alteration & loss of trees or limbs	major	Low (Short term)

- 1) These cost estimates are based upon 1998 dollars, and recent unit cost data from the State, and include reasonable estimates of quantities of material, excavation, maintenance & protection of traffic, incidentals, contingencies, additional right of way, and traffic equipment.

 2) This cost estimate does not include: wetland mitigation, utilities, retaining walls, or realignment
- 3) These areas indicate approximate ROW to be acquired to construct widened roadway. Additional acquisitions may be required to establish a uniform ROW width. Easements and rights may also be required for sloping or drainage

Promotional efforts have been made on a statewide basis. In order to further this effort, the Midstate Region, as well as the Towns of Portland and East Hampton, may increase public awareness of these services by promoting distribution of *The Commuters' Register*, requesting more effective placement of Rideshare signs on Route 66 (such as the intersection of Routes 66 and 16), and encouraging publicity by the local media. Additionally, municipal bus service providers, such as MTD may benefit from posting schedules in *The Commuter's Register*. The Midstate Regional Planning Agency could work with The Rideshare Company to tailor a program for the corridor communities. An active program targeting additional large or mid-size employers in the commuting area should be implemented to encourage such businesses to promote ridesharing, offer staggered working hours or home-based work.

Non-Traditional Modes

In addition to roadway improvements and efforts to increase the use of transit and ridesharing in the corridor, it was the desire of the Advisory Committee that non-traditional modes be addressed in this corridor planning study. This is reflected in the study goals that were developed with the Advisory Committee. In the case of the Route 66 corridor, non-traditional modes include bicycle and pedestrian travel.

Bicycle: As was described earlier, Route 66 is designated by the Connecticut Department of Transportation as a cross-state bicycle route, but is not very bicycle-friendly. It is a primary route bicyclists may travel to reach the area's state forests and parks, including the Meshomasic and Salmon River State Forests and Hurd State Park. Any alternatives for major reconstruction of the roadway should include provisions for bicycle facilities. The preferred bicycle facility of the Connecticut Bicycle Coalition, a statewide organization advocating on behalf of all local bicycle clubs, includes a wide shoulder (1.2 meters (4 feet) or more) and emphasizes that the vehicle travel lanes are clearly striped to be no more than 3.65 meters (12 feet). This is to prevent the tendency for vehicles to maneuver laterally after a pavement widening is made. Special drainage grates designed with angled grate bars that do not trap bicycle tires or bike-safe grates currently in use by ConnDOT, should replace the older, hazardous grates. Special consideration should also be given to sight distances as measured from the road shoulder. This may factor into brush clearing projects and sign placement plans. Additionally, signage has been used in some states which reminds motorists to "share the road" and includes images of bicycles, pedestrians and cars.

In the 1980's the State of Connecticut purchased the railroad right-of-way in East Hampton. A new trail was opened in 1997 on this portion of the right-of-way under the Rails to Trails program. In Portland, the former right-of-way was sold to individual owners, and local efforts to promote a rail-trail through Portland have thus far been unsuccessful. The development of a rail-trail in Portland would provide many benefits to both communities as well as to people traveling through or visiting the area. In addition to providing a means for local commuters to bicycle or walk to work, a rail-trail would add to the attractiveness of the community, and be likely to attract visitors who may frequent local businesses. Several owners of large segments of the railroad right-of-way, on the eastern side of Portland, have expressed a willingness to allow a trail on the former right-of-way. Land use measures such as, the purchasing/transferring of development rights may help secure access to the former right-of-way. Viable access points from Route 66 would need to be arranged. Parcels along Route 66 with good potential for access include the industrial development zone near the junction of Routes 17 (Gospel Lane) and 66 and at Camp Ingersoll, a privately owned, 77-acre Day Camp operated by the Northern Middlesex YMCA.

Although safety and property access issues would need to be addressed, both of these locations would likely benefit from the presence of a multi-use or bike trail.

Pedestrian: To increase pedestrian safety and access, the intersection improvements have included features such as marked crosswalks and pedestrian phases at signals that will enhance the safety and accessibility of the corridor for pedestrian traffic. ConnDot has already included reconstruction of sidewalks in Portland in plans for the Route 66 roadway improvement project. Pedestrian improvements were also suggested in the Lake Pocotopaug area as part of recommendations for the Route 196 and Old Marlborough Road (west) intersections.

ACCESS MANAGEMENT

The *Route 66 Access Management Plans* for Portland and East Hampton, bound separately from this report, present the details of an access management plan for the corridor for each of the two municipalities. The key to access management will be for the municipalities to be committed to a program of regulating access and fostering property owner cooperation.

Access management regulations have been incorporated into the Zoning Regulations of several Connecticut municipalities. This can be done in Portland and East Hampton by designating an overlay zone which establishes an area subject to access management regulations. This zone could consist of all parcels of land located on or providing access to Route 66. The authority to develop these regulations is set forth in Section 7-148 of the Connecticut General Statutes (CGS) which authorizes municipalities to regulate traffic on streets and highways. Section 8-2 of the CGS states that zoning regulations shall be designed to lessen congestion in the streets and to facilitate adequate provision for transportation.

Regulations should govern access spacing in the entire corridor. However, they will be especially important in the yet-to-be developed areas. Eastern Portland and outlying areas of East Hampton are lightly developed and afford an excellent opportunity for "preventive" access management actions.

Existing curb cuts along Route 66 were assessed for improvement potential based upon the criteria outlined in the *Access Management Plans*. There were three main areas in East Hampton and four in Portland for which retrofit curb cut designs were considered. Such a retrofit may include consolidation, modification, closure or relocation of driveways, or provision of cross-access connections. In many cases, modification of existing curb cuts will only be possible in conjunction with substantial changes to currently developed properties or during significant roadwork on Route 66. Following are of the areas for which curb cut retrofit designs were considered:

- RT17A (Main Street) to Elmcrest Manor
- Portland Plaza area
- Commercial area east of Grove Street
- Commercial area west of Sand Hill Road (west)
- Adjacent to the junction of Route 151 (Middle Haddam Road) and Route 66
- Between junctions of Main Street and Route 196 (East Hampton Mall area)
- Between junctions of Old Marlborough Road (west) and Old Marlborough Road (east)

SUMMARY OF RECOMMENDATIONS

All of the recommendations of this *Corridor Improvement Plan* are summarized in Table 6. Some of these recommendations are straightforward physical improvements, easily implementable, and will make a significant difference in the flow of traffic on Route 66. Other recommendations require further study or analysis, such as coordination of signals and signal warrant analyses.

Table 6 lists not only the recommendation, but also the implementation responsibility. The public clearly wants to see improvement in the traffic flow and safety of Route 66 while allowing the corridor to retain its historic and small town character. The recommendations of this report allow both of these objectives to be met.

Table 6 Summary of Recommendations

Location	Improvement	Implementation Responsibility
	Intersection / Arterial Improvements	
Short Range Improvements: 1-3 Years		
Route 66 & 17A (Main _ Street, Portland) to High Street	 Widen pavement to provide right turn bypass onto Route 66. Review signal warrant and enhance crosswalk at Elmcrest to provide increased visibility; perform signal warrant analysis at Barry Avenue Adjust pedestrian signal at High Street to include all traffic phases 	Connecticut DOT
Route 66 & Sand Hill Road	Perform traffic signal warrant analysis	Connecticut DOT
Route 66 & Payne Boulevard/ Middle Haddam Road	 Realign intersection to be perpendicular Add left turn lanes eastbound and westbound Perform signal warrant analysis 	Connecticut DOT
Route 66 & St. Clement's Banquet Facility	 Widen shoulder westbound to allow bypass of vehicles turning left into St. Clements Remove brush and relocate signs to improve sight distance 	St. Clements; Connecticut DOT
Route 66 & Route 151/ Depot Hill Road	 Add through lanes eastbound and westbound Add left turn lane northbound, and bypass for right turns southbound Modify curb cuts southeast of intersection Close access to Old Depot Hill Road and clear sight line at Oakum Dock, and study feasibility of light at Oakum Dock, coordinated with Route 151, to improve safety 	Connecticut DOT
Route 66 & Keighley Pond Road	Perform signal warrant analysis	Connecticut DOT
Route 66 & Long Hill Road	 Realign intersection to be perpendicular Widen Route 66 slightly to provide bypass of vehicles turning 	Town of East Hampton; Connecticut DOT
Route 66 & Champion Hill Road	Regrade bank and clear vegetation for sight line improvement	Connecticut DOT
Route 66 & North Main Street / Main Street	 Add left turn lanes eastbound and westbound Add left turn lanes northbound and southbound Increase curve radii on corners, eliminate parking bump-out Reconstruct sidewalks; add crosswalks 	Connecticut DOT

Location	Improvement	Implementation Responsibility	
	Intersection / Arterial Improvements-Cont.		
Route 66 & Route 196/ Old Marlborough Road and the "Belltown Curve"	 Realign both intersections to be perpendicular with Route 66 Regrade RT 196 to reduce slope Clear brush at Old Marlborough Road to increase sight line Widen Route 66 slightly to provide bypass of turning vehicles and sufficient shoulder width for pedestrian/bicycle use along lake shore Perform signal warrant analysis including signal warning light for westbound approach to Old Marlborough Road (west) Moderate curve east of Old Marlborough Road (west) Clear line of sight by cutting back bank along curve Add painted median on curve to separate opposing traffic Continue 30 mph speed zone from Town Center to Old Marlborough Road (east) 	Connecticut DOT —	
Medium Range Improvements: 5-10 Years			
Route 66 - four lane with median			
Route 66 & "The Ledges" Between Payne Boulevard and Oakum Dock Road • Cut back rock outcrop enough to improve sight lines, provide cle zone for emergency recovery of errant vehicles, and eliminate winter icing problem created by water seepage from rock onto roadway		Connecticut DOT	
Route 66 & North Maple Street	Adjust traffic signal cycle length to improve 2020 level of service	Connecticut DOT	
Route 66 & East Hamp- ton Mall / Brooks Plaza Area	 Provide westbound right turn lane into Mall; include all traffic signal phases in pedestrian signal Provide directional left turn lanes in coordination with access management Perform signal warrant analysis 	Connecticut DOT	
Long Range Improvements: 15-20 Year	s		
Route 66 - four lane with median	Widen Route 66 to 4 lanes from Sand Hill Rd.(east) to Route 16 with median to Riverdale Motel; includes provisions for bicycle and pedestrian safety	Connecticut DOT	
Route 66 & Champion Hill Road	Lower profile of Route 66 slightly to improve sight line	Connecticut DOT	

Table 6 Summary of Recommendations


Location	Improvement	Implementation Responsibility
	General Corridor Safety Improvements	
Short Range Improvements: 3 Years	-	
Route 66 Corridor Portland and East Hampton	Check all lines of sight at intersections and bring up to safety standards for prevailing speeds traveled on Route 66	Connecticut DOT; Towns of Portland and East Hampton
Route 66 Corridor Portland and East Hampton	Increase enforcement of safe speeds Encourage media recap of accident causes on a yearly basis to provide public with insight into primary problems	Towns of Portland and East Hampton
	System Improvements	
From Main Street to Grove Street	Coordinate traffic signals to operate on common background cycle (100 secs)	Connecticut DOT
Sand Hill Road (west) (future) and Route 17 (Gospel Lane)	Coordinate traffic signals to operate on common background cycle (80-100 secs)	Connecticut DOT
From Route 151 to Route 16	Coordinate traffic signals to operate on common background cycle (80-100 secs)	Connecticut DOT
From North Main Street to Old Marlborough Rd.	Coordinate traffic signals to operate on common background cycle (80-100 secs)	Connecticut DOT
	Alternative Modes	
Transit: Middletown to Portland and East Hampton	Increase advertising of schedule (i.e. Commuters Register) Coordinate with CT Transit - Middletown to Hartford	Private and/or community efforts
Ridesharing: Route 66 Corridor and the region	 Local and regional distribution of the Commuters Register Local and regional promotion by the media Encourage corporate/employer rideshare programs, staggered work hours, and work at home Increase visibility of Rideshare Company signs on Route 66 	Private and/or community efforts


Location	Improvement	Implementation Responsibility
	Non-Traditional Modes	
Bicycle: Route 66 Corridor	Connecticut DOT; Private and/or community efforts	
Pedestrian: Route 66 Corridor	 Enhance visibility of crosswalk at Elmcrest Manor Include all signal phases in pedestrian signals at High Street and East Hampton Mall Add crosswalks at Main/North Main Street Include pedestrian path in future roadway widening designs Provide for pedestrian access between parking lots of neighboring businesses Provide shoulder for pedestrian travel along shore of Lake Pocotopaug at Old Marlborough Road (west) 	Connecticut DOT; Town of Portland; Town of East Hampton; Private property owners
	Access Management	
Town of Portland and East Hampton	Incorporate access management regulations into Town Zoning Regulations Designate Route 66 as an access management overlay zone	Town of Portland
Main Street to Sand Hill Road, Portland	 Encourage shared access between businesses Perform retrofit of curb cuts in vicinity of Portland Plaza, Grandview Terrace and of Sand Hill Road (West) as roadway projects or site plan modifications allow 	Town of Portland
Sand Hill Road to East Hampton town line,	Apply access management regulations to undeveloped or redeveloped parcels in conjunction with site plan approval process	Town of Portland
Route 151 to North Maple, East Hampton	Consolidate and relocate curb cuts on southeast side of Route 151 intersection Apply access management regulations to undeveloped or redeveloped parcels in conjunction with site plan approval process	Town of East Hampton
East Hampton Mall /Brook's Plaza Area, East Hampton	 Stripe left turn lanes at MacDonalds and Brooks Plaza eastbound and package store and Food Bag westbound Enlarge island between Food Bag and package store to delineate driveways Apply access management regulations to redeveloped parcels in conjunction with site plan approval process 	Town of East Hampton
Old Marlborough Road to Marlborough town line	Encourage owners to consolidate and decrease size of curb cuts at group of businesses east of Old Marlborough Road (West) Apply access management regulations to undeveloped or redeveloped parcels in conjunction with site plan approval process	Town of East Hampton

Appendix A: Turning Movement Volumes

ROUTE 66 CORRIDOR STUDY PORTLAND TRAFFIC COUNTS



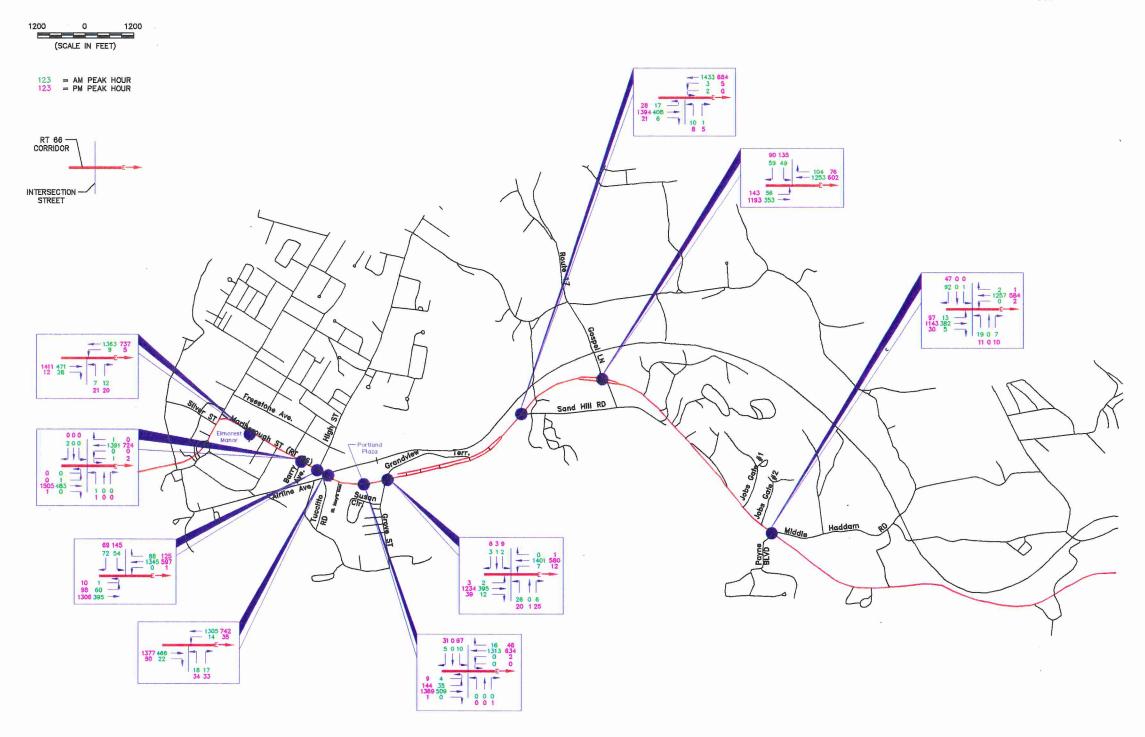


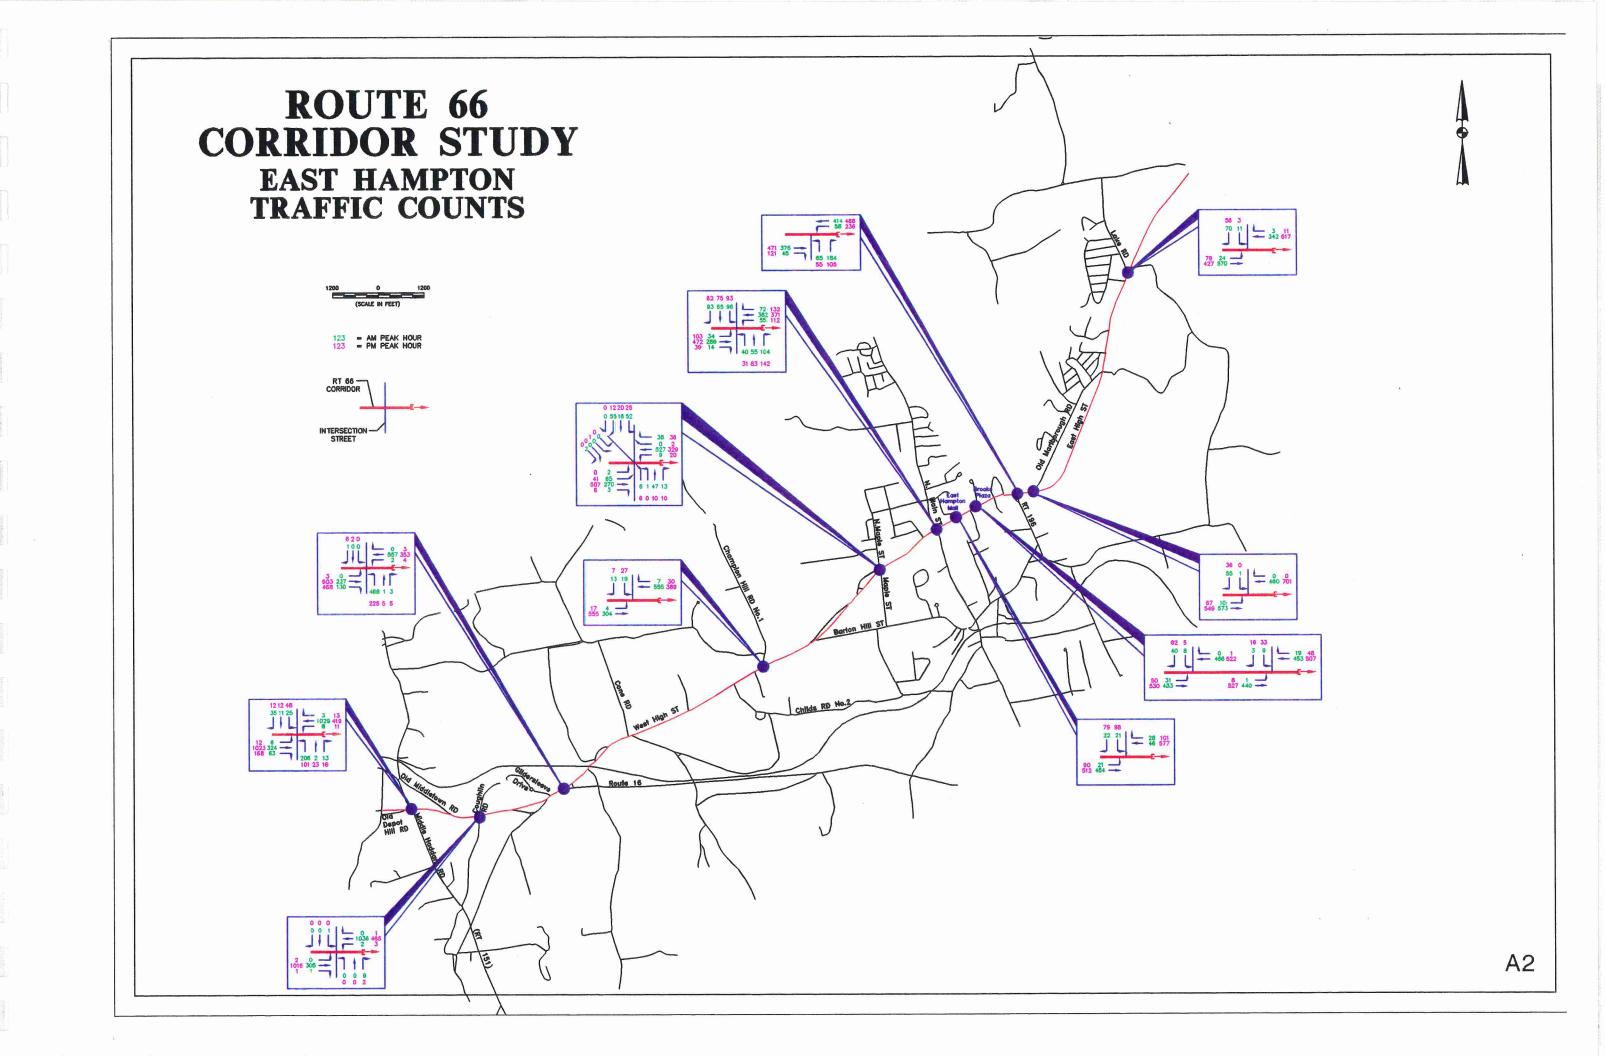


ROUTE 66 CORRIDOR STUDY PORTLAND


PROJECTED TRAFFIC COUNTS


(Generated from CONNDOT Year 2020 Traffic Volume Forecast)

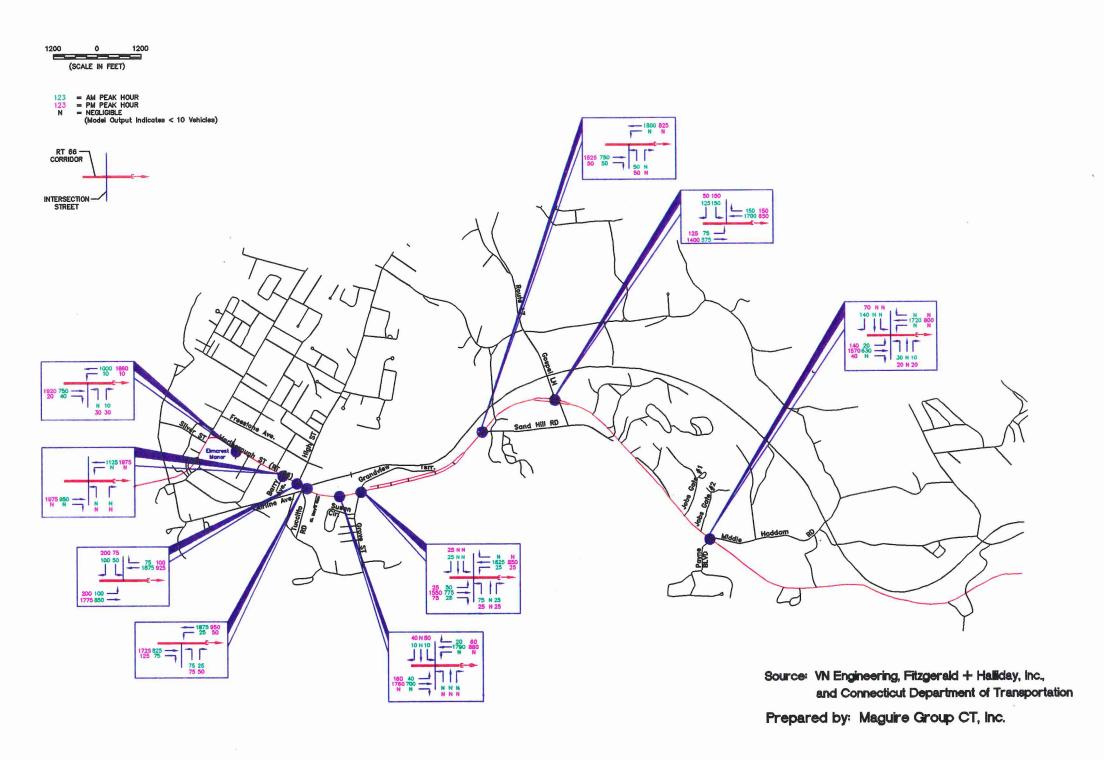


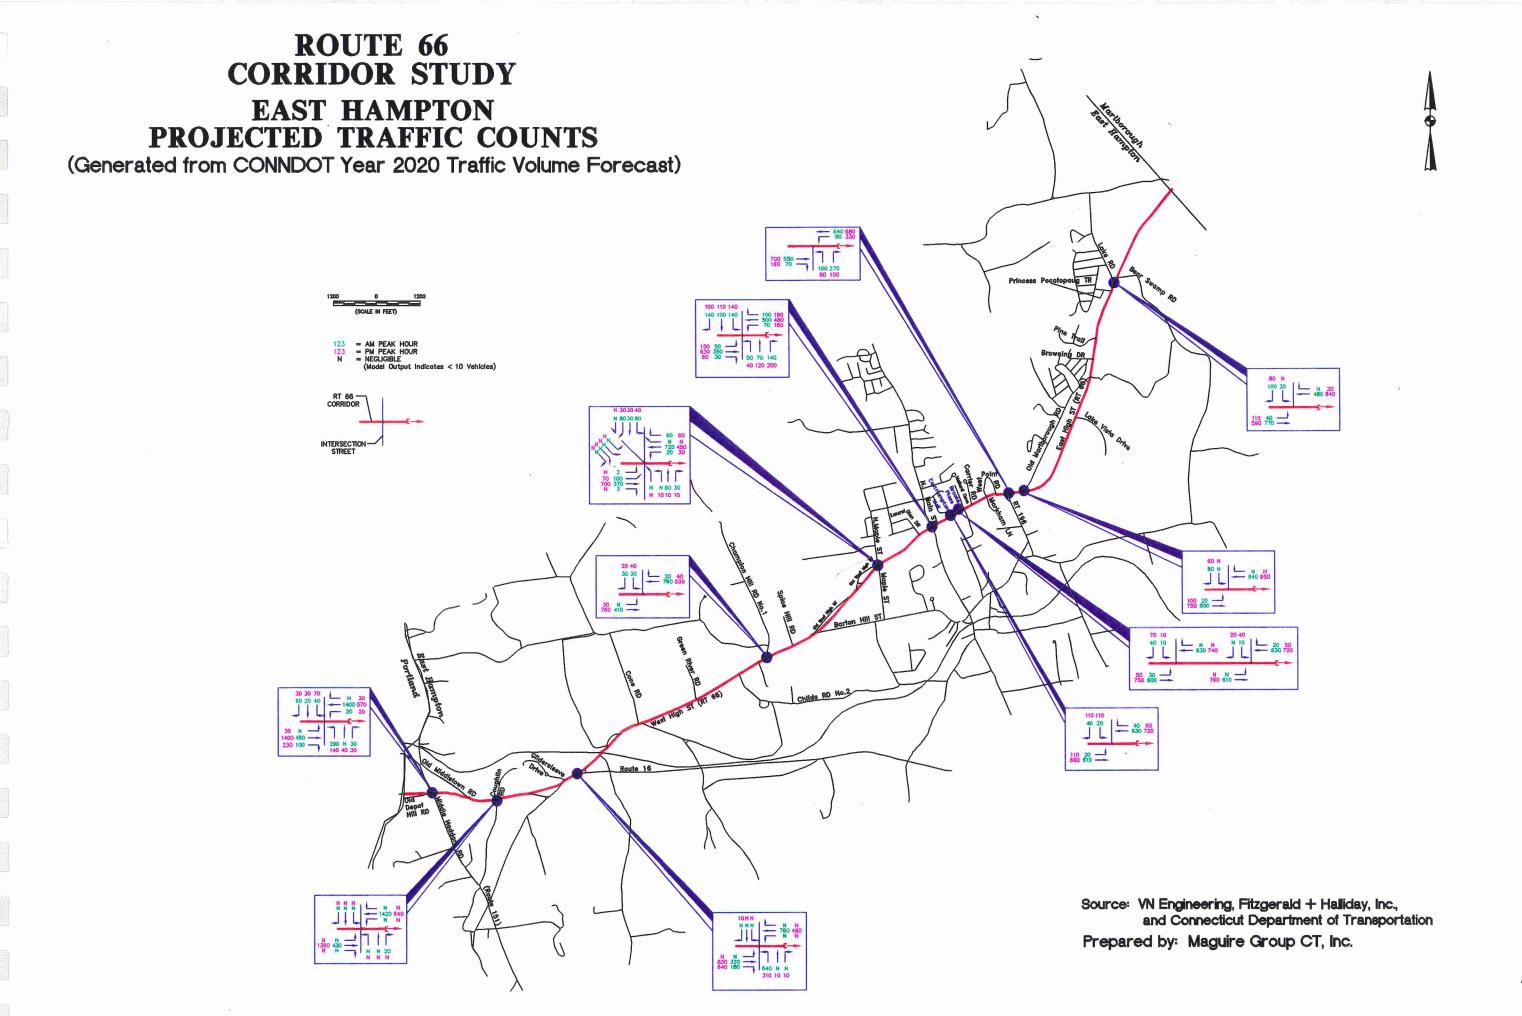

Appendix B:Conceptual Plans of Recommended Intersection/Arterial Improvements

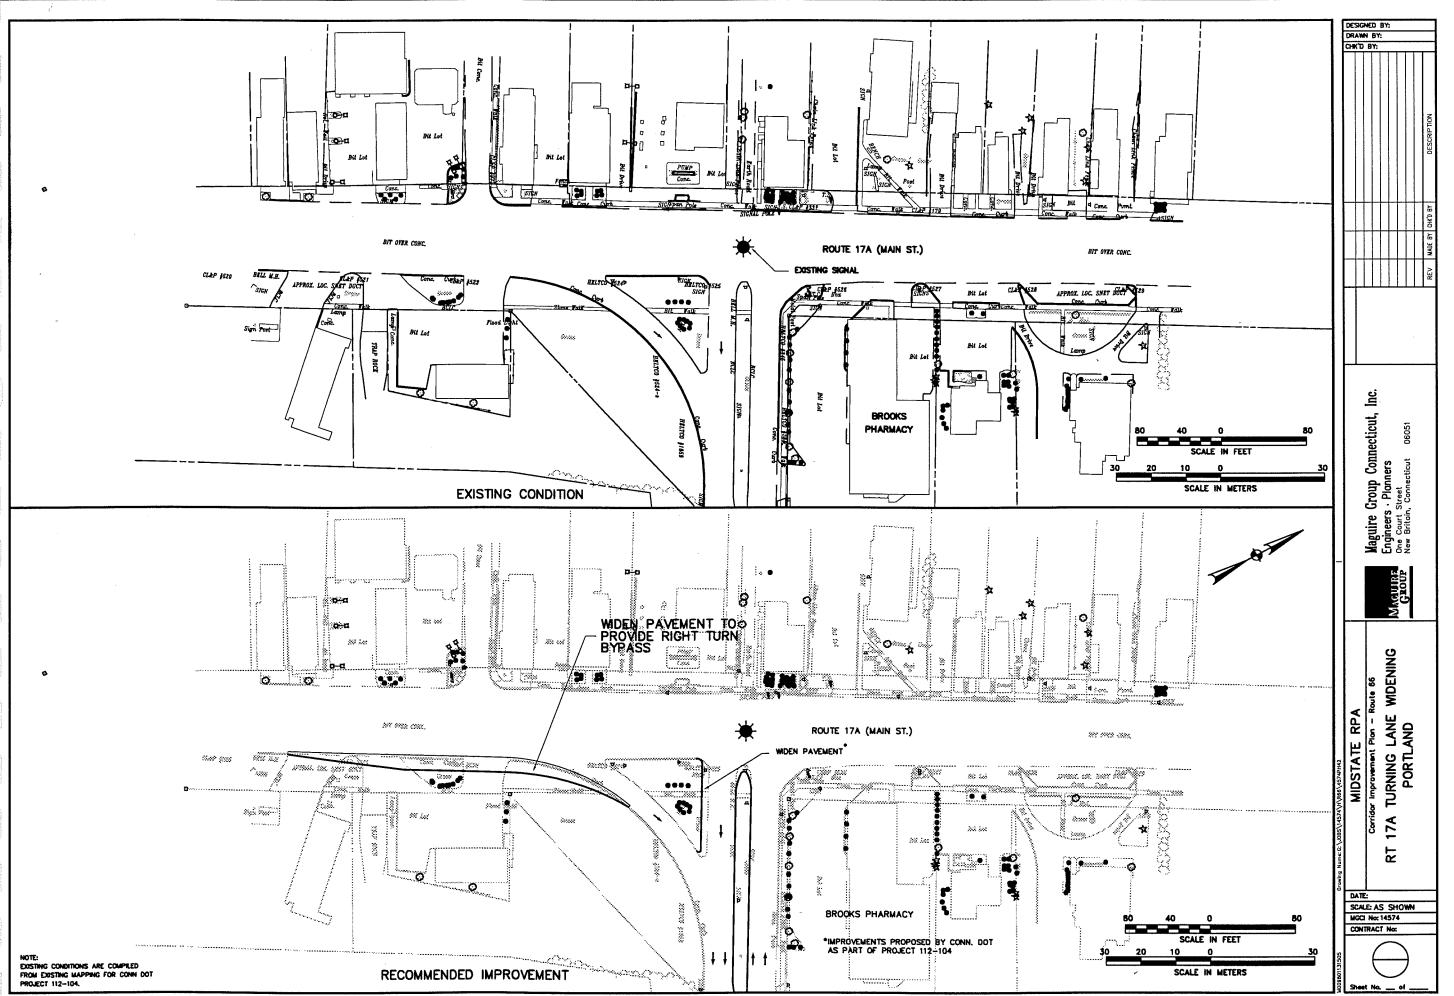

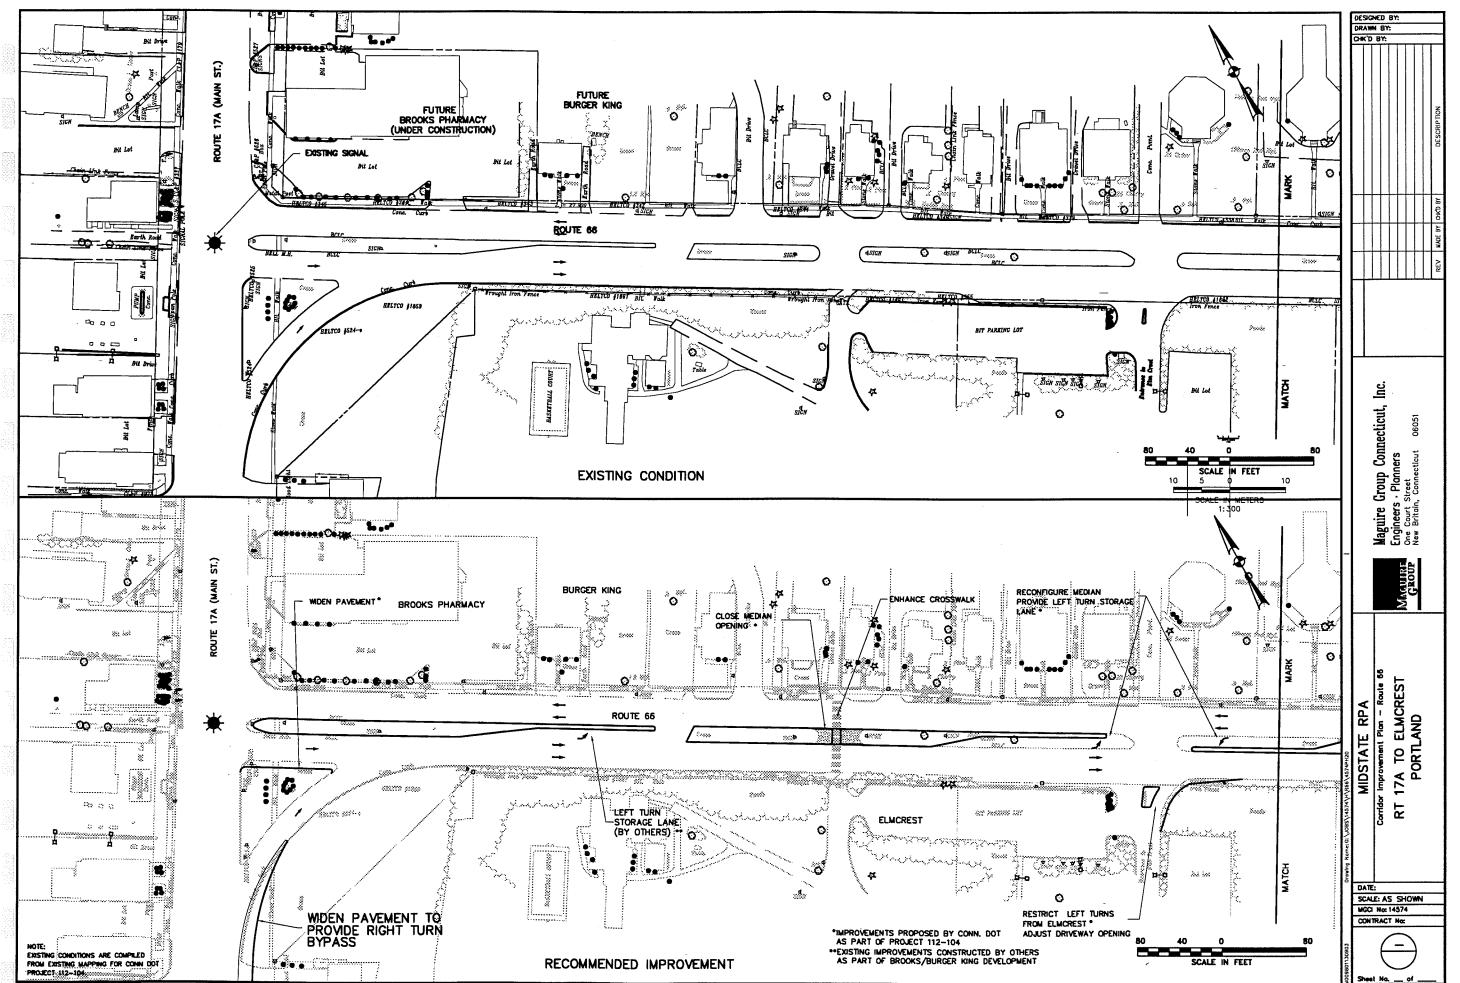

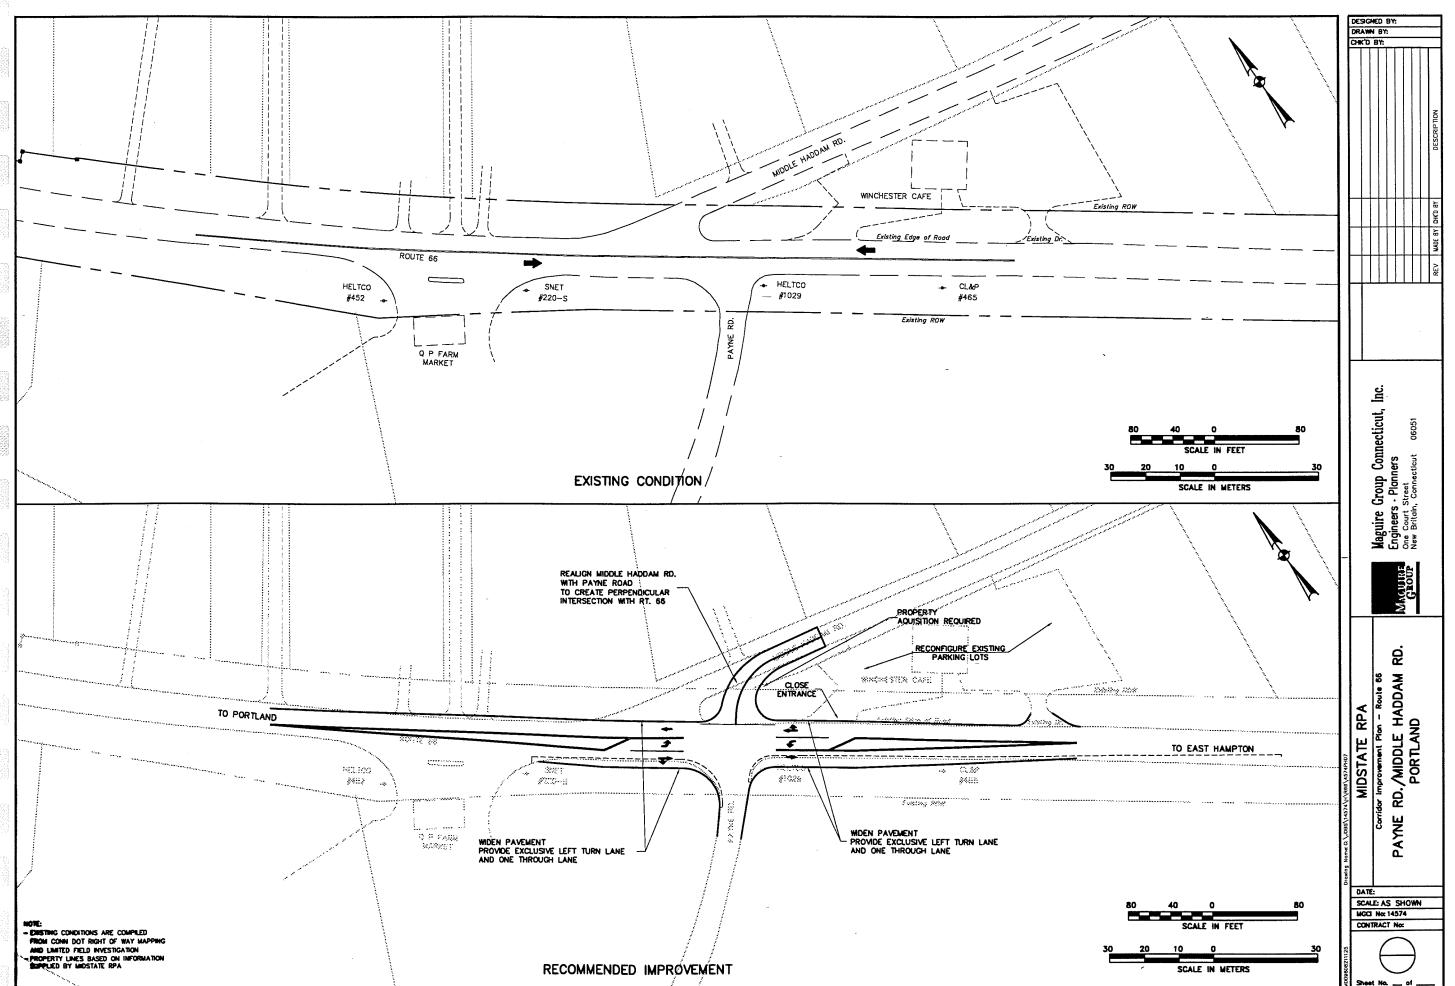

			L	2.1 m 7'-0"	€ -			
3.0 m 10'-0"	3.7 m 12'-0"	3.7 m 12'-0"	1.2 m 4'-0"	1.8 m 6'-0"	3.7 m 12'-0"	3.7 m 12'-0"	3.7 m 12'-0"	3.0 m 10'-0"
SHOULDER	TRAVEL LANE	TRAVEL LANE	SHDER	MEDIAN	TURNING LANE	TRAVEL LANE	TRAVEL LANE	SHOULDER (BICYCLE AND PEDESTRIAN SAFE)
	1	1				†	†	
	V	V				_		

MEDIUM RANGE FOUR — LANE ALTERNATIVE WITH MEDIAN AND TURNING LANE WHERE NEEDED TYPICAL CROSS SECTION SECTION A — SAND HILL ROAD (EAST) TO EAST OF RIVERDALE MOTEL


ı	3.0 m 10'-0"	3.7 m 12'-0"	3.7 m 12'-0"	1.2 m 4'-0"	2.1 m 7'-0"	2.1 m 7'-0"	1.2 m 4'-0"	3.7 m 12'-0"	3.7 m 12'-0"	3.0 m 10"-0"
	SHOULDER	TRAVEL LANE	TRAVEL LANE	SHDER	MEDIAN	MEDIAN	SHDER	TRAVEL LANE	TRAVEL LANE	SHOULDER (BICYCLE AND PEDESTRIAN SAFE)
		+	•					†	†	


LONG RANGE FOUR — LANE ALTERNATIVE WITH MEDIAN OR TURNING LANE (SEE ABOVE) TYPICAL CROSS SECTION SECTION A — SAND HILL ROAD (EAST) TO EAST OF RIVERDALE MOTEL


3.0 m 10°-0°	3.7 m 12'-0"	3.7 m 12'-0"	© 3.7 m 12'-0"	3.7 m 12'-0"	3.0 m 10'-0"
SHOULDER	TRAVEL LANE	TRAVEL LANE	TRAVEL LANE	TRAVEL LANE	SHOULDER (BICYCLE AND PEDESTRIAN SAFE)
	↓	+	†	†	


LONG RANGE FOUR - LANE ALTERNATIVE
TYPICAL CROSS SECTION
SECTION B - RIVERDALE TO ROUTE 16


To	ORAW HK'D	N BY:	BY:				
							DESCRIP TION
ŀ				Ì			анк'в ву
ľ	1						MADE BY CHK'D BY
							REV
		Maguire Group Connecticut, Inc.	Engineers · Planners	One Court Street	New Britain, Connecticut 06		
			}		5		
g Name: G. \JOBS\14574\H\R66\4574PH41	MIDSTATE RPA	Corridor Improvement Plan - Route 66		DOADWAY CROSS_SECTIONS SAMPAOR	•	PORTLAND / EAST HAMPION	
Drawing Name: G.\JDBS\14574\H\R6G\4574PH41	MIDSTATE RPA		4 LANE ALTERNATIVE	₹_			

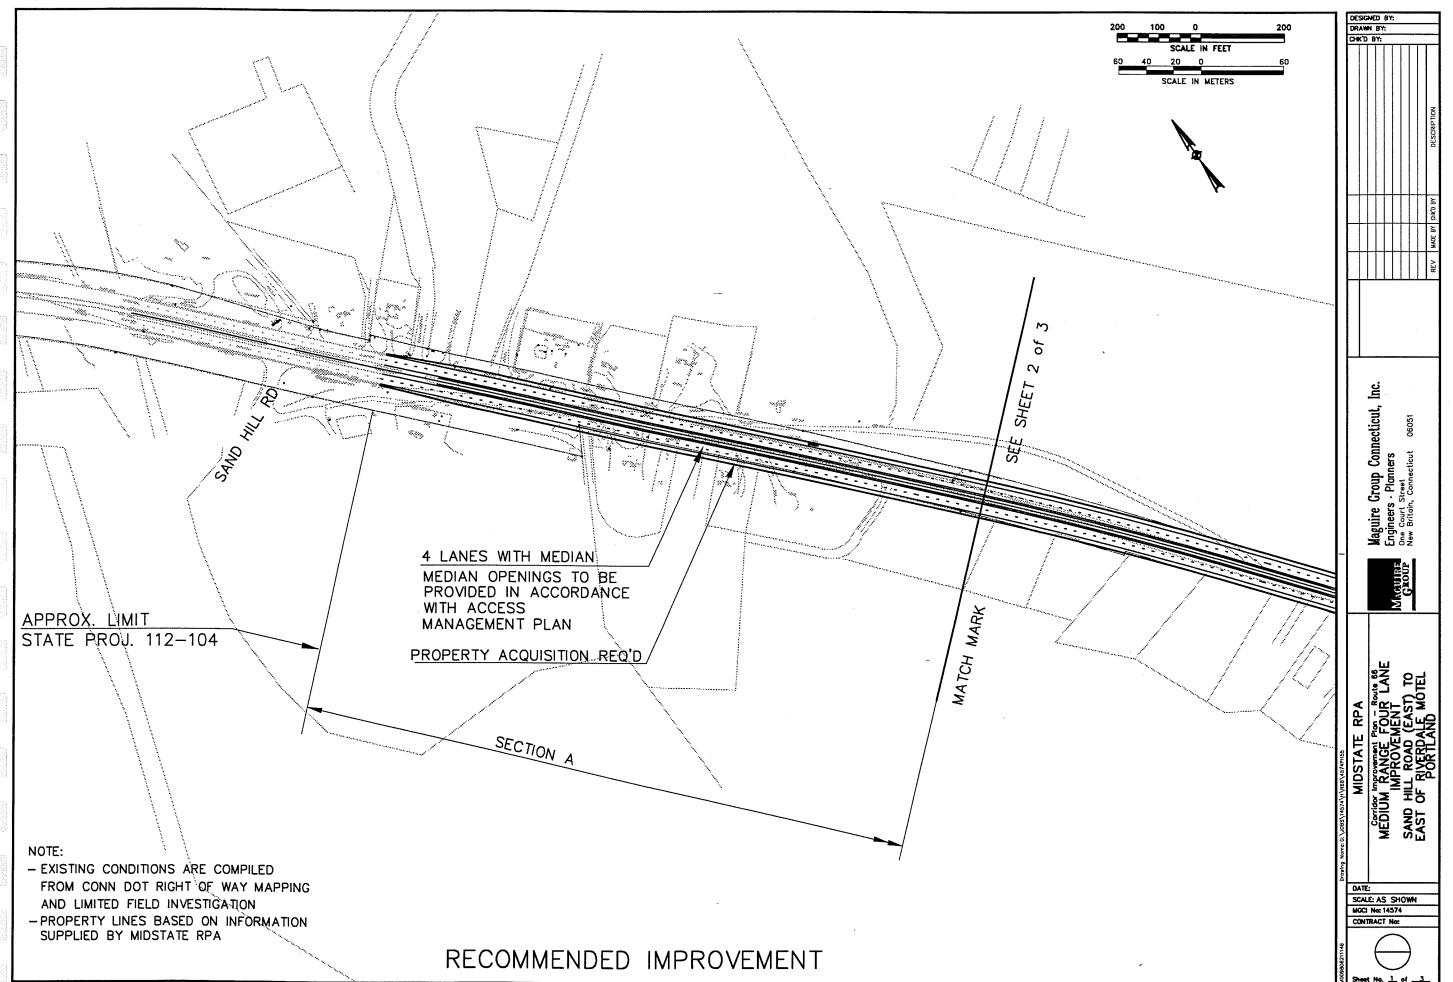


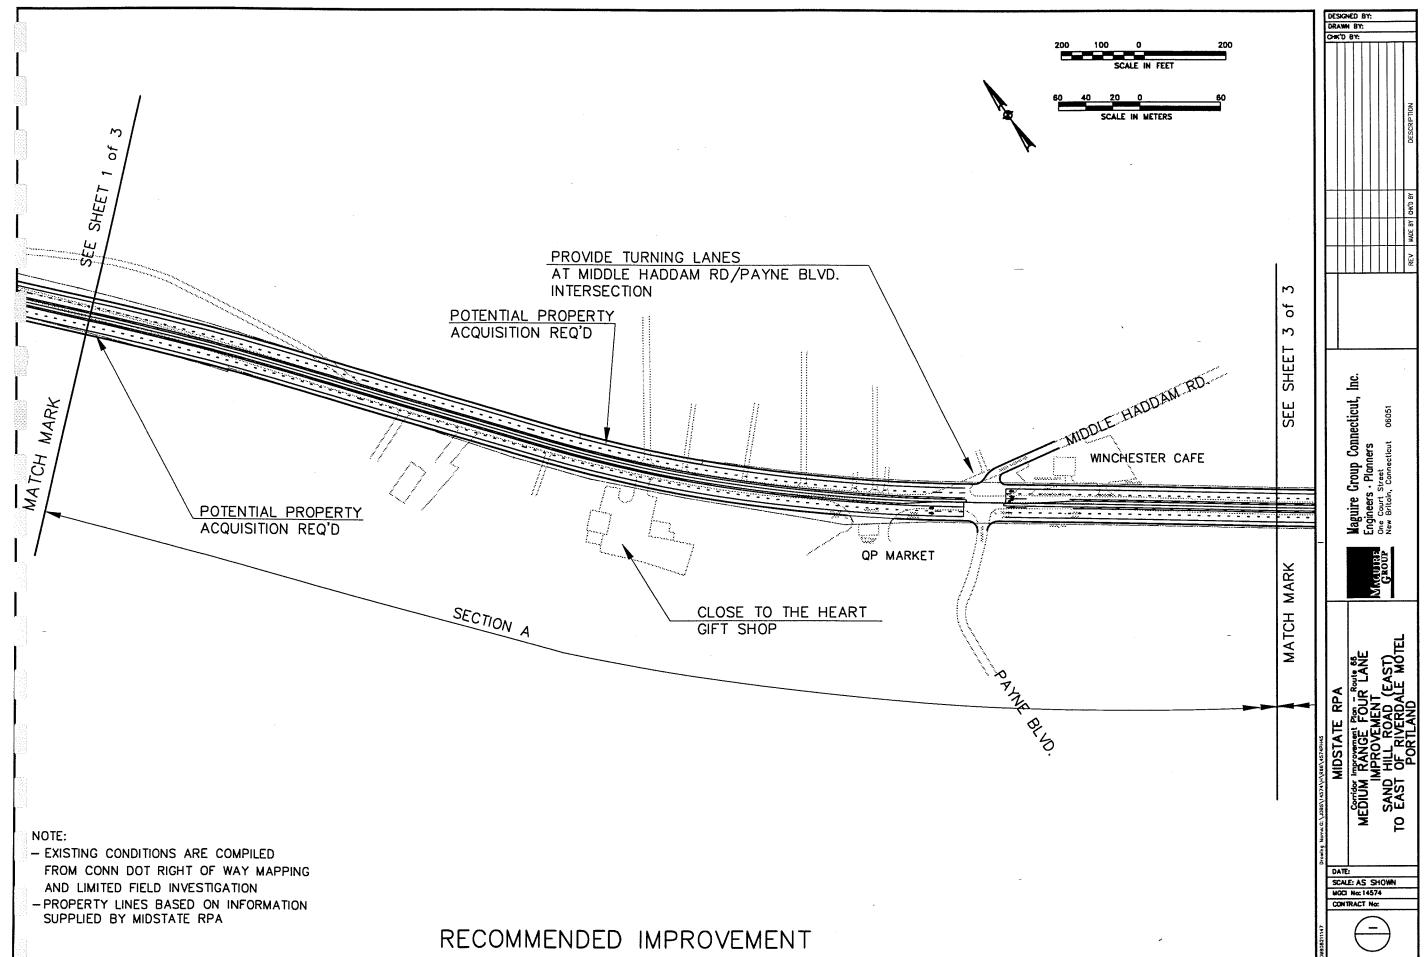


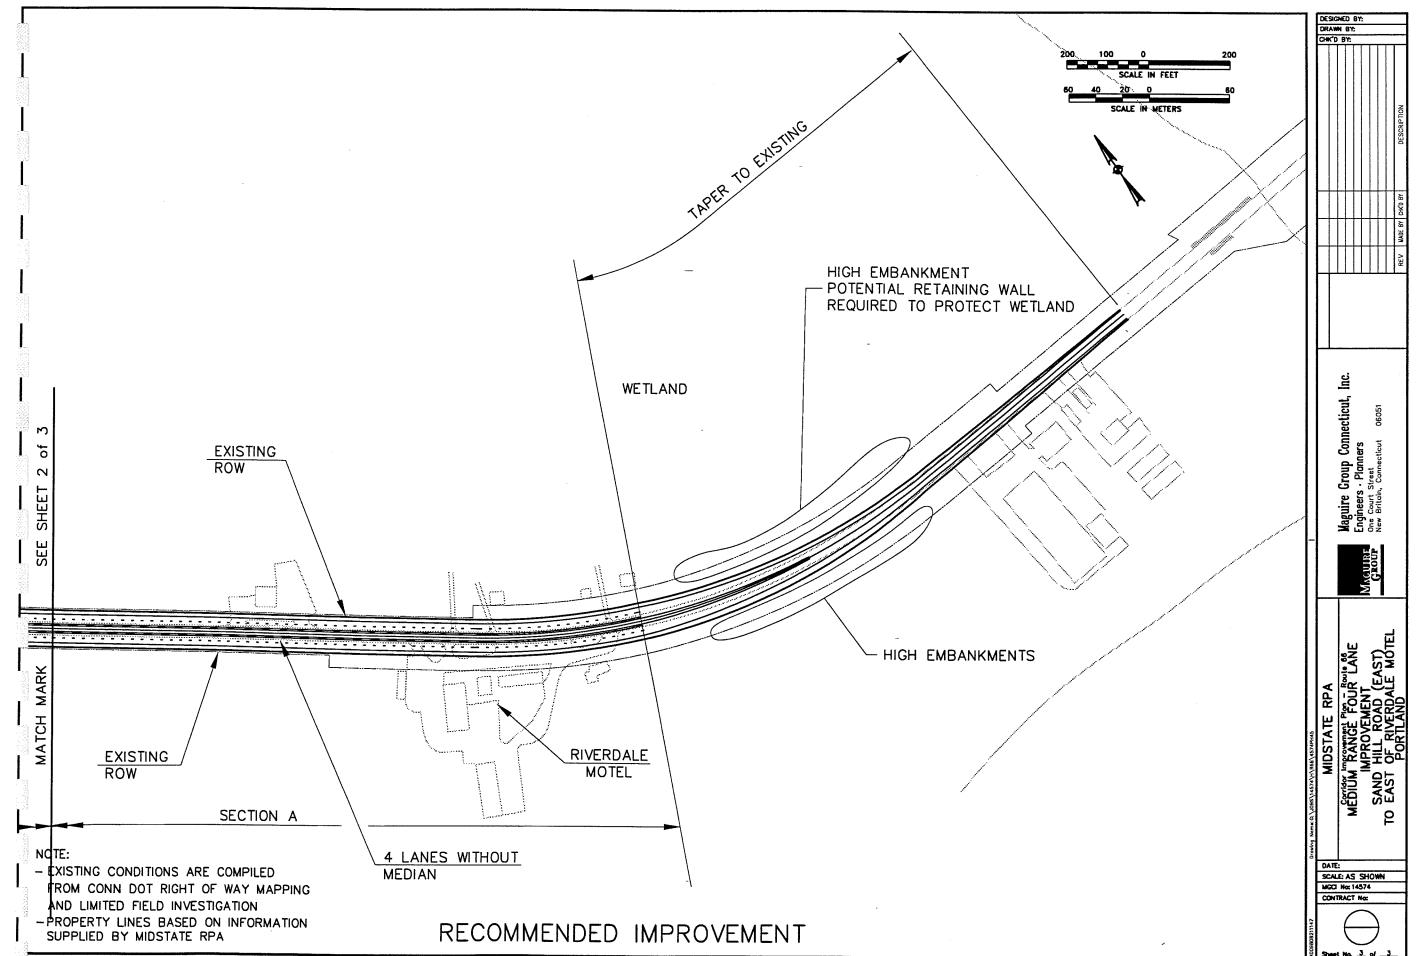


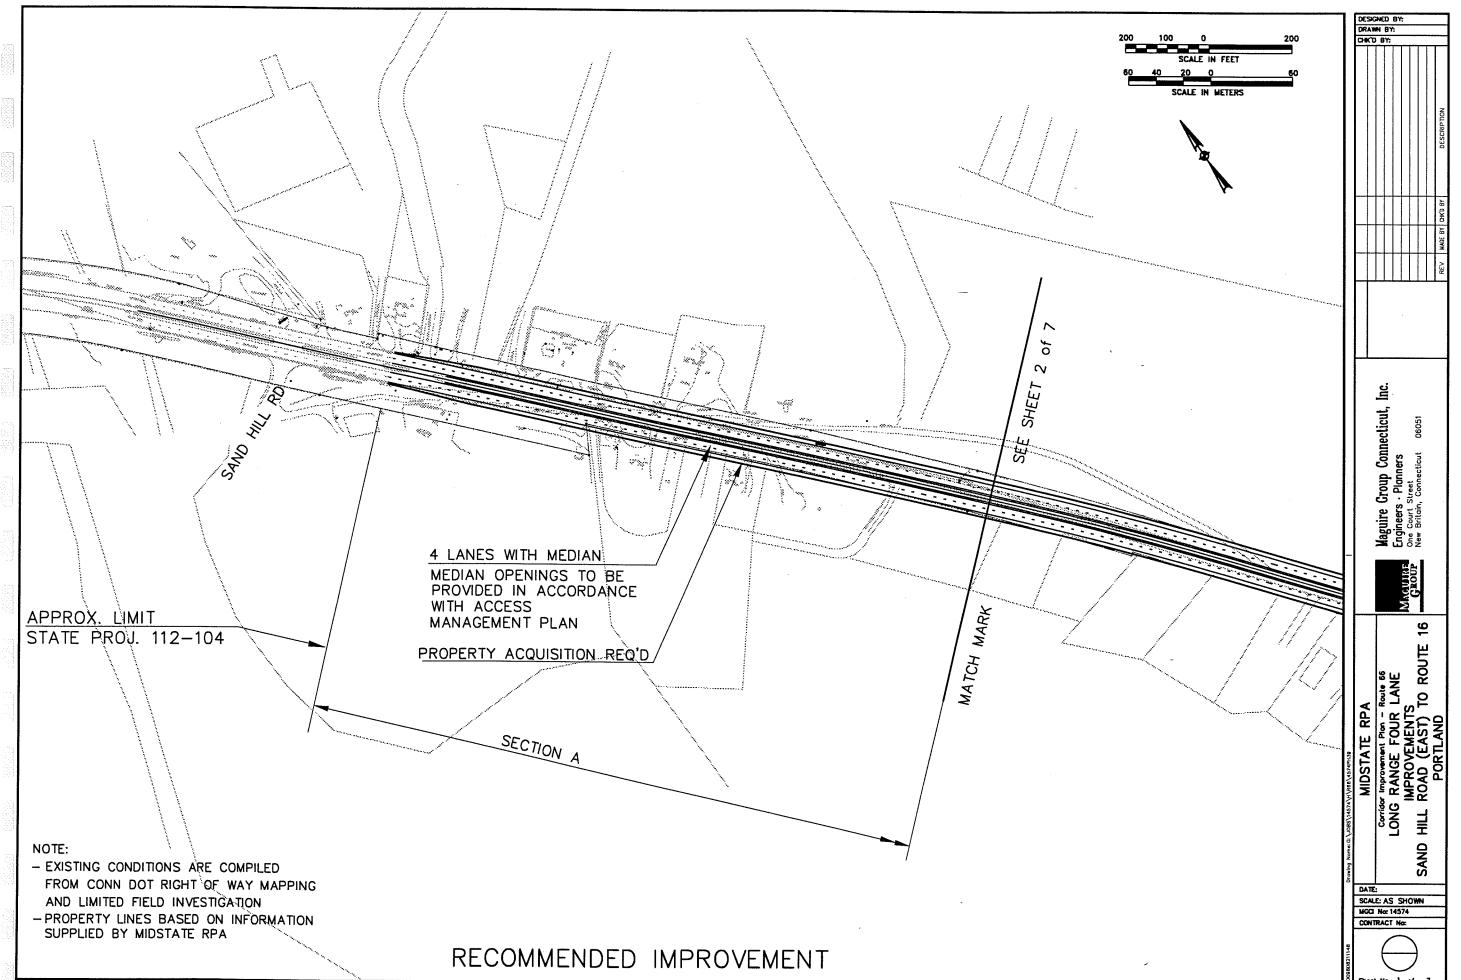


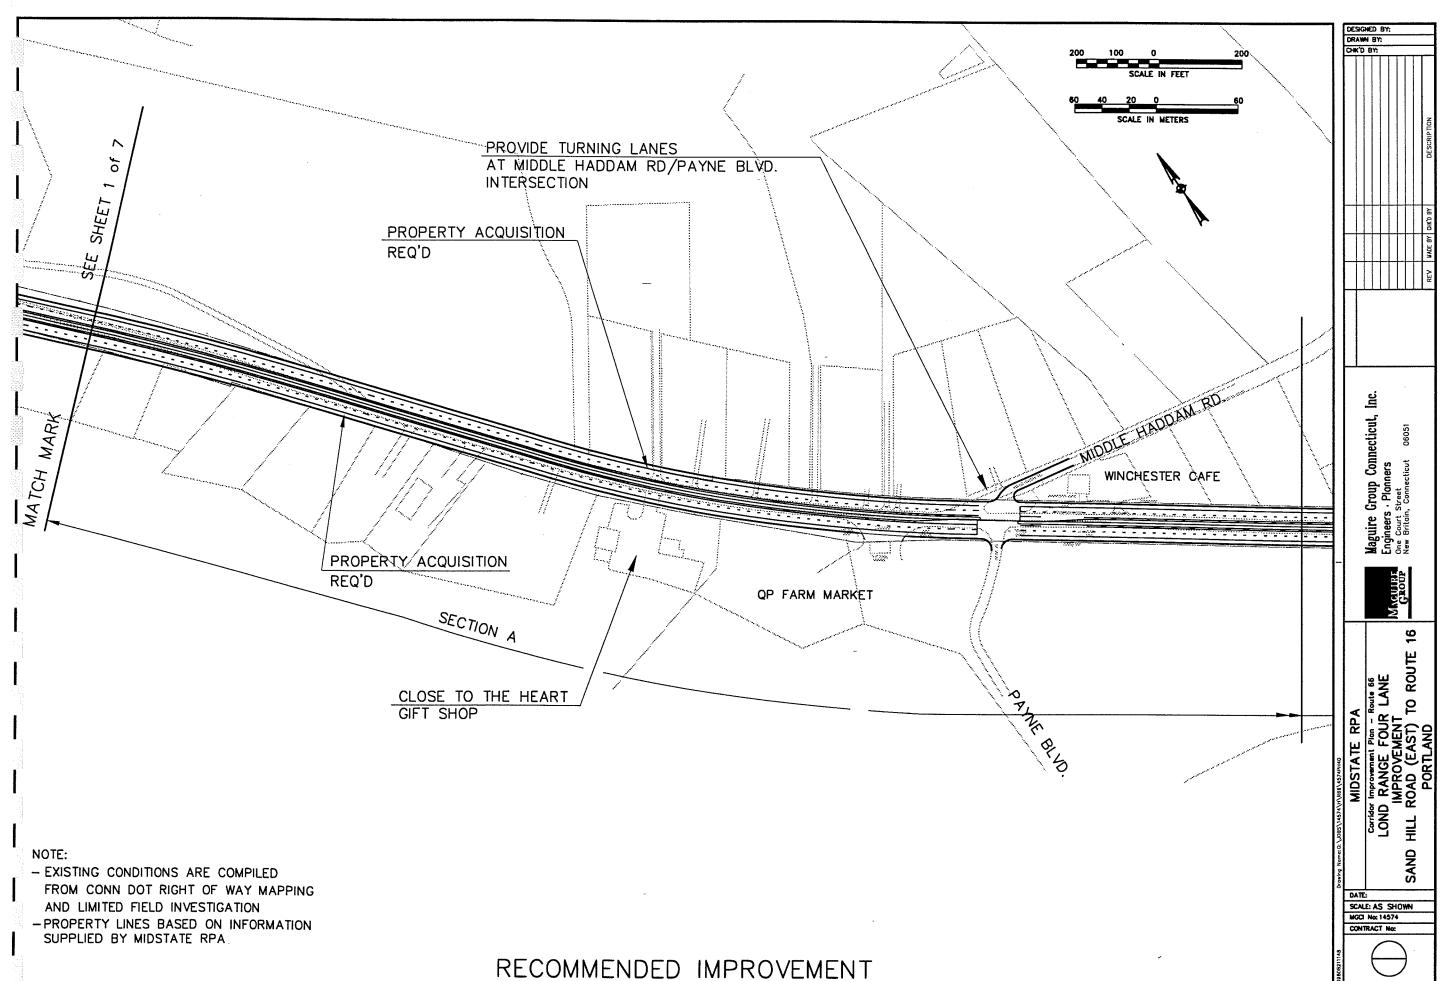


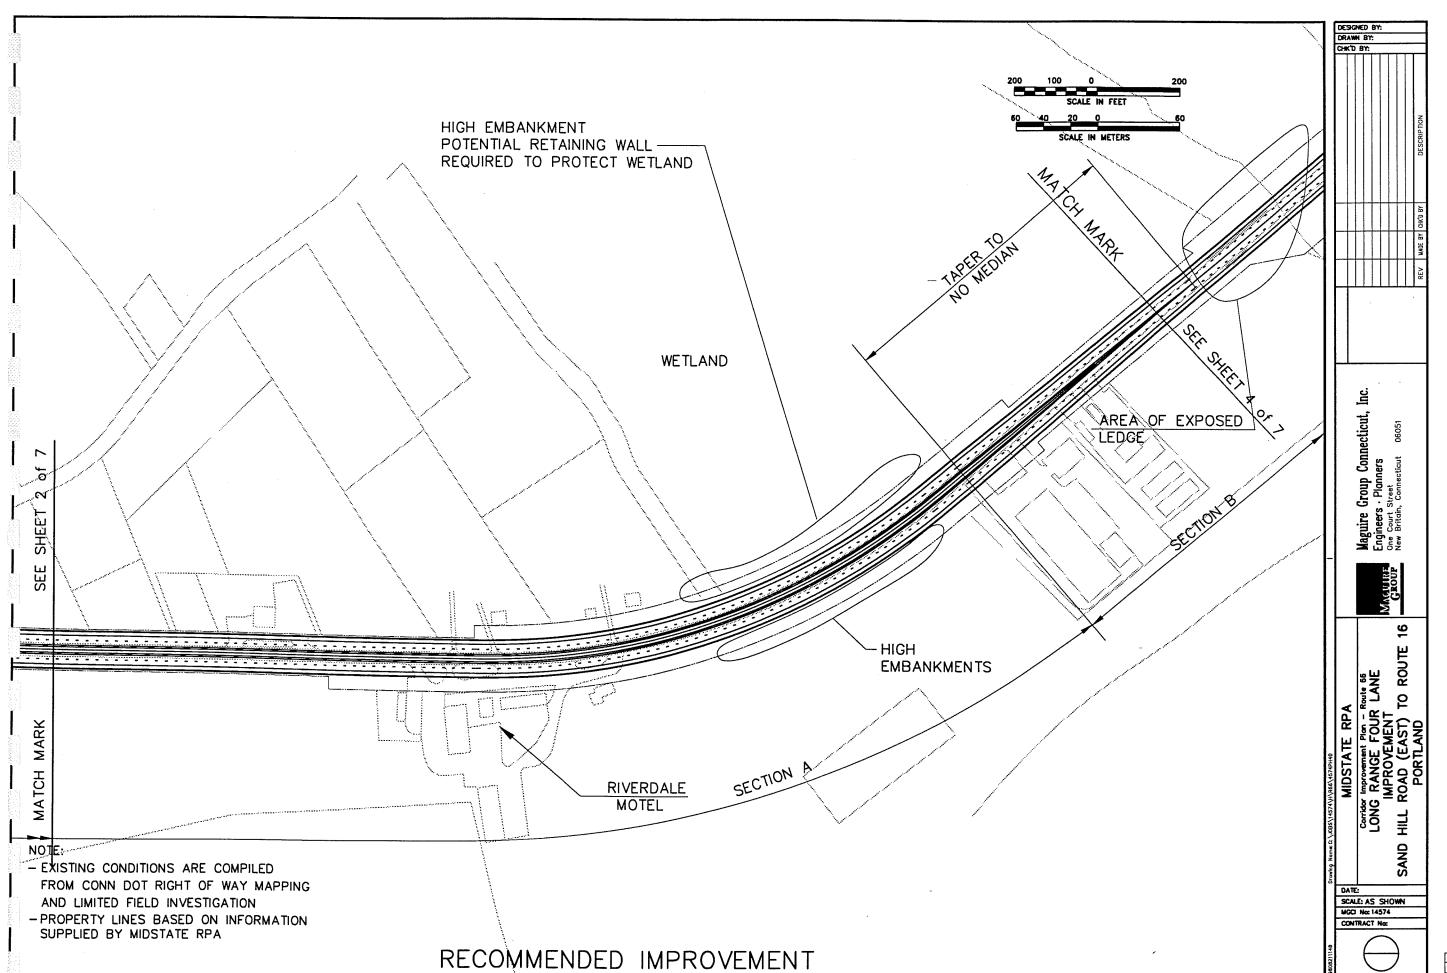


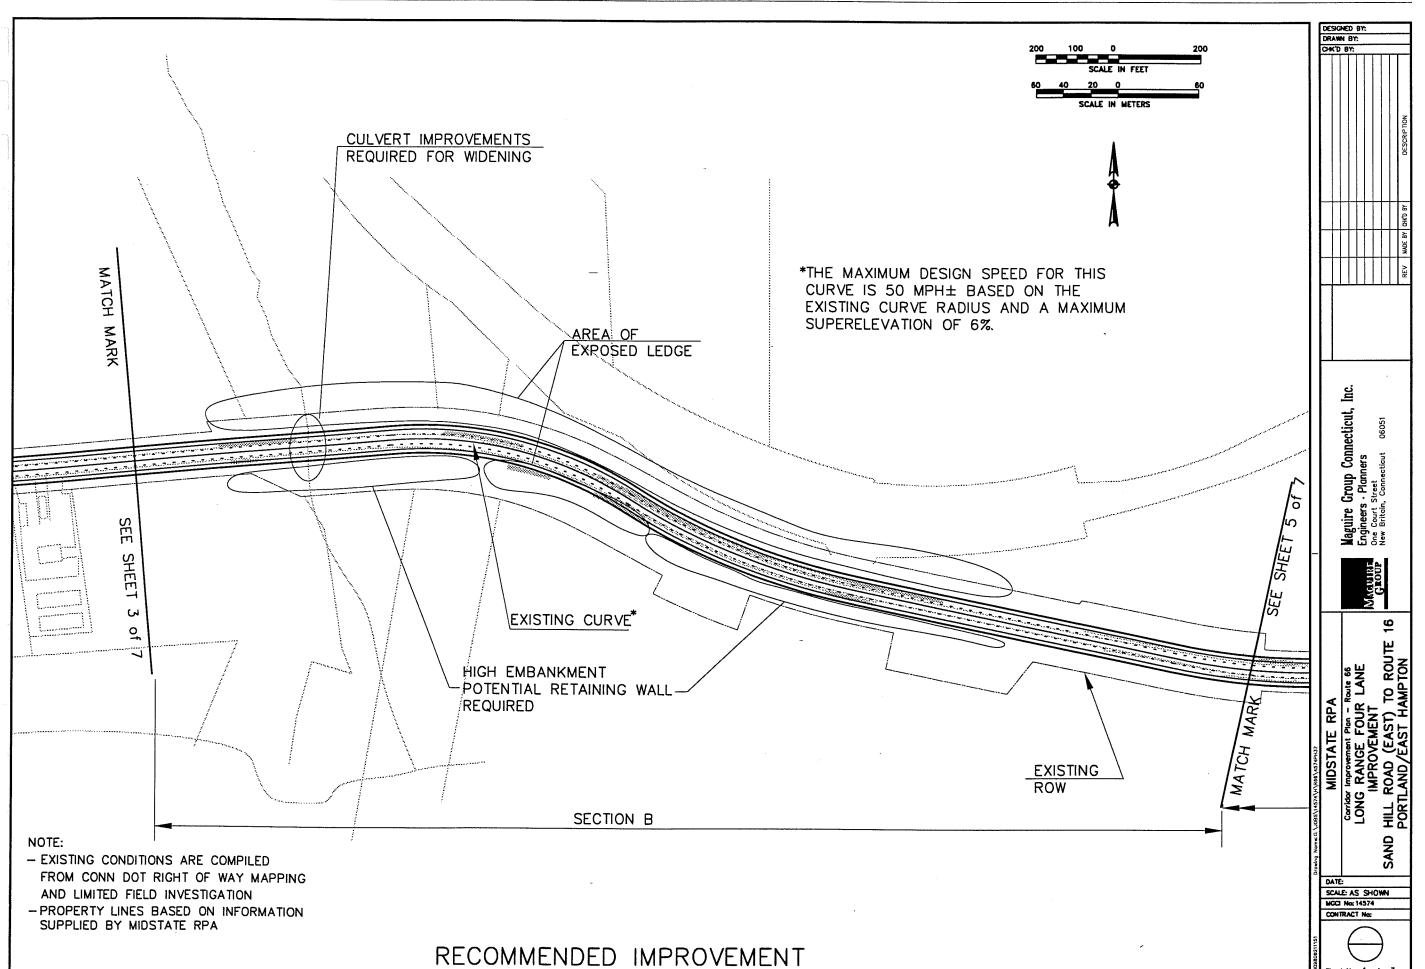


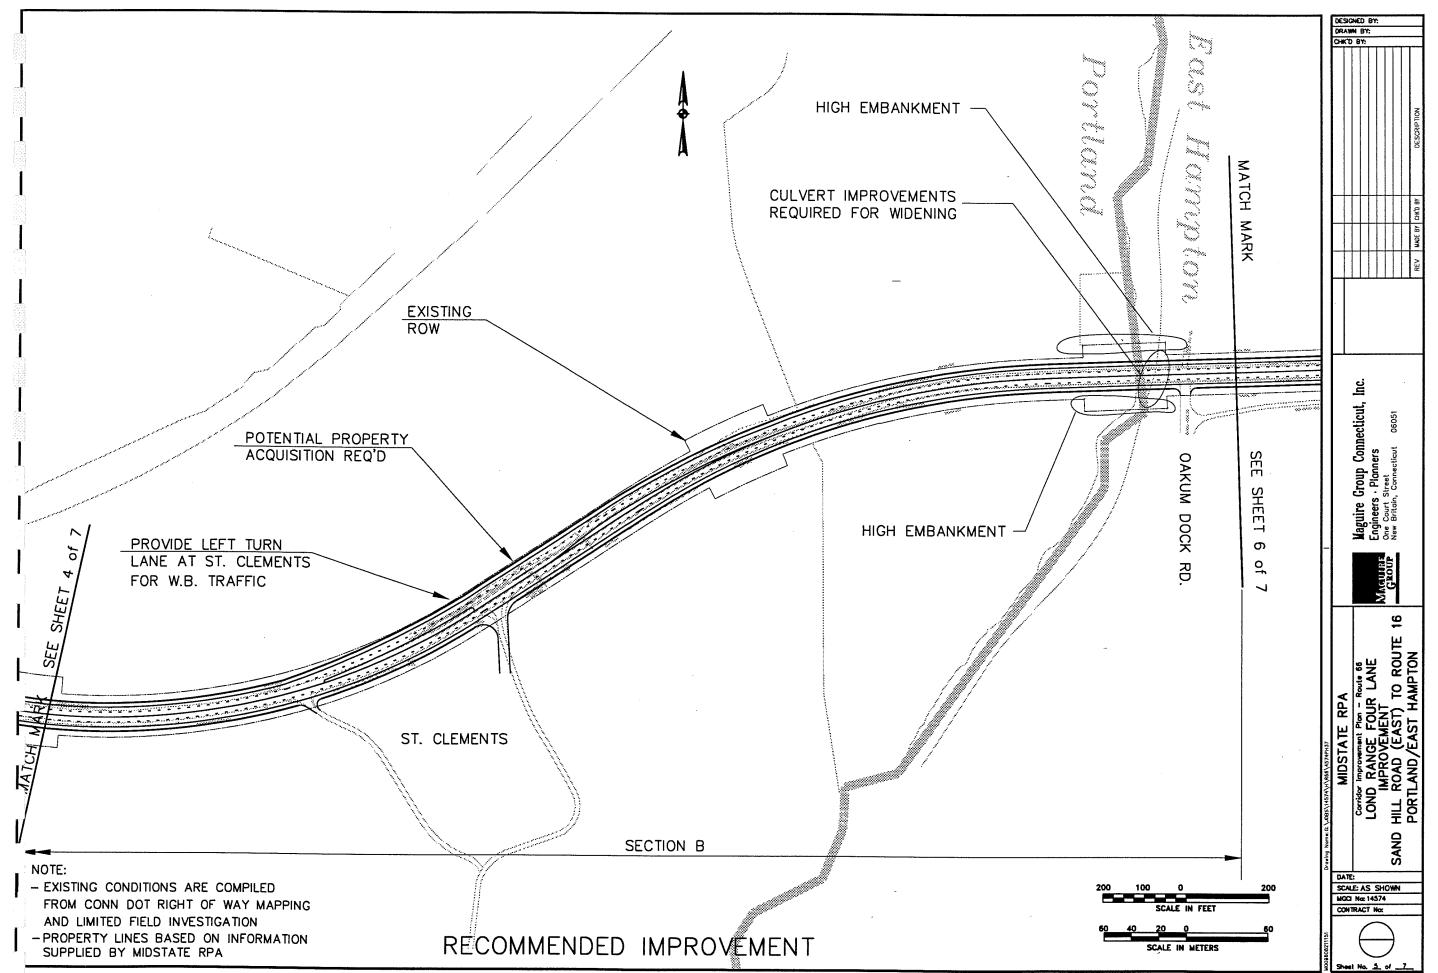

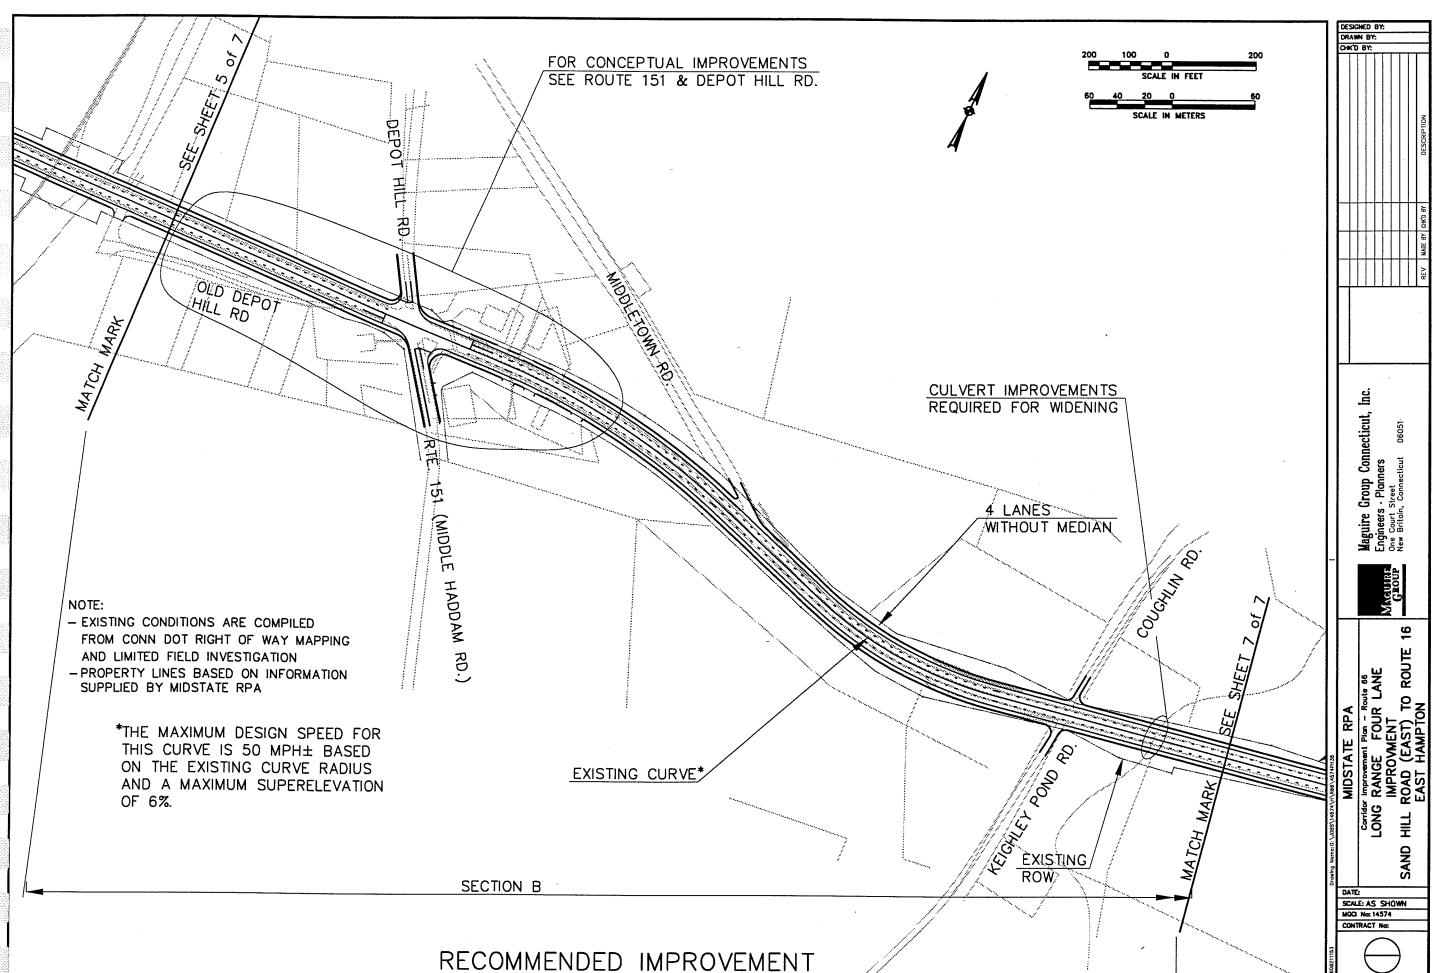


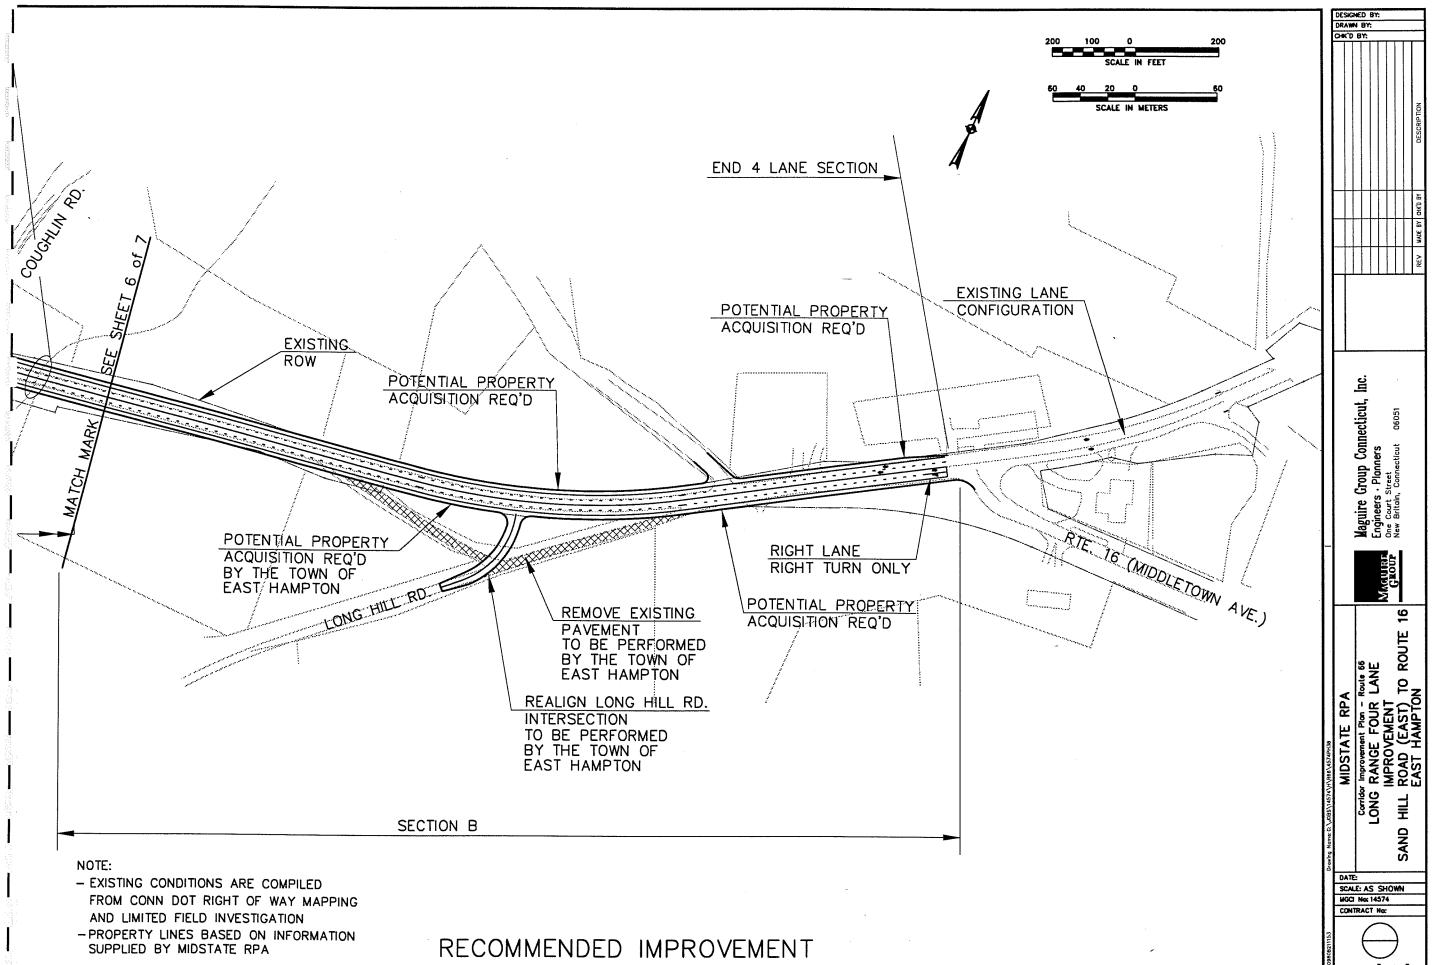


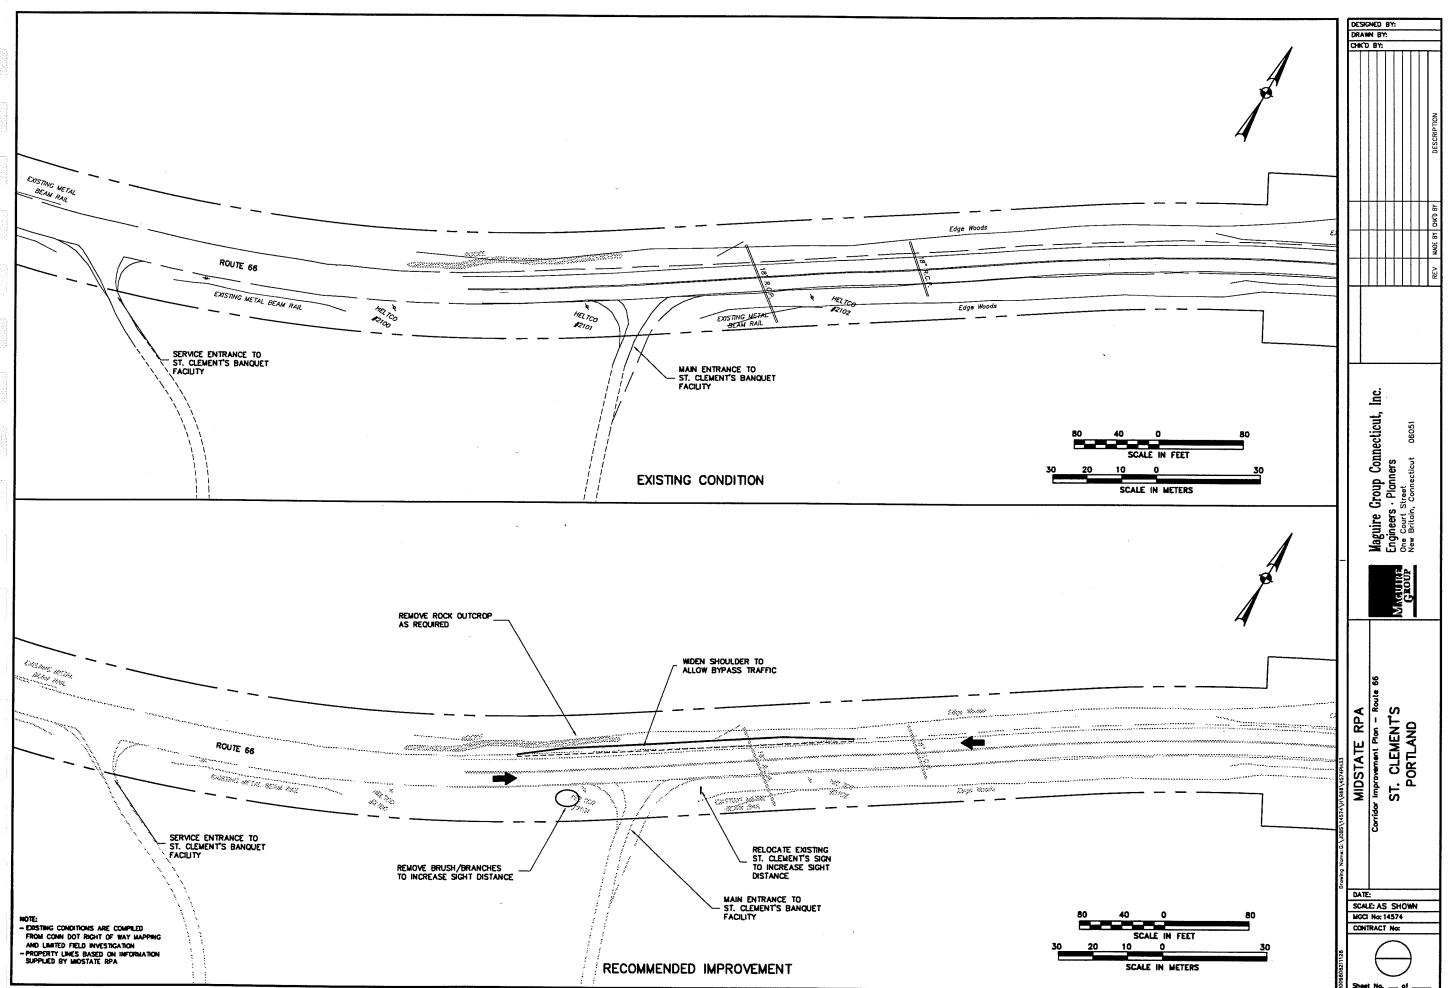


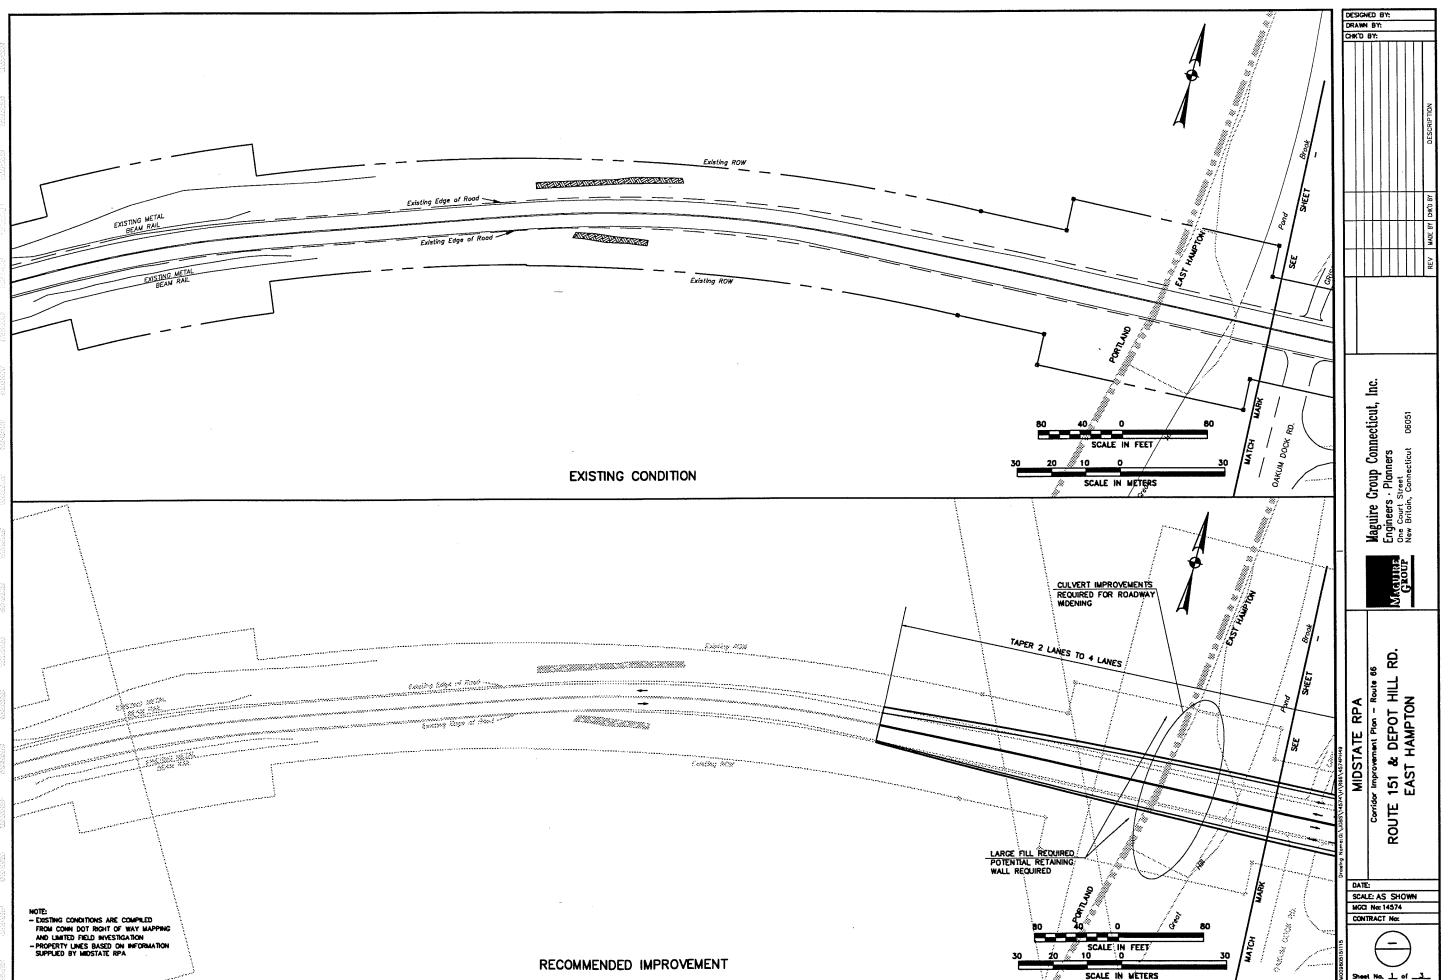



B-8a

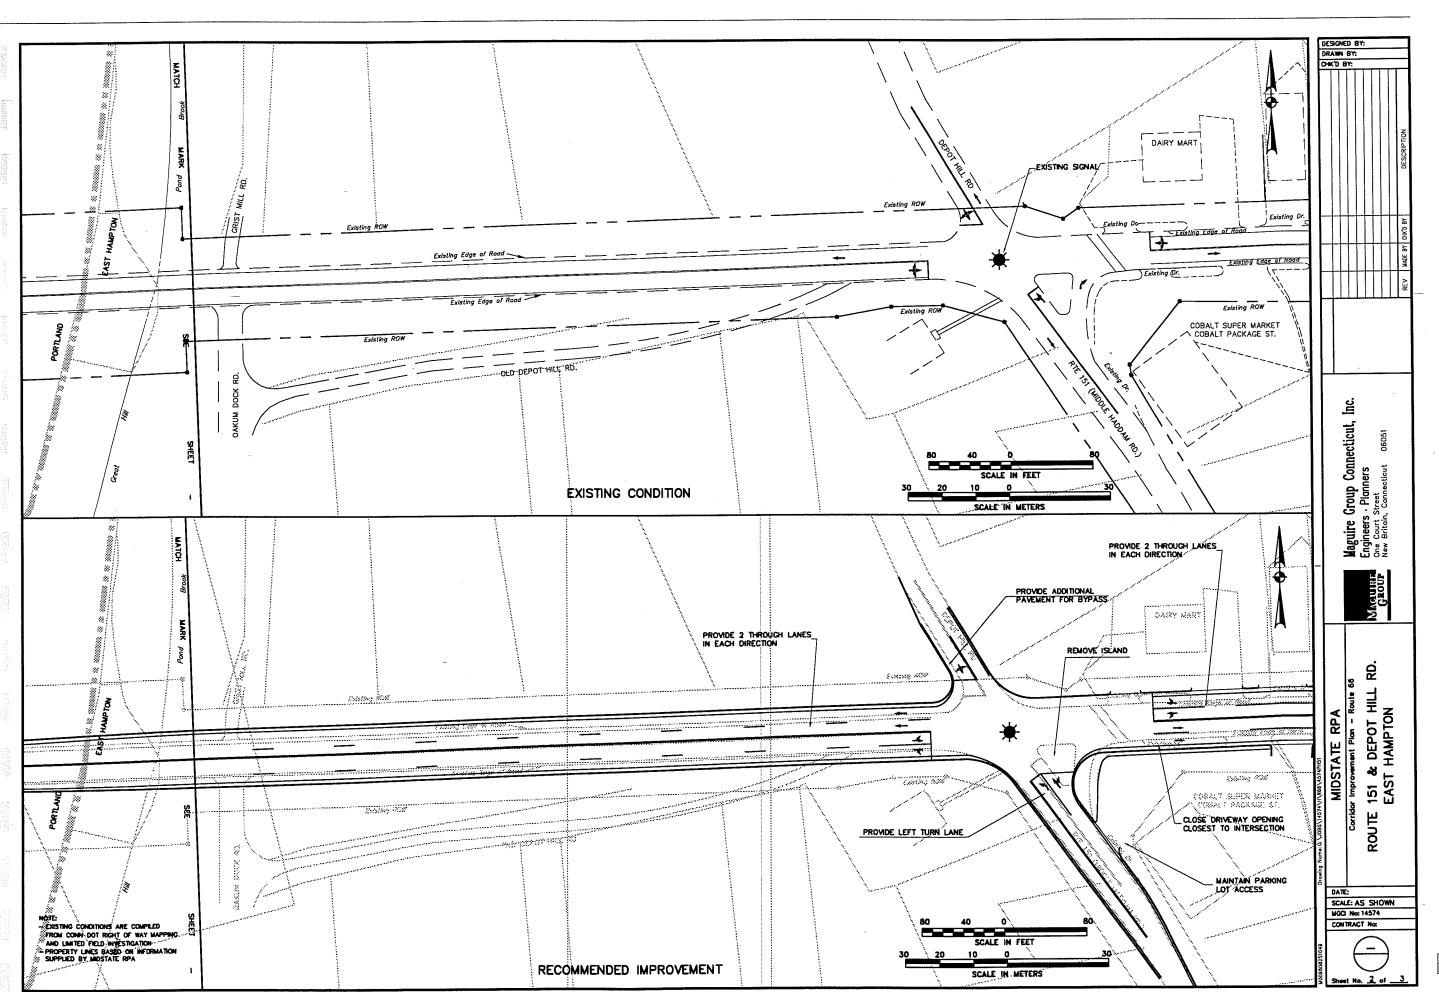


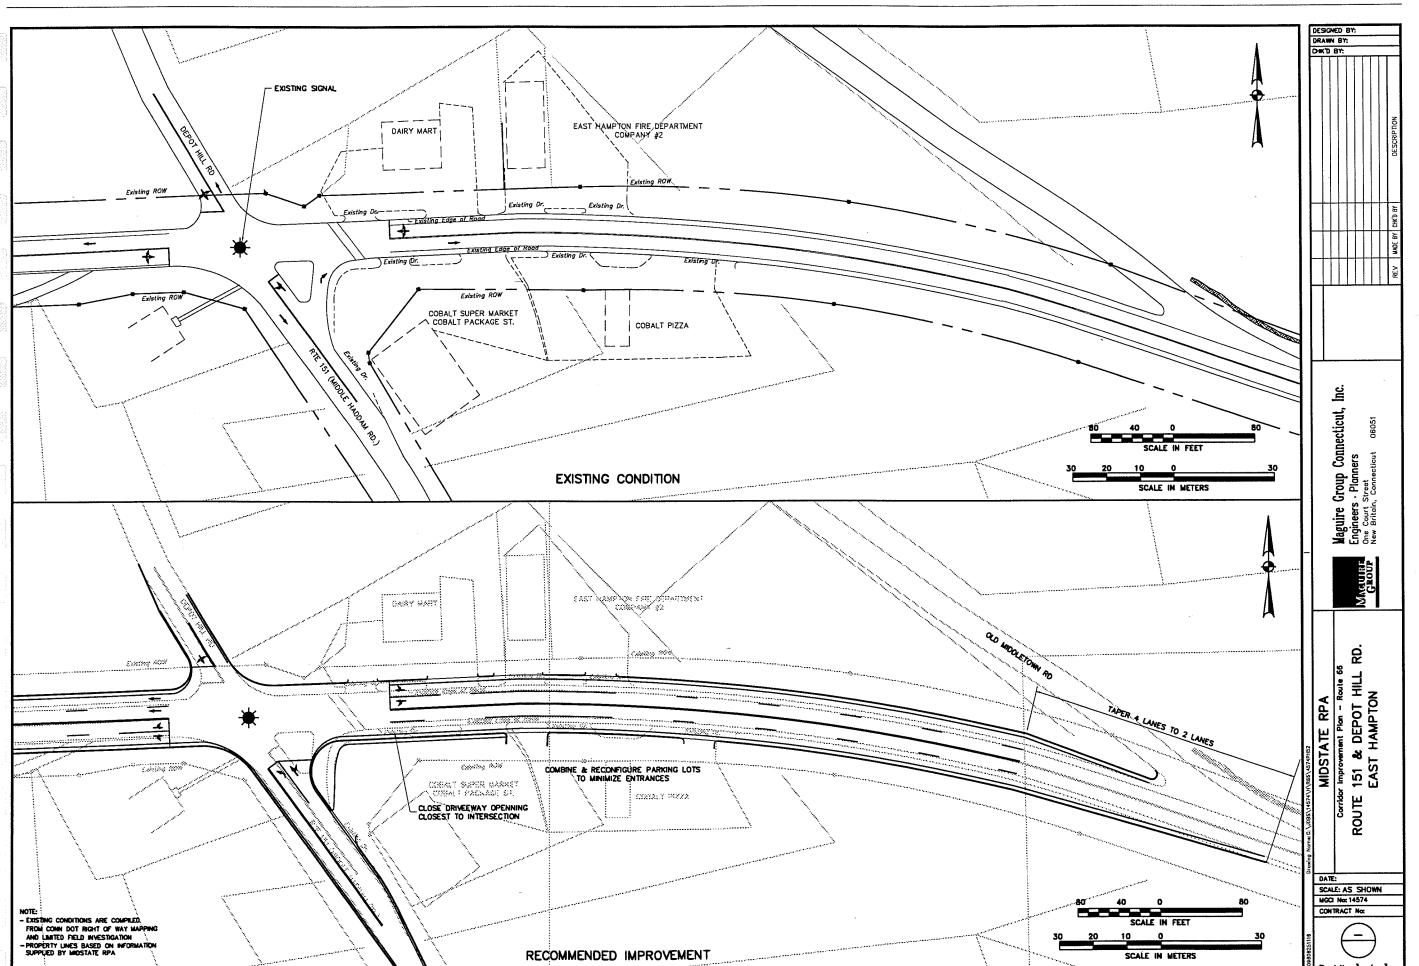


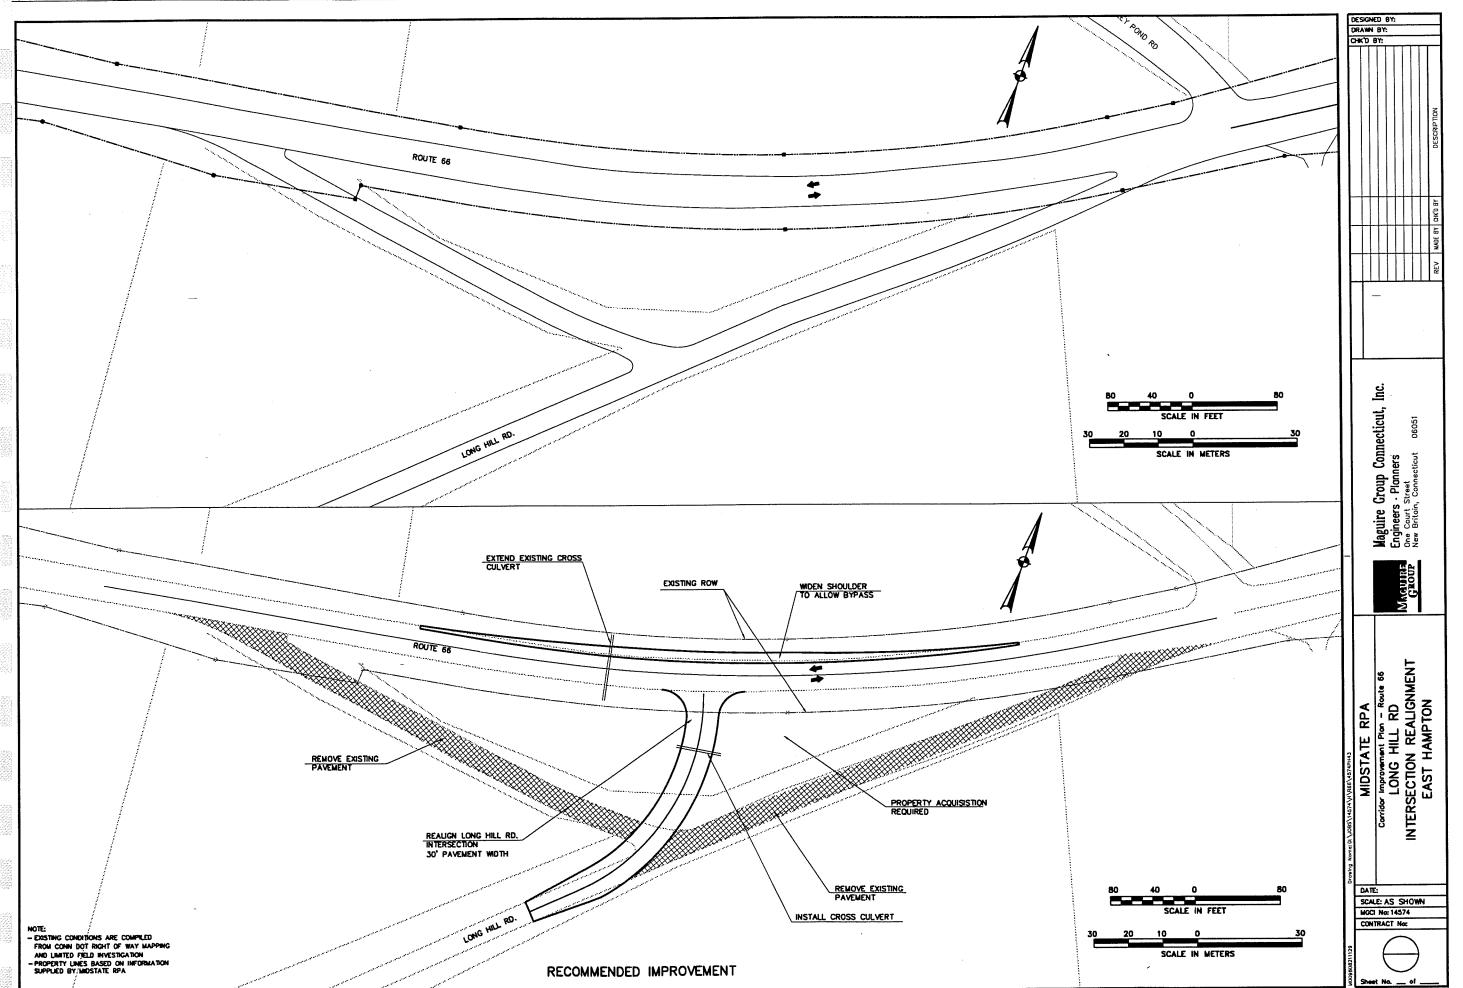


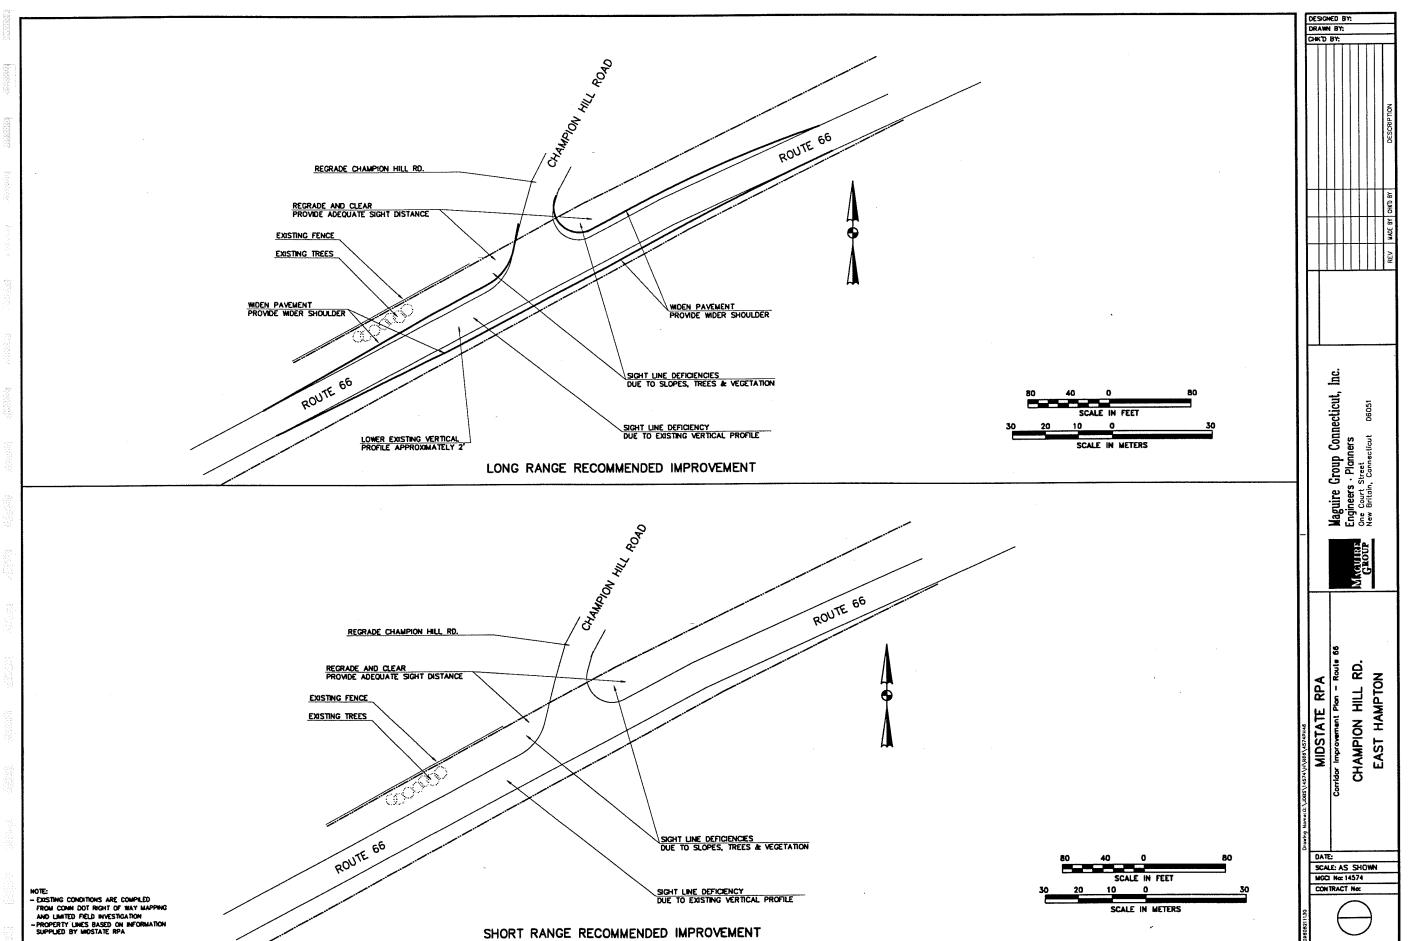

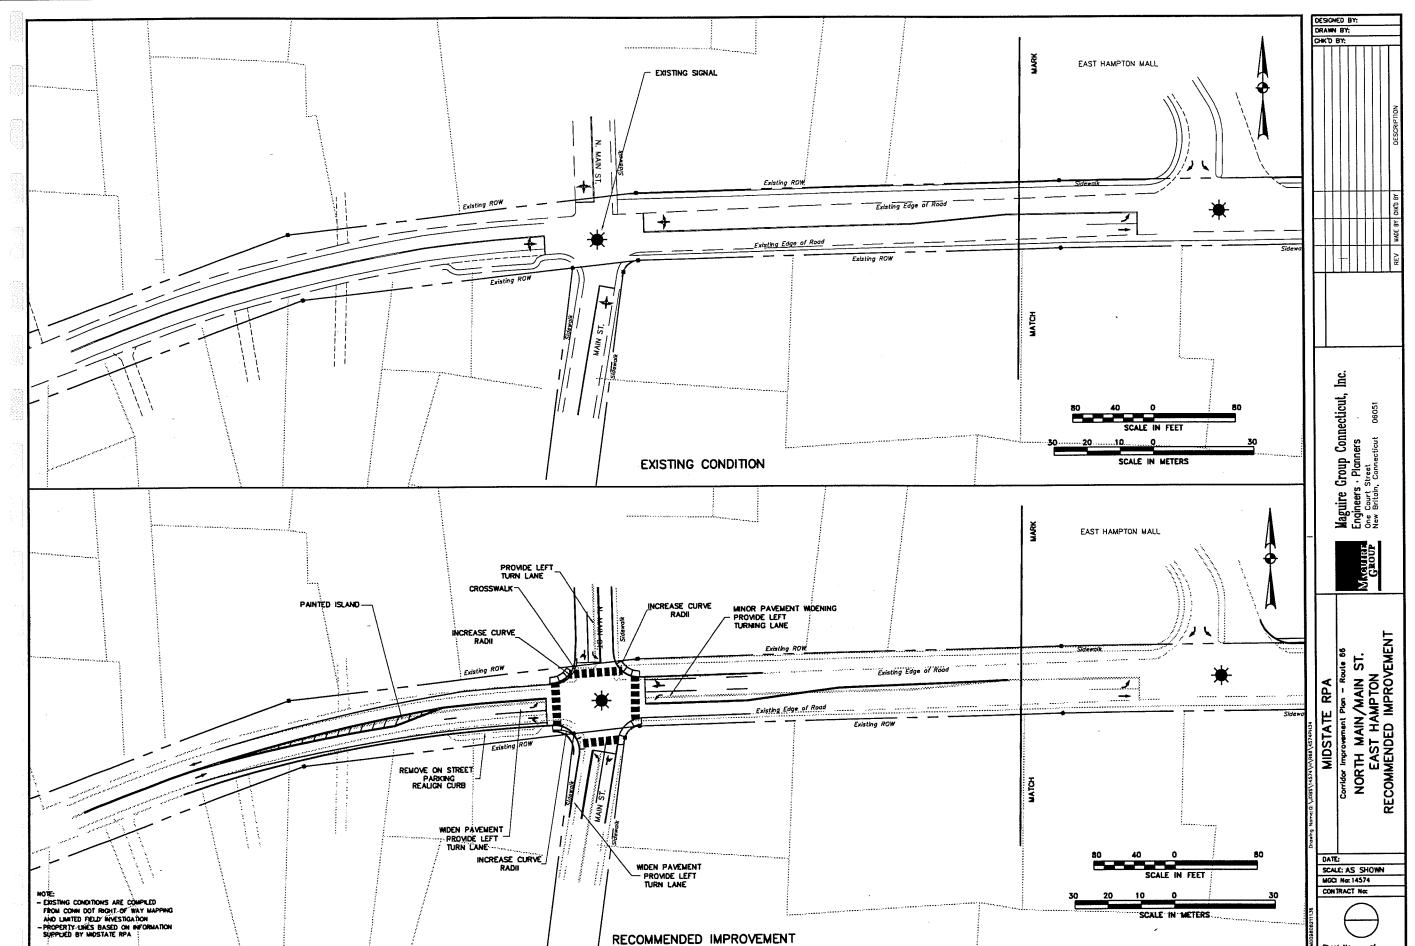

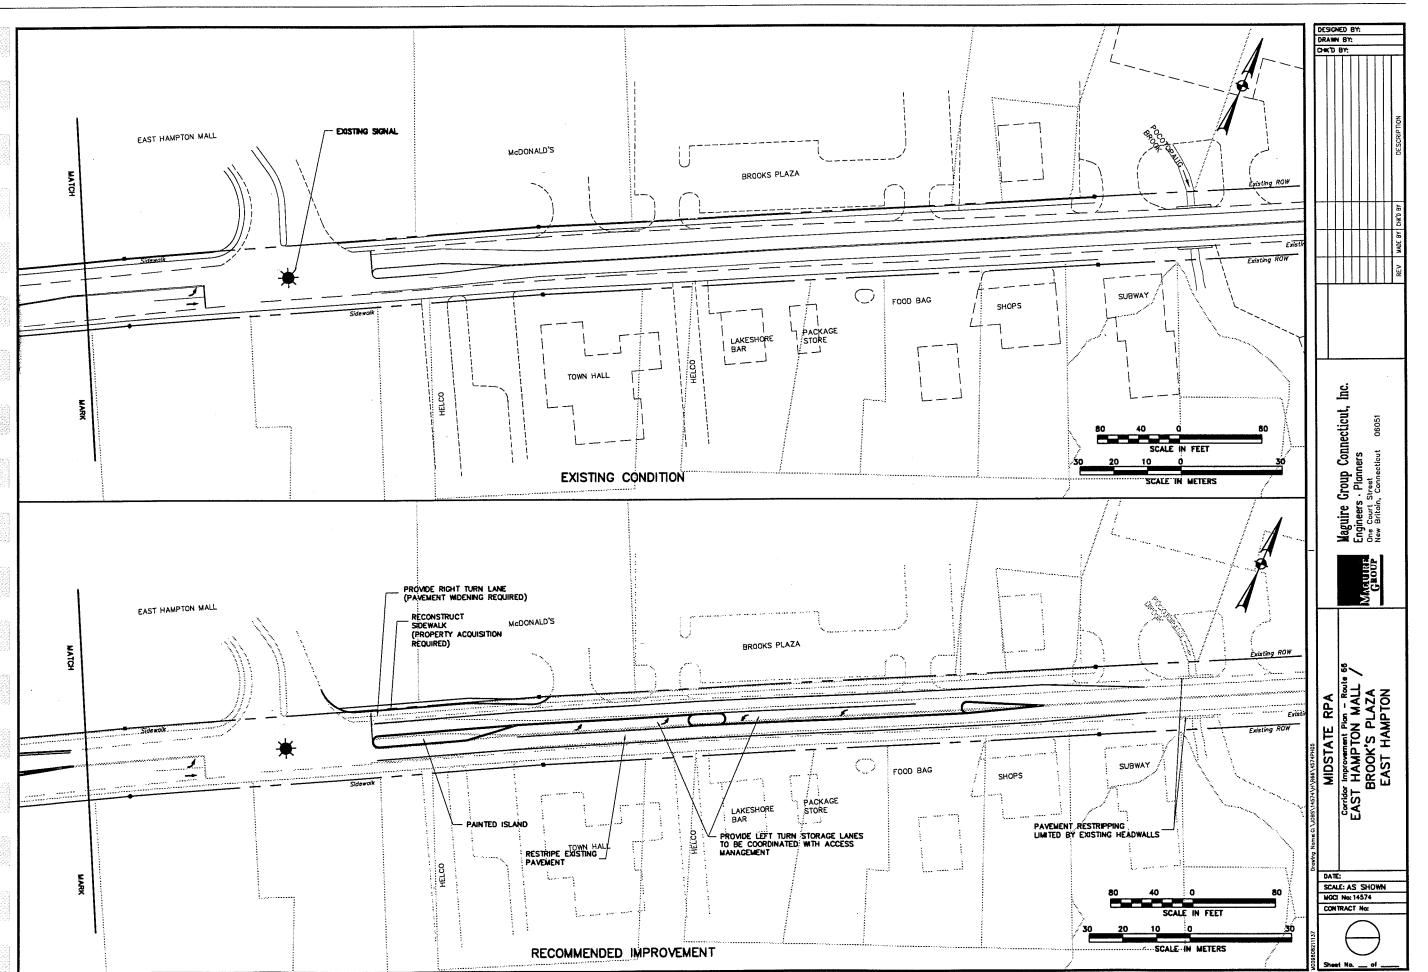

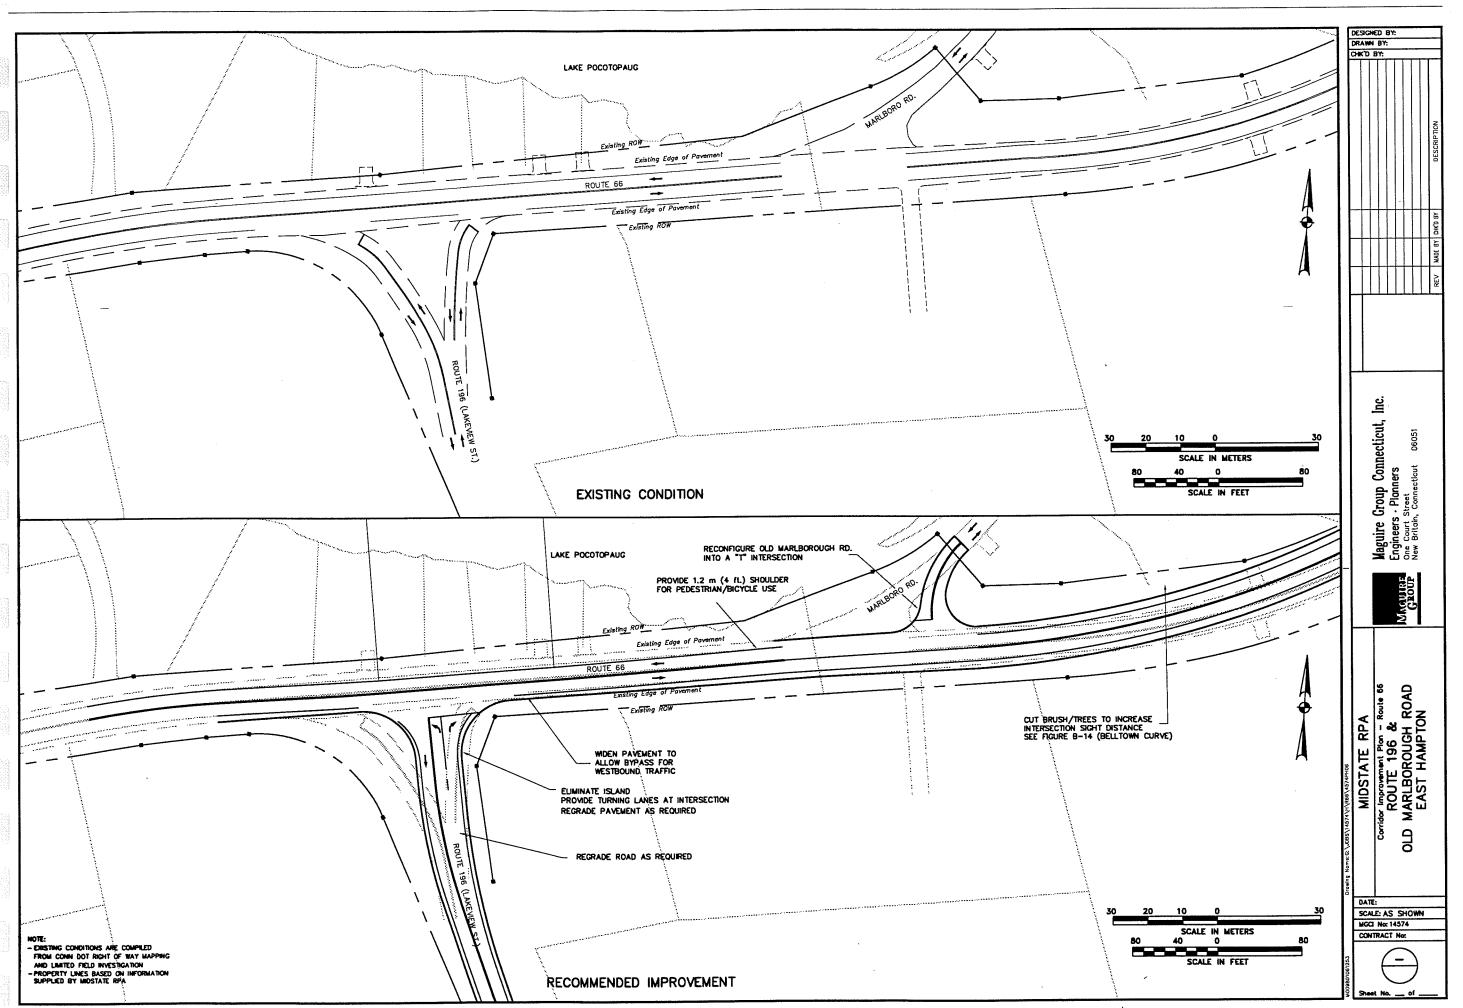

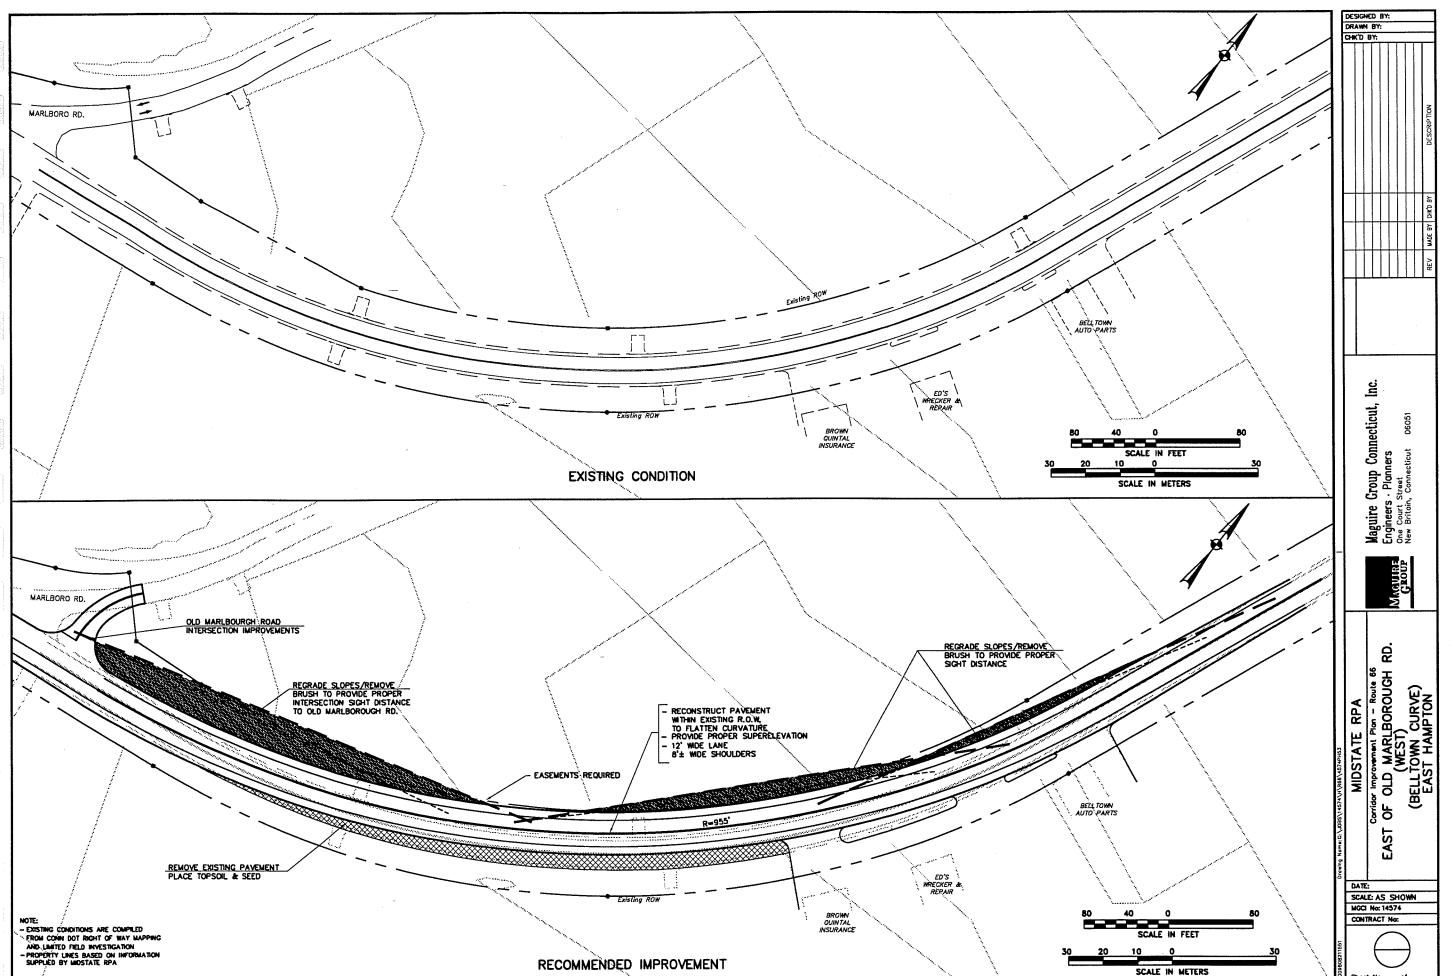

Appendix C: Congestion Management System Strategy Report

Appendix C CONGESTION MANAGEMENT SYSTEM STRATEGY REPORT

This report is a congestion management system (CMS) strategy report reflecting tasks performed on the Route 66 corridor planning study. Tasks performed were carried out in conformance with the requirements of the design of Congestion Management Systems as outlined in the June 16, 1994 Connecticut Department of Transportation report, "Congestion Management Systems of Connecticut."

A congestion management system, as defined in a 1991 FHWA workshop, is "the continuous activity of considering and implementing actions that enhance mobility and reduce congestion on designated systems or in targeted areas, appropriate to the magnitude and scope of desired system performance." A good congestion management system will strive to alleviate existing and potential congestion, enhance the mobility of people and goods, evaluate the performance of the system, identify alternative actions, and evaluate the effectiveness of those actions.

The consulting team, with assistance from an Advisory Committee consisting of ten representatives of the two involved communities, set forth a planning process that would plan for future transportation-related expenditures, coordinate future land use and development proposals with transportation improvements, and further the objectives and recommendations set forth in the *Regional Transportation Plan* of the Midstate Regional Planning Agency. This process included data collection, performance measures, needs analysis, strategy identification and a method to evaluate the effectiveness of any proposed actions.

The following sections of this Congestion Management System Strategy Report focus on problems identified along the Route 66 corridor, analysis of the congestion problems, and an evaluation of all appropriate mitigation strategies.

DATA COLLECTION AND MONITORING

Data was collected for analysis of existing and future conditions in the corridor. Data relative to modes of travel (vehicle, transit, and bicycles), natural, historical, and architectural resources, land use developments, zoning, planned or programmed roadway improvements, accident experience, travel time and delay runs, traffic control devices, ROW lines, and pedestrian activity were collected, including a.m. and p.m. peak turning movement counts at twenty intersections identified as key intersections along the corridor under study.

A SELECTION OF PROBLEM AREAS

An analysis of existing corridor conditions was performed based on available data sources, level of service analysis, field observation, and input from the Advisory Committee. Future problems and needs were also identified based on forecast traffic conditions along the corridor. Several distinct areas in the corridor were identified as particular areas of concern. These areas were evaluated in terms of safety, geometrics, pedestrian movement, land use and zoning, traffic flow level of service, access management issues and other

pertinent factors. Along Route 66, the seven areas listed below were identified as key problem areas in the corridor:

- Main Street / Downtown Area and Elmcrest Manor
- Payne Boulevard
- St. Clements Banquet Facility
- Route 151 (Middle Haddam Road) / Depot Hill Road
- North Main Street
- East Hampton Mall and Brooks Plaza area
- Route 196 and Old Marlborough Road area

These seven areas include the primary business areas in both Portland and East Hampton. Also included were multiple intersections that exhibit capacity and/or geometric problems. In the densely-developed areas of both Portland and East Hampton, intersections in close proximity were considered as one area for purposes of developing potential alternative scenarios.

Analysis of Problem

Each study area was evaluated closely and the specific causes of the problem identified. Listed below is a summary of the primary problems or potential problems identified for each area.

Main Street / Downtown Area and Elmcrest Manor:

- Pedestrian circulation and safety
- Poor levels of service on side streets
- High accident location
- Medians effect on traffic / pedestrian movement; aesthetics
- Consistency with Main Street Program objectives

Payne Boulevard:

- Safety concerns
- Alignment of Payne and Middle Haddam Roads

St. Clements Banquet Facility:

- Advance planning for access/egress to accommodate future expansion
- Potential reconfiguration of access drive to accommodate future traffic flows
- Possible need for signalization and/or signage

Route 151 (Middle Haddam Road) / Depot Hill Road:

- Lack of turning lanes impede traffic flow
- Alignment and sight distances
- Commercial property access / egress (curb cut locations)

North Main Street:

Poor level of service due to left turns

East Hampton Mall and Brooks Plaza area:

- Poor level of service
- Lack of turning lanes impede traffic flow
- Coordination with North Main signal

Route 196 and Old Marlborough Road area:

- Poor level of service
- Poor alignment and sight distances
- Frequent accidents noted

Performance Measures

Performance measures used to identify and monitor congestion are as follows:

- Level of service: describes traffic operations from free-flow to severely congested based on vehicle delay
- Average speed: the rate at which a vehicle can travel from beginning of the corridor to the end
- Vehicle delay: Time vehicle spends stopped
- High accident rates: roadway segments and intersections having 15 or more accidents during a three year analysis period as identified by ConnDOT's SLOSSS

IDENTIFICATION OF MITIGATION STRATEGIES

A full range of mitigation strategies were identified and investigated. These mitigation strategies address

broad general concepts and more detailed intersection improvements. The congestion mitigation strategies considered for solving safety, congestion, access, and other problems identified in the corridor include:

Transportation Demand Management

Transportation demand management (TDM) describes actions that are geared toward improving the efficiency of mobility by increasing the number of persons in a vehicle, or by influencing the time of or need to travel. To accomplish this type of change in travel behavior, programs such as carpools, vanpools, public and private transit, non-motorized or non-traditional mode travel, alternative work hours, and telecommuting can be implemented or encouraged. Establishing high occupancy vehicle (HOV) lanes and commuter parking lot facilities and expanding transit services can supplement these measures.

Traffic Operational Improvements

This describes actions that improve traffic flow at specific intersections and along arterial segments. Such actions might include providing additional lanes, increasing storage bay lengths for turning lanes, improving signs and pavement markings, implementing traffic calming measures, upgrading intersection geometry, coordinating signals, and improving signal timing plans.

Measures to Encourage Non-traditional Modes such as Bicycles

These measures promote modes of travel other than car or transit. Pedestrian and bicycle facilities are established to encourage travel by means of non-traditional modes.

Access Management

Techniques used to control access to land development while maintaining an adequate flow of traffic on adjacent roadways are referred to as access management. Access management is designed to balance the needs of safety, capacity, and speed. Some access management techniques include:

- Providing a minimum depth of front yard as measured from Route 66;
- Allowing only one access point per a certain frontage distance;
- Treatment of contiguous parcels as a single lot for purposes of access management;
- Setting a minimum setback for parking;
- Requiring traffic circulation plans as part of the Site Plan Review process;
- Setting a minimum intersection spacing;
- Disallowing new driveways close to intersections or crosswalks.

Land Use Planning

Local planning and zoning efforts can be directed at controlling growth within the corridor and surrounding area. These efforts will aid in managing the undeveloped land which could generate future traffic. Growth can be controlled by a variety of means, including:

- Changing zones to lower density uses;
- Designating high truck generators (e.g. industrial parks) near limited-access highway access points;
- Modifying zoning and subdivision regulations (incorporating access management regulations);
- Encouraging the state's purchase of development rights (PDR) or transfer of development rights (TDR) particularly for agriculture land; and,
- Fee simple purchase of land for open space preservation.

IDENTIFICATION OF FEASIBLE ALTERNATIVES

Roadway Improvements

Feasible improvement alternatives for the Route 66 corridor that were designed to alleviate traffic congestion and improve level of service are described below. In most cases, the improvement alternatives address roadway capacity issues by lane additions, lane widening, restriping, curve radii modifications and suggested signal warrant analyses. In some instances, improvements have been proposed as safety measures alone. In general, three categories of alternatives were considered for each problem area:

- No-build: Leave intersection as is.
- A minor improvement proposal that effects a moderate improvement in traffic flow with minimal road reconstruction or widening.
- A major improvement proposal that optimizes traffic flow. This alternative usually involves a significant amount of road reconstruction.

Route 66 & Main Street (Route 17A)/Downtown Area/Elmcrest Manor to High Street

Route 66 in the downtown area of Portland is highly congested. There are numerous intersecting driveways and side streets. For this reason, ConnDOT has already planned improvements as part of State Project 112-104 that will close some hazardous median openings and provide additional left turn lanes. Construction on this project is expected to begin by the Fall of 1998.

In addition to those improvements, this study will consider some minor additions. Alternative 1 suggests widening of pavement on the southeast corner of the intersection of Routes 66 and 17A to allow vehicles

turning right onto Route 66 to pass northbound vehicles stopped at the traffic light. This bypass would prevent a peak period backup approaching the Arrigoni Bridge.

Alternative 2 suggests improvement of the crosswalk west of the Elmcrest entrance. Special paving materials and additional signage would help to draw the attention of motorists approaching the crosswalk, thereby increasing pedestrian safety.

Elmcrest Manor and Barry Avenue are experiencing a poor level of service due to difficulty of vehicles entering the flow of traffic on Route 66. For this reason, a signal warrant analysis is suggested.

The intersection at High Street is projected to have a failing level of service in the future year (2020). Any significant improvement in level of service would require additional through lanes. Since existing conditions consist of two through lanes and one left turn lane in each direction, it was determined that adding any additional lanes would be inappropriate.

Route 66 and Portland Plaza

In the westbound direction, the intersection at Portland (Tri-town) Plaza is projected to have an undesirable level of service (E) by the year 2020. The alternative concept for this location is the addition of a right turn lane accessing Portland Plaza. In addition to improving level of service, it would offer a safety improvement by removing right turning vehicles from the flow of through traffic.

Route 66 & Sand Hill Road (West)

Vehicles entering the Route 66 traffic flow from Sand Hill Road are currently experiencing a deficient level of service; this poor level of service is projected under future conditions as well. Therefore, a signal warrant analysis is recommended at this intersection. A signal would provide a periodic break in traffic for vehicles to safely turn onto Route 66.

Route 66 Four-Lane Alternatives

The existing four-lane portion of Route 66 in this corridor ends at Sand Hill Road (East) where it narrows to two lanes without a median (one lane in each direction). Route 66 is currently operating at or over capacity from Portland through East Hampton. Public comment has indicated that the location where the roadway narrows from four lanes to two is an area of traffic flow problems and accidents. Additionally, in order to increase capacity throughout the extent of this portion of the Route 66 corridor, additional lanes are required in each direction. The concept of a four-lane road was initially not included in the alternatives presented to the public during the Public Information Meeting in November 1997. The strategy was to try to alleviate congestion and safety problems without changing the rural and historic character of the area. However, the message conveyed by members of the public as well as further consideration by the advisory committee has resulted in the conception of several four-lane alternatives. These conceptual alternatives were then presented to the AC and are included in the following discussion. Their purpose is to address concerns expressed that anything short of four lanes is inadequate for the relief of corridor congestion problems.

The alternative required for correcting the problem of capacity throughout this Route 66 corridor, based on available data, would be to extend the four lane section from Sand Hill Road in Portland all the way to the East Hampton/Marlborough town line. This possibility was not proposed in the alternatives described below because of several important factors. Route 66 passes through part of the historic area of East Hampton town center. Historic buildings, as well as many other buildings along the edge of the roadway, would be impacted adversely by construction of this magnitude. This road also passes close to the shore of Lake Pocotopaug. According to the traffic data reported in previous technical memoranda, the time delay during peak periods in the area is not significant enough to justify the environmental impact and cost to the aesthetic quality and properties of this section of East Hampton. Additionally, comments of residents of East Hampton have focused on the problem of excess speed throughout this stretch of Route 66 rather than on congestion. Therefore, for the portion of Route 66 east of Route 16, the alternatives discussed have involved only intersection improvements.

In addition to providing increased capacity for vehicles, one of the goals of this corridor study is to consider opportunities for alternative modes of transportation such as bicycle and pedestrian. Route 66 is shown on the *Connecticut Bicycle Map*, produced by ConnDOT in 1992, as a cross state bicycle route. Therefore, any alternatives for major reconstruction of the roadway should include provisions for these facilities. The cross-sections referred to in the alternative descriptions below include 10-foot shoulders and do not show bike lanes or sidewalks. Bicycle/pedestrian facilities would be designed according to The American Association of State Highway and Transportation Officials (AASHTO) *Guide for Development of New Bicycle Facilities*. These facilities should be considered in discussions as this study progresses, and included in future plans, where feasible. Additional options for alternative modes of transportation are discussed in subsequent sections of this report.

Alternative 1 involves reconstruction of Route 66 to provide four lanes without a median extending from the current four-lane segment at Sand Hill Road (East) to the junction of Route 16 in East Hampton. The exclusion of a median reduces right-of-way impact, but does not provide a separation between the two opposing directions of traffic. It does, however, increase roadway capacity in the area of high volume.

Alternative 2 includes the same length of road as in Alternative 1, but provides a median from Sand Hill Road (East), continuing from the currently existing median, to west of the area know locally as "the ledges", at which point the median would be tapered and the four-lane Alternative 1 continues. At "the ledges" there is a lack of road shoulders due to rock outcrops that are very close to the edge of the pavement. The median affords a more gradual transition in roadway expectation in the higher speed stretch while lessening requirements for rock removal and/or fill at "the ledges" or incurring additional impact in the developed area of Cobalt (Route 151). A left turn lane could be incorporated into the median where required.

Alternative 3 involves the same length of roadway as Alternatives 1 and 2, but provides slightly less width of pavement than Alternative 2. It includes a central two-way left turn lane that could be coordinated with access management.

Alternative 1A and 2A present a more moderate four-lane design in that they do not carry through to Route 16, but are tapered back to two lanes just east of the Riverdale Motel. 1A does not have a median and is the shorter of the two. 2A includes a median and provides a longer taper for increased safety. The termination location of the four-lane road could be varied. For example, the tapering to two lanes could

occur closer to the Middle Haddam/Payne Boulevard intersection. These shortened alternatives are an attempt to lessen the impact of a four-lane widening by avoiding wetlands near Riverdale; reducing requirements for rock removal (thereby decreasing costs and environmental impact) at "the ledges"; minimizing stream encroachment and culvert reconstruction at Great Hill Pond Brook; and avoiding changes to the character of the Cobalt area. This stretch of four lanes along with the moderate improvements at Route 151 (to be discussed in forthcoming sections) would provide a means of relieving key congestion areas while incurring less impact.

The various four-lane alternatives may be implemented in increments. The Portland section can be targeted for shorter term improvement whereas the East Hampton section may be delayed until evaluations of congestion are made in future years.

Route 66 & Middle Haddam Road/Payne Blvd

Due to the absence of defined turning lanes at this location, there have been numerous accidents caused by a through vehicle colliding with a vehicle waiting to turn left onto Middle Haddam Road. Poor sight line is also a problem for vehicles entering Route 66 from Middle Haddam Road due to the acute angle of Middle Haddam Road with Route 66. These safety issues are of great concern to area residents. Additionally, residents have vehemently expressed their distress over difficulties experienced turning onto Route 66 from Payne Boulevard due to the steady stream of fast-moving traffic. These issues have been considered in the following alternatives.

Alternative 1 suggests the realignment of Middle Haddam Road to create a perpendicular intersection with Route 66 and alignment with Payne Boulevard. This geometry is preferred by AASHTO in order to provide adequate sight distance. The pavement would also be widened to provide exclusive left turn lanes in both directions. Any addition of lanes at this location should include provisions for a possible four-lane widening throughout this part of Route 66. The alternatives for four lanes, as described above, including long-term needs for acquisition of right-of-way, should be factored into the improvement design plans.

Alternative 2 also includes realignment of Middle Haddam Road, but would entail only a minor widening of pavement eastbound to allow through traffic to bypass vehicles turning left onto Middle Haddam Road.

Alternative 3 suggests a signal warrant study. This is an unsignalized intersection that is currently and projected to be operating at a poor level of service due to the difficulty vehicles experience entering Route 66 traffic from Middle Haddam Road and Payne Blvd. For this reason, it is suggested that this intersection undergo a signal warrant analysis. A new traffic signal could be incorporated as an additional element into either of the above concepts.

Route 66 & St. Clements Banquet Facility

St. Clements is located in the area known as "the ledges" in Portland. In view of the current and planned expansions at the St. Clements Banquet Facility, the following alternatives are suggested. Alternative 1 recommends a widening of the pavement in the westbound direction to allow through vehicles to bypass a vehicle turning left into the St. Clements entrance. This will require some rock removal. There is already a similar plan on file with the Town of Portland that was submitted by St. Clements and approved by

ConnDOT. Alternative 2 involves the clearing of sight line for safe exit from the St. Clements drive. Brush removal and sign relocation is recommended.

In addition, if future expansion at St. Clements results in higher traffic volumes at this facility, some form of traffic control may be required. Signalization or police traffic control may be necessary to handle events, particularly when they occur at times of peak traffic volume on Route 66. The addition of turning lanes may also be warranted. These requirements should be considered during future site reviews.

Route 66 and Oakum Dock Road

The alternative concept for this location is removal of vegetation to improve sight line.

Route 66 and Route 151 (Middle Haddam Road)/Depot Hill Road

This intersection will experience a failing level of service by 2020. Currently, comments by members of the public and the AC, as well as field observation, have indicated that this intersection is presently congested during peak period. For this reason, the alternative concepts were designed so that they could represent short-term and long-term improvements. Alternative 1 recommends adding a through lane eastbound and westbound and adding left turn lanes northbound and southbound. The island on RT 151 would be removed. Access from Old Depot Hill Road to Route 66 should be closed since this intersection is too close to the Route 151/Depot Hill Road intersection, and vehicles could easily use Oakum Dock Road as an alternate access point to Route 66. Also, curb cut consolidation in this area would better channelize turning movements. The commercial curb cut closest to the intersection should be closed and access to the supermarket could be combined with the pizza restaurant. Alternative 1 may be considered a short or long-term improvement. If a four-lane widening throughout this area is planned, this alternative would accommodate the four lanes without the need for later reconstruction. In this way it would act as a short-term plan for the purpose of determining whether or not congestion can be relieved with only the intersection improvement. The design would also serve for the long term in the event of a four-lane widening of Route 66.

Alternative 2 represents a more moderate approach that could be used as a short-term solution. Pavement on Route 66 eastbound could be widened enough to allow through vehicles to bypass vehicles that are turning right to Route 151 or left to Depot Hill Road. Pavement on Depot Hill Road could be widened to allow vehicles to turn right while through/left vehicles are waiting. As in Alternative 1, a left turn lane is added from Route 151, but the island would remain. Curb cut consolidation would be as described above. If this alternative does not accommodate future volume, Alternative 1 could then be the long-term solution. The design of Alternative 2 is compatible with shortened four-lane alternatives 1A and 2A.

Route 66 and Keighley Pond Road/Coughlin Road

Due to the difficulty of vehicles entering Route 66 from Keighley Pond and Coughlin, this intersection currently operates, and will operate in the future, at a poor level of service. For this reason, a signal warrant study is suggested.

Route 66 and Long Hill Road

The acute angle of this intersection has caused a safety problem as identified by members of the AC. The intersection would operate more safely if Long Hill Road was realigned to be perpendicular with Route 66. For this purpose, the Town of East Hampton is considering acquiring the piece of land between the current "Y" split at the end of Long Hill Road.

Route 66 & Champion Hill Road

Vehicles entering or exiting Champion Hill and vehicles traveling past this intersection on Route 66 experience sight line deficiencies. The embankment at the end of Champion Hill and a rise in the vertical grade of Route 66 in this area are the major factors. Alternative 1 suggests not only removal of vegetation and regrading of the bank that obstructs sight line on Champion Hill, but also a regrading of Route 66 itself to lower the profile of the road, thereby providing approaching vehicles a longer sight distance to the intersection. A regrading would also involve a slight widening of pavement on the shoulders. Alternative 2 suggests only a regrade of the bank on Champion Hill and clearing of vegetation as a lower impact or short-term solution.

Route 66 & North Maple Street

This intersection is projected to be operating at a poor level of service in 2020. An adjustment in traffic signal cycle length is suggested.

Route 66 & North Main Street/Main Street

Currently and in the future year (2020) this intersection operates at a failing level of service. It is also the site of a high rate of accidents. The major improvement, Alternative 1, suggests the addition of a left turn lane eastbound, and left and right turn lanes westbound (totaling three lanes). It also includes the addition of right turn lanes northbound and southbound. An increase in curve radii and the elimination of a parking bump-out near the southwest corner is recommended. Any disturbed sidewalks should be replaced.

Alternative 2 outlines a ConnDOT Preliminary Concept currently under consideration for implementation in the short term. It entails addition of left turn lanes eastbound and westbound (requiring some widening), increase of curve radii, reconstruction of sidewalks and addition of a pedestrian crosswalk.

Route 66 & East Hampton Mall/Brooks Plaza Area

As the most commercial stretch of Route 66 in East Hampton, there is a concentration of businesses and town government offices that draw numerous vehicles and pedestrians. This is an area of a higher than average frequency of accidents involving rear-end and turning movement collisions. As mentioned previously, this area is in need of access management measures. Following are additional improvement options.

Alternative 1 provides a right turn lane westbound at the East Hampton Mall. This would remove turning vehicles from the flow of through traffic. Pavement widening would be necessary as well as reconstruction of the sidewalk for which a minor amount of additional right-of-way may be required. To increase pedestrian safety, the pedestrian signal at East Hampton Mall should include all signal phases. Currently

only through traffic on Route 66 is stopped for the pedestrian signal. This adjustment should not significantly affect the level of service for vehicles at this signal. Also included in this alternative is the creation of a two-way left turn lane for eastbound and westbound vehicles between McDonald's and the Pocotopaug Brook culvert. Since the pavement is wide enough to accommodate the turning lane in this area, only a restriping is required. However, turning areas must be coordinated with clearly defined access drives to all area businesses to ensure a safe and efficient system.

Alternative 2 addresses the current and future year failing level of service experienced by vehicles exiting Brooks Plaza. A signal warrant analysis is suggested.

Route 66 & Route 196 (Lakeview Street)/Old Marlborough Road (West)

The Route 196 and Old Marlborough Road intersections both present safety problems due to poor geometry and line of sight. Route 196 connects with Route 66 in a "Y" configuration, and a steep grade at the intersection also contributes to the limited sight distance. Old Marlborough Road is situated at a sharp horizontal angle to Route 66. These geometrics contribute to reduced sight distance. Alternative 1 suggests a redesign of Route 196 to be perpendicular with Route 66, with removal of the island situated between the easterly and westerly branches, and regrading of the slope. This will improve sight line and situate the left turn lane at a safer distance from the curve just west of the intersection. The quality of sight line from Old Marlborough Road (West) would also benefit from a perpendicular realignment and removal of any brush obstructing views.

Alternative 2 suggests another solution for Old Marlborough Road (West). The current western intersection could be closed and moved to another location eastward where there is improved line of sight due to a straighter stretch of roadway. This intersection is currently located on a curve and is considered by residents to be unsafe. The closing of this section of road may also benefit the shore of Lake Pocotopaug, along which the Old Marlborough Road (West) intersection is situated, by reducing road surface runoff and offering opportunities for shoreline enhancement. Currently, travel through this intersection is made more difficult in the summer when vehicles park on the road to access the lake shore, according to local residents. There are presently some undeveloped parcels east of the intersection, approximately midway between the east and west intersections of Old Marlborough Road, that could provide a new location for the intersection. The feasibility of a right-of-way in this area has yet to be determined.

Alternative 3 suggests consideration of a signal warrant analysis for Route 196 due to failing level of service for the northbound movement. In conjunction, a signal should also be considered for Old Marlborough Road as a safety measure. These signals could operate in coordination.

Route 66 and Lake Road

The acute angle of Lake Road to Route 66 may decrease the safety of this intersection. A realignment to provide a perpendicular intersection is suggested.

Traffic Operational Improvements

Signal coordination is also important in optimizing traffic flow along segments that contain more than one

signalized intersection. Coordination of signals is possible when there is minimal distance between the signals and side street traffic volumes are low. Currently, two sets of signals are coordinated. In Portland, they include High Street, Airline Avenue, Portland Plaza, and Grove Street. In East Hampton, they include North Main Street and East Hampton Mall. If the recommended signal warrant analyses result in recommendations for additional signals, then there are opportunities to further coordinate signals. Coordination could be accomplished for the following sets of signals:

- Portland Main Street and Elmcrest Manor
- Barry Avenue and the High/Airline/Portland Plaza/Grove group
- Sand Hill Road (West) and RT 17 (Gospel Lane)
- East Hampton Mall/North Main and Brooks Plaza)
- Route 196 and Old Marlborough Road

The other sets of intersections along the corridor are too far apart for coordination, and excessive delays on the intersecting collectors would occur if these signals were coordinated.

Access Management

Areas of the corridor in Portland in which access management strategies can be employed are the vicinity of the intersection of Route 66/17A. There are several businesses that could share curb cuts without significantly affecting their businesses. Along Route 66 from Sand Hill Road to the East Hampton town line area there are opportunities to minimize access points to Route 66 if the town plans to encourage growth of business in this area.

In East Hampton, the intersection of Route 66/151 could benefit from access management measures. There are opportunities for curb cut closures that would facilitate traffic flow along the main road. The stretch of Route 66 from the East Hampton Mall to Food Bag requires access management measures. This area contains dense commercial development and is the location of a higher than average accident rate. This may be an appropriate area in which to establish a specific overlay zone. Along Route 66 from Old Marlborough Road to the Marlborough town line would also greatly benefit from access management strategies. There are a great many undeveloped parcels in this area that are zoned commercial or design development. As these parcels develop, access would be specifically considered as an important part of the Site Plan Review process.

Land Use Planning

Techniques that could manage growth in the residentially-zoned sections of both Portland and East Hampton are:

- Purchase of land for preservation of open space
- Purchase of development rights
- Transfer of development rights

• Increase of minimum lot size

Travel Demand Management

Areas wherein travel demand strategies can be employed are described below:

- Provide aggressive marketing of mass transit opportunities by Middletown Area Transit and the Ridesharing Company (who publishes the *Commuter Register*) to reduce the percentage of single occupancy vehicles.
- Establish an active program targeting the larger businesses in the area to encourage such businesses to encourage ridesharing and offer staggered working hours.

EVALUATION OF ALTERNATIVES

An evaluation of the alternatives were performed for the various aspects of the Route 66 corridor improvements. This step in the process allows an informed decision to be made to select alternatives which will move forward to design. The alternatives selected should be implementable, cost effective, and responsible to environmental and cultural resources in the corridor. The following quantitative and non-quantitative elements were used to evaluate the alternatives:

- 1) Cost: The estimated cost of design and construction in 1998 dollars. The cost does not include acquisition costs for property takings or wetland mitigation.
- 2) Level of Service (LOS): The future year (2020) level of service that would be realized if the improvement was implemented. It is based on the projected future year volumes detailed in Technical Memorandum 2. The level of service ranges from A-F, with A being the best and F the worst congestion scenarios. In some cases a * is noted where level of service is worse than F.
- 3) Traffic Safety: The anticipated change in vehicular and pedestrian safety as a result of the improvement. Among the consideration for safety are speed, intersection geometry, lighting.
- 4) Right of Way (ROW) Impacts: The amount of land outside the ConnDOT right of way, that will be encroached upon as a result of the improvement alternative. The cost for compensating the land owner has not been included in the cost section.
- 5) Historical Resource Impacts: The potential impact to historical resources resulting from the improvement alternative.
- 6) Aesthetic Impacts: The impact of the road on the scenic beauty of the area. The beauty can be attributed to both natural and man-made (historical) resources.
- 7) Environmental Impacts: The potential for the project to have a negative effect on natural resources

(wetland, forests, etc.).

All seven evaluating criteria are important. For the purposes of this study, level of service and traffic safety are the primary considerations; however, most of the recommended improvement alternatives summarized in the following section avoid sensitive historic and natural resource areas.

The analysis of alternatives is discussed in detail below. A summary of the evaluation of the recommended physical and operational improvements is presented in Table 1. Comments and suggestions from the Route 66 Advisory Committee, ConnDOT, and the general public were used in establishing the alternatives and in the evaluation of these alternatives.

Route 66 & Main Street (Route 17A)/Downtown Area/Elmcrest Manor

Route 66 in the downtown area of Portland is congested at peak hours. There are numerous intersecting driveways and side streets. For this reason, ConnDOT has already planned improvements as part of State Project 112-104 that will close some hazardous median openings and provide additional left turn lanes. In addition to those improvements, this study considers some minor additions to the proposed ConnDOT plans.

Alternative 1 suggests widening of pavement on the southeast corner of the intersection of Routes 66 and 17A to allow vehicles turning right onto Route 66 to pass northbound vehicles stopped at the traffic light. This bypass would prevent a peak period backup approaching the Arrigoni Bridge. The cost of approximately \$20,000 is relatively minor, and no additional right-of-way is required. Relocation of at least two utility poles would be necessary. There are no impacts on resources, and businesses in this area are currently vacant. The project is ranked as the highest priority in Portland due the likelihood that it can easily be implemented as part of the scheduled State Project 112-104.

Alternative 2 suggests improvement of the crosswalk west of the Elmcrest Manor entrance. Special paving materials and additional signage would help to draw the attention of motorists approaching the crosswalk, thereby increasing pedestrian safety. Additional issues discussed below must be resolved before improvements to this crosswalk are planned.

Elmcrest Manor and Barry Avenue are experiencing a poor level of service due to the difficulty motorists experience entering the flow of traffic on Route 66. For this reason, a signal warrant analysis is suggested. ConnDOT previously approved a signal at the Elmcrest entrance, along with a relocation of the mid-block crosswalk, discussed above, to the Elmcrest entrance so that it may be controlled by a pedestrian signal. A review of the previous signal warrant study is now required due to recent changes in this area, such as, median opening alterations performed after the construction of Burger King and Brooks Pharmacy. Access management must also be considered, as will be presented in the forthcoming Access Management Plan for Portland. The review should also be coordinated with the signal warrant study at Barry Avenue.

High Street / Airline Avenue

The intersection at High Street is projected to have a failing level of service in the future year (2020). Any significant improvement in level of service would require additional through lanes. Since existing conditions

Alternative Concepts	Cost Estimate ¹	Level of Service (2020)	Traffic Safety	ROW Impacts (sf) Preliminary Estimate	Historical Resource Impacts	Aesthetic Impacts	Environmental Impacts	Constructibility	Priority Ranking
Route 66 & Route 17A Alternative Concept #1	\$20,000	not analyzed	relieves peak hour backups/accidents	relocation of utility poles required	none	none	none	minor	Highest
Route 66 & Route 17A No Build	\$0	not analyzed	continued backups/congestion	0	none	none	none	N/A	
Route 66 & Portland Plaza Alternative Concept #1	\$32,000	C westbound	slight improvement	0	none	none	none	minor	Lowest
Route 66 & Portland Plaza No Build	\$0	E westbound	no improvement	0	none	none	none	N/A	
Route 66 4-Lane without median - Alternative Concept #1: Sand Hill Rd.(east) to Route 16	\$16-20+ million 4	not analyzed as a whole	relief of peak hour traffic backups, accidents & difficulty entering traffic	10,000 5	minimal-moderate	major-significantly changes character of area	wetland/stream disturbance, ledge removal, tree removal, fill	major	Low
Route 66 4-Lane with median - Alternative Concept #2: Sand Hill Rd.(east) to Route 16	\$16-20+ million 4	not analyzed as a whole	relief of peak hour traffic backups, accidents & difficulty entering traffic	44,000 5	minimal-moderate	major-significantly changes character of area	wetland/stream disturbance, ledge removal, tree removal, fill	major	Low
Route 66 4-Lane without median -Alternative Concept #1A: Sand Hill Rd.(east) to East of Riverdale	\$3.3 million 4	not analyzed as a whole	relief of peak hour traffic backups, accidents & difficulty entering traffic	6,500 5	none	moderate-reduces area subject to significant change	removal of vegetation	major	
Route 66 4-Lane with median - Alternative Concept #2A: Sand Hill Rd.(east) to East of Riverdale	\$4.06 million 4	not analyzed as a whole	relief of peak hour traffic backups, accidents & difficulty entering traffic	20,500 5	none	moderate-reduces area subject to significant change	removal of vegetation	major	High (if intersection imps. not effective)
Route 66 4-Lane Alternatives No Build	\$cost of spot improvements	not analyzed as a whole	accidents, congestion & difficulty entering traffic	0	none	none	none	N/A	· ·
Route 66 & Payne Road / Middle Haddam Road Alternative Concept #1 (without signal)	\$330,000 2	no change	improves safety of turning movements	4,000	none	minimal	minor	major	High
Route 66 & Payne Road / Middle Haddam Road Alternative Concept #1 (with signal)	\$430,000 2	* eastbound/westbound B from side streets	improves safety of turning movements	4,000	none	minimal	minor	major	
Route 66 & Payne Road / Middle Haddam Road Alternative Concept #1 - With 4-Lane Alternatives (with signal)	see 4-lane Alternatives	B intersection	improves safety of turning movements	see 4-Lane → Alternatives	→	→	→	→	→
Route 66 & Payne Road / Middle Haddam Road Alternative Concept #2 (without signal)	\$88,000 2	no change	improves safety of turning movements	4,000	none	minimal	minor	major	
Route 66 & Payne Road / Middle Haddam Road Alternative Concept #2 (with signal)	\$188,000 2	* eastbound/westbound B from side streets	improves safety of turning movements	4,000	none	none	minor	moderate	
Route 66 & Payne Road / Middle Haddam Road No Build	\$0	A eastbound/westbound F from side streets	accident location/ unsafe turning movements	0	none	none	none	N/A	

Alternative Concepts	Cost Estimate ¹	Level of Service (2020)	Traffic Safety	ROW Impacts (sf) Preliminary Estimate	Historical Resource Impacts	Aesthetic Impacts	Environmental Impacts	Constructibility	Priority Rankin
Route 66 & St. Clement's Banquet Facility Alternative Concept #1	\$40,000	not analyzed	through traffic able to pass turning vehicles	0	none	none	outcrop removal	minor	High
Route 66 & St. Clement's Banquet Facility No Build	\$0	not analyzed	turning vehicles block traffic flow	0	none	none	none	N/A	
Route 66 & Route 151 / Depot Hill Road Alternative Concept #1 Modified with addition of left turn lanes	\$1,525,000 4 \$1,585,000 4	B intersection B intersection	slight improvement significant improvement	0	minimal moderate	minimal moderate	reconstruction of culvert; fill/retaining wall	major	High
Route 66 & Route 151 / Depot Hill Road Alternative Concept #2	\$26,000	* intersection	slight improvement	0	minimal	none	minor	minor	
Route 66 & Route 151 / Depot-Hill Road No Build	\$0	* intersection	no improvement	0	none	none	none	N/A	
Route 66 & Long Hill Road Alternative Concept #1 With slight widening on Route 66	\$165,000 2	N/A	improved geometrics	town acquisition	none	none	possible wetland/drainage disturbance, culvert construction	moderate	High
Route 66 & Long Hill Road No Build	\$0	N/A	acute angle cause safety problem	0	none	none	none	none	
Route 66 & Champion Hill Road Alternative #1	\$320,000	no change likely	improve sight line all directions	potential minor impact for easements	none	minimal, possible loss of stone wall & fence	possible drainage alteration & loss of trees or limbs	major	Low (Short term)
Route 66 & Champion Hill Road Alternative #2	\$cost of regrade & brush removal	no change likely	improve sight line	0	none	minimal	possible drainage alteration	minor	High (Short term)
Route 66 & Champion Hill Road No Build	\$minimal cost for brush cutting	A eastbound E southbound	accident location/ poor sight line	0	none	none	none	N/A	·
Route 66 & North Main Street / Main Street	\$550,0001	В	reduce accident potential	potential minor impact	minimal	minimal	none	major	Moderate
Route 66 & North Main Street / Main Street Alternative Concept #2	\$531,000³	C east & west E north & Below F south	reduce accident potential	0	none	none	none	major	High
Route 66 & North Main Street / Main Street Alternative No Build	\$0	Below F	no improvement	0	none	none	none	N/A	
Route 66 & East Hampton Mall/McDonald's / Brook's Plaza Alternative Concept #1	\$21,000	С	improvement	potential minor impact	none	none	none	minor	Moderate
Route 66 & East Hampton Mall/McDonald's / Brook's Plaza No Build	\$0	Below F to F	no improvement	0	none	none	none	N/A	
Route 66 & Route 196 / Old Marlborough Road Alternative Concept #1 With widened pavement for bypass	\$240,000	no change	improve sight line/ reduce accident potential	0	none	none	temporary construction impacts, possible drainage alteration	moderate	High
Route 66 & Route 196 / Old Marlborough Road No Build	\$0	F northbound	dangerous sight line	0	none	none	none	N/A	
Route 66 & Lake Road Alternative Concept #1	\$75,000 2	no change likely	improve sight line	600	none	none	none	moderate	Low
Route 66 & Lake Road No Build	\$0	C southbound	poor sight line	0	none	none	none	N/A	

3

- 1) These cost estimates are based upon 1998 dollars, and do not include costs associated with additional right of way that may have to be acquired by the State of Connecticut Department of Transportation due to the alternative concept improvements.
- 2) These cost estimates are based upon 1998 dollars, and do not include costs associated with additional right of way that may have to be acquired by the affected municipality due to the alternative concept improvements.
- 3) ConnDOT Preliminary Concept Cost Estimate
- 4) This cost estimate does not include: wetland mitigation, utilities, retaining walls, or realignment
- 5) These areas indicate approximate ROW to be acquired to construct widened roadway. Additional acquisitions may be required to establish a uniform ROW width. Easements and rights may also be required for sloping or drainage.
- Those intersections which require new traffic equipment (signals, loop detectors, etc.) due to the alternative concept improvements or other factors (inadequate timing and coordination, etc.) include the costs associated with these traffic items.

6) Level of Service (LOS) Scale

- A < 5 second vehicle delay
- B 5-15 second vehicle delay
- C 15-25 second vehicle delay
- D 25-40 second vehicle delay
- E 40-60 seconds vehicle delay (limit of acceptable delay)
- F >60 seconds vehicle delay (unacceptable)
- * Below F (unacceptable)
- N/A Not Applicable Location was not analyzed for LOS

consist of 2 through lanes and 1 left turn lane in each direction, it was determined that adding any additional lanes would be detrimental to the character of the area.

Another possible solution to improve level of service through this intersection is the realignment of Airline Avenue to be opposite High Street and perpendicular to Route 66. An analysis was made to investigate the possibility that by combining the intersections and eliminating the Airline traffic light, a decrease in cycle time for the signal, and therefore increase in level of service, could be achieved. The results of the level of service analysis using variations in signal phasing, however, show that even with a realignment, High Street would continue to fail and level of service at Airline would be compromised. Additionally, there are various impacts and concerns associated with this concept including:

Necessary avoidance of a historic railroad depot located opposite High Street; Buildings and houses in the path of any realignment alternative; Pedestrian crossing at Airline; Removal of railroad track and crossing of railroad right-of-way Rerouting of Tuccitto Road traffic

The investigation concludes that there is not enough benefit achieved to justify the impact of a major reconstruction at this intersection, therefore, this is not included with the alternatives.

Another important issue at High Street, according to Portland town officials, is the pedestrian signal. Currently the pedestrian control only stops through traffic on Route 66 and does not stop traffic entering the intersection from High Street. Since two schools are located on High Street, this pedestrian crossing is used frequently by school children. A significant volume of vehicular traffic is generated on High Street as well. The adjustment of this pedestrian signal to stop vehicular traffic in all directions is considered the highest priority for this intersection.

Route 66 and Portland Plaza

In the westbound direction, the intersection at Portland Plaza is projected to have an undesirable level of service (E) by the year 2020. The alternative concept for this location is the addition of a right turn lane accessing Portland (Tri-town) Plaza. In addition to improving the level of service to C, in the westbound direction, it would offer a safety improvement by removing right turning vehicles from the flow of through traffic. This improvement, estimated at a cost of approximately \$32,000, received the lowest priority ranking in Portland. After consultation with the Town of Portland and ConnDOT, it was determined that the responsibility for this type of improvement lies with the owners of Tri-town Plaza. In the event of any changes to, or expansion of, the plaza, the Town should evaluate traffic impacts in association with the site plan review process; roadway improvements may be required at this time. This alternative has, therefore, been eliminated from the selected alternative package.

Route 66 & Sand Hill Road (West)

Due to a current and projected deficient level of service, this intersection is listed as requiring a signal warrant analysis. A signal would aid vehicles entering the flow of traffic on Route 66 from Sand Hill Road.

Route 66 Four-Lane Alternatives

In order to increase capacity throughout the two-lane portion of the Route 66 corridor, from Sand Hill Road to Route 16, additional lanes are required in each direction.

Alternative 1 involves reconstruction of Route 66 to provide four lanes without a median extending from the current four-lane segment at Sand Hill Road (East) to the junction of Route 16 in East Hampton. The exclusion of a median reduces right-of-way impact, but does not provide a separation between the two opposing directions of traffic. It does, however, increase roadway capacity in the area of high volume.

Alternative 2 includes the same length of road as in Alternative 1, but provides a median from Sand Hill Road (East), continuing from the existing median, to west of the area know locally as "the ledges", at which point the median would be tapered and the four-lane Alternative 1 continues. The median affords continuity in driver expectation of the four-lane roadway and provides a safer division of opposing directions of traffic. Median openings should be designed in accordance with access management guidelines in addition to highway standards. The discontinuation of the median before "the ledges" lessens requirements for rock removal and/or fill and avoids additional impact in the developed area of Cobalt (intersection of Routes 66 and 151). A left turn lane could be incorporated into the median where required.

Alternative 3 provides slightly less pavement width than Alternative 2 and includes a two-way left turn lane. The two-way left turn lane provides a practical option only if coordinated with access management

Alternative Concepts 1 and 2 are major projects with a cost estimated to be in the range of \$16-20 million or more. All three alternatives would ease congestion problems in the corridor, however, there would be a significant change to the character of this rural road. Impacts upon historic/archaeologic resources are projected to be minimal to moderate. There are two historic properties in the Cobalt area of East Hampton that are in close proximity to Route 66 and may be marginally affected by a widening. The archaeologically sensitive Great Hill Pond Brook, near the Portland/East Hampton border, would also be disturbed by a widening of the roadway and reconstruction of the culvert that carries the brook under Route 66.

In addition to stream encroachment, other environmental impacts associated with widening in this area would include possible wetland disturbance, ledge removal, tree removal and deposition of fill material. Widening of the road in "the ledges" area may address concerns expressed about the lack of road shoulders contributing to safety problems and difficulties with incident management (i.e., maintaining vehicle flow around a blocked lane). However, costs and environmental impacts associated with this work are significant.

Alternative 1, without a median, would require acquisition of approximately 930 square meters (10,000 square feet) of additional right-of-way and Alternative 2 would require 4,080 square meters (44,000 square feet). The property acquisition needed for Alternative 3 would be somewhat less than Alternative 2. These alternatives were given a low priority among East Hampton Advisory Committee members and a low, short-term priority by Portland members. A full widening, carried all the way to Route 16 is considered favorable only if lower impact intersection improvements or a reduced length widening (discussed below) prove to be insufficient to ease congestion problems.

Because construction of a four-lane road without a median would compromise safety in this segment of Route 66, where the eighty-fifth percentile speeds range from 51 to 56 mph, Alternatives 1 and 3 have been eliminated from the selected alternatives package. Due to the projected impacts, as well as the low ranking given by the Advisory Committee, Alternative 2 has been eliminated from the short-term recommended improvement package, but will remain as a long-term contingency improvement in the event that short-term improvement does not alleviate future roadway congestion.

Alternative 1A and 2A present a more moderate four-lane design in that they do not carry through to Route 16, but are tapered back to two lanes just east of the Riverdale Motel. 1A does not have a median and is the shorter of the two. 2A includes a median and provides a longer taper for increased safety. Median openings should be designed in accordance with access management guidelines in addition to highway standards. The termination location of the four-lane road could be varied. For example, the tapering to two lanes could occur closer to the Middle Haddam/Payne Boulevard intersection. These shortened alternatives are an attempt to lessen the impact of a four-lane widening by avoiding wetlands northeast of the Riverdale Motel; requirements for rock removal (thereby decreasing costs and environmental impact) at "the ledges"; stream disturbance and culvert reconstruction at Great Hill Pond Brook; and impacts to historic properties in the Cobalt area.

Alternative 1A has an estimated cost of \$3.3 million and would require 600 square meters (6,500 square) of right-of-way and Alternative 2A a cost estimate of \$4.06 million with 1,900 square meters (20,500 square feet) of right-of-way required. These shortened alternatives would still require property acquisition, but would not incur the resource impacts as would the first three alternatives. Alternative 1A, without a median, has been eliminated because of the same safety problems as Alternative 1. Alternative 2A, with a median, remains the most favorable of the four-lane alternatives. The Advisory Committee ranked this alternative as a high priority, although there were opinions expressed that it may be preferable to judge the results of the intersection improvements alone before proceeding with a widening. The current congestion, projected increase in traffic, as presented in Technical Memorandum 2, and potential for further commercial development in this area all seems to indicate the need for a more extensive widening. ConnDOT has acknowledged the need to increase capacity with additional lanes on Route 66, and views Alternative 2A as the most implementable.

Route 66 is shown on the *Connecticut Bicycle Map*, produced by ConnDOT, as a cross state bicycle route. Is also a primary route bicyclists may travel to reach the area's state forests and parks, including the Meshomasic and Salmon River State Forests and Hurd State Park. Any alternatives for major reconstruction of the roadway should include provisions for bicycle facilities. The cross-sections referred to in the four-lane alternatives descriptions include 10-foot shoulders. According to the 1991 *AASHTO Guide for Development of New Bicycle Facilities*, minimum shoulder width where vehicle speed is 35 mph should be 1.2 meters (4 feet). In areas of higher speeds, such as the segment Route 66 under discussion, additional width is recommended. AASHTO also specifies the need to avoid placement of any structures, such as drainage grates, that might be hazardous to bicycles. Special drainage grates may be used that are designed to prevent the entrapment of bicycle tires.

Another type of bicycle facility is a designated bicycle lane. These lanes must be a minimum of 1.2 meters (4 feet) wide, not including roadway shoulder, and are specially striped as a bicycle lane. In addition to concerns about structural hazards, this type of a lane requires that full consideration be given to turning

movements at intersections and operation of traffic signals. According to the Connecticut Bicycle Coalition, a statewide organization advocating on behalf of all local bicycle clubs, bike lanes are not encouraged at this time due to the complicated operational and safety issues. The preferred bicycle facility includes the wide shoulder and emphasizes that the vehicle travel lanes are clearly striped to be no more than 3.65 meters (12 feet). This is to prevent the tendency for vehicles to maneuver laterally after a pavement widening is made. Special drainage grates, as described above, are essential and special consideration should be given to sight distances as measured from the road shoulder. This may factor into brush clearing and sign placement plans. Additionally, signage has been used in some states which reminds motorists to "share the road" and includes images of bicycles, pedestrians and cars. Provisions for bicycle facilities should be included in all four-lane alternatives.

Route 66 & Middle Haddam Road/Payne Boulevard

There are safety issues at this intersection of great concern to area residents. There have been numerous accidents caused by a through vehicle colliding with a vehicle waiting to turn left onto Middle Haddam Road. There is also poor sight line on Middle Haddam Road due to its acute angle with Route 66. Residents of Payne Boulevard have vehemently expressed their concerns about difficulties experienced turning onto Route 66 due to the steady stream of fast-moving traffic. These issues have been considered in the following alternatives

Alternative 1 suggests the realignment of Middle Haddam Road to create a perpendicular intersection with Route 66 and alignment with Payne Boulevard. This geometry is preferred by AASHTO in order to provide adequate sight distance. The pavement on Route 66 would be widened to provide exclusive left turn lanes in both directions. Any addition of lanes at this location should include provisions for a possible four-lane widening throughout this part of Route 66, as discussed above. Long-term needs for acquisition of right-of-way should be factored into the improvement design plans. Preliminary estimates indicate that approximately 4,000 sq.ft. of additional right-of-way would be required. The cost of this alternative is estimated to be \$330,000, exclusive of right-of-way acquisition. Safety of turning movements would be increased. There would be minor aesthetic and environmental impact. This alternative received a high priority ranking from the Advisory Committee; it will be included in the selected alternatives.

Alternative 2 also includes realignment of Middle Haddam Road, but would entail only a minor widening of pavement eastbound to allow through traffic to bypass vehicles turning left onto Middle Haddam Road. Since this alternative would not be as effective in removing turning vehicles from through traffic flow, and would not be compatible with a four-lane widening, this alternative has been eliminated from the selected alternatives.

Alternative 3 suggests a signal warrant study. This is an unsignalized intersection that is currently and projected to be operating at a poor level of service due to the difficulty vehicles experience entering Route 66 traffic from Middle Haddam Road and Payne Boulevard. This movement experiences a level of service F. For this reason, and due to the concerns of residents, it is suggested that this intersection undergo a signal warrant analysis. In contrast, however, the eastbound/westbound through movements experience a level of service A. The absence of a traffic signal at this location, is advantageous for the level of service of through traffic. There are mixed results, with the most favorable level of service for the entire intersection being accomplished by both signalization and the four-lane alternatives.

Route 66 & St. Clements Banquet Facility

St. Clements is located in "the ledges" area of Portland. In view of the concerns of the Advisory Committee about current and planned expansions at the St. Clements Banquet Facility, the following alternatives are suggested. Alternative 1 recommends a widening of the pavement in the westbound direction to allow through vehicles to bypass vehicles turning left into the St. Clements entrance. This will require some rock removal. There is already a similar plan on file with the Town of Portland that was submitted by St. Clements and approved by ConnDOT. Alternative 2 involves the clearing of sight line for safe exit from the St. Clements drive. Brush removal and sign relocation is recommended.

Since a similar improvement will be performed by St. Clements, there is no need to promote this alternative as a future State project. However, this site should be monitored by the Town of Portland as future expansions occur. Should the facility ever have the potential to generate substantial traffic volume during peak traffic periods on Route 66 (am, pm, and Saturday peak hours), some form of traffic control may be required. Signalization or police traffic control may be necessary to handle events, particularly when they occur at times of peak traffic volume on Route 66. The addition of turning lanes may also be warranted. Such requirements should be considered during the site review process. In order to provide a reference for future planning, this location is mentioned in the selected alternatives package.

Route 66 and Oakum Dock Road

The alternative concept for this location is removal of vegetation to improve sight line. This improvement may be performed as part of regularly scheduled maintenance as coordinated between the Town of East Hampton and the State or may be included as part of the Route 151 intersection improvements.

Route 66 and Route 151 (Middle Haddam Road)/Depot Hill Road

This intersection will experience a failure of level of service by 2020. Currently, comments by members of the public and the Advisory Committee, as well as field observation, have indicated that this intersection is presently congested during peak periods.

Alternative 1 recommends adding a through lane eastbound and westbound. The addition of left turn lanes northbound and southbound is also suggested. The island on Route 151 would be removed, and the timing of the traffic signal adjusted. Access from Old Depot Hill Road to Route 66 should be closed since this intersection is too close to the Route 151/Depot Hill Road intersection and vehicles could easily use Oakum Dock Road as an alternate access point to Route 66.

The evaluation of this intersection has resulted in the consideration of a modification option for Alternative 1 in which exclusive left turn lanes are added eastbound and westbound. It is the experience of ConnDOT that absence of delineated turning lanes at an intersection of this type may result in increased operating difficulties or accidents. Additionally, curb cut consolidation in this area would improve traffic flow by channelization of turning movements. The commercial curb cut closest to the intersection should be closed and access to the supermarket could be combined with the pizza restaurant. Access management issues will be discussed further in the Access Management Plan for East Hampton.

Further analysis has resulted in identification of significant environmental and financial impact with Alternative 1. In order to maintain optimal lane length and standard taper distance before the transition back to two lanes, the widened roadway must be extended in the westbound direction beyond the intersection of Oakum Dock Road/Grist Mill Lane. This would necessitate replacement of the culvert at Great Hill Pond Brook, and require fill and/or retaining walls on the steep side slopes present in this area. It is possible that flexibility in design may provide an opportunity to make the full intersection improvement without incurring additional impact. The estimated cost for Alternative 1 without these additional impacts is \$1.5 million. If these impacts cannot be avoided, the additional financial and environmental costs could be significant. In addition, further consideration must be given to the eventuality of a full four-lane widening occurring throughout this area. Designs for any major reconstruction may need to accommodate a future expansion.

Additionally, historical resource impact could occur due to the close proximity of a historical property to the southwest corner of the intersection. The impact would be limited to the yard of the property, and not directly affect the building itself. This impact would increase with the option of additional left turn lanes. In addition to environmental impacts, the disturbance of Great Hill Pond Brook may result in archaeological impact due to the brook being considered archaeologically sensitive by the Connecticut Historical Commission. The aesthetic character of this area would likely be altered, but a lessening of traffic congestion and associated vehicle emissions may help to counteract the negative aspects. The level of service of the intersection as a whole, with or without the added left turn lanes, would improve from below failure (*) to level B.

Alternative 2 represents a more moderate approach that could be used as a short-term solution. Pavement on Route 66 eastbound could be widened enough to allow through vehicles to bypass vehicles that are turning right to Route 151 or left to Depot Hill Road. Pavement on Depot Hill Road could be widened to allow vehicles to turn right while through/left vehicles are waiting. As in Alternative 1, a left turn lane is added from Route 151, but the island would remain. Curb cut consolidation would be as described in Alternative 1. If this alternative does not accommodate future volume, Alternative 1 could then be the long-term solution. The design of Alternative 2 is compatible with shortened four-lane alternatives 1A and 2A. The advantages to this concept are its relatively low cost (\$26,000) and minor impact. The disadvantages are a negligible improvement in level of service, and potential driver confusion resulting from a widening of the roadway without a delineation of turning lanes. ConnDOT reports experiencing an increase in accidents and operating problems in this type of situation.

Due to the disadvantages associated with Alternative 2, this concept has not been included in the package of selected alternatives. Since Alternative 1 received a high priority ranking from the Advisory Committee, was preferred by ConnDOT, and presents the most effective option short of a full four-lane widening to Route 16, this is the selected alternative for this intersection.

Route 66 and Keighley Pond Road/Coughlin Road

Due to the difficulty experienced by vehicles entering Route 66 from Keighley Pond Road and Coughlin Road, this intersection currently operates, and will operate in the future, at a poor level of service. For this reason, a signal warrant study is suggested.

Route 66 and Long Hill Road

The acute angle of this intersection has caused a safety problem as identified by members of the Advisory Committee. The intersection would operate more safely if Long Hill Road was realigned to be perpendicular with Route 66 as shown in Alternative 1. For this purpose, the Town of East Hampton is considering acquiring the piece of land between the current "Y" split at the end of Long Hill Road. Before this intersection is reconstructed, however, ConnDOT suggests that careful attention is paid to resulting sight lines as well as the need for bypass shoulders on Route 66. Because state road improvements may be required as part of the town road improvements, this alternative has been included in the selected alternative package.

Route 66 & Champion Hill Road

Vehicles entering or exiting Champion Hill and vehicles traveling past this intersection on Route 66 experience sight line deficiencies. The embankment at the end of Champion Hill and a rise in the vertical grade of Route 66 in this area are the major factors.

Alternative 1 suggests removal of vegetation and regrading of the bank that obstructs sight line on Champion Hill, and regrading of Route 66 itself to lower the profile of the road, thereby providing approaching vehicles a longer sight distance to the intersection. A regrading would also involve a slight widening of pavement on the shoulders. The cost of Alternative 1 is substantial at \$200,000. This estimate is based on a lowering of the existing roadway profile by approximately .6 meters (2 feet), full depth reconstruction extending 60 meters (200 feet) west and east of the intersection, and the addition of 2.4 meters (8 feet) of pavement width extending 15 meters (50 feet) east and west of the intersection. Impacts to the wall, fence and trees of abutting properties are anticipated. Drainage would also be also altered.

Alternative 2 suggests only a regrade of the bank on Champion Hill and clearing of vegetation, and is a lower impact, short-term solution

In view of the scope of Alternative 1, it was given a low priority by the Advisory Committee. The preferred strategy is to proceed with improvements outlined in Alternative 2, and then assess their effectiveness. If this improvement is not sufficient, Alternative 1 may later be moved to a higher priority. This is, therefore, regarded as a long-range alternative.

Route 66 & North Maple Street

This intersection is projected to be operating at a poor level of service in 2020. An adjustment in traffic signal cycle length is suggested.

Route 66 & North Main Street/Main Street

Currently, and in the future year (2020), this intersection operates at a failing level of service. It is also the site of a high number of accidents. The major improvement, Alternative 1, suggests the addition of a left turn lane eastbound, and left and right turn lanes westbound (totaling three lanes). It also includes the addition of left turn lanes northbound and southbound along with adjustment of signal timing. An increase

in curve radii and the elimination of a parking bump-out near the southwest corner is recommended. Any disturbed sidewalks would also be replaced. The estimated cost for this improvement is \$550,000 and has a potential requirement for minor additional right-of-way acquisition. There is anticipated to be some aesthetic/historic resource impact due to the presence of several historical properties, including a church. This alternative offers the best improvement in level of service, bringing the overall intersection level to a B from below failure (*) forecasted for 2020.

An additional alternative is currently under consideration by ConnDOT for implementation in the short term. It entails addition of left turn lanes eastbound and westbound (requiring some widening), improvement of curve radii, reconstruction of sidewalks and addition of a pedestrian crosswalk. The cost will be slightly less at \$531,000 and will not require additional right-of-way. There will also be less impact to the area. The level of service, however, will not be significantly improved.

Alternative 1 received a priority of moderate, while Alternative 2 received a high priority, largely due to the fact that ConnDOT has already placed this improvement on a short-term project list. In view of recent changes to buildings at this intersection, ConnDOT will be reassessing the preliminary design. The final design is more likely to reflect a combination of both alternatives. In light of this possibility, the selected alternative package will include a combination of both alternatives to be further studied in the field.

Route 66 & East Hampton Mall/Brooks Plaza Area

As the most commercial stretch of Route 66 in East Hampton, there is a concentration of businesses and town government offices that draw numerous vehicles and pedestrians. This is an area of a higher than average frequency of accidents involving rear-end and turning- movement collisions. As mentioned previously, this area is in need of access management measures, as will be discussed further in the Access Management Plan for East Hampton. Following are additional improvement options.

Alternative 1 provides a right turn lane westbound at the East Hampton Mall. This would remove turning vehicles from the flow of through traffic. Pavement widening would be necessary as well as reconstruction of the sidewalk for which a minor amount of additional right-of-way may be required. To increase pedestrian safety, the pedestrian signal at East Hampton Mall should include all signal phases. Currently only through traffic on Route 66 is stopped for the pedestrian signal. This adjustment should not significantly affect the level of service for vehicles at this signal. The right turn lane, expected to cost approximately \$21,000, would increase level of service in the westbound direction from below failing (*) to D.

Originally, included in this alternative was the creation of a two-way left turn lane for eastbound and westbound vehicles between McDonald's and Food Bag, tapering before the Pocotopaug Brook culvert. Since the pavement is wide enough to accommodate the turning lane in this area, only a restriping would be required. The turning areas would be coordinated with clearly defined access drives. Although the cost for this improvement would be low, the coordination of access drives would likely be difficult, based on the current ownership of the affected properties. For this reason, the Advisory Committee ranked this alternative as moderate. Additionally, in ConnDOT's view, the difficulties that may occur with a two-way left turn lane in this area, do not outweigh the minimal benefit gained. As a result of consultation with ConnDOT, it was determined that the best solution is to, instead, create directional left turns at defined

driveways, and bypass capability at other locations. This option will require business owner cooperation and effective access management coordination.

Alternative 2 addresses the current and future year failing level of service experienced by vehicles exiting Brooks Plaza. A signal warrant analysis is suggested.

The alternative selected for this area will include the right turn lane for East Hampton Mall and the suggested signal warrant analysis for Brooks Plaza. Locations for left turns lanes will be addressed in the Access Management Plan.

Route 66 & Route 196 (Lakeview Street)/Old Marlborough Road (West)

The Route 196 and Old Marlborough Road intersections both present safety problems due to poor geometry and line of sight. Route 196 (Lakeview Street) connects with Route 66 in a "Y" configuration, and a steep grade at the intersection also contributes to the limited sight distance. Old Marlborough Road is situated at a sharp horizontal angle to Route 66. These geometrics contribute to reduced sight distance. Alternative 1 suggests redesigning Route 196 to be perpendicular with Route 66, removing the island situated between the easterly and westerly branches, and regrading. This will improve sight line and situate the left turn lane at a safer distance from the curve just west of the intersection. In addition, a minor widening of Route 66 at this intersection would allow through vehicles to bypass those turning left. Widening should favor the south side of the right-of-way, away from the shore of Lake Pocotopaug and the houses on the north edge of Route 66. An exclusive left turn lane is not warranted here due to a projected level of service of C in 2020 (See Technical Memorandum 2); this is considered to be well within acceptable limits. The quality of sight line from Old Marlborough Road (West) would also benefit from a perpendicular realignment, as well as removal of any brush obstructing views. These improvements are estimated to cost approximately \$240,000. The regrading at Route 196 will require concurrent planning to accommodate drainage needs. Work in this area will require extreme care in controlling erosion and sedimentation during construction due to the close proximity of the lake shore. This alternative was ranked as a high priority by the Advisory Committee and is considered potentially beneficial by ConnDOT. These improvements have been selected as preferred alternatives.

Alternative 2 suggests another solution for Old Marlborough Road (West). The current western intersection could be closed and moved to another location eastward where there is improved line of sight due to a straighter stretch of roadway. This intersection currently resides on a curve and is considered by residents to be unsafe. The closing of this section of road could also benefit the shore of Lake Pocotopaug, along which the Old Marlborough Road (West) intersection is situated, by reducing road surface runoff and offering opportunities for shoreline enhancement. Currently, travel through this intersection is made more difficult in the summer when vehicles park on the road to access the lake shore, according to local residents. In assessing the potential for relocation of the intersection, some undeveloped parcels east of the intersection, approximately midway between the east and west intersections of Old Marlborough Road, were investigated for their ability to provide a new location for the intersection. However, the cost of acquiring sufficient property and building a new road segment would likely be prohibitive, especially considering the relatively small volume of traffic using the road. Preliminary investigation indicates that such a relocation may also face wetland permitting issues. Further, it is possible that improvements outlined in Alternative 1 may be enough to reduce the difficulties encountered at this intersection. For these reasons, this

alternative has not been carried forth.

Alternative 3 suggests consideration of a signal warrant analysis for Route 196 due to a failing level of service for the northbound movement. In conjunction, a signal should also be considered for Old Marlborough Road as a safety measure. These signals, if warranted, should operate in coordination. The signal warrants will be recommended along with Alternative 1.

Route 66 and Lake Road

The acute angle of Lake Road to Route 66 may decrease the safety of this intersection. A realignment to provide a perpendicular intersection was suggested. There is not a level of service problem with this intersection and additional right-of-way may be required. The Advisory Committee has ranked this improvement as low, and East Hampton officials have suggested that this improvement could be handled by the town. For these reasons, the alternative has not been promoted to the final package of alternatives.


Additional Traffic Operational Issues

All existing and future traffic signals should be coordinated. All signals should be semi-actuated and should operate on the same background cycle. Route 66 would receive the green indication except when there are traffic demands on the cross streets. The cross street green indication would begin at a designated time in the overall background cycle. Cross streets with the heaviest traffic would receive more green time than cross streets with lower traffic volumes.

If future signal warrant analyses indicate the need for additional signals, signal coordination should be accomplished for the following sets of signals:

- Portland Main Street and Elmcrest Manor/Barry Avenue/High/Airline/Portland Plaza/Grove Street
- Sand Hill Road (West) and RT 17 (Gospel Lane)
- East Hampton Mall/North Main/Brooks Plaza/Route 196/Old Marlborough Road

A summary of all recommendations for improvement of the corridor is presented in Table 6 of Chapter 4.

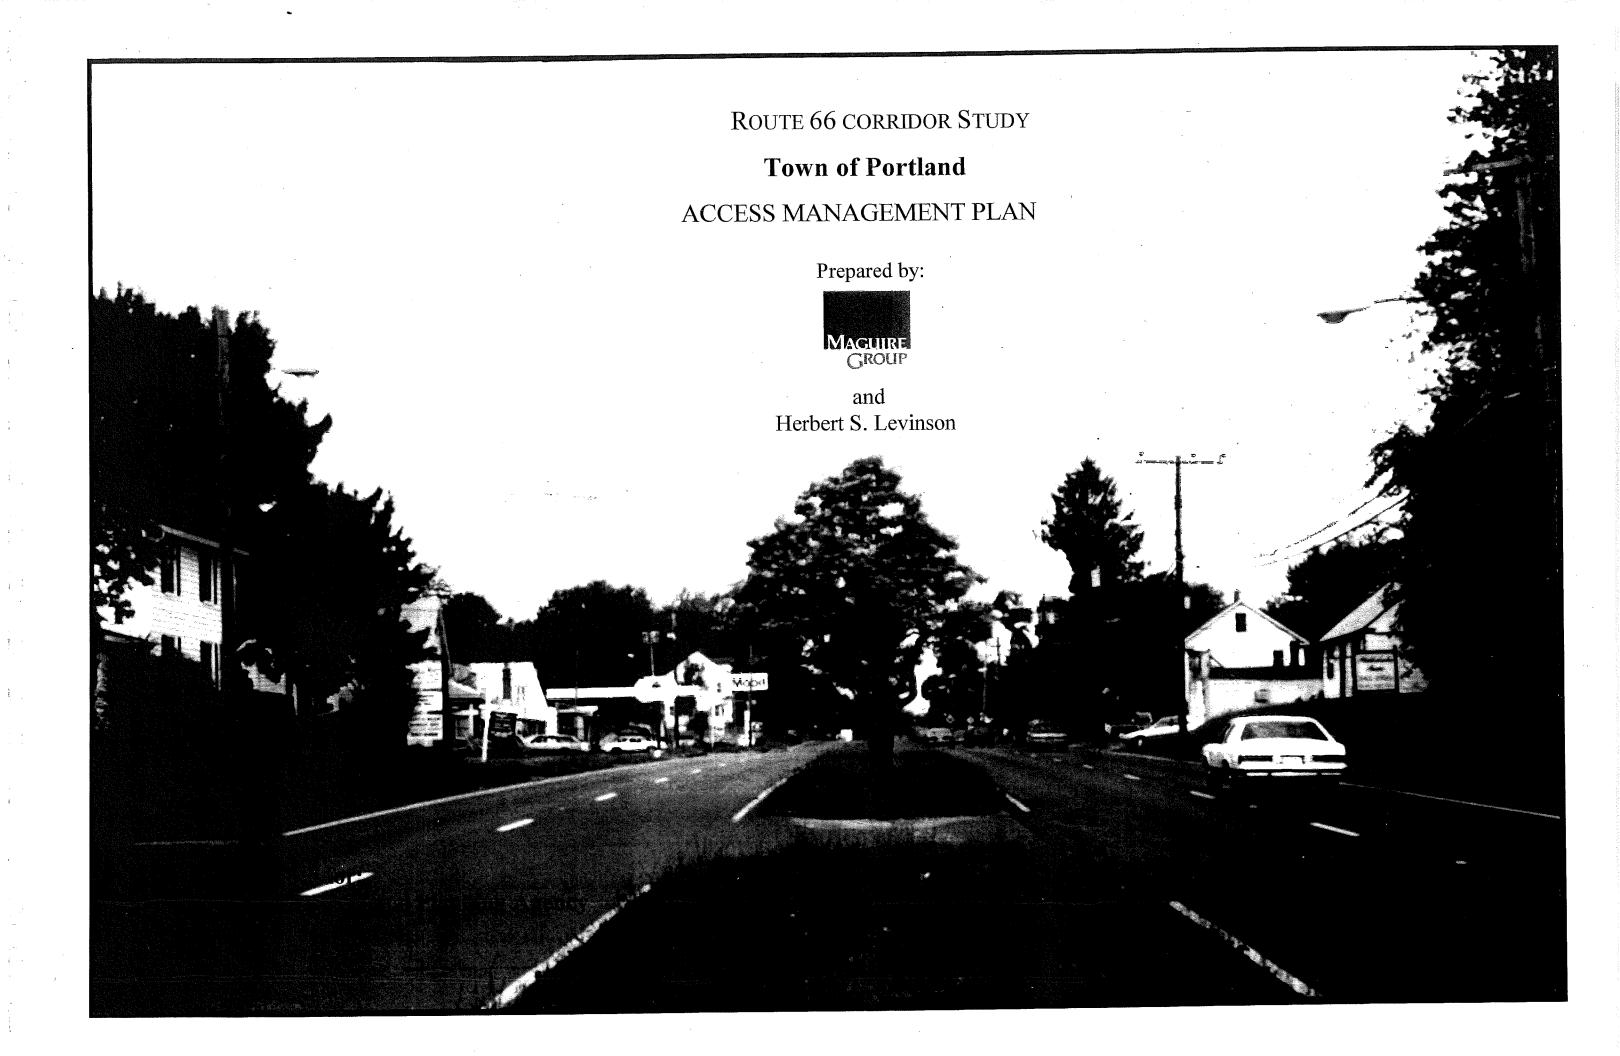

CONTENTS

TEX	Γ		Page
1.	INTRO	DDUCTION	2
2.	CORR	IDOR OVERVIEW	2
		Existing Town Regulations State Regulations Traffic Conditions	4 4 4
3.	ACCE	SS MANAGEMENT REGULATIONS	5
		Basic Objectives Road System Site Development Site Access Variances	6 6 6 6
		Access Spacing Guidelines Traffic Signal Spacing Unsignalized Access Spacing Median Openings	7 7 7 7
		Recommended Approach Proposed Route 66 Corridor Overlay Zone	7 7
4.	CURB	CUT IMPROVEMENTS	12
TAB	LES		
Table	Number 1	Title Access Management Strategy	2
	2	Distribution of Property Frontages along Route 66 in Portland	4
	3	Traffic Profile of Route 66 in Portland	5

4	Summary of Minimum Unsignalized Access Spacing in Feet by Speed for Various Criteria	9
5	Suggested Route 66 Access Spacing Standards for Unsignalized Driveways and Corner Clearances	9
FIGURES		
igure No.	Title	
	Access management Strategy	3
2	Traffic Signal Coordination Plan	8
3	Curb Cut Improvement-East of Grove Street	14
ļ	Curb Cut Improvement-West of Sand Hill Road (West)	15
APPENDICES Appendix A -	S Site Plan Review Guidelines	16

1. INTRODUCTION

This report presents Access Management Guidelines and Regulations for Route 66 in Portland. These proposals are part of an integrated corridor improvement and access management plan that includes roadway and intersection improvements and "retrofit" access management actions such as driveway consolidation, closure, and relocation. The report's main focus is on access spacing guidelines and necessary additions to existing regulations that would apply these guidelines as areas develop more intensively or land uses change.

The report overviews land use and traffic conditions in the corridor including existing regulations. It identifies the basic regulatory principles that govern access spacing, suggests access spacing guidelines for signalized intersections and unsignalized driveways, and presents specific regulations for potential adoption by Portland. Specific access management recommendations for existing curb cuts in areas of concern are also outlined.

2. CORRIDOR OVERVIEW

The Route 66 corridor in Portland is approximately five miles. The study limits extend from Route 66 near the Portland town line at the east end of the Arrigoni bridge to the Portland/East Hampton town line. The areas in central Portland are largely developed. Eastern Portland is lightly developed and affords an excellent opportunity for "preventive" access management actions.

For access management purposes, the corridor was subdivided into the three sections (Figure 1). These sections and their associated access management emphasis are shown in Table 1.

- Retrofit action should focus on Central Portland (Section 1) and Section 2.
- Regulations should govern access spacing in the entire corridor. However, they will be especially important in the yet-to-be developed areas (Section 3).

The distributions of existing property frontage along Route 66 are shown in Table 2. A review of this table indicates the following frontage distances. These distances reflect history, existing regulations, and the degree of development.

Section	Median	75 Percentile
	Frontage	Frontage
	Distance	Distance
1	100'	225'
2	160'	275'
3	450'	750'

TABLE 1

ACCESS MANAGEMENT STRATEGY


PRIMARY EMPHASIS

SECT	TION	RETROFIT	REGULATIONS
1	Route 17A- Sand Hill Road	X	
2	Sand Hill Road - Middle Haddam Road	X	
3	Middle Haddam Road - East Hampton Town Line		X

ROUTE 66 CORRIDOR STUDY

Access Management Strategy

TOWN OF PORTLAND, CT

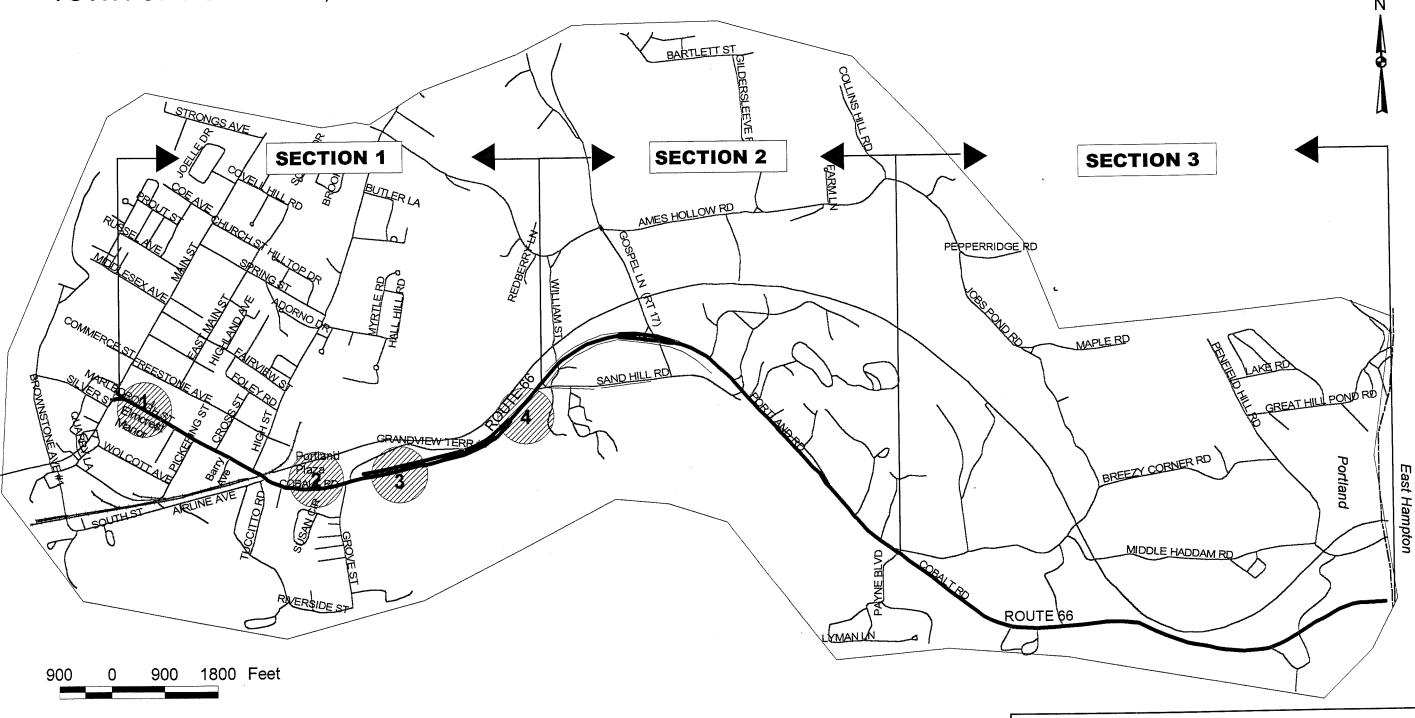





1. INTRODUCTION

This report presents Access Management Guidelines and Regulations for Route 66 in Portland. These proposals are part of an integrated corridor improvement and access management plan that includes roadway and intersection improvements and "retrofit" access management actions such as driveway consolidation, closure, and relocation. The report's main focus is on access spacing guidelines and necessary additions to existing regulations that would apply these guidelines as areas develop more intensively or land uses change.

The report overviews land use and traffic conditions in the corridor including existing regulations. It identifies the basic regulatory principles that govern access spacing, suggests access spacing guidelines for signalized intersections and unsignalized driveways, and presents specific regulations for potential adoption by Portland. Specific access management recommendations for existing curb cuts in areas of concern are also outlined.

CORRIDOR OVERVIEW

The Route 66 corridor in Portland is approximately five miles. The study limits extend from Route 66 near the Portland town line at the east end of the Arrigoni bridge to the Portland/East Hampton town line. The areas in central Portland are largely developed. Eastern Portland is lightly developed and affords an excellent opportunity for "preventive" access management actions.

For access management purposes, the corridor was subdivided into the three sections (Figure 1). These sections and their associated access management emphasis are shown in Table 1.

- Retrofit action should focus on Central Portland (Section 1) and Section 2.
- Regulations should govern access spacing in the entire corridor. However, they will be especially important in the yet-to-be developed areas (Section 3).

The distributions of existing property frontage along Route 66 are shown in Table 2. A review of this table indicates the following frontage distances. These distances reflect history, existing regulations, and the degree of development.

Section	Median	75 Percentile
	Frontage	Frontage
	Distance	Distance
1	100'	225'
2	160'	275'
3	450'	750'

TABLE 1

ACCESS MANAGEMENT STRATEGY

PRIMARY EMPHASIS

SECT	TION	RETROFIT	REGULATIONS
1	Route 17A- Sand Hill Road	X	
2	Sand Hill Road - Middle Haddam Road	X	
3	Middle Haddam Road - East Hampton Town Line		X

ROUTE 66 CORRIDOR STUDY

Access Management Strategy

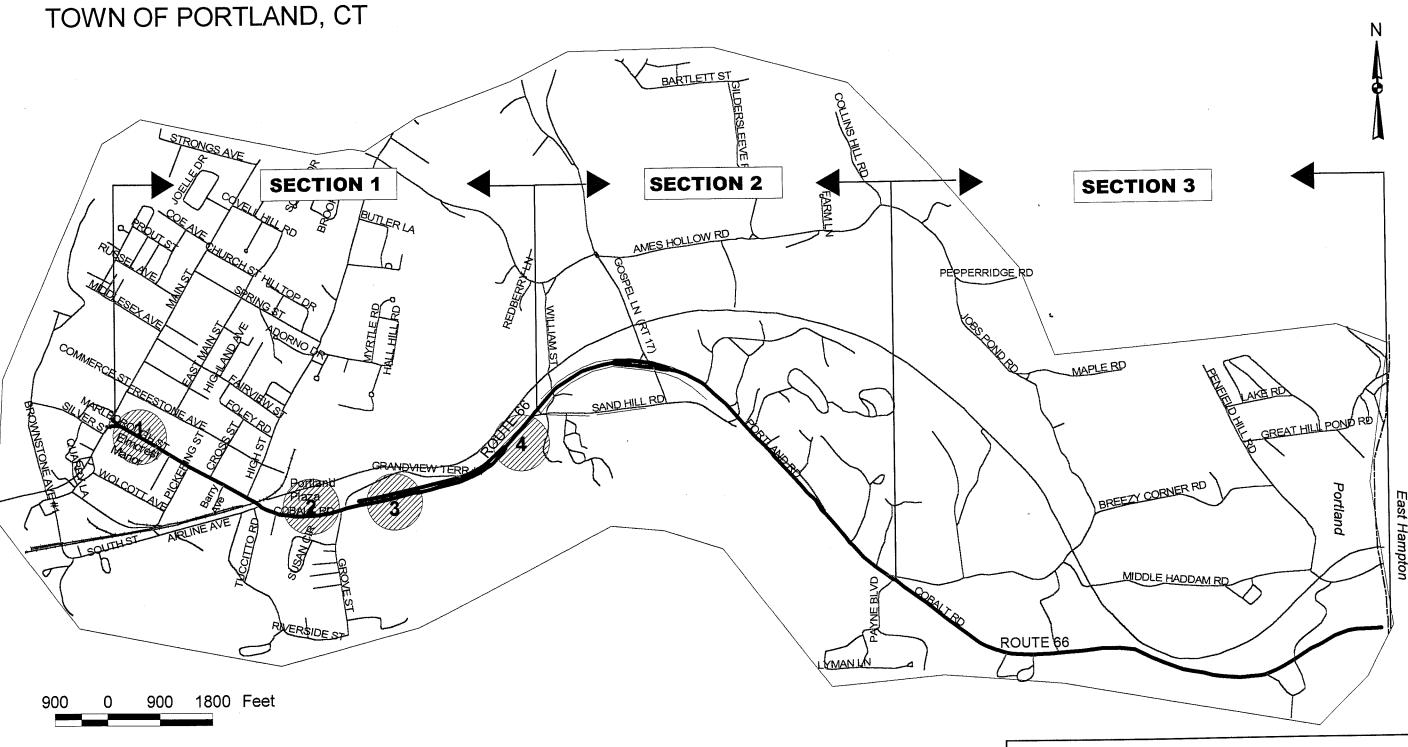






TABLE 2

DISTRIBUTION OF PROPERTY FRONTAGES
ALONG ROUTE 66 IN PORTLAND

FRONTAGE DISTANCE (FEET)	1 RT 17A SAND	A- HILL RD	2 SAND HILL RD MIDDLE HADDAM ROAD		MIDDLE I EAST	3 MIDDLE HADDAM EAST HAMPTON TOWN LINE		TOTAL	
	NO.	%	NO.	%	NO.	%	NO.	%	
0-50 INC	17	17	7	16	0	0	24	14	
50-100	33	34	6	13	2	8	41	25	
100-150	17	18	7	16	4	17	28	17	
150-200	2	2	8	18	1	4	11	6	
200-250	8	8	2	4	1	4	11	6	
250-300	8	8	6	13	2	8	16	10	
300-450	8	8	3	7	2	8	13	8	
450-600	1	1	1	2	3	13	5	3	
600-750	3	3			3	13	6	4	
750-900	1	1			1	4	2	<1	
900-1050			-		1	4	1	<1	
1050-1200			1	2			1	<1	
OVER 1200			4		4	17	8	5	
TOTAL	98	100	45	100	24	100	167	100	
MEDIAN DISTANCE		100'	160	,	45	0'		130'	

Existing Town Regulations

The Town of Portland has updated its Zoning Regulations to February 1996.

- Minimum property widths are specified for various land uses (Section 05.01.01). These include residential 75 to 125 feet, rural residential 150 feet, business 100 to 150 feet and industrial 100 to 500 feet.
- Minimum separation distances between single interior lots access strips are set at 300 feet. Minimum separation distances between adjoining access strips and other access strips are set at 450 feet (Section 05.03.05).

State Regulations

The State of Connecticut regulates the use of public Right-of-way through its "Highway Encroachment Permit Regulations" and through State Traffic Commission(STC) approval for major traffic generators. The Highway Encroachment permit Regulations have set the following standards and criteria.

- Properties with frontages of less than 50 feet will have not more than one combination entrance and exit. Properties having a frontage of 50 to 100 feet may be permitted two access points if a minimum of ½ of the total frontage is used to separate the driveways.
- No entrance or exit may be constructed at the intersection of two highways or streets for a distance of 25 feet from the right-of-way lines at unsignalized intersections. Driveways at signalized intersections are reviewed on an individual basis.
- All entrances and exits shall be located so that sight distances are adequate.

State Traffic Commission approval is required for any major traffic generator that provides 200 or more parking spaces or has a gross floor area of 100,000 square feet that substantially affects state traffic. The submission requires detailed site plans as well as traffic impact, queue, and accident analyses.

For retail gasoline stations, along State highways, there must be at least two points of access to the highway. These access points must be separated by at least the length of the gasoline dispenser.

Traffic Conditions

Existing traffic characteristics along Route 66 in Portland are summarized in Table 3. A review indicates:

- The average daily traffic in Portland ranges from a low of approximately 17,400 vehicles per day at the East Hampton town line to a high of approximately 20,900 vehicles per day in just east of High Street.
- AM peak-hour traffic is oriented toward Middletown to the west of the Route 66-16 junction. Volumes

4

TABLE 3

TRAFFIC PROFILE OF ROUTE 66 IN PORTLAND

ITEM	PORTLAND
TRAVEL LANES	2 - 4
AVERAGE DAILY TRAFFIC	17,000 - 21,000
AM PEAK HOUR TRAFFIC (vph)	
EB WB	450 - 550
WB	1,300 - 1,400
PM PEAK HOUR TRAFFIC (vph)	
EB	1,300 - 1,500
WB	600 - 800
85th PERCENTILE SPEEDS	46 - 58 mph
POSTED SPEEDS	35 - 45 mph

Source: Route 66 Corridor Study, Technical Memorandum 1

range from about 1300 to 1500 vph. Traffic in the off-peak direction ranges from 400 to 800 vph.

- Posted speeds range from 30 to 35 mph in built-up areas, and are set at 45 mph in other parts of the corridor.
- A time loss of over 2 minutes was associated with eastbound PM peak-hour travel over the AM peak. Westbound the maximum time loss was less than a minute. Overall, Route 66 moves well during the peak periods.
- The major problems include:
- There is a lack of left-turn lanes and adequate separation distances between median openings along Route 66 west of Route 17. (CONN DOT plans to correct this situation).
- Many side streets intersect Route 66 at very flat (acute) angles.
- Shared left-turn lanes result in delays and accidents.
- Traffic signal coordination is limited to the two intersections between Grove and High Streets in Portland.
- Strip development and frequent driveways with uncontrolled curb frontages are found near the Portland Plaza.
- The Connecticut River on the south, and hilly terrain to the north limit the opportunities for parallel roads that would provide access to developments.

Alleviating these problems and serving anticipated growth along Route 66 calls for a coordinated set of roadway and traffic improvements. There is also a need to improve existing driveway access and to establish regulations for the spacing of access drives in anticipation of future development.

3. ACCESS MANAGEMENT REGULATIONS

This section sets forth proposed guidelines and regulations for improving access management along Route 66 in Portland. It presents the basic objectives that govern access management and provides a general discussion of regulatory controls for improving existing regulations. This section also suggests regulations for possible adoption by the town of Portland.

The suggested regulatory changes along Route 66 reflect development, mobility and safety needs. They provide systematic guidance to applicants, staff, and Planning and Zoning Commissions. And they permit sufficient flexibility to address the many land-use and access situations that may occur - especially in developing or redeveloping areas.

5

Basic Objectives

The underlying objective of access management is to balance mobility and land access in a way that provides access to land development while simultaneously protecting the flow of traffic on the surrounding road system so that safety, capacity, and desired speeds are maintained. This calls for viewing the highway and its surrounding activities as part of a single system - and for introducing access spacing standards into the land planning and highway design process.

Accordingly, access management regulations are designed to:

- Maintain service levels, capacity and safety along Route 66;
- Provide reasonable access to abutting property;
- Limit the number of conflict points and adequately separate conflicts;
- Minimize the number of traffic signals to ensure effective traffic signal coordination in each direction of travel;
- Provide an access framework for future land development decisions;
- Improve the site planning and design process;
- Preserve the character of the corridor and improve roadside aesthetics;
- Contain specific provisions that address access spacing, limiting curb cuts, sharing driveways, using secondary streets, encouraging new interior streets, and requiring road improvements to accommodate development; and,
- Establish procedures for dealing with unusual circumstances.

Access management regulations should also be guided by the following design principles:

Road System

- The community's road hierarchy should reflect the importance of its highway;
- Property access to and from roads intersecting Route 66 should be encouraged, and should serve as a substitute for direct access whenever possible and acceptable environmentally;
- Spacing standards should be established for signalized and unsignalized driveways, corner (intersection)

clearances, and median openings;

- Joint or shared access between adjacent properties should be encouraged;
- Reverse frontage roads should be provided wherever possible, especially for residential subdivisions;
- Access driveways on opposite sides of a route should be lined up with each other wherever possible.

Site Development

- Commercial strip zoning should be minimized.
- Large property frontages should be preserved. (This is especially important along the sections of Route 66 outside of the town center).
- Standards should be set for interior lots, oùtparcels, and lot width-to-depth ratios. Interior lots should be prohibited for new developments.
- Residential or commercial subdivisions served by a single access should be avoided. Generally, at least two points of access should be provided -- one point onto Route 66 and one point via a cross street.
- Direct access from individual residential units within a subdivision into Route 66 should be prohibited.
- Adequate space should be provided for utilities.

Site Access

- Site access should be designed from the "outside in" (i.e., from public highway) into development.
- Safe stopping sight distance must be provided.
- Adequate storage space should be provided on access drives entering Route 66.
- Suitable pedestrian, transit, and emergency vehicle access should be provided as appropriate.
- Driveway closures should not restrict internal site circulation.

Variances

• Procedures for dealing with variances should be established.

Access Spacing Guidelines

Access spacing guidelines should be established for signalized intersections, unsignalized access points, corner clearances, and median openings.

Traffic Signal Spacing

Signals are closely spaced in the town center, and are widely spaced elsewhere along the corridor. The signal spacing guidelines assume that existing and future signals would operate on common background cycles - two systems are suggested:

- A- existing 100 second cycle Grove Street through Main Street in Portland.
- B Gospel Lane coordinated with a possible future signal at Sand Hill Road (east) (i.e. 80" Cycle).

Figure 2 shows the location of existing and possible future signals in each of these systems.

The desired spacing of signalized driveways and intersections should permit at least a 50% through band in each direction of travel at speeds of 35 to 40 mph, based upon an 80 to 100 second cycle. This translates into uniformly spaced signals at about 2000 feet to about half-mile intervals.

Semi-actuated traffic signals (detector located on cross street only) would operate on the same background cycle in each system. Route 66 would receive the green indication except when there are traffic demands on the cross streets. The cross-street green indication at each location would begin at a designated time in each overall background signal cycle.

Unsignalized Access Spacing

Spacing standards for unsignalized driveways and corner clearances should consider safety, driver response capabilities and existing property frontage characteristics. Safety consideration argues for longer spacings since accident rates rise as the number of driveways per mile increase. However, a too stringent standard that limits reasonable access would result in an undue number of variances or exceptions.

Table 4 summarizes the minimum requirements for unsignalized access points as a function of posted speeds as found in the literature. Posted speeds of 45 mph dominate along Route 66 except in built up areas; these speeds result in access spacings of about 300 to 850 feet. For 30 to 35 mph speeds the desired spacings generally range from 100 to 450 feet. Given the property frontage constraints along most sections of Route 66, the lower values in this table appear more realistic.

Table 5 gives suggested unsignalized access spacing distances for each section of Route 66. These spacings are keyed to the posted speeds. Unsignalized access spacing distances of 150 to 300 feet would maintain reasonable access. This is because the spacing requirements would mainly apply to new and/or expanded developments that would be mainly located on the larger land parcels.

Median Openings

Median openings should reflect the street/block spacing. Current practices show full median openings ranging up to a half mile. However, 660 feet directional to 1320 feet for full openings are more common. Accordingly, the following median opening criteria are suggested.

- Sections 1, 2 Existing Divided Highway 330 feet
- Section 3 Future Widening

Recommended Approach

The approach to implementing access management regulations or practices varies widely among states. Colorado, Florida, and New Jersey have adopted comprehensive access codes that govern when and where access can be provided along state highways. `A few cities and counties also have established comprehensive codes or guidelines.

In Connecticut, access management decisions are largely left to individual communities, and must, therefore, be achieved through the local regulatory process. This calls for making appropriate changes in the local comprehensive plans of development, zoning/development regulations, subdivision regulations and/or in guidelines governing the site plan review process.

The suggested approach is to establish Route 66 Corridor Overlay Zones in Portland. These zones would be appended to the towns existing regulations. They will give a legal status to the Access Management Plans and provide the basis for prescribing these plans in the future.

<u>Proposed Route 66 Corridor Overlay Zoning-Portland.</u> A Route 66 Corridor Overlay Zone should be established. The following text is recommended.

- 1. <u>Purpose and Application</u>. The Route 66 Corridor Overlay Zone should govern access provision along Route 66 within the town. Developments along the roadway should be governed by the specific provisions that follow, and by the Access Management Plan that is appended in these regulations. The intent is to provide and manage access to adjacent land development while simultaneously improving traffic flow in terms of safety, capacity and flow.
 - a. These regulations shall complement policies and requirements that are set forth in the Town's zoning regulations.
 - b. The provisions shall apply to new developments or to substantial changes in existing developments.

March, 1998

GROUP

Route 66 Corridor Study Traffic Signal Coordination Plan TOWN OF PORTLAND, CT

2000 Feet

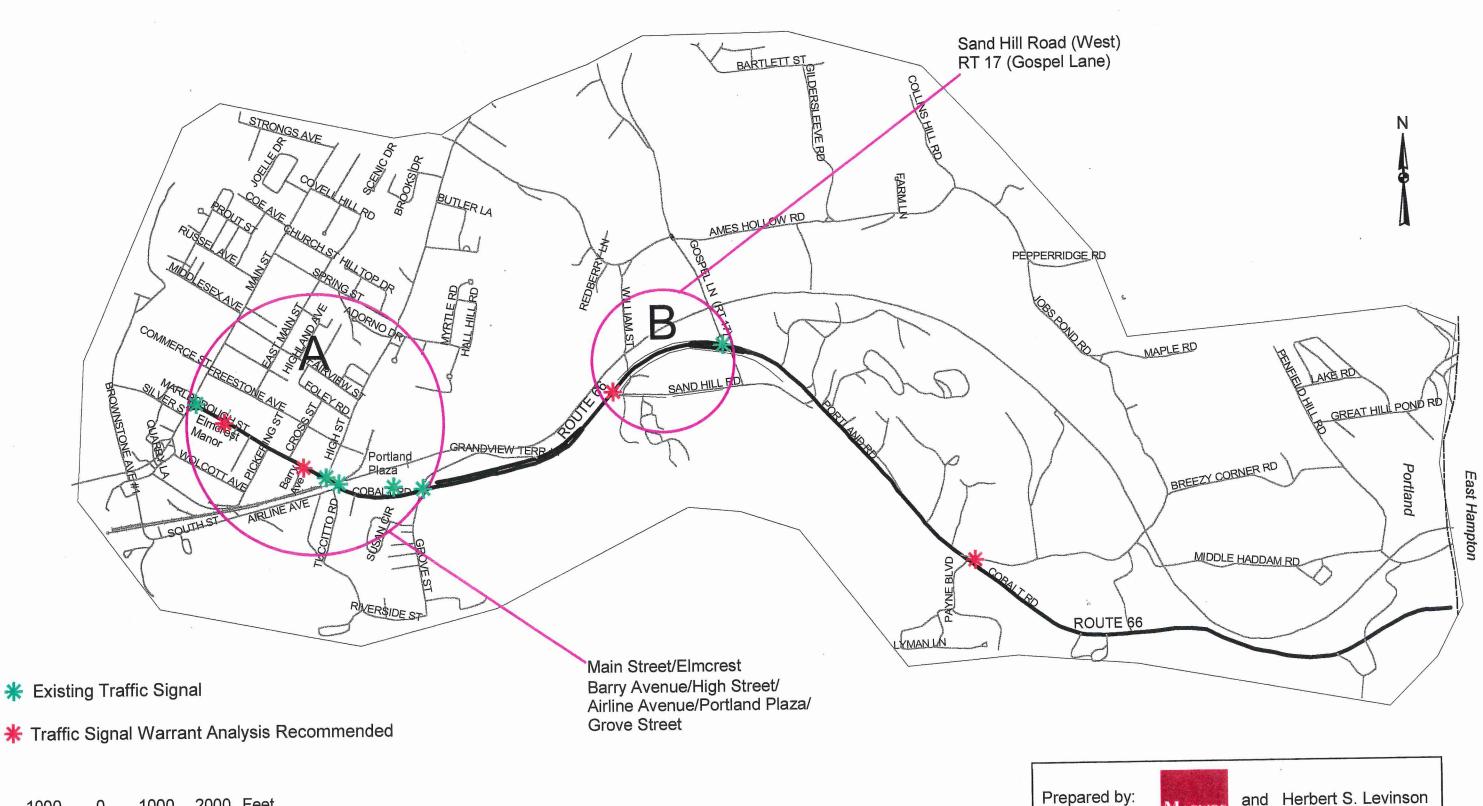


TABLE 4 SUMMARY OF MINIMUM UNSIGNALIZED ACCESS SPACING IN FEET BY SPEED FOR VARIOUS CRITERIA

Posted Speed (mph)											
Criteria	Criteria 20 25 30 35 40 45 50 55 60										
1. Stopping sight distance	120	165	220	275	340	410	482	565	655		
2. Length of Turn lane: Turning traffic to leave differential of: a) ≤ 10mph b) ≤ 15mph c) ≤ 20mph			320	390 320	490 390 320	590 490 390	700 590 490	820 700 590	950 820 700		
Minimize right turn conflict overlap	·		100	150	200	300					
Intersection sight distance through traffic reduces speed by 15%	230	300	375	460	575	700	850	1000	1150		
5. Maximum egress capacity	120	190	320	450	620	800	1125	1500	1875		

One mph = 1.609 km/h; one foot = 0.3048 meters

Source: Gluck, J.; Levinson, H.S., Stover, V.; Yazersky-Ritzer, G., Access Spacing Guidelines, Transportation Research Board Circular 456, National Research Council, Washington, D.C. 1996.

TABLE 5

SUGGESTED ROUTE 66 ACCESS SPACING STANDARDS FOR UNSIGNALIZED DRIVEWAYS AND CORNER CLEARANCES (FEET)

PORTLAND SECTION	POSTED SPEED	SPACING NCHRP 456*	SUGGESTED SPACING(1)
1	30-35	100-150	150'
2	45	300	250' (2)
3	45	300	300'

NOTE:

APPLIES TO NEW DEVELOPMENTS OR TO SUBSTANTIAL CHANGES IN EXISTING DEVELOPMENTS

- (1) MINIMUM CITED SPACING
- (2) SHORTER SPACINGS DUE TO SMALLER EXISTING PROPERTY FRONTAGE

^{*}National Cooperative Highway Research Program Circular 456

A "substantial change" shall involve: (i) a change in use from residential to commercial, (ii) a 25% or greater increase in gross floor area, required or provided parking spaces, employment, or traffic generation, (iii) a 10,000 square foot or greater increase in gross floor area, (iv) a 50 parking space or greater increase in the required or provided parking spaces, (v) a subdivision of the property is proposed.

The provisions do not apply to existing drives where no new development or substantial change in existing development is planned.

- 2. <u>Plan Conformance.</u> All access drives and intersections shall be brought into conformance with the improvements indicated in the adopted Access Management Plans if:
 - a. The uses of the property changes or any alternatives are proposed that would require a site plan or subdivision application; or,
 - b. A major resurfacing or widening of the roadway is initiated,
- 3. <u>Access Spacing</u>. The spacing of access points shall be consistent with the Access Management Plan. Access spacing shall conform with (or exceed) that shown on the following schedule.

Access Spacing Design Element	<u>Standards</u>
Traffic Signal Spacing	50% Minimum through band based on 80 to 100 second cycle and 35 to 40 mph speeds
Unsignalized Access Spacing/Corner Clearances	
Section 1 Main St. (Route 17A) to Sand Hill Road	150 ft
Section 2 Sand Hill Road to Middle Haddam Road	250 ft
Section 3 Middle Haddam Road to East Hampton town Line	300 ft
Median Openings	
Section 1, 2 From Main Street to east of Portland Plaza	330 feet
Section 2, 3	

To East Hampton Town Line

1320 feet full opening 660 feet Directional / opening for left turn entrance

- a. Unsignalized intersection spacing and corner clearance distances shall be measured between the closest edge of the two pavements.
- o. If the spacing requirements cannot be achieved, left turn restrictions, joint-use driveways and cross access easements may be required.
- c. Variations may be permitted where they would enhance roadway operations or safety; for example, two one-way driveways in lieu of a two-way drive.
- d. Lesser corner clearances may be permitted on a temporary or permanent basis only when:

No reasonable alternative access is available; The proposed location does not create a safety or operating problem; and The access is located as far from the intersection as possible.

- e. Safe stopping distances shall be provided for all driveways entering the highway.
- f. The centerline of driveways on opposite sides of the roadway shall line up with each other or be separated by at least 150 feet.
- 4. <u>Number of Driveways.</u> The number of access drives and intersections permitted shall be the <u>minimum</u> necessary to provide reasonable access to abutting properties, <u>not the maximum</u> available to each parcel. The Access Management Plan will govern the number and location of drives and intersections. Access drives shall also conform to specified access spacing requirements. When necessary, to provide "reasonable access" the following guidelines may be used to modify the Access Management Plan.
 - a. There should be no more than one driveway per residential property.
 - b. The number of commercial driveways shall be consistent with the following schedule:

Corridor Section	Property Frontage	Driveways
Section 1	0 - 150'	1
	150 - 450'	2
	450 - 900'	3
	Over 900'	4
Section 2	0 - 250	1

	250 - 500	2
	500 - 900	3
	Over 900	4
Section 3	0 - 300'	1
	300 - 600'	2
	600 - 900'	3
	Over 900'	4

- 5. <u>Property and Subdivision Access</u>. Residential and commercial subdivisions with frontage along Route 66 shall be designed to provide shared access wherever possible. The following additional property requirements shall apply:
 - a. Direct access to individual dwelling units shall be prohibited when an alternative exists.
 - b. Where existing properties are subdivided, the minimum lot frontage shall not be less than the minimum acceptable spacings.
 - c. Existing parcels with frontage less than the minimum driveway spacing may not be permitted a direct connection where reasonable alternative access is available.
- 6. <u>Shared Access</u>. (Joint or Cross Access) Adjacent commercial properties (i.e., retail or office) shall provide an on-site cross access drive and a pedestrian connection between the sites, wherever possible.
 - a. Joint-use and cross access driveways shall incorporate
 - a continuous service drive or cross-access corridor that extends the entire length required for driveway separation,
 - a design speed of 10 mph, and sufficient width to accommodate automobiles, service vehicles and loading vehicles,
 - design features to make it clear that the abutting properties may be tied into the service drive
 - a unified access and circulation system that includes coordinated or shared parking areas where feasible.
 - b. Shared parking areas shall permit a reduction in the number of parking spaces if the peak demands for proposed land uses do not occur at the same time.

- c. Property owners entering into joint access agreements shall:
 - record an easement with the deed allowing cross sections to and from other properties served by the cross access drives;
 - record an agreement with the deed that remaining access rights along Route 66 will be
 dedicated to the Town and that preexisting driveways will be closed after the joint-use
 driveway is constructed; and
 - record a joint maintenance agreement with the deed defining maintenance responsibilities of individual property owners.
- 1. The Town Planning and Zoning Commission may reduce the required separation of access points where they prove impractical if all of the following requirements are met:
 - joint access driveways and cross access agreements are provided wherever feasible;
 - the site plan incorporates a unified access and circulation system; and
 - the property owner enters into a written agreement with the town. The deed shall state that the preexisting connections will be closed after the joint use driveway is provided.
- e. The Commission may modify or waive the requirements of this section, where the characteristics or arrangement of abutting properties make a unified or shared access and circulation system impractical.
- Outparcels, Phased Development and Multiple Parcels. Development sites under multiple ownership, the same ownership or consolidated for the purposes of development shall not be considered as separate properties in relation to the access spacing standards.
 - a. The number of driveways permitted shall be the minimum necessary to provide reasonable access to these properties, not the maximum available for that frontage. All necessary easements, agreements, and stipulations required under previous sections shall be met. These requirements shall also apply to phased development plans.
 - b. Where by reason of property ownership or phased construction, it is not practical to construct an entire service road or internal circulation system, then temporary driveway access meets all spacing, location, and related requirements and that the temporary access will be removed once the service road is complete.
 - All access to the outparcel must be internalized by using the shared circulation system of the main development. Access shall be designed to avoid excessive movement across parking aisles

and queuing across surrounding parking and driveway aisles.

- d. The number of outparcels shall not exceed one per 10 acres of site area.
- 8. <u>Reverse Frontage</u>. Access to lots that front on both Route 66 and a parallel roadway shall be provided from the parallel roadway.
 - a. When a proposed residential subdivision would abut Route 66, lots shall have access from a frontage road or interior local road.
 - b. Access rights of these lots shall be dedicated to the Town, and recorded with the deed.
 - c. A berm or buffer may be required at the rear of the lots, and located off of the public right-of-way.

9. <u>Interior lots.</u>

- a. Interior lots shall not be permitted where they would increase the number of properties requiring direct and individual access connections to Route 66.
- b. Interior lots may be permitted for residential developments when deemed necessary to achieve planning objectives such as reducing direct access to thoroughfares, providing internal platted lots with access to a residential street or preserving natural or historic resources.
- 10. <u>Nonconforming Access.</u> Access connections that are already in place and that do not conform with the standards herein shall be designated as nonconforming.
 - a. They shall be brought into compliance with applicable standards under the following conditions:
 - when new access permits are requested,
 - when substantial enlargements or improvements are planned,
 - when there is a significant change in land use or trip generation; or
 - as roadway improvements allow.
 - b. If a principal activity on a property with nonconforming access features is discontinued for a consecutive period of 365 days, or discontinued without a clear intention of assuming that activity, then the access for the property shall be brought into conformity with the applicable

driveway spacing requirements unless otherwise exempted by the permitting authority.

- 11. <u>Variance Procedures</u>. The granting of a variance shall be consistent with the purpose and intent of these regulations. Variances shall be considered only after every feasible option for meeting access standards is explored.
 - a. Applicants for a variance from these standards must provide proof of unique or special conditions that make strict application of the provisions impractical. This shall include proof that:
 - indirect or restricted access cannot be obtained;
 - no engineering or construction solutions can be applied to mitigate the condition;
 - no reasonable alternative access is available from other roads or streets.
 - b. Under no circumstances should a variance be granted, unless not granting the variance would deny all reasonable access, endanger public health, welfare or safety, or cause an exceptional and undue hardship on the applicant. No variance should be granted where such hardship is self-created.
- 12. <u>Site Plan Review Guidelines.</u> Vehicular access points to Route 66 shall be designed to provide for safety and to avoid potential traffic impacts. Site plan review shall include the following findings:
 - a. The road system shall be designed to meet the projected traffic demand of the project.
 - b. Access must be properly placed in relation to sight distance, driveway spacing, and other related considerations, including opportunities for joint and cross access.
 - c. Where possible, access to Route 66 should be from side streets rather than the arterial itself.
 - d. Automobile movement within the site should be possible without having to use the peripheral road network.
 - e. Potential for pedestrian and public transit access should be incorporated.

4. CURB CUT IMPROVEMENTS

Existing curb cuts along Route 66 were assessed for improvement potential based upon the criteria outlined in the proposed access management regulations. The goal is to reduce potential points of vehicular conflict while maintaining sufficient access to properties. There were four areas identified within Section 1 for which retrofit curb-cut designs were considered (Figure 1). Such a retrofit may include consolidation,

closure, modification or relocation of driveways or provision of cross-access connections. In most cases, modification of existing curb cuts will only be possible in conjunction with substantial changes to currently developed properties or significant roadwork on Route 66. Following are descriptions of the areas selected for detailed study.

① RT17A (Main Street) to Elmcrest Manor

This is a highly congested area during peak periods due to the close proximity of Portland Center and the Arrigoni Bridge. There are three major vehicle trip generators within this section of roadway that have access drives on Route 66. Brooks Pharmacy and Burger King are new developments, and the Elmcrest Manor parking lot serves Elmcrest Manor Hospital employees. There is currently no provision for vehicle or pedestrian cross access between the parking lots of these three businesses. To prevent multiple vehicles stops, it is recommended that pedestrian sidewalks are provided between the Elmcrest and Burger King and Burger King and Brooks parking lots. Additionally, a rear entrance from Freestone Avenue and shared drives could be explored. However, due to the recent completion of construction of the new developments, there is no retrofit plan proposed at this time.

② Portland Plaza

The mixture of residential lots and commercial development in this area has resulted in numerous curb cuts. The frequency and spacing of these curb cuts were analyzed. Under existing conditions, there are no feasible modifications that can be suggested at this time. Any changes to properties or proposals for new development should include conformance with the recommended access management plan.

Areas 1 and 2 are considered to be "nonconforming" under the recommended access management regulations. Any new development or changes to existing development should include plans to bring access connections into conformance with access management regulations as established for the corridor overlay zone.

3 Commercial area east of Grove Street

The cluster of commercial access drives just east of Grove Street was studied. Consolidation and narrowing of driveway openings accessing DeLaurs Restaurant and The Veterinarian's Hospital on the south side of the roadway is recommended. This may be accomplished by increasing the size of the island situated between the driveways (Figure 3). These improvements are currently planned as part of the Connecticut Department of Transportation's Route 66 safety improvement project #112-104.

① Commercial area west of Sand Hill Road (west)

Several excessively wide commercial access drives are located in this area. Figure 4 shows recommendations for access management. Curb cut improvements may be made on the south side of Route 17, at the gasoline station opposite the miniature golf. The westerly driveway may be modified by increasing the corner radius and decreasing the driveway width. The driveway openings of the gasoline

station just west of Sand Hill Road can be decreased by extending the length of the island which separates the openings.

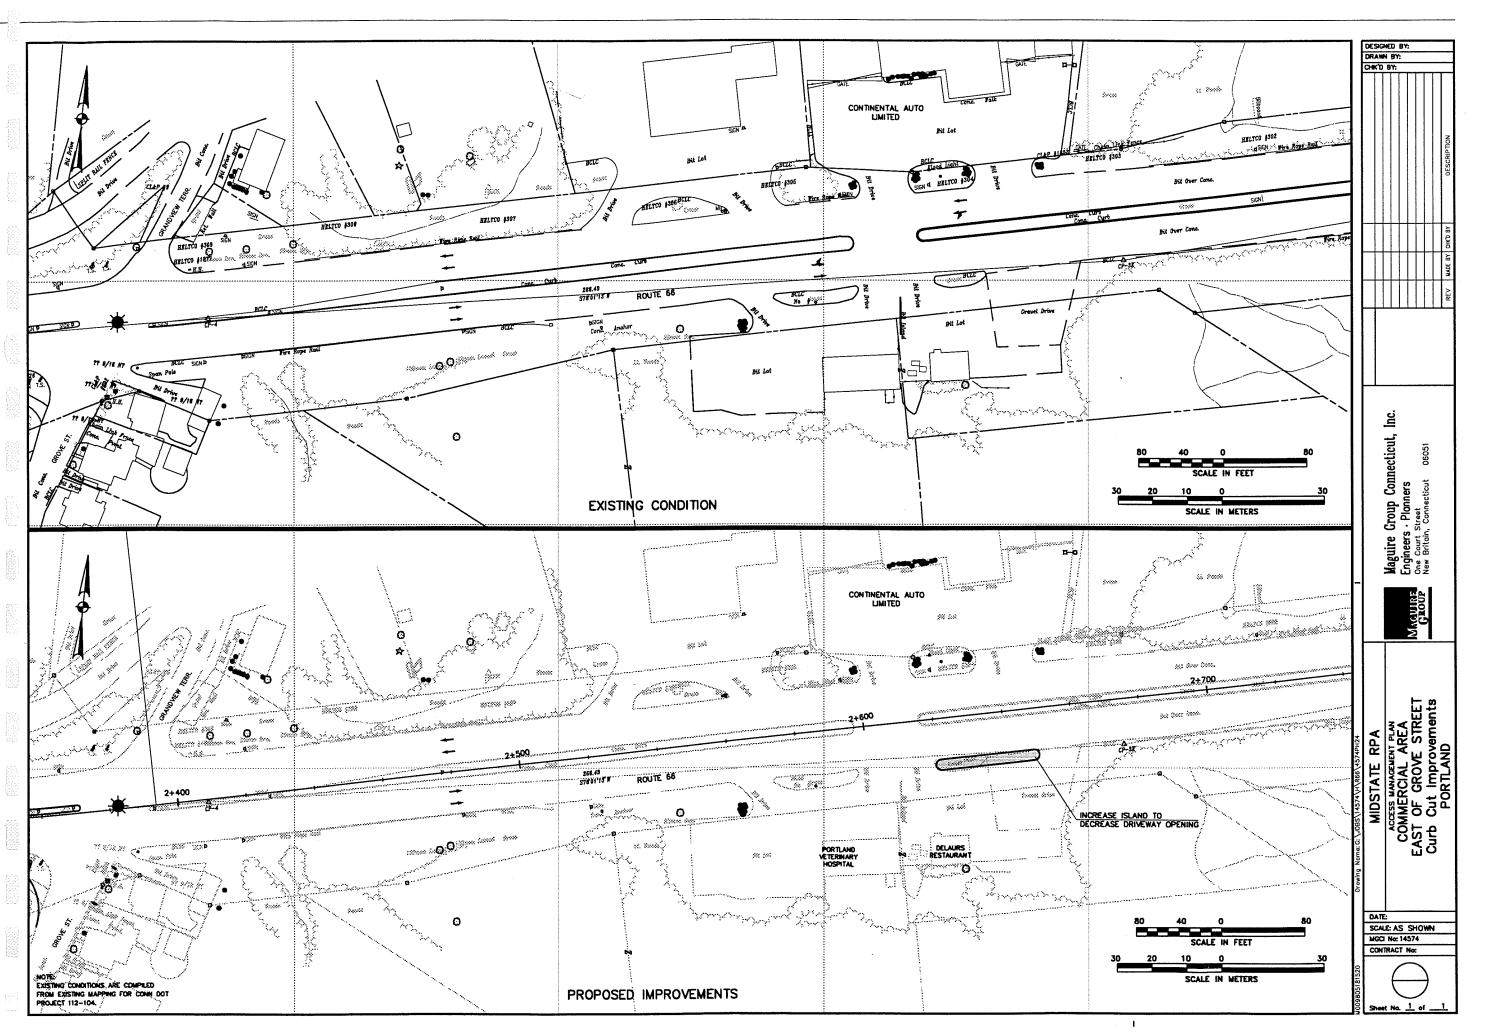


Figure 3

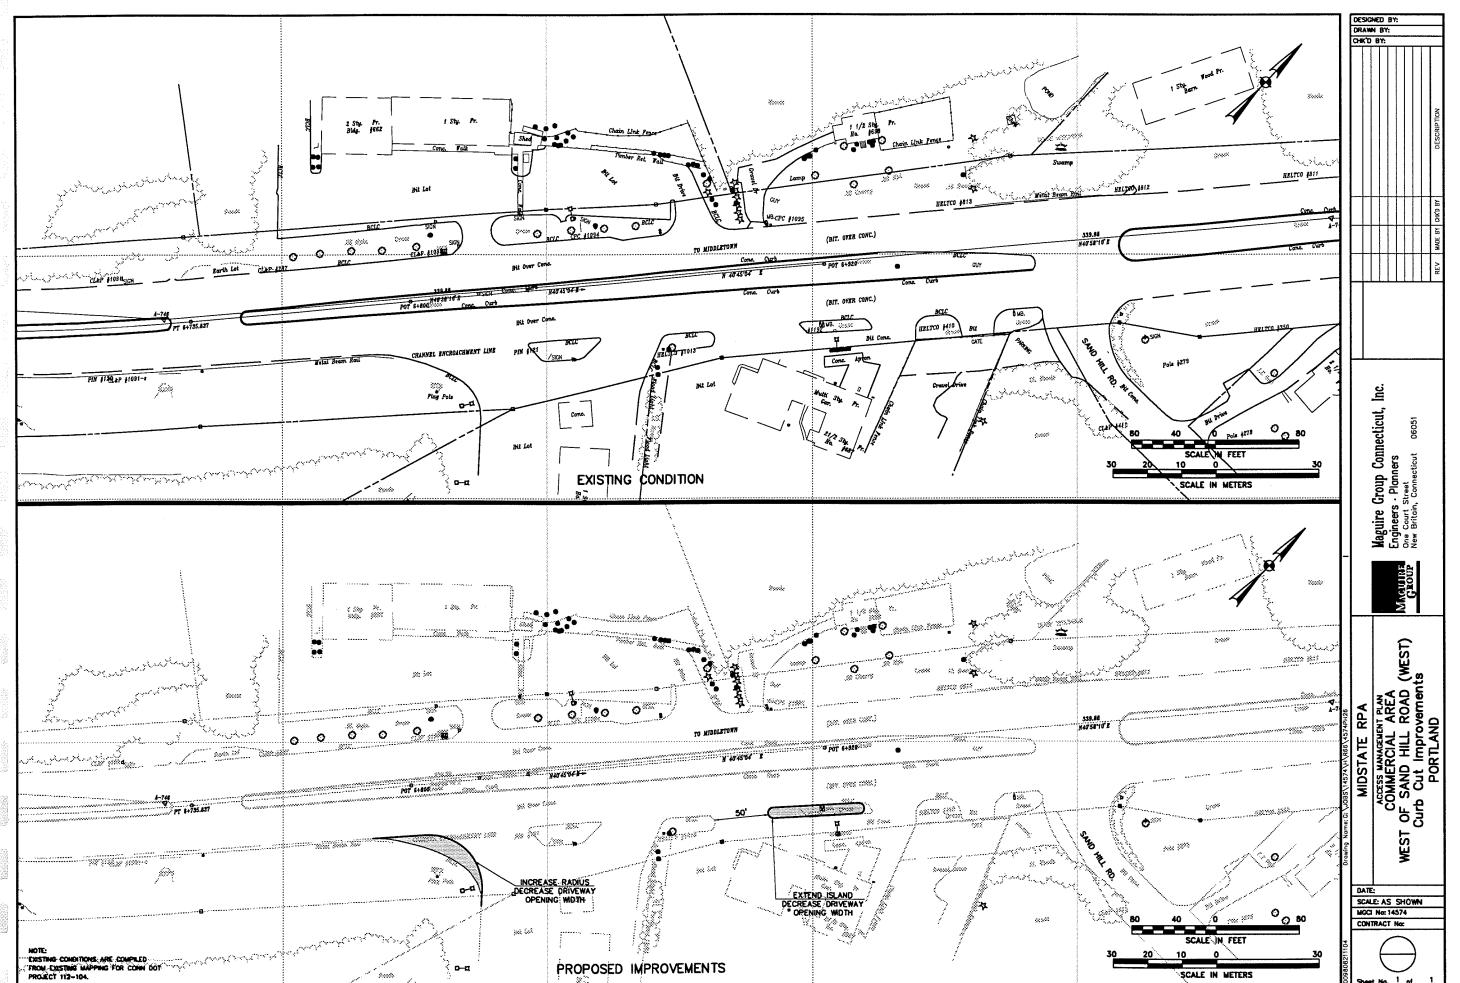



Figure 4

Appendix A

Site Plan Review Guidelines

The implementation of any set of access regulations requires that the professionals reviewing proposed site plans are not only familiar with the access management regulations, but also are more generally knowledgeable about access management issues. The site plan and subdivision review professionals should, ideally, address the following access considerations:

- a. Is the road system designed to meet the projected traffic demand and does the road network consist of a hierarchy of roads designed according to function?
- Does the road network follow the natural topography and preserve natural features of the site as much as possible? Have alignments been planned so that grading requirements are minimized?
- c. Is access properly placed in relation to sight distance, driveway spacing and other related considerations, including opportunities for joint and cross access? Are entry roads clearly visible from the major arterials?
- d. Do units front on local access streets rather than major roadways?
- e. Does the project avoid areas unsuitable for development?
- f. Is automobile movement within the site provided without having to use the peripheral road network?
- g. Does the road system provide adequate access to buildings for residents, visitors, deliveries, emergency vehicles, and garbage collection?
- h. Are there adequate provisions for public transport access?
- I. Have the edges of the roadways been landscaped? If sidewalks are provided alongside the road, have they been set back sufficiently from the road, and has a landscaped planting strip between the road and the sidewalk been provided?
- j. Does the pedestrian path system link buildings with parking areas, entrances to the development, open space, and recreational and other community facilities?

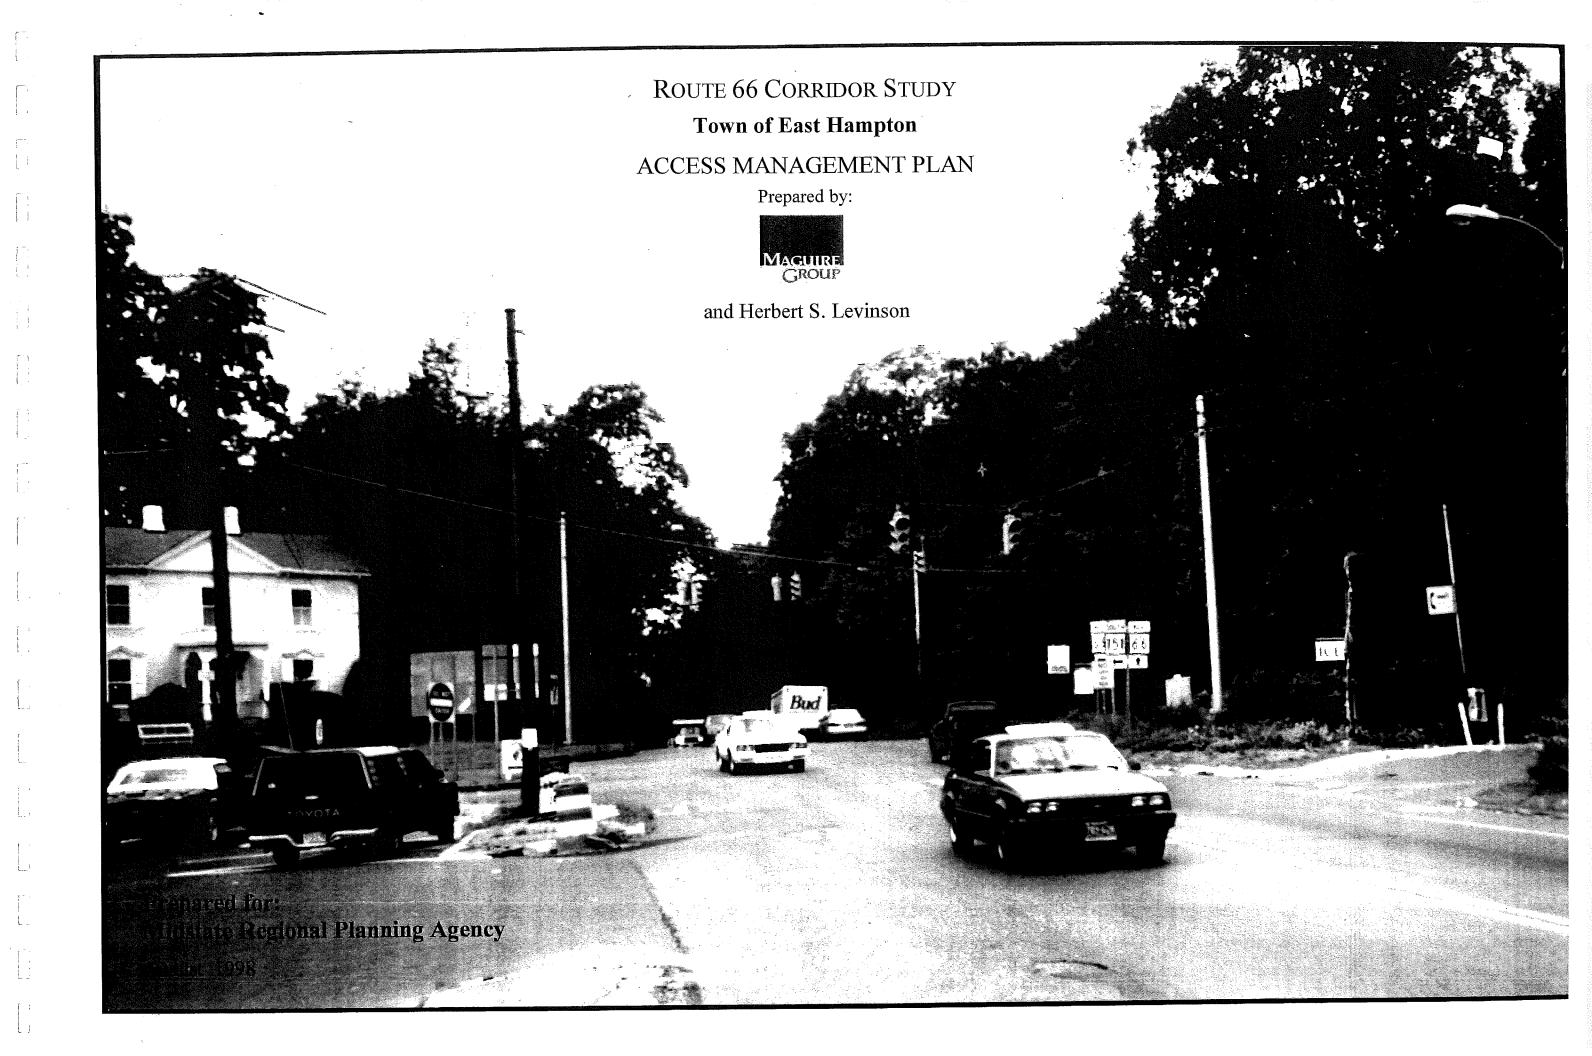

CONTENTS

TEXT			Page
1.	INTRODUCTION		2
2.	CORRIDOR OVERVIEW		2
	Existing Town Regulations State Regulations Traffic Conditions		4 4 4
3.	ACCESS MANAGEMENT REGULATIONS		5
	Basic Objectives Road System Site Development Site Access Variances Access Spacing Guidelines Traffic Signal Spacing Unsignalized Access Spacing Median Openings		6 6 6 6 7 7 7
	Recommended Approach Proposed Route 66 Corridor Overlay Zone		7 7
4.	CURB CUT IMPROVEMENTS		12
TABL	JES		-
Table 1	Number Title	Page	
	1 Access Management Strategy	2	
	2 Distribution of Property Frontages along Route 66 in East Hampton	4	

Traffic Profile of Route 66 in East Hampton

3

4	Summary of Minimum Unsignalized Access Spacing in Feet by Speed for Various Criteria	9
5	Suggested Route 66 Access Spacing Standards for Unsignalized Driveways and Corner Clearances	9
FIGURES		
Figure No.	Title	
1	Access management Strategy	3
2	Traffic Signal Coordination Plan	8
3	Curb Cut Improvements-Adjacent to Routes 66 and 151	14
4	Curb Cut Improvements-Between Main Street and Route 196	15
5	Curb Cut Improvements-Between Old Marlborough Road (East and West)	16
APPENDICE	e e	
	Site Plan Review Guidelines	17

INTRODUCTION

This report presents Access Management Guidelines and Regulations for Route 66 in East Hampton. These proposals are part of an integrated corridor improvement and access management plan that includes roadway and intersection improvements and "retrofit" access management actions such as driveway consolidation, closure, and relocation. The report's main focus is on access spacing guidelines and necessary additions to existing regulations that would apply these guidelines as areas develop more intensively or land uses change.

The report overviews land use and traffic conditions in the corridor including existing regulations. It identifies the basic regulatory principles that govern access spacing, suggests access spacing guidelines for signalized intersections and unsignalized driveways, and presents regulations for potential adoption by East Hampton. Specific access management recommendations for existing curb cuts in areas of concern are also outlined.

2. CORRIDOR OVERVIEW

The Route 66 corridor in East Hampton is approximately five miles. The study limits extend from the Portland / East Hampton town line to the East Hampton / Marlborough town line. The areas in central East Hampton are largely developed. Outlying parts of East Hampton are lightly developed and afford an excellent opportunity for "preventive" access management actions.

For access management purposes, the corridor was subdivided into the three sections (Figure 1). These sections and their associated access management emphasis are shown in Table 1.

- Retrofit action should focus on central East Hampton. (Section 2)
- Regulations should govern access spacing in the entire corridor. However, they will be especially important in the yet-to-be developed areas (Parts of Sections 1 and Section 3).

The distributions of existing property frontage along Route 66 are shown in Table 2. A review of this table indicates the following frontage distances. These distances reflect history, existing regulations, and the degree of development.

Section	Median Frontage Distance	75 Percentile Frontage Distance
1	160'	285'
2	120'	160'
3	120'	200'

The close spacings in Section 3 result from the residential units along the lake that fronts Route 66.

TABLE 1

ACCESS MANAGEMENT STRATEGY

PRIMARY EMPHASIS

		RETROFIT	REGULATIONS
SEC	TION		
1	East Hampton Town line -North Maple Street		X
2	North Maple Street -Old Marlborough Road (west)	X	
3	Old Marlborough Road (west) -East Hampton/Marlborough Town Line		X

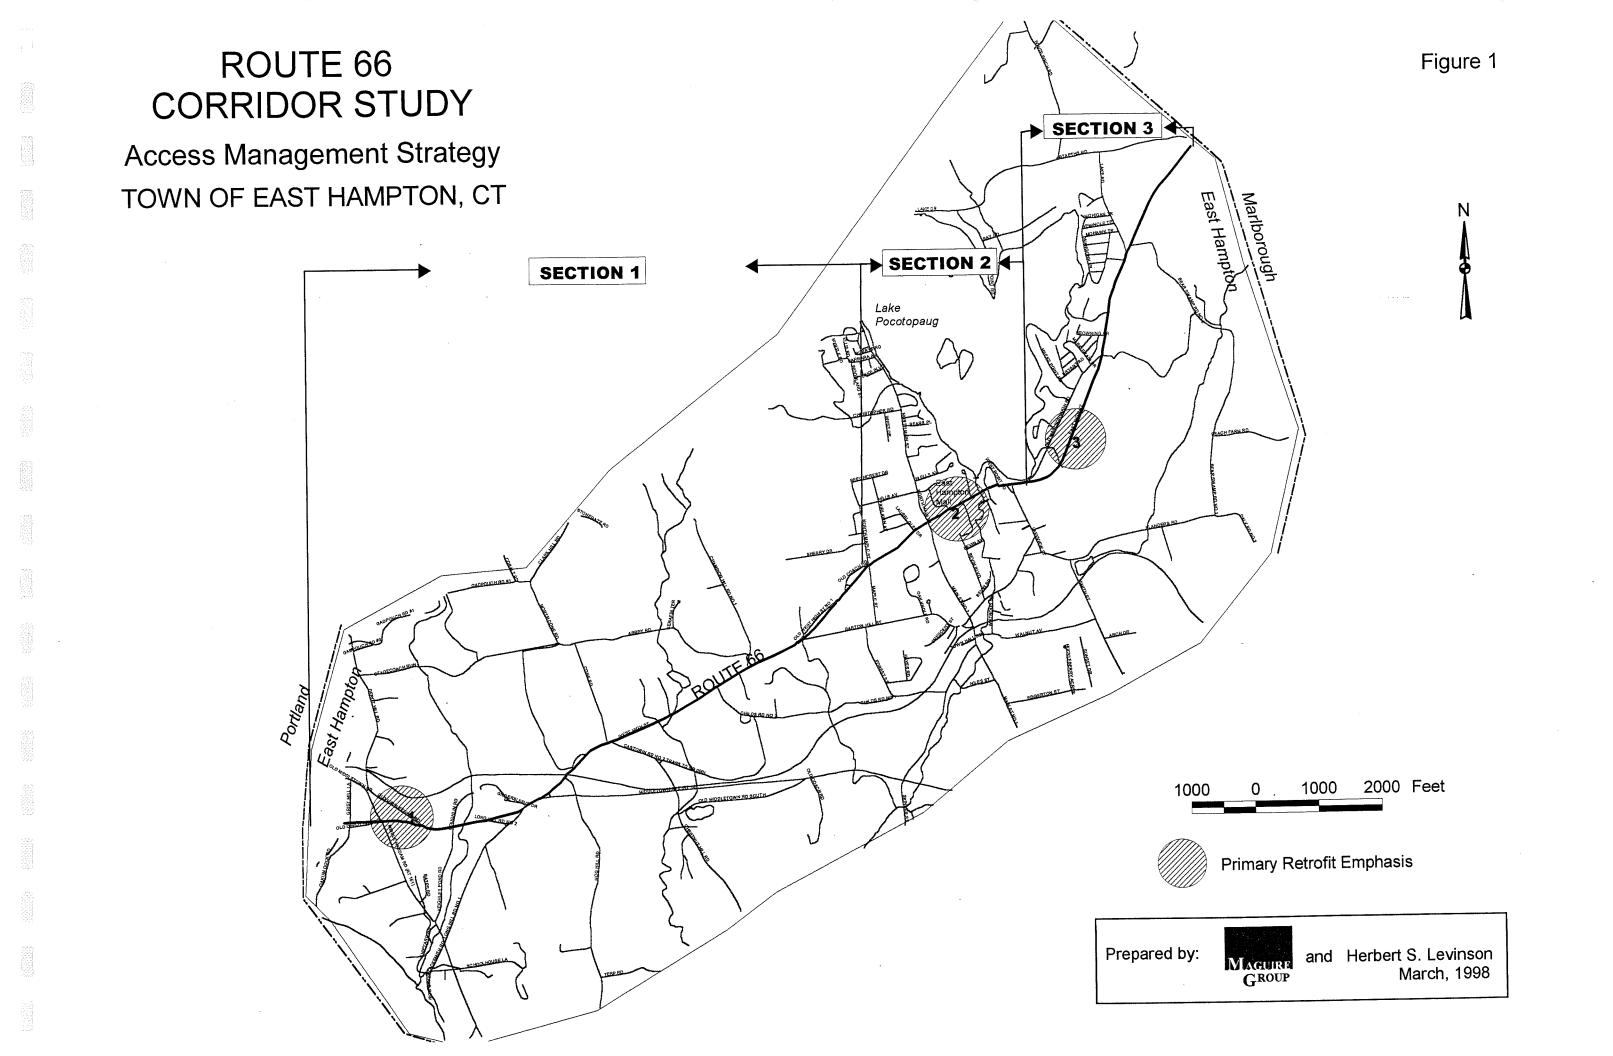


TABLE 2

DISTRIBUTION OF PROPERTY FRONTAGES
ALONG ROUTE 66 IN EAST HAMPTON

	SEC	SECTION 1		SECTION 2		13	TOTAL	
FRONTAGE DISTANCE (FEET)	NO.	%	NO.	%	NO.	%	NO.	%
0-50 INC	10	9	8	12	27	23	45	16
50-100	6	6	19	29	25	21	50	17
100-150	33	30	21	32	19	16	73	25
150-200	16	15	7	11	16	14	39	13
200-250	9	8	8	12	10	9	27	9
250-300	11	10			6	5	17	6
300-450	9	8	3	4	10	9	22	8
450-600	2	2			4	3	6	2
600-750	9	8					9	3
750-900	1	1					1	<1
900-1050	1	1					1	<1
1050-1200	2	2					2	<1
>1200								
TOTAL	100	100	66	100	117	100	292	100
MEDIAN DISTANCE		160'	1:	20'	120)'	1	60'

Existing Town Regulations

East Hampton updated its Zoning Regulations to September 1994. Minimum lot widths range from 100 to 150 feet, and minimum lot frontages are set at 100 feet.

State Regulations

The State of Connecticut regulates the use of public Right-of-way through its "Highway Encroachment Permit Regulations" and through State Traffic Commission(STC) approval for major traffic generators.

The Highway Encroachment permit Regulations have set the following standards and criteria.

• Properties with frontages of less than 50 feet will have not more than one combination entrance and exit. Properties having a frontage of 50 to 100 feet may be permitted two access points if a minimum of ½ of the total frontage is used to separate the driveways.

No entrance or exit may be constructed at the intersection of two highways or streets for a distance of 25 feet from the right-of-way lines at unsignalized intersections. Driveways at signalized intersections are reviewed on an individual basis.

• All entrances and exits shall be located so that sight distances are adequate.

State Traffic Commission approval is required for any major traffic generator that provides 200 or more parking spaces or has a gross floor area of 100,000 square feet that substantially affects state traffic. The submission requires detailed site plans as well as traffic impact, queue, and accident analyses.

For retail gasoline stations, along State highways, there must be at least two points of access to the highway. These access points must be separated by at least the length of the gasoline dispenser.

Traffic Conditions

Existing traffic characteristics along Route 66 in East Hampton are summarized in Table 3. A review of the data indicates:

- The average daily traffic volumes in East Hampton range from a low of approximately 11,700 vehicles per day just west of North Main Street to a high of approximately 17,000 vehicles per day just east of Route 16.
- Through East Hampton, peak-hour traffic volumes are generally balanced by direction of travel. They range from about 300 to 700 vph. At the eastern limits of the corridor, peak traffic flows are more oriented to Willimantic than to Middletown.

TABLE 3

TRAFFIC PROFILE OF ROUTE 66 IN EAST HAMPTON

ITEM	EAST HAMPTON
TRAVEL LANES	2
AVERAGE DAILY TRAFFIC	12,000 - 17,000
AM PEAK HOUR TRAFFIC (vph)	
EB	300 - 600 a
WB	350 - 600 a
PM PEAK HOUR TRAFFIC	
EB	500 - 600 a
WB	400 - 700 a
85 PERCENTILE SPEEDS	44 - 54 mph
POSTED SPEEDS	30 - 45 mph

a = East of Rt. 16

Source: Route 66 Corridor Study, Technical Memorandum 1

- Posted speeds range from 30 to 35 mph in built-up areas, and are set at 45 mph in other parts of the corridor.
- A time loss of over 2 minutes was associated with eastbound PM peak-hour travel over the AM peak. Westbound the maximum time loss was less than a minute. Overall, Route 66 moves well during the peak periods.
- The major problems include:
- Future traffic projections anticipate peak hour peak direction flows of nearly 1000 vph east of North Main Street in East Hampton.
- Many side streets intersect Route 66 at very flat (acute) angles.
- Shared left-turn lanes result in delays and accidents. The North Main-Route 66 junction in the Center of East Hampton is especially problematical. (36 accidents were reported in a 2 year period).
- Traffic signal coordination is limited to two intersections at North Main Street and East Hampton Mall.
- Considerable strip development with frequent driveways and uncontrolled curb frontages are found in the vicinity of the Main Street and Old Marlborough Road (west) junctions.
- The Connecticut River on the south and hilly terrain to the north limit the opportunities for parallel roads, that would provide access to developments.

Alleviating these problems and serving anticipated growth along Route 66, calls for a coordinated set of roadway and traffic improvements. There is also a need to improve existing driveway access and to establish regulations for the spacing of access drives in anticipation of future development.

3. ACCESS MANAGEMENT REGULATIONS

This section sets forth proposed guidelines and regulations for improving access management along Route 66 in East Hampton. It presents the basic objectives that govern access management and provides a general discussion of regulatory controls for improving existing regulations. This section also suggests regulations for possible adoption by the town of East Hampton.

The suggested regulatory changes along Route 66 reflect development, mobility and safety needs. They provide systematic guidance to applicants, staff, and Planning and Zoning Commissions. And they permit sufficient flexibility to address the many land-use and access situations that may occur - especially in developing or redeveloping areas.

Basic Objectives

The underlying objective of access management is to balance mobility and land access in a way that provides access to land development while simultaneously protecting the flow of traffic on the surrounding road system so that safety, capacity, and desired speeds are maintained. This calls for viewing the highway and its surrounding activities as part of a single system - and for introducing access spacing standards into the land planning and highway design process.

Accordingly, access management regulations are designed to:

- Maintain service levels, capacity and safety along Route 66;
- Provide reasonable access to abutting property;
- Limit the number of conflict points and adequately separate conflicts;
- Minimize the number of traffic signals to ensure effective traffic signal coordination in each direction of travel;
- Provide an access framework for future land development decisions;
- Improve the site planning and design process;
- Preserve the character of the corridor and improve roadside aesthetics;
- Contain specific provisions that address access spacing, limiting curb cuts, sharing driveways, using secondary streets, encouraging new interior streets, and requiring road improvements to accommodate development; and,
- Establish procedures for dealing with unusual circumstances.

Access management regulations should also be guided by the following design principles:

Road System

- Each community's road hierarchy should reflect the importance of its highway;
- Property access to and from roads intersecting Route 66 should be encouraged, and should serve as a substitute for direct access whenever possible and acceptable environmentally;
- Spacing standards should be established for signalized and unsignalized driveways, corner (intersection) clearances, and median openings;

- Joint or shared access between adjacent properties should be encouraged;
- Reverse frontage roads should be provided wherever possible, especially for residential subdivisions;
- Access driveways on opposite sides of a route should be lined up with each other wherever possible.

Site Development

- Commercial strip zoning should be minimized.
- Large property frontages should be preserved. (This is especially important along the sections of Route 66 outside of the town center).
- Standards should be set for interior lots, outparcels, and lot width-to-depth ratios. Interior lots should be prohibited for new developments.
- Residential or commercial subdivisions served by a single access should be avoided. Generally, at least two points of access should be provided -- one point onto Route 66 and one point via a cross street.
- Direct access from individual residential units within a subdivision into Route 66 should be prohibited.
- Adequate space should be provided for utilities.

Site Access

- Site access should be designed from the "outside in" (i.e., from public highway) into development.
- Safe stopping sight distance must be provided.
- Adequate storage space should be provided on access drives entering Route 66.
- Suitable pedestrian, transit, and emergency vehicle access should be provided as appropriate.
- Driveway closures should not restrict internal site circulation.

Variances

• Procedures for dealing with variances should be established.

Access Spacing Guidelines

Access spacing guidelines should be established for signalized intersections, unsignalized access points, corner clearances, and median openings.

Traffic Signal Spacing

Signals are closely spaced in the town center, and are widely spaced elsewhere along the corridor. The signal spacing guidelines assume that existing and future signals would operate on common background cycles - two systems are suggested:

- A Middle Haddam Road (Rt. 151) to Middletown Avenue (Rt. 16) (i.e. 80" cycle).
- B Barton Hill Street to Old Marlborough Road (east) (i.e. 90" cycle)

Figure 2 shows the location of existing and possible future signals in each of these systems.

The desired spacing of signalized driveways and intersections should permit at least a 50% through band in each direction of travel at speeds of 35 to 40 mph, based upon an 80 to 100 second cycle. This translates into uniformly spaced signals at about 2000 feet to about a half-mile interval.

Unsignalized Access Spacing

Spacing standards for unsignalized driveways and corner clearances should consider safety, driver response capabilities and existing property frontage characteristics. Safety consideration argues for longer spacings since accident rates rise as the number of driveways per mile increase. However, a too stringent standard that limits reasonable access would result in an undue number of variances or exceptions.

Table 4 summarizes the minimum requirements for unsignalized access points as a function of posted speeds as found in the literature. Posted speeds of 45 mph dominate along Route 66 except in built up areas; these speeds result in access spacings of about 300 to 850 feet. For 30 to 35 mph speeds the desired spacings generally range from 100 to 450 feet. Given, the property frontage constraints along most sections of Route 66, the lower values in this table appear more realistic.

Table 5 gives suggested unsignalized access spacing distances for each section of Route 66. These spacings are keyed to the posted speeds. Unsignalized access spacing distances of 150 to 300 feet would maintain reasonable access. This is because the spacing requirements would mainly apply to new and/or expanded developments that would be mainly located on the larger land parcels.

Median Openings

Median openings should reflect the street/block spacing. Current practices show full median openings ranging

up to a half mile. However, 660 feet directional to 1320 feet for full openings are more common. Accordingly, the following median opening criteria are suggested.

Section 1 - Future Widening Full Opening 1320 feet
Directional Opening (left turns only) 660 feet

Recommended Approach

The approach to implementing access management regulations or practices varies widely among states. Colorado, Florida, and New Jersey have adopted comprehensive access codes that govern when and where access can be provided along state highways. A few cities and counties also have established comprehensive codes or guidelines.

In Connecticut, access management decisions are largely left to individual communities, and must, therefore, be achieved through the local regulatory process. This calls for making appropriate changes in the local comprehensive plans of development, zoning/development regulations, subdivision regulations and/or in guidelines governing the site plan review process.

The suggested approach is to establish a <u>Route 66 Corridor Overlay Zone</u> in East Hampton. This zone would be appended to the town's existing regulations. It will give a legal status to the Access Management Plan and provide the basis for prescribing these plans in the future.

<u>Proposed Route 66 Corridor Overlay Zoning-East Hampton</u>. A Route 66 Corridor Overlay Zone should be established. The following text is recommended.

- Purpose and Applicability. The Route 66 Corridor Overlay Zone shall govern access provision along Route 66 within the town. Developments along the roadway shall be governed by the specific provisions that follow and by the Access Management Plan that is appended to these regulations. The intent is to provide and manage access to adjacent land development while simultaneously improving traffic flow in terms of safety capacity and speed.
 - a. These regulations shall complement policies and requirements that are set forth in the Town's zoning regulations.
 - b. The provisions shall apply to new developments or to substantial changes in existing developments. A "substantial change" shall involve:
 - a change in use from residential to commercial,
 - a 25% or greater increase in gross floor area, required or provided parking, spaces, employment, or traffic generation
 - a 10,000 square foot or greater increase in gross floor area,F

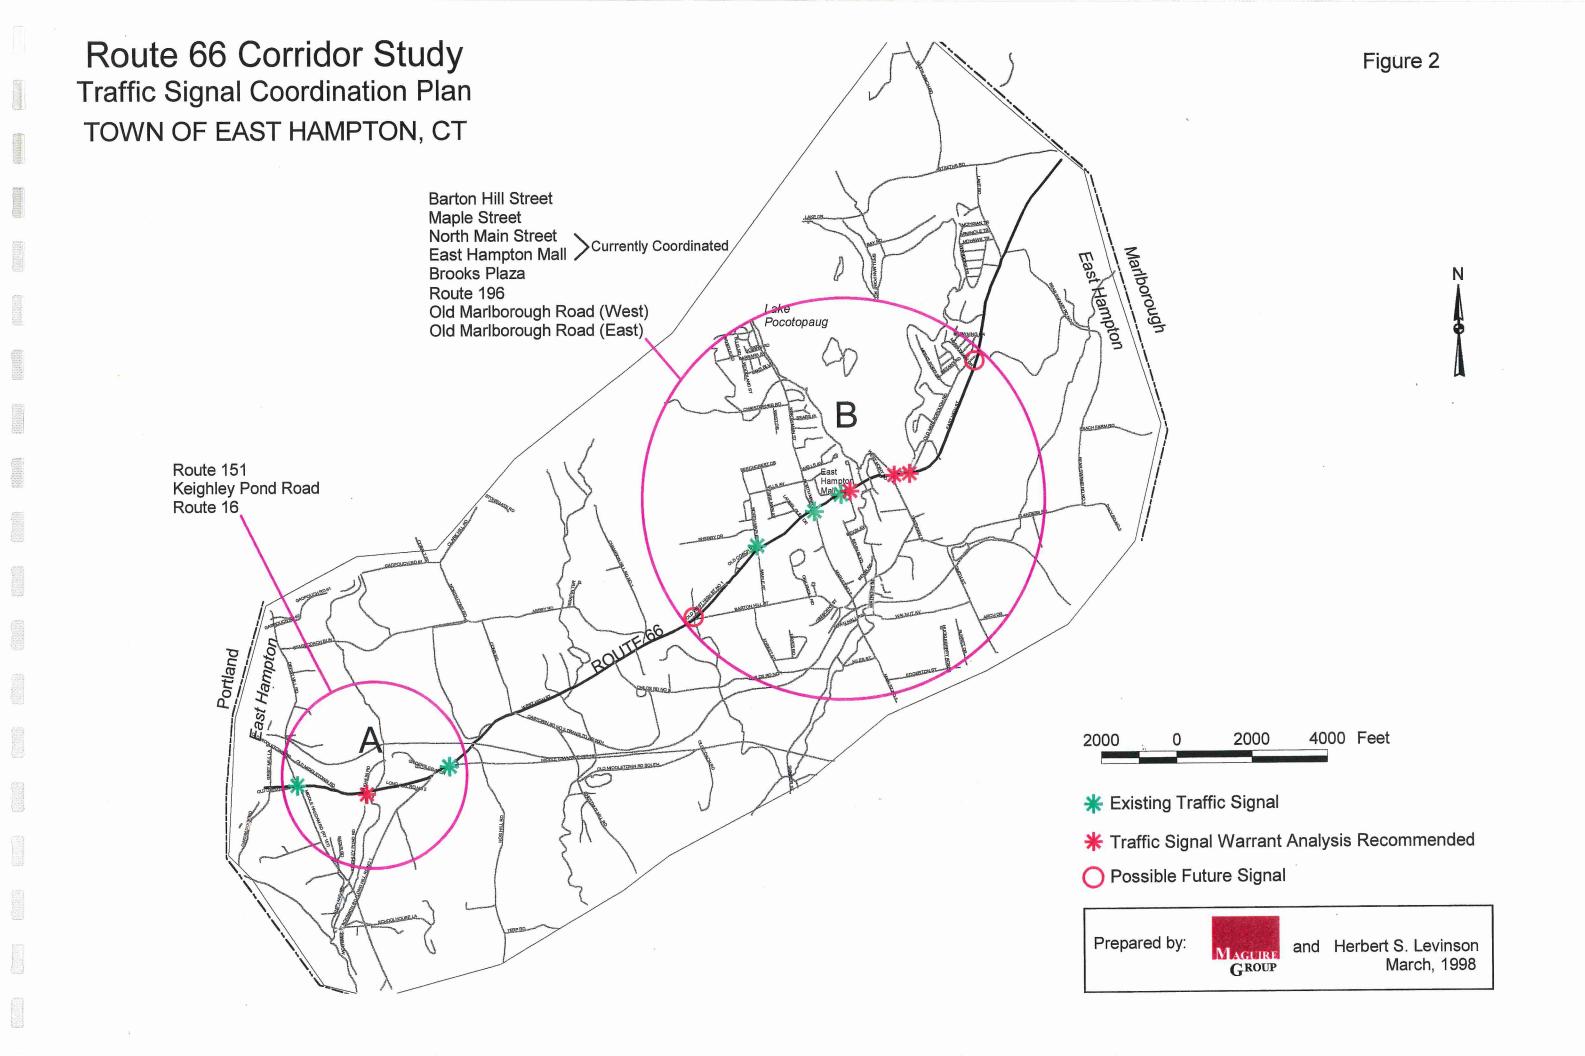


TABLE 4

SUMMARY OF MINIMUM UNSIGNALIZED ACCESS
SPACING IN FEET BY SPEED FOR VARIOUS CRITERIA

	Posted Speed (mph)								
Criteria	20	25	30	35	40	45	50	55	60
1. Stopping sight distance	120	165	220	275	340	410	482	565	655
 2. Length of Turn lane: Turning traffic to leave differential of: a) ≤ 10mph b) ≤ 15mph c) ≤ 20mph 			320	390 320	490 390 320	590 490 390	700 590 490	820 700 590	950 820 700
Minimize right turn conflict overlap			100	150	200	300			
Intersection sight distance through traffic reduces speed by 15%	230	300	375	460	575	700	850	1000	1150
5. Maximum egress capacity	120	190	320	450	620	800	1125	1500	1875

One mph = 1.609 km/h; one foot = 0.3048 meters

Source: Gluck, J.; Levinson, H.S., Stover, V.; Yazersky-Ritzer, G., Access Spacing Guidelines, Transportation Research Board Circular 456, National Research Council, Washington, D.C. 1996.

TABLE 5

SUGGESTED ROUTE 66 ACCESS SPACING STANDARDS FOR UNSIGNALIZED DRIVEWAYS AND CORNER CLEARANCES (FEET)

EAST HAMPTON SECTION	POSTED SPEED	SPACING NCHRP 456*	SUGGESTED SPACING
1	35-45	150-300	250' (2)
2	30-35	100-150	150'
3	45	300	250 (2)

NOTE:
APPLIES TO NEW DEVELOPMENTS OR TO SUBSTANTIAL CHANGES IN EXISTING DEVELOPMENTS

- (1) MINIMUM CITED SPACING
- (2) SHORTER SPACINGS DUE TO SMALLER EXISTING PROPERTY FRONTAGE

^{*}National Cooperative Highway Research Program Circular 456

- a 50 parking space or greater increase in the required or provided parking spaces,
- a subdivision of the property is proposed.

The provisions do not apply to existing access drives where no new development or substantial change in existing development is planned.

- 2. <u>Plan Conformance.</u> All access drives and intersections shall be brought into conformance with the improvements indicated in the adopted Access Management Plans if:
 - a. The use of the property changes or any alternatives are proposed that would require a site plan or subdivision application; or,
 - b. A major resurfacing or widening of the roadway is initiated.
- 3. <u>Access Spacing</u>. The spacing of access points shall be consistent with the Access Management Plan. Access spacing shall conform with (or exceed) that shown on the following schedule.

Access Spacing Design Element	<u>Standards</u>
Traffic Signal Spacing	50% Minimum through band
	Based on 80 to 100 second cycle

Unsignalized Access Spacing

Section 1 Portland/East Hampton Town Line to North Maple Street	250 ft							
Section 2 North Maple Street to Old Marlborough Road (West)	150 ft							
Section 3 Old Marlborough Road (West) to East Hampton Town Line	250 ft							
Median Openings								
If Route 66 is widened to four lanes with median to Route 16								
Full opening	1320 ft,							
Directional (left-turn opening)	660 ft.							

- a. Unsignalized intersection spacing and corner clearance distances shall be measured between the closest edge of the two pavements.
- b. If the spacing requirements cannot be achieved, left turn restrictions, joint-use driveways and cross access easements may be required.
- c. Variations may be permitted where they would enhance roadway operations or safety; for example, two one-way driveways in lieu of a two-way drive.
- d. Lesser corner clearances may be permitted on a temporary or permanent basis only when:

No reasonable alternative access is available; The proposed location does not create a safety or operating problem; and, The access is located as far from the intersection as possible.

- Safe stopping distances shall be provided for all driveways entering the highway.
- f. The centerline of driveways on opposite sides of the roadway shall line up with each other or be separated by at least 150 feet.
- 4. <u>Number of Driveways.</u> The number of access drives and intersections permitted shall be the <u>minimum</u> necessary to provide reasonable access to abutting properties, <u>not the maximum</u> available to each parcel. The Access Management Plan will govern the number and location of drives and intersections. Access drives shall also conform to specified access spacing requirements. When necessary, to provide "reasonable access" the following guidelines may be used to modify and amend the Access Management Plan.
 - a. There should be no more than one driveway per residential property.
 - b. The number of commercial driveways shall be consistent with the following schedule:

Section 1, 3	
0-250'	1
250-500'	2
500-900'	3
Over 900'	4
	0-250' 250-500' 500-900'

5. <u>Property and Subdivision Access</u>. Residential and commercial subdivisions with frontage along Route 17 shall be designed to provide shared access wherever possible. The following additional property requirements shall apply:

- a. Direct access to individual dwelling units shall be prohibited when an alternative exists.
- b. When existing properties are subdivided the minimum lot frontages shall not be less than the minimum acceptable spacing.
- Existing parcels with frontage less than the minimum driveway spacing may not be permitted a direct connection where reasonable alternative access is available.
- 6. <u>Shared Access.</u> (Joint or Cross access) Adjacent commercial properties (i.e., retail or office) shall provide an on-site cross access drive and a pedestrian connection between the sites, wherever possible.
 - Joint-use and cross access driveways shall incorporate:
 - continuous service drive or cross access corridor that extends the entire length required for driveway separation,
 - a design speed of 10 mph, and sufficient width to accommodate automobiles, service vehicles and loading vehicles,
 - design features to make it clear that the abutting properties may be tied into the service drive,
 - a unified access and circulation system that includes coordinated or shared parking areas where feasible.
 - b. Shared parking areas shall permit a reduction in the number of parking spaces if the peak demands for proposed land uses do not occur at the same time.
 - c. Property owners entering into joint access agreements shall:
 - record an easement with the deed allowing cross sections to and from other properties served by the cross access drives;
 - record an agreement with the deed that remaining access rights along Route 66 will be dedicated to the Town and that preexisting driveways will be closed after the joint-use driveway is constructed; and
 - record a joint maintenance agreement with the deed defining maintenance responsibilities of individual property owners.
 - d. The Town Planning and Zoning Commission may reduce the required separation of access points where they prove impractical if all of the following requirements are met:

- joint access driveways and cross access agreements are provided wherever feasible;
- the site plan incorporates a unified access and circulation system; and,
- the property owner enters into a written agreement with the town. The deed shall state that the preexisting connections will be closed after the joint use driveway is provided.
- The Commission may modify or waive the requirements of this section, where the characteristics or arrangement of abutting properties make a unified or shared access and circulation system impractical.
- 7. <u>Outparcels, Phased Development and Multiple Parcels</u>. Development sites under multiple ownership, the same ownership or consolidated for the purposes of development shall not be considered as separate properties in relation to the access spacing standards.
 - a. The number of driveways permitted shall be the minimum necessary to provide reasonable access to these properties, or the maximum available for that frontage. All necessary easements, agreements, and stipulations required under previous sections shall be met. These requirements shall also apply to phased development plans.
 - b. Where by reason of property ownership or phased construction, it is not practical to construct an entire service road or internal circulation system, then temporary driveway access may be allowed provided that the temporary access meets all spacing, location, and related requirements and that the temporary access will be removed once the service road is complete.
 - c. All access to the outparcel must be internalized by using the shared circulation system of the main development. Access shall be designed to avoid excessive movement across parking aisles and queuing across surrounding parking and driveway aisles.
 - d. The number of outparcels shall not exceed one per 10 acres of site area.
- 8. Reverse Frontage. Access to lots that front on both Route 66 and a parallel roadway shall be provided from the parallel roadway.
 - a. When a proposed residential subdivision would abut Route 66, lots shall have access from a frontage road or interior local road.
 - Access rights of these lots shall be dedicated to the Town, and recorded with the deed.
 - c. A berm or buffer may be required at the rear of the lots, and located off of the public right-of-

way.

9. <u>Interior lots</u>.

- a. Interior lots shall not be permitted where they would increase the number of properties requiring direct and individual access connections to Route 66.
- b. Interior lots may be permitted for residential development when deemed necessary to achieve planning objectives such as reducing direct access to thoroughfares, providing internal platted lots with access to residential streets, or preserving natural or historic resources.
- 10. <u>Nonconforming Access.</u> Access connections that are already in place and that do not conform with the standards herein shall be designated as nonconforming.
 - a. They shall be brought into compliance with applicable standards under the following conditions:
 - when new access permits are requested,
 - when substantial enlargements or improvements are planned,
 - when there is a significant change in land use or trip generation; or
 - as roadway improvements allow.
 - b. If a principal activity on a property with nonconforming access features is discontinued for a consecutive period of 365 days, or discontinued without a clear intention of resuming that activity, then the access for the property shall be brought into conformity with the applicable driveway spacing requirements unless otherwise exempted by the permitting authority.
- 11. <u>Variance Procedures.</u> The granting of a variance shall be consistent with the purpose and intent of these regulations. Variances shall be considered only after every feasible option for meeting access standards is explored.
 - a. Applicants for a variance from these standards must provide proof of unique or special conditions that make strict application of the provisions impractical. This shall include proof that:
 - indirect or restricted access cannot be obtained;
 - no engineering or constructions solutions can be applied to mitigate the condition; and
 - no reasonable alternative access is available from other roads or streets.

- Under no circumstances should a variance be granted, unless not granting the variance would deny all reasonable access, endanger public health, welfare or safety, or cause an exceptional and undue hardship on the applicant. No variance should be granted where such hardship is self-created.
- 12. <u>Site Plan Review Guidelines.</u> Vehicular access points to Route 66 shall be designed to provide for safety and to avoid potential traffic impacts. Site plan review shall include the following findings:
 - a. The road system shall be designed to meet the projected traffic demand of the project.
 - b. Access must be properly placed in relation to sight distance, driveway spacing, and other related considerations, including opportunities for joint and cross access.
 - c. Where possible, access to Route 66 should be from side streets rather than the arterial itself.
 - d. Automobile movement within the site should be possible without having to use the peripheral road network.
 - e. Potential for pedestrian and public transit access should be incorporated.

4. CURB CUT IMPROVEMENTS

Existing curb cuts along Route 66 were assessed for improvement potential based upon the criteria outlined in the proposed access management regulations. The goal is to reduce potential points of vehicular conflict while maintaining sufficient access to properties. There were three main areas identified along the corridor in East Hampton for which retrofit curb cut designs were considered (Figure 1). Such a retrofit may include consolidation, modification, closure or relocation of driveways, or provision of cross-access connections. In many cases, modification of existing curb cuts will only be possible in conjunction with substantial changes to currently developed properties or during significant roadwork on Route 66. Following are descriptions of the areas selected for detailed study.

① Adjacent to the junction of Route 151 (Middle Haddam Road) and Route 66

The driveways accessing the supermarket on the southeast corner of this intersection are closely spaced as well as being situated in close proximity to this high-volume intersection (approximately 50 feet). In an effort to resolve safety and congestion problems at this location, curb cut improvements have been suggested in conjunction with the intersection improvement concepts presented in the Route 66 Corridor Improvement Plan. The recommended retrofit design includes closure of the curb cut closest to the southeast corner and consolidation and minimization of drives between the supermarket and pizza restaurant (Figure 3). The easterly supermarket drive and the westerly pizza restaurant drive may be combined into a single entrance at

a central location. Removal of the existing median separating the two parking lots would allow cross access. The entrance to the supermarket from Route 151 would remain unchanged, therefore maintaining the desired two points of access. These changes would decrease potential vehicle conflict points, and allow an opportunity to improve visual aesthetics in this area.

2 Between junctions of Main Street and Route 196 (East Hampton Mall area)

As the most commercial stretch of Route 66 in East Hampton, there is a concentration of businesses and town government offices that draw numerous vehicles and pedestrians. This is an area of a higher than average frequency of accidents involving rear-end and turning-movement collisions. This area is in need of access management measures in the form of curb-cut retrofit action. The lack of defined turning lanes and delineated access driveways contributes to operational problems.

Ideally, all properties should include landscaped strips between the roadway and sidewalks, and separation islands between sidewalks and parking lots. The islands may serve to define drives accessing Route 66. Access drives should be shared where possible.

Unfortunately, there are many buildings situated close to the roadway where property frontage is used for parking. In many cases, vehicles must exist the parking lot by backing onto Route 66, creating a hazardous situation. The addition of islands would result in the loss of these parking spaces. Even though this may improve safety, it is necessary to determine, on an individual basis, whether or not rear or side parking would be sufficient if the number of parking spaces is reduced. Conformance with access management regulations should be programmed into future changes at these sites. Figure 4 illustrates minor driveway and turning lane improvements that may be accomplished with a minimum impact on existing parking areas. Eastbound left turn lanes may be provided for McDonald's and Brooks Plaza (westerly drive). Eastbound turn lanes may be provided at Lakeshore Tavern and adjacent package store. A no turn zone between opposing turn lanes should be clearly defined. The island between the package store and Food Bag should be enlarged to divide the access drives of these two establishments

3 Between junctions of Old Marlborough Road (west) and Old Marlborough Road (east)

This is an area in which regulation of new, or substantial changes to existing, curb cuts on Route 66 will be critical. Some existing commercial properties lack defined or properly spaced access drives. A curb-cut retrofit may be beneficial at the group of businesses east of Old Marlborough Road (west) on the south side of Route 66. The opening at Brown Insurance may be reduced and access could be shared with Ed's Wreck and Repair. The wide curb cuts between Ed's Repair and Belltown Parts may be consolidated and reduced.

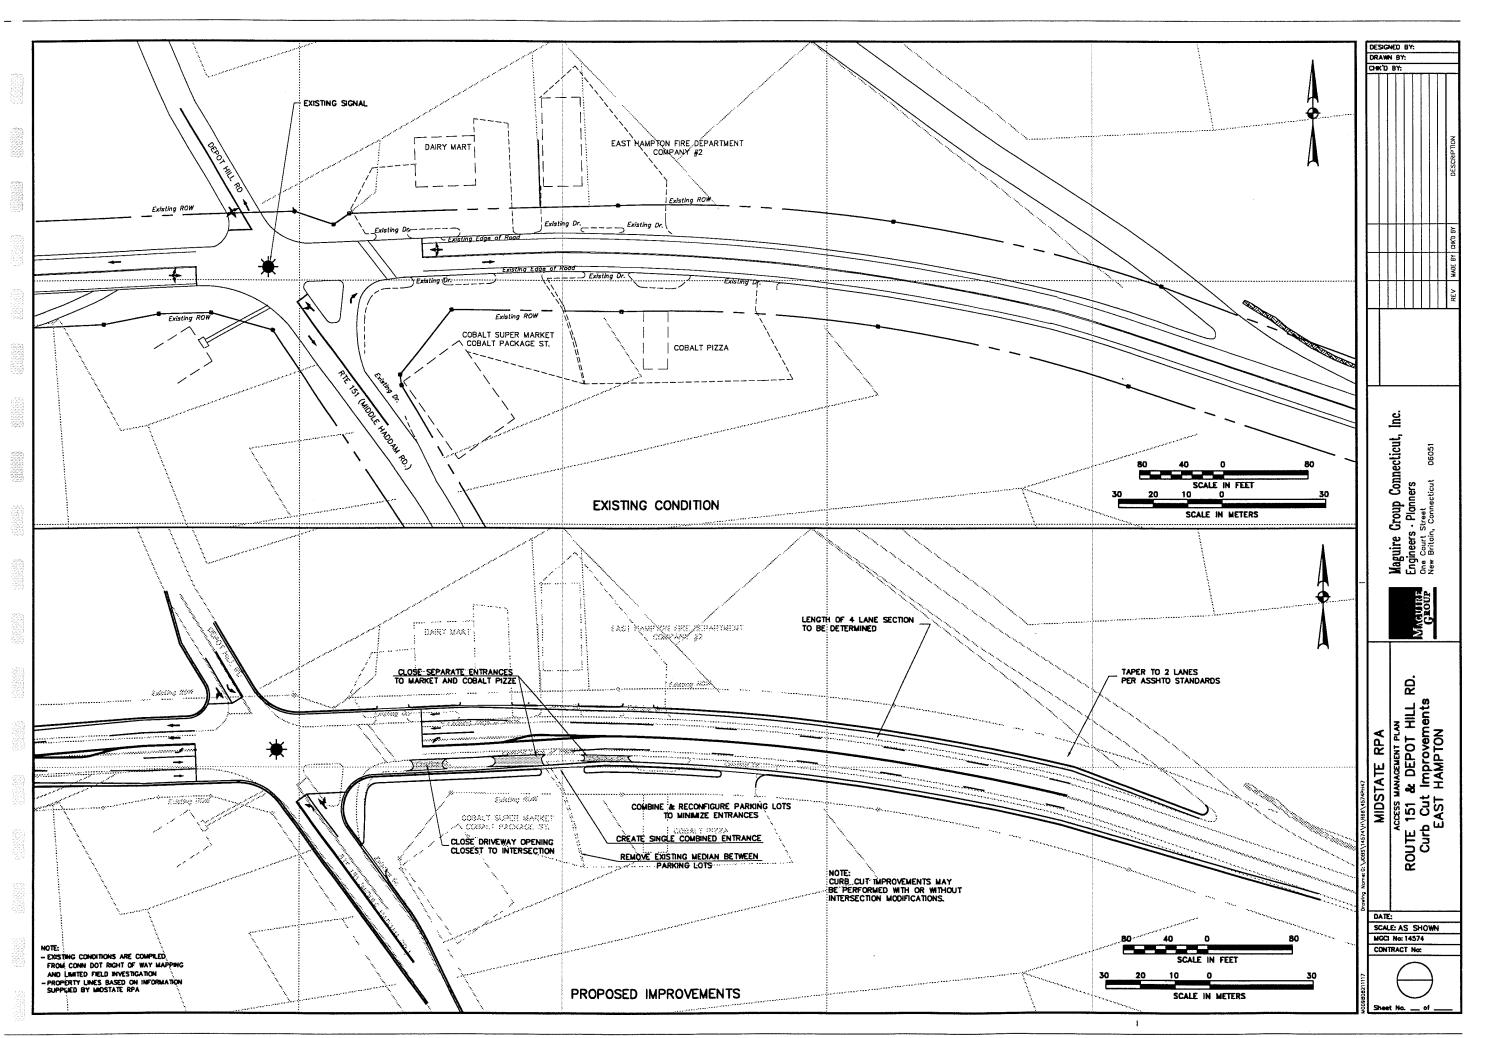


Figure 3

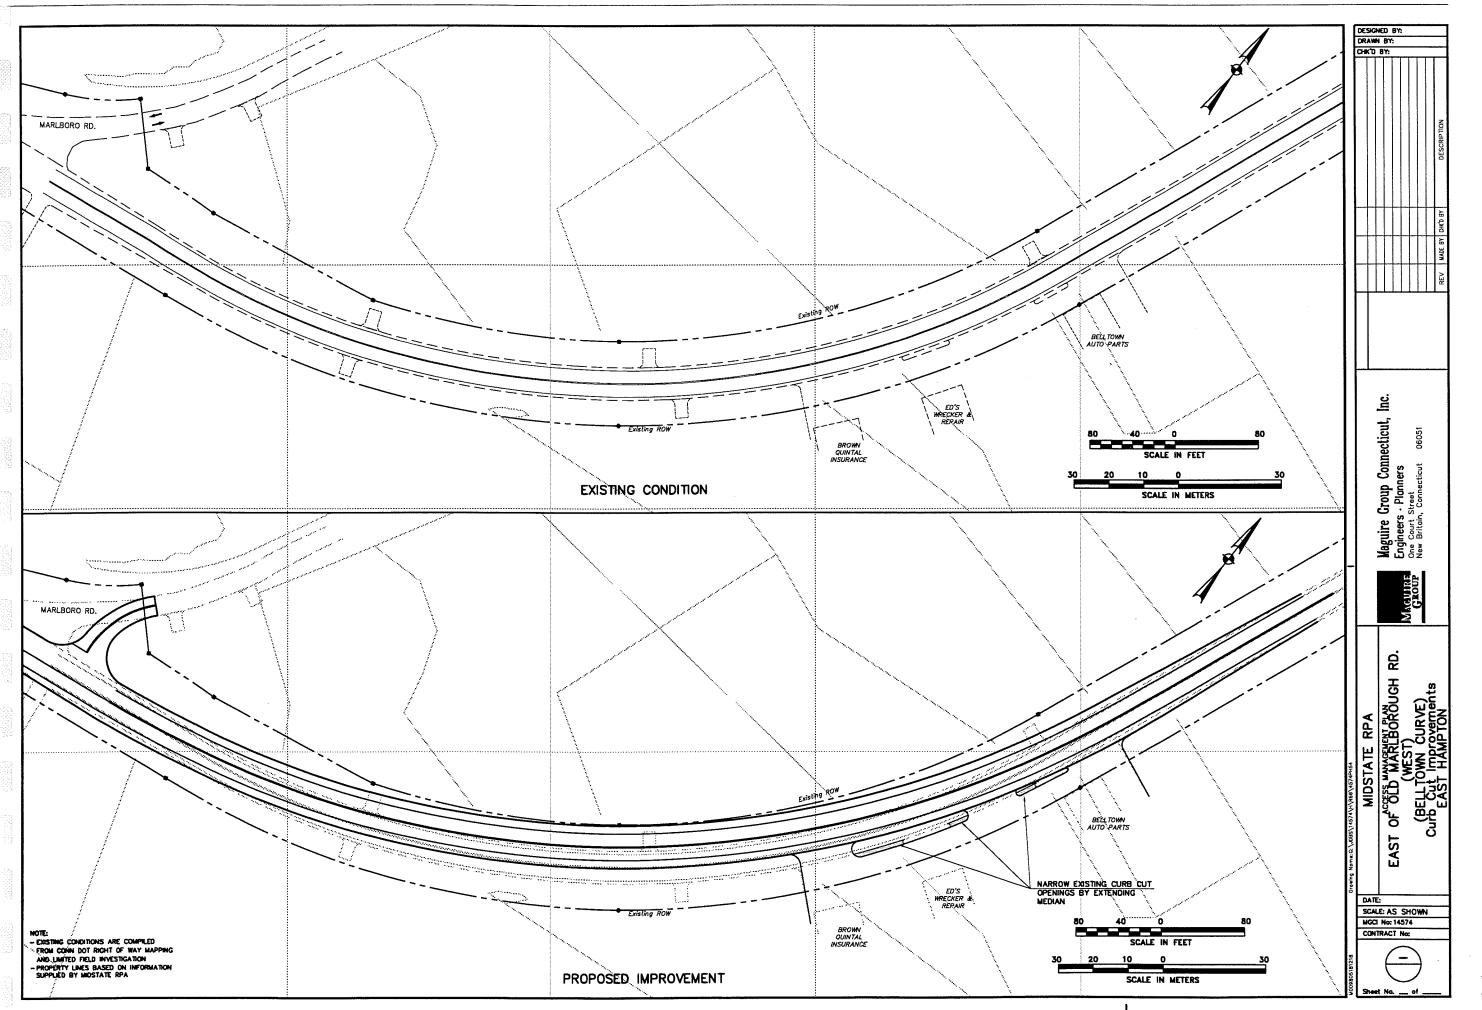


Figure 4


Appendix A


Site Plan Review Guidelines

The implementation of any set of access regulations requires that the professionals reviewing proposed site plans are not only familiar with the access management regulations, but also are more generally knowledgeable about access management issues. The site plan and subdivision review professionals should, ideally, address the following access considerations:

- a. Is the road system designed to meet the projected traffic demand and does the road network consist of a hierarchy of roads designed according to function?
- b. Does the road network follow the natural topography and preserve natural features of the site as much as possible? Have alignments been planned so that grading requirements are minimized?
- c. Is access properly placed in relation to sight distance, driveway spacing and other related considerations, including opportunities for joint and cross access? Are entry roads clearly visible from the major arterials?
- d. Do units front on local access streets rather than major roadways?
- e. Does the project avoid areas unsuitable for development?
- f. Is automobile movement within the site provided without having to use the peripheral road network?
- g. Does the road system provide adequate access to buildings for residents, visitors, deliveries, emergency vehicles, and garbage collection?
- h. Are there adequate provisions for public transport access?
- I. Have the edges of the roadways been landscaped? If sidewalks are provided alongside the road, have they been set back sufficiently from the road, and has a landscaped planting strip between the road and the sidewalk been provided?
- j. Does the pedestrian path system link buildings with parking areas, entrances to the development, open space, and recreational and other community facilities?

Roadway	Function	PPENDIX (cation Map	
		Tighe&Bon	d

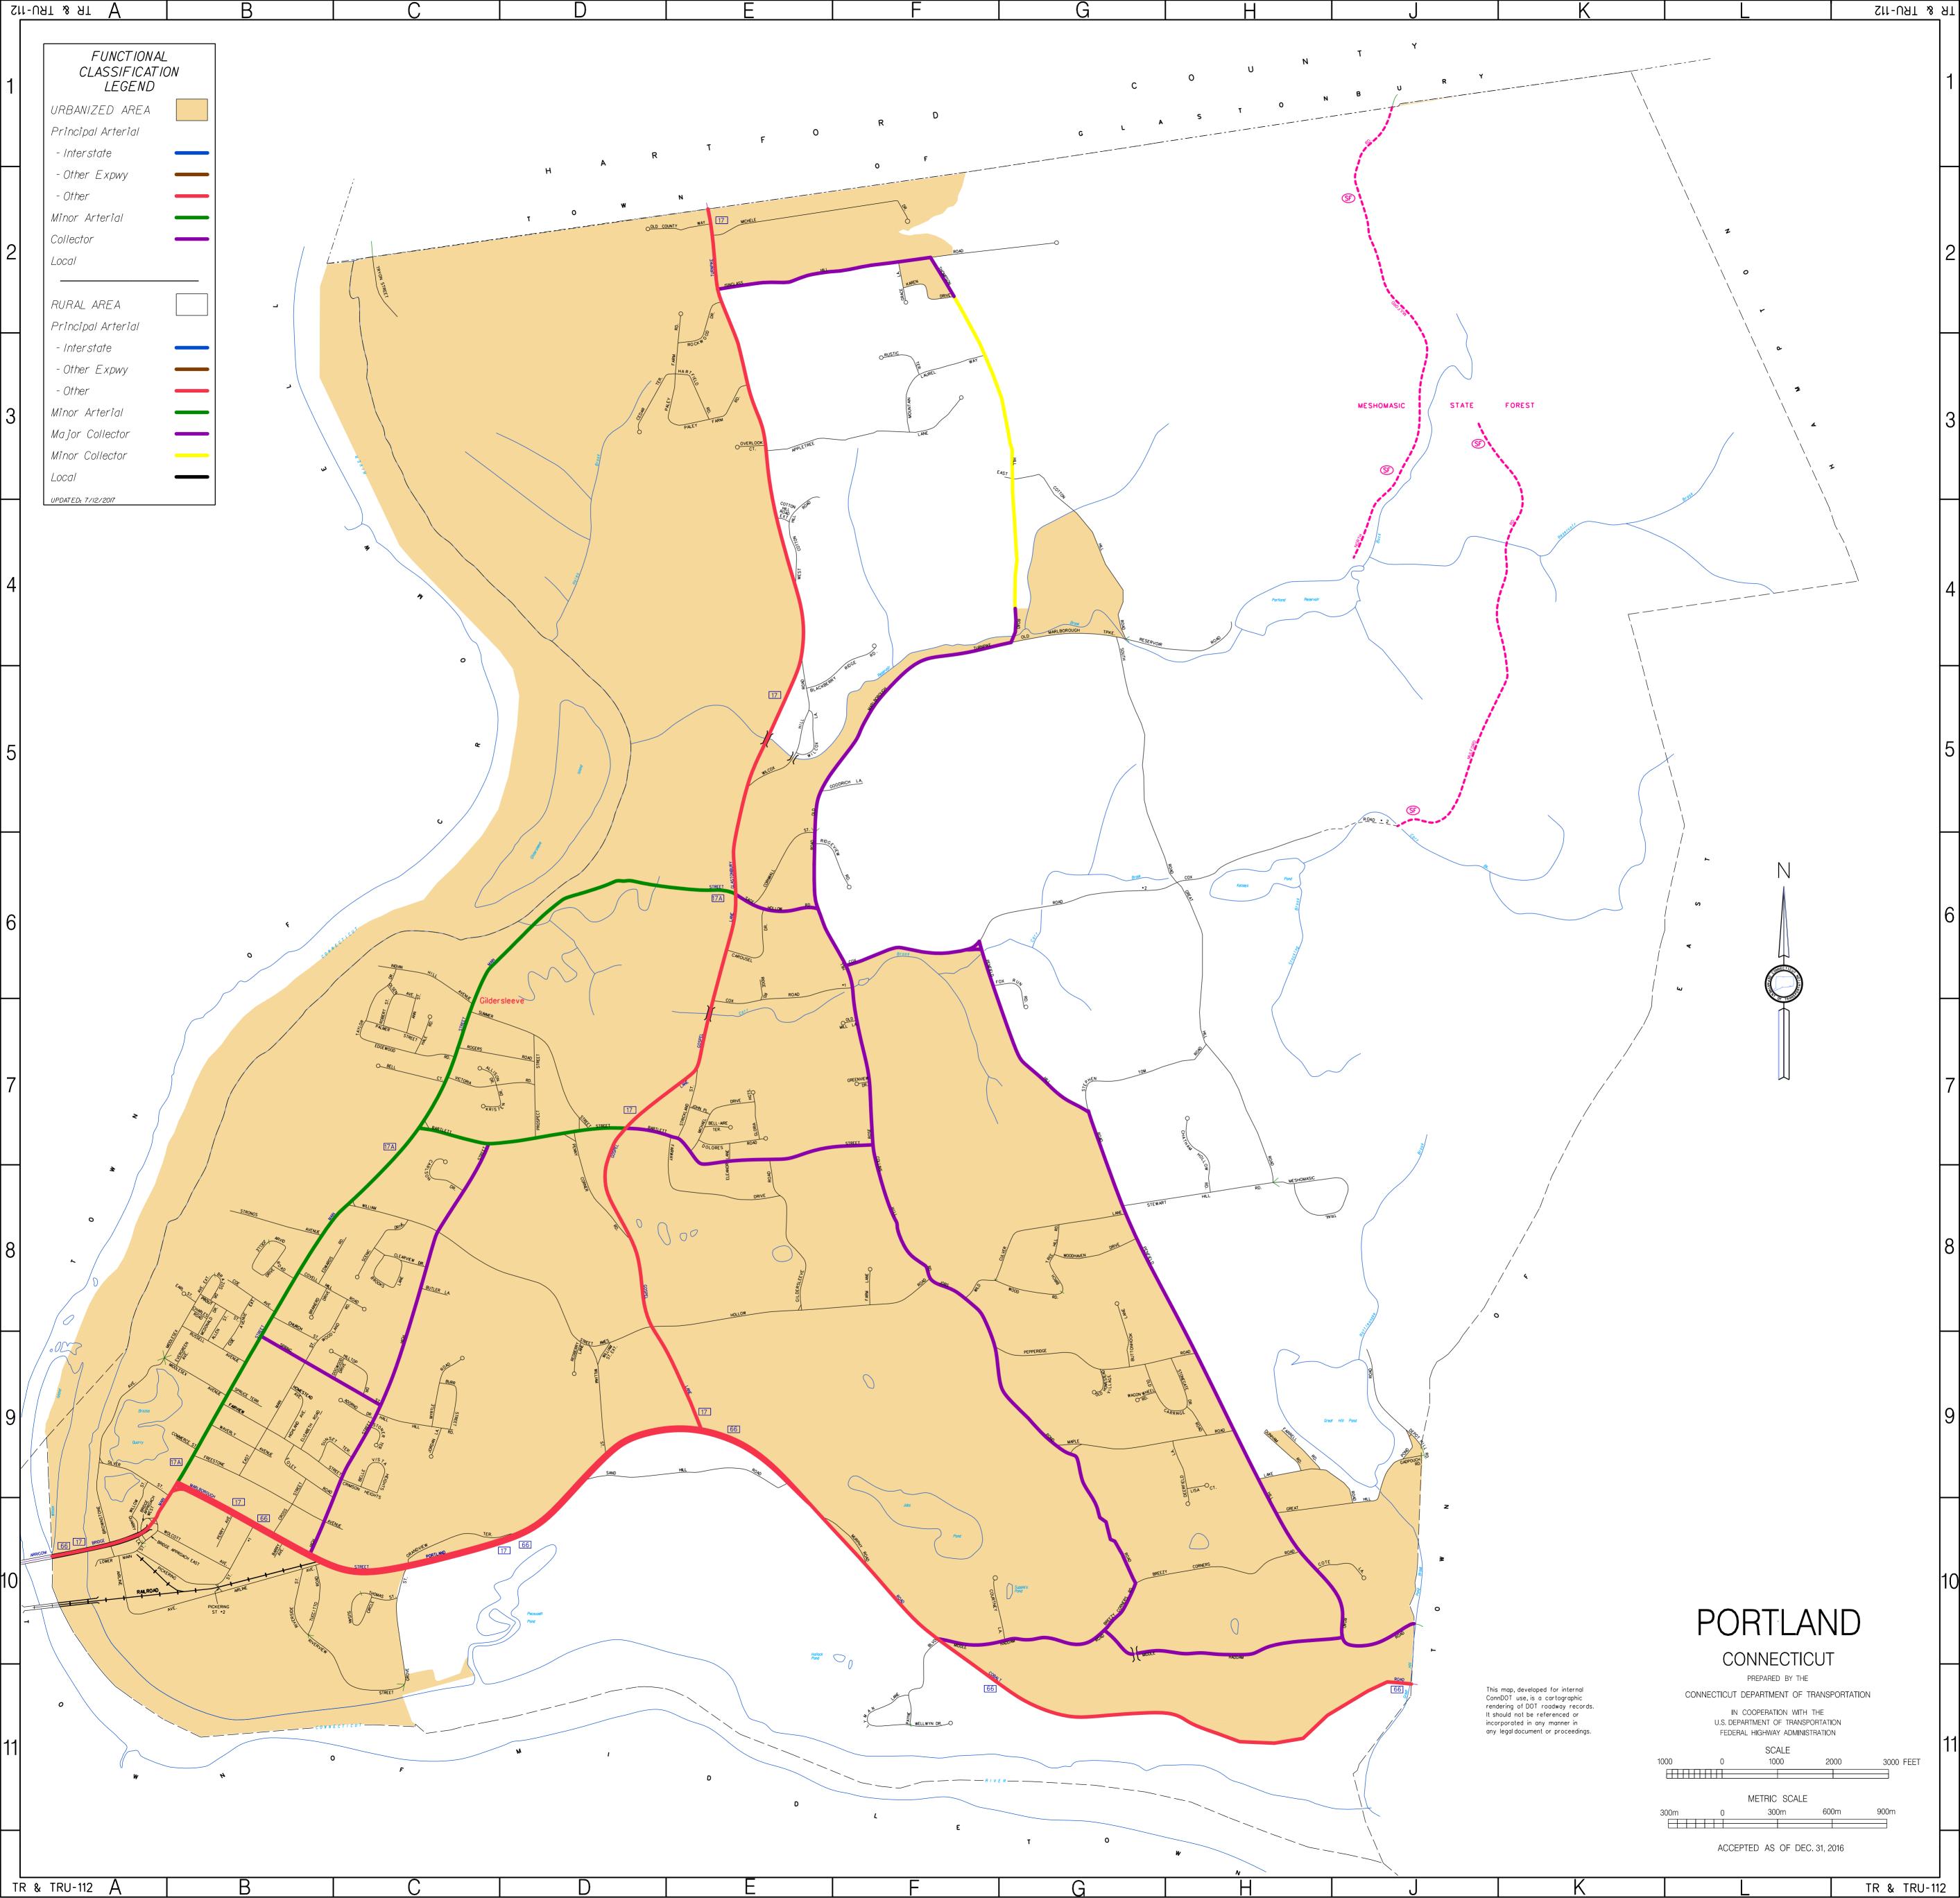

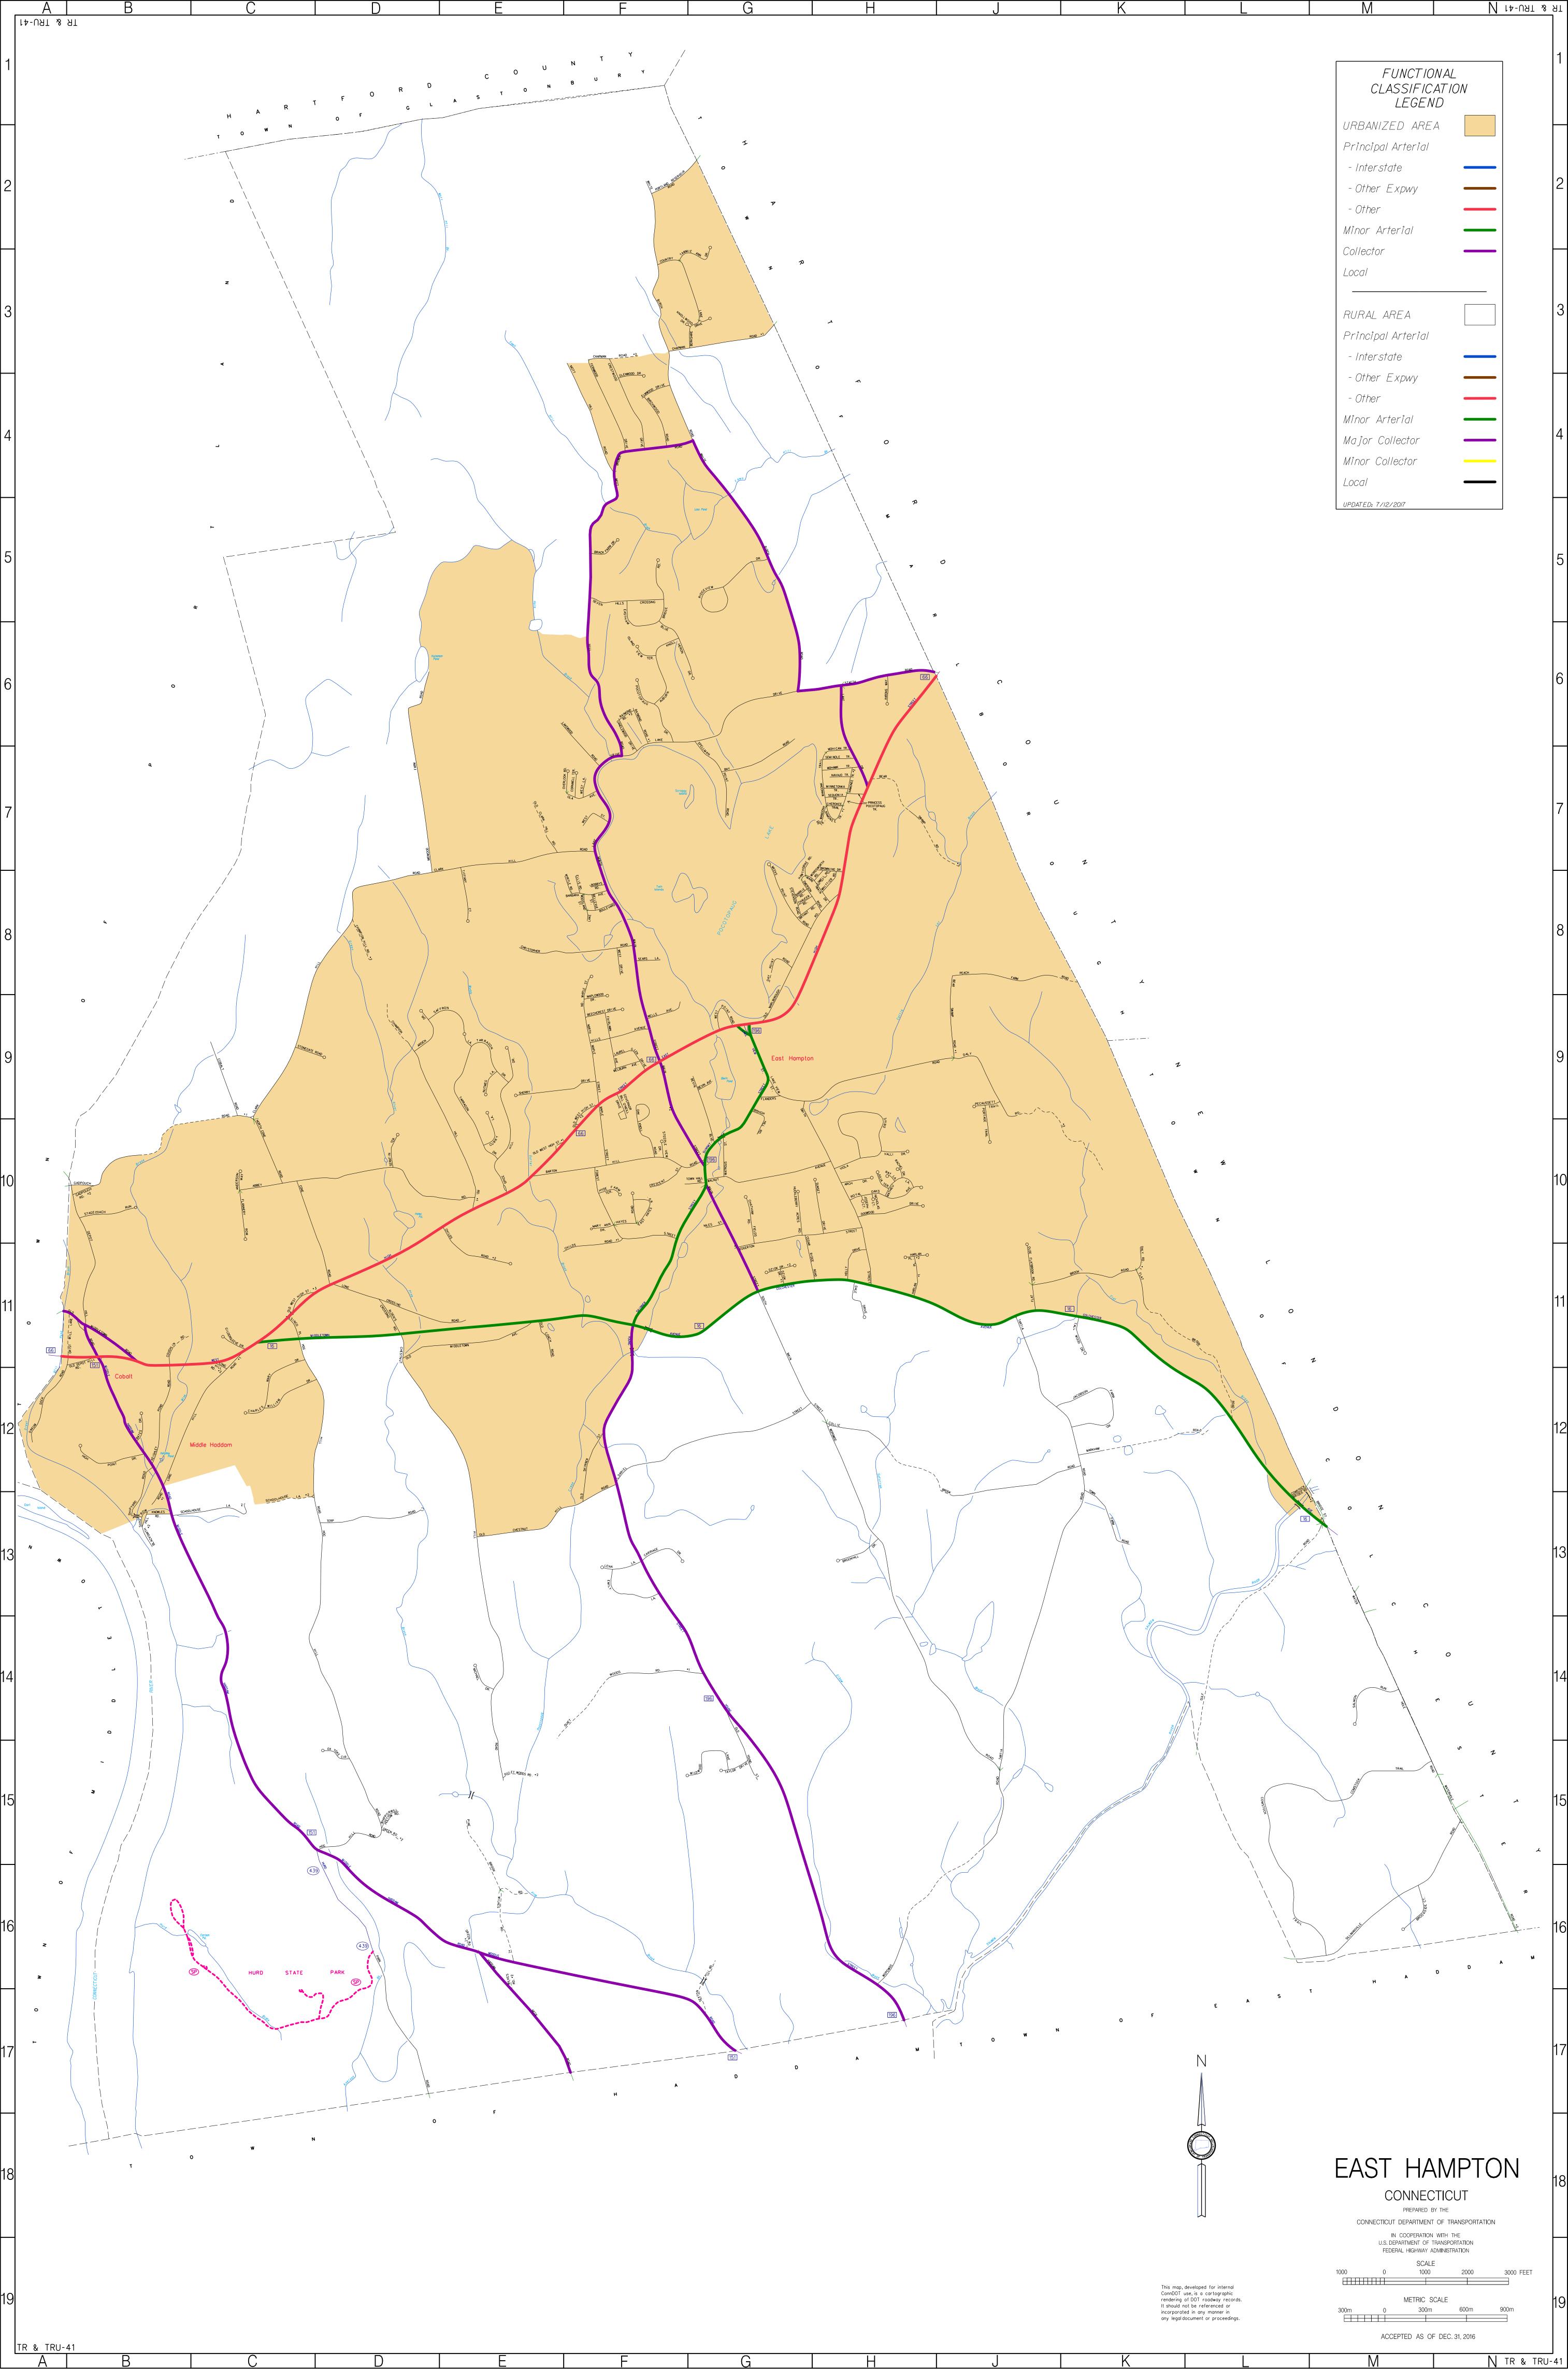


East Hampton Plan of Conservation and Development GLASTONBUK Transportation Plan Town of East Hampton, CT Legend Potential Road Connections Existing Scenic Road Proposed Scenic Road Sidewalk Priority Area Park and Ride Lake Data Sources: Town of East Har CT DEP CT DOT EAST HADDAM MIDDLETOWN 5,000

Page 93


HADDAM



This map is for planning purposes only.

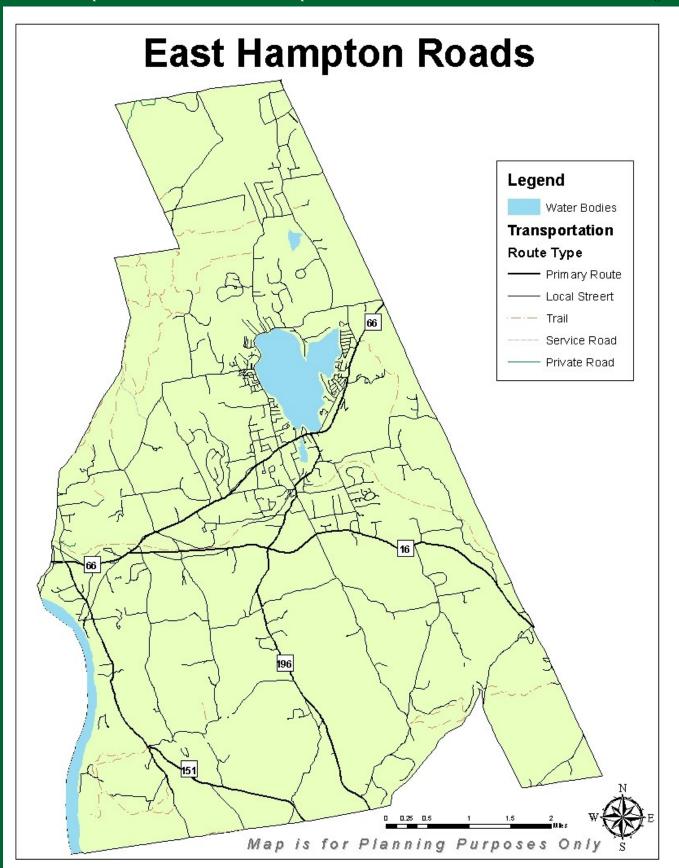




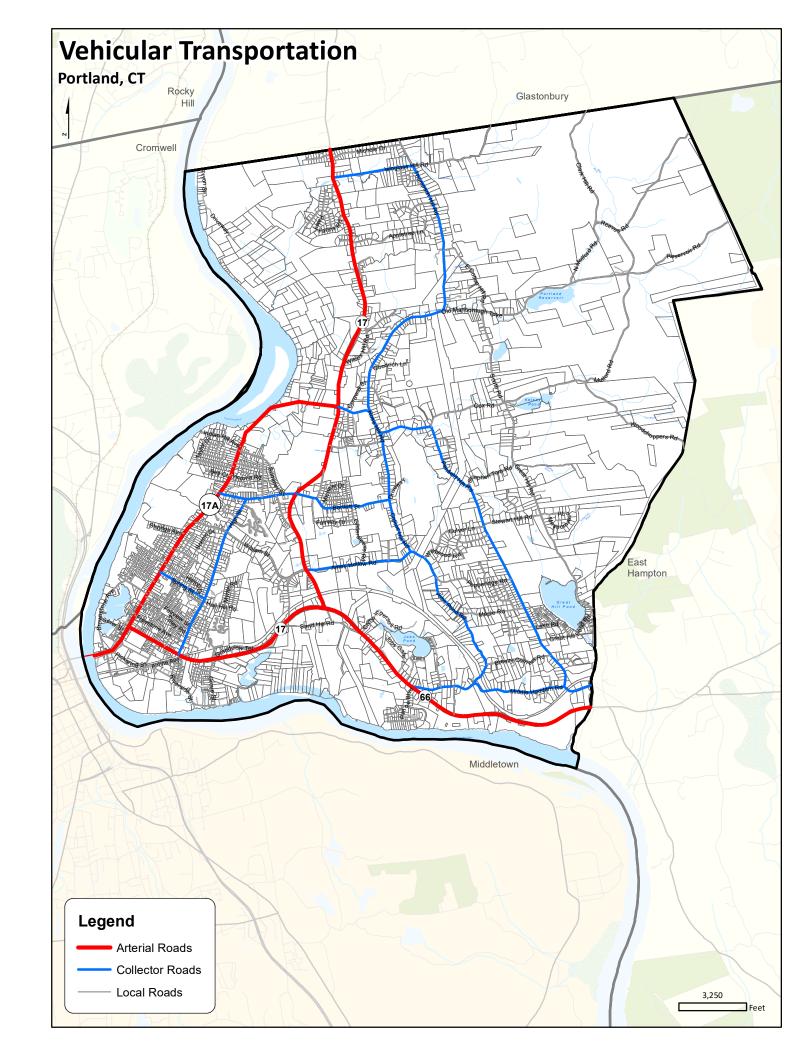

APPENDIX D Existing Study Area Intersection Traffic Control Signal Plans	
Tighe&Bond	

	1																											
Ĭ	PRE-	-EMPT 1						PRE-E	EMPT 2		MOVE	EMEN ⁻	T DIAGE	RAM							GY BY- STAT	E		ER # -				N #112-207
		L .		•	1 11			- 11												MAINT	Γ LEVEL 2			VICE POLE-	· CL&P 526	FL. SI	GN 112	-213
NONE	▼	↓ ×	↓	•		000			4												UNME	TERED SE	RVICE			OFFICE	RECORD	
NONE	2	1 🗀	2 1						5												SIG	GNAL FAC	`FS				ON # 10	
				3					•													SIVAL TAC			STC #11	2-9910-03	SM	
		П	1	TT		П		-	П												300 mm	3	00 mm	300	mm SIGNAL REV	SED: 2-15-00		
				110-0					11		5114.05			5114.05					DUI 4 0 0 0					$\left \begin{array}{c} R \end{array}\right $		ALL NEW TRAFFIO ECT 112-104.	S SIGNAL EQ	UIPMENT
NTOR		HASE 1		HASE 2		HASE 3			IASE 4		PHASE			PHASE			ASE 7		PHASE 8	_ (4¥	300 mm	J Δ				AN DRAWN 5/01		
FLASH				CL CL	GRN	CL	CL	GRN	_	_	RN CL	CL	GRN	CL	CL GF	RN	CL	CL C	GRN CL CI	$\dashv \stackrel{\sim}{\vdash}$							ON # 11	
$\begin{bmatrix} 1 & Y \\ 2 & Y \end{bmatrix}$	← G			Y R	R	R	R	R	- ' '	R											·)((G)		G	JOB # 1			# 86054
$ \mathbf{F} = \frac{2}{3} \mathbf{Y} $	G	G G		Y R	R	R	R	R	R	R										$\dashv \hookrightarrow$	1	2.3.4				IGN : MWL SED 11/14/00	ELECT	DESIGN : N/A
3 T	R D	R R	G	T K	R D	R	R D	G	K V	R												2,3,4				OPERATION, REV	ISED PHASE	1 TIMES
$ A \xrightarrow{7} R $	R	R R	R	R R	R	R	R	G G	Y	R	-										300 mm			5.6		REVISIO		// D. / A
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	R	R R	R	R R	R	R		• G	Y	R											M			3/0	STC #N/A	N IGN : SIGNAL LA	SM 7	#N/A DESIGN : N/A
P OFF	1	IX IX	DW.		WØ ◀		- `	- DW	·	<u> </u>																SED 10/20/09	D ELECT	DESIGN . N/A
					1112			D V V												<u>'</u>	ALL IN	NDICATIONS H	HAVE LED L	AMPS		OGRAM TIMES FO	R AUD PED	BUZZER FROM
																									0600-1900 T	O ALL TIMES. REVISIO	N #12	
#			4	- YIELD PT.																		PRE-EM	PTION SE	ETTINGS	IOB # 1	12-000053	SM # 13	#N/A
 																							PRE-EMP	T 1 PRE-EMPT 2				T. DESIGN: N/A
T MIN GRN	4		15			·		10				•										PRIORITY	NO	NO		SED 11/4/10		
WALK WALK					7																	DET. LOCK	YES			PED PUSH BUTTO T SIDE TO SIDE		SIDE OF RTE. 17A
PED CLR					17	AUDIB																DELAY	0	0	TROM STREET	REVISIO		
T VEH EXT						PEDESTI SIGNA		3.0													⊢	ALT. MIN. GRN	5		JOB # 1:	2-000061	SM 7	#N/A
E MAX 1	4		30			SIGNA		42													⊢	ALT. YELLOW ALT. RED	PAREN PAREN			IGN : SIGNAL LA	В	ELECT. DESIGN: N/A
D MAX 2	4		15					32				_						_				ALT. PED. CLR.	17	_		SED: 5-30-13 PHASE 4 VEH.EX	T. TO 3.0" FR	ROM 1.5".
YELLOW		3		4		0.1	_		4	_											<u> </u>	HOLD GREEN	15			REVISIO		.011 110 1
V RED		1.0		1			0			2				_ [HOLD YELLOW	4	4	TIR #N/A		SM #	,
A ADD INIT							_							4							⊢	HOLD RED	2	2	TRAFFIC DES	:RJP SED:11/05/2015		DES :MMS
MAX INIT														_				_			<u> </u>	HOLD PHASE EXIT PHASE	2	4				N WITH 41-0833 AND
														+							<u> </u>	EXIT PHASE	NONE		INSTALLED	12" LED FLASHE	RS UNDER P	ROJECT 170-3254.
S TTR MIN GAP														-														
MODE	MA	X. RECALL	MAX	RECALL	NON-	LOCK		NON-L	OCK		OFF			OFF			OFF		OFF			LEGEND		PROPOSED	OF TRAFFIC ENGINE			INECTICUT RANSPORTATION
INI START				PHASE																R Y	RED YELLOW			CONTROLLER	Sin			& HWY OPERATIONS
DETECTO	ORS		1	PROGRAM	•	COORE	OINATIO	N TYPE-	TIME	CLOCK TE	3C (3 CYC	LE)	PERMIS	SYSTEM	<u> </u>	TF	CHNIC	CAL NO	TFS	G € R	GREEN RED ARROW			EXISTING CONTROLLER		´ 		IC ENGINEERING
IDENT SIZE (WXL)		MODE	FUNCTION	TIME	DAYS			PHASE	SPLITS	SEC /		SET	PER IOD I—	LOC MASTER					TURES APPLY	─	YELLOW ARROW GREEN ARROW		<u>ا</u>	PROPOSED HANDHOLE EXISTING	CADD	TRAFFI	C CONT	ROL SIGNAL
D4A 1.8 m X 3.6		PRESENCE	FLASH	0001-0500	DAILY	CYCLE	Ø1 Ø	2 Ø3	Ø4 Ø5		7 Ø8 SEC	%		112-207	517111D7111	(D OVE		1(11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TORLS THEE		WALK/ FL. D.W. . DON'T WALK			HANDHOLE PROPOSED		TOWN OF	PORTLAN	D
D4B 1.8 m X 3.6 ı		PRESENCE					' '		, ,	, ,	,	/			PHASE 2 O	ON TO	OMIT F	PHASE 1.		FL.		SPAN POLE		(R.M.C.) RIGID METAL CONDUIT	ROUTES 66			ST. & MAIN ST.)
D4C 1.8 m X 1.8 i		PRESENCE	MAX. 1	0600-1800								1 1		112-204							EXISTING WOOD S	SPAN POLE		EXISTING (R.M.C.) RIGID		AT ROUTE 1		
D4D 1.8 m X 1.8 i	m 3	PRESENCE		ALL OTHER TIM										l-	PRE-EMPTIC			DPERATIV	/E DURING		PROPOSED STEEL SEEXISTING STEEL SE		_	METAL CONDUIT CABLE CLOSURE				,
			PATTERN 1	0600-1800	DAILY	80"					1				FLASHING	OPERA	IION.				PROPOSED UTILITYEXISTING UTILITY I			DET. LEADS IN SAW CUT	REV # 10	TRAFF	IC DATE	ELECTRICAL DATE
			PATTERN 2	ALL OTHER TIM	IES	70"					1		-		SIGNAL MA	<u>ΔΥ ΡΟΙ</u>	IRI F CV	CIFTE	PED. PHASE IS					AUXILIARY	ENGINEER			PSF 12/97
			PATTERN 3	FUTURE											CALLED.	~ i DO(JULE CI	CLL II P	LD. ITIMOL IO	─ □	PEDESTRIAN PUSH BUTTON & SIGN			TERMINATION CABINET	DRAFTER			GMF 12/97
					DATIN							+ +			CALLED.					$\dashv \leftarrow$	TRAFFIC SIGNAL FA	ACE		AUXILIARY EQUIPMENT	CHECKED BY	JTW	11/97	MRM 12/97
		1	FREE	2200-0001	DAILY							\perp										AL FACE		CABINET AUDIBLE	SUBMITTED BY		3/98	MJG 3-6-98
		1	1										-								MAGNETIC DETECTO		=-	PEDESTRIAN SIGNAL	APPROVED BY	J. CAREY		J. VIVARI
			-																		<pre>SYSTEM DETECTOR → OPTICAL DETECTOR</pre>				DATI		98 RIGINAL S	3-9-98 SIGNED
						1			1	1										1	3. 113.12 DETECTOR	:					OINTE	J. J. (1)

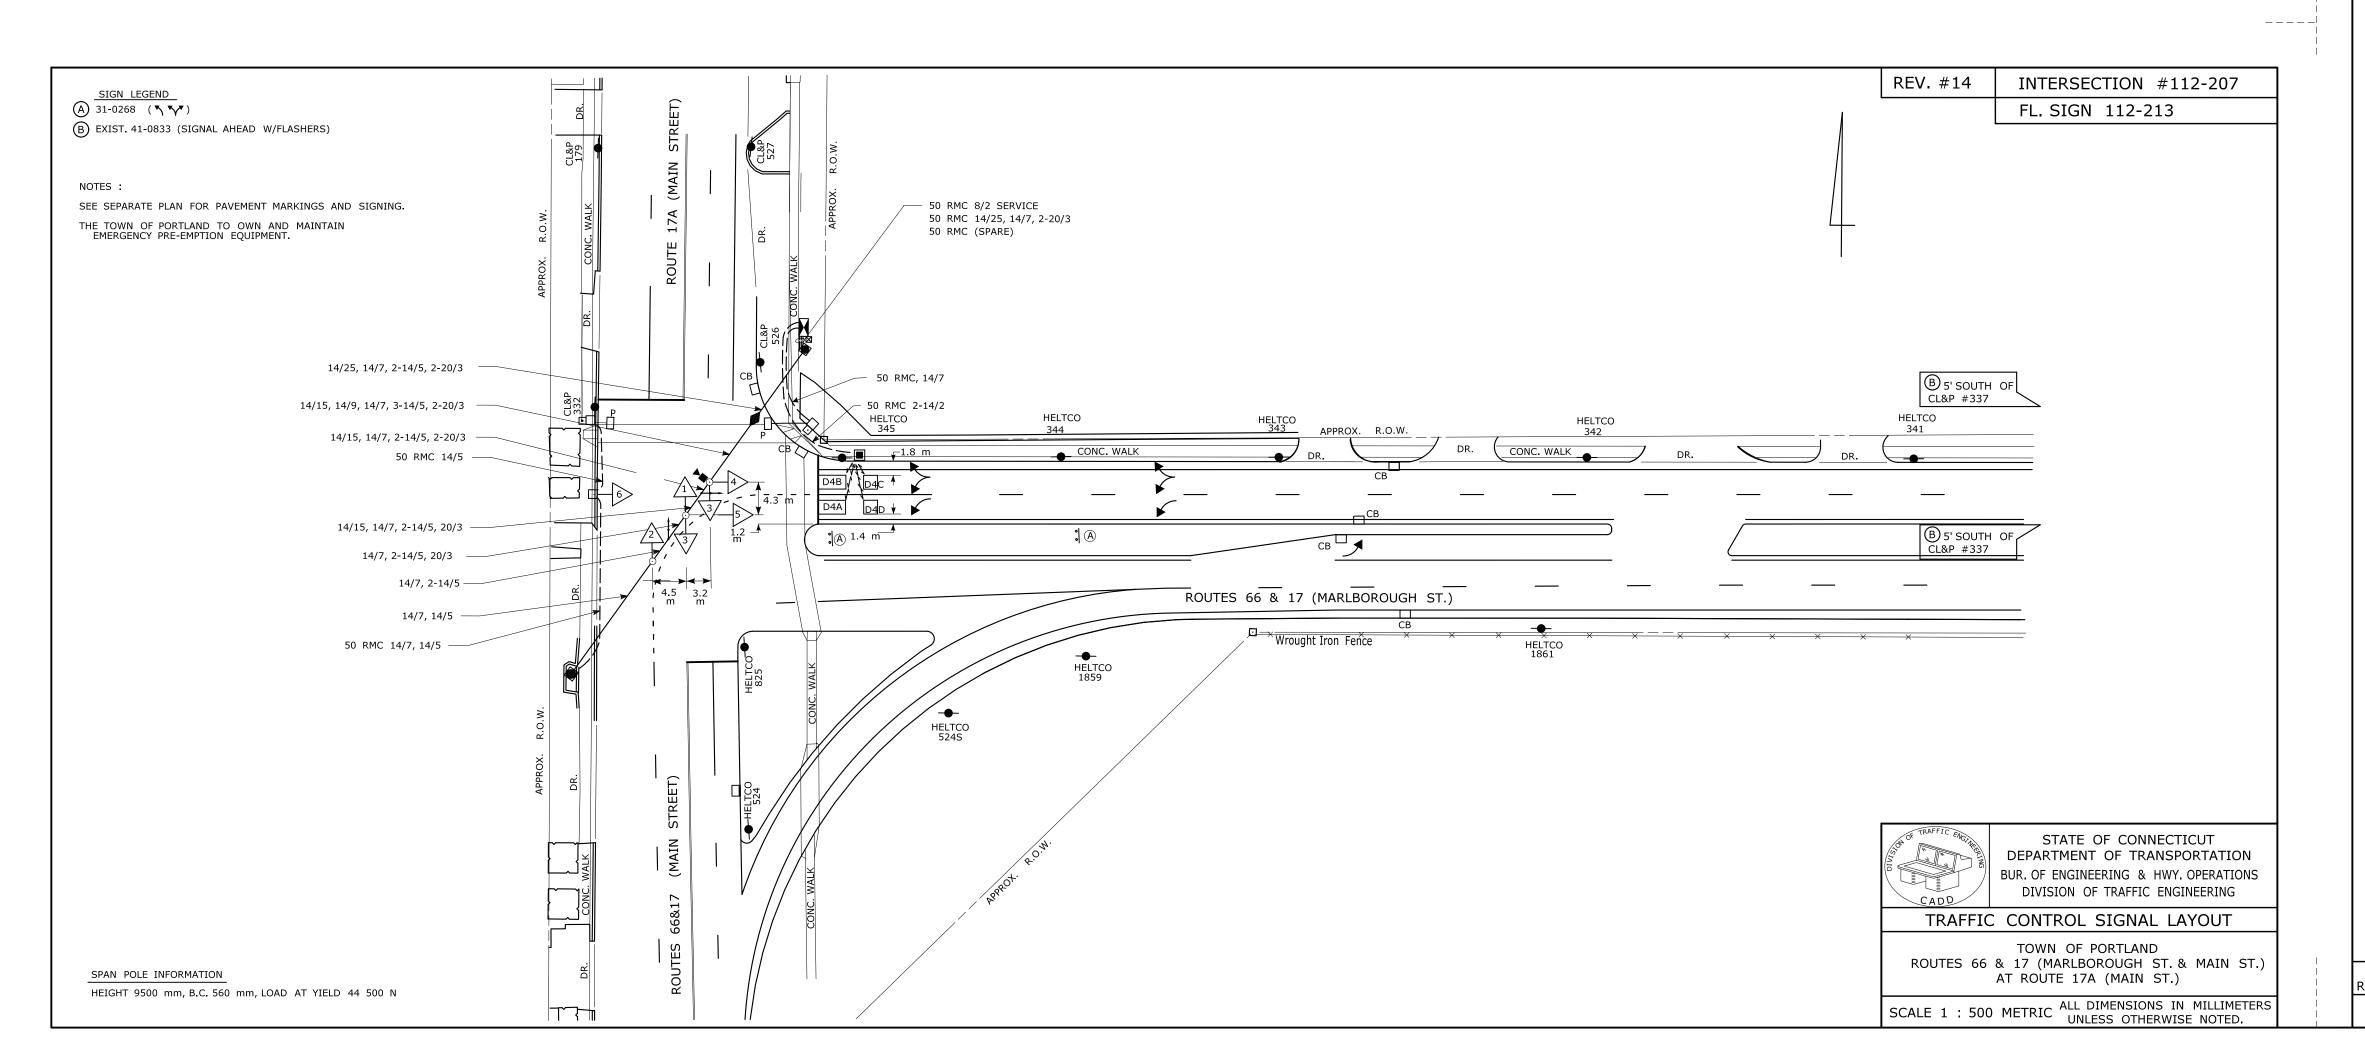

CONSTRUCTION NOTES

ALL TRAFFIC SIGNAL EQUIPMENT IS NEW.

STAKE ALL R.O.W. PRIOR TO EXCAVATION.

B REPLACE EXISTING PEDESTAL AND FOUNDATION WITH A NEW PEDESTAL AND SIGNAL INDICATIONS AS SHOWN ON THE PLAN.

REPLACE ENTIRE SECTION OF SIDEWALK DAMAGED DUE TO INSTALLATION OF CONDUIT, HANDHOLE OR FOUNDATION.

INSTALL LOOP DETECTORS AS SHOWN, 2.4 m APART.

SEGMENTED LOOPS TO BE SPLICED IN SERIES.

INSTALL NEW 8 PHASE CONTROLLER ON TYPE IV FOUNDATION.

RELOCATE EXISTING TIME CLOCK TO NEW CONTROLLER CABINET.

CABINET DOOR TO OPEN FIELD SIDE.

(C) INSTALL SPAN POLE AND CONTROLLER FOUNDATION ADJACENT TO BACK EDGE OF WALK AS SHOWN.

REMOVE ALL ABANDONED TRAFFIC SIGNAL EQUIPMENT INCLUDING, BUT NOT LIMITED TO FOUNDATIONS, HANDHOLES, CONDUIT RISERS & CABLE, MESSENGER & INTERCONNECT, STEEL POLES, AND WOOD POLES.

TWO WEEKS PRIOR TO INSTALLATION CONTACT CL&P
REPRESENTATIVE BILL BUONGIORNO AT (203) 245-5364 AND SNET
REPRESENTATIVE JERRY COUTURE AT (860) 725-4503.

TRAFFIC SIGNAL CABLE CLOSURE SHALL BE INSTALLED ON THE SPAN

+ 1.5 m FROM THE CURBLINE.

INSTALL AUXILIARY EQUIPMENT CABINET ON LEFT SIDE OF CONTROLLER CABINET.

INSTALL PRE-EMPTION EQUIPMENT IN AUXILIARY CABINET.

PRE-EMPTION IS TO OPERATE THROUGH THE INTERNAL PRE-EMPTION OF THE SIGNAL CONTROLLER.

CONTRACTOR TO INSTALL A SWITCH IN THE SIGNAL CABINET TO EFFECTIVELY DISCONNECT THE PRE-EMPTION EQUIPMENT FROM THE TRAFFIC SIGNAL CONTROLLER.

OPTICAL DETECTOR LOCATIONS ARE FOR ILLUSTRATION ONLY. EXACT LOCATIONS
SHALL BE DETERMINED BY THE MANUFACTURER OR HIS DESIGNATED
REPRESENTATIVE. DETECTOR CABLES ARE TO BE INSTALLED CONTINUOUS
BETWEEN EACH OPTICAL DETECTOR AND THE AUXILIARY EQUIPMENT CABINET.

CONSTRUCTION NOTES FOR SHEET NO. 44B

ADD EXCLUSIVE PEDESTRIAN PHASE 3.

REMOVE 1300mm PEDESTAL ON WEST SIDE OF RTE. 17A AND INSTALL NEW 2400mm PEDESTAL WITH PED. PUSH BUTTON, SIGN AND 1 WAY PEDESTRIAN SIGNAL ON THE EXISTING FOUNDATION.

REPLACE THE 1WAY, 3 SECTION TRAFFIC SIGNAL, PED. PUSH BUTTON AND SIGN ON N.E. CORNER WITH A NEW 1 WAY PEDESTRIAN SIGNAL, PUSH BUTTON AND SIGN.


INSTALL A NEW AUDIBLE PEDESTRIAN SIGNAL ON THE SPAN AND 14/5 CABLE FROM THE CONTROLLER TO THE AUDIBLE PED. SIGNAL AS SHOWN.


REVISE TIMINGS AND PROGRAM AS INDICATED.


INSTALL CROSSWALKS ON EAST SIDE AS SHOWN ON THE PLAN.

			_							
			REVISIONS	STATE OF CONNECTICUT DEPARTMENT OF TRANSPORTATION BUREAU OF ENGINEERING & HIGHWAY OPERATIONS DIVISION OF TRAFFIC ENGINEERING						
NO.	DATE	INIT								
Α	12/9									
			SPAN POLE ADJACENT TO BACK							
			EDGE OF WALK ON NE CORNER.	TRAFFIC	CONTRO	L SIG	SNAL			
В	10/9	9 BBF	R ADDED EXCLUSIVE PED PHASE.							
F.H.V REGIOI		STATE	TOWN	FED. AID PROJ. NO.	PROJ. NO	YEAR	ROUTE NO.	SHEET NO.		
1				NH-22 (140)	112-104	1998	66&17	44B		

REV. #14 | INTERSECTION #

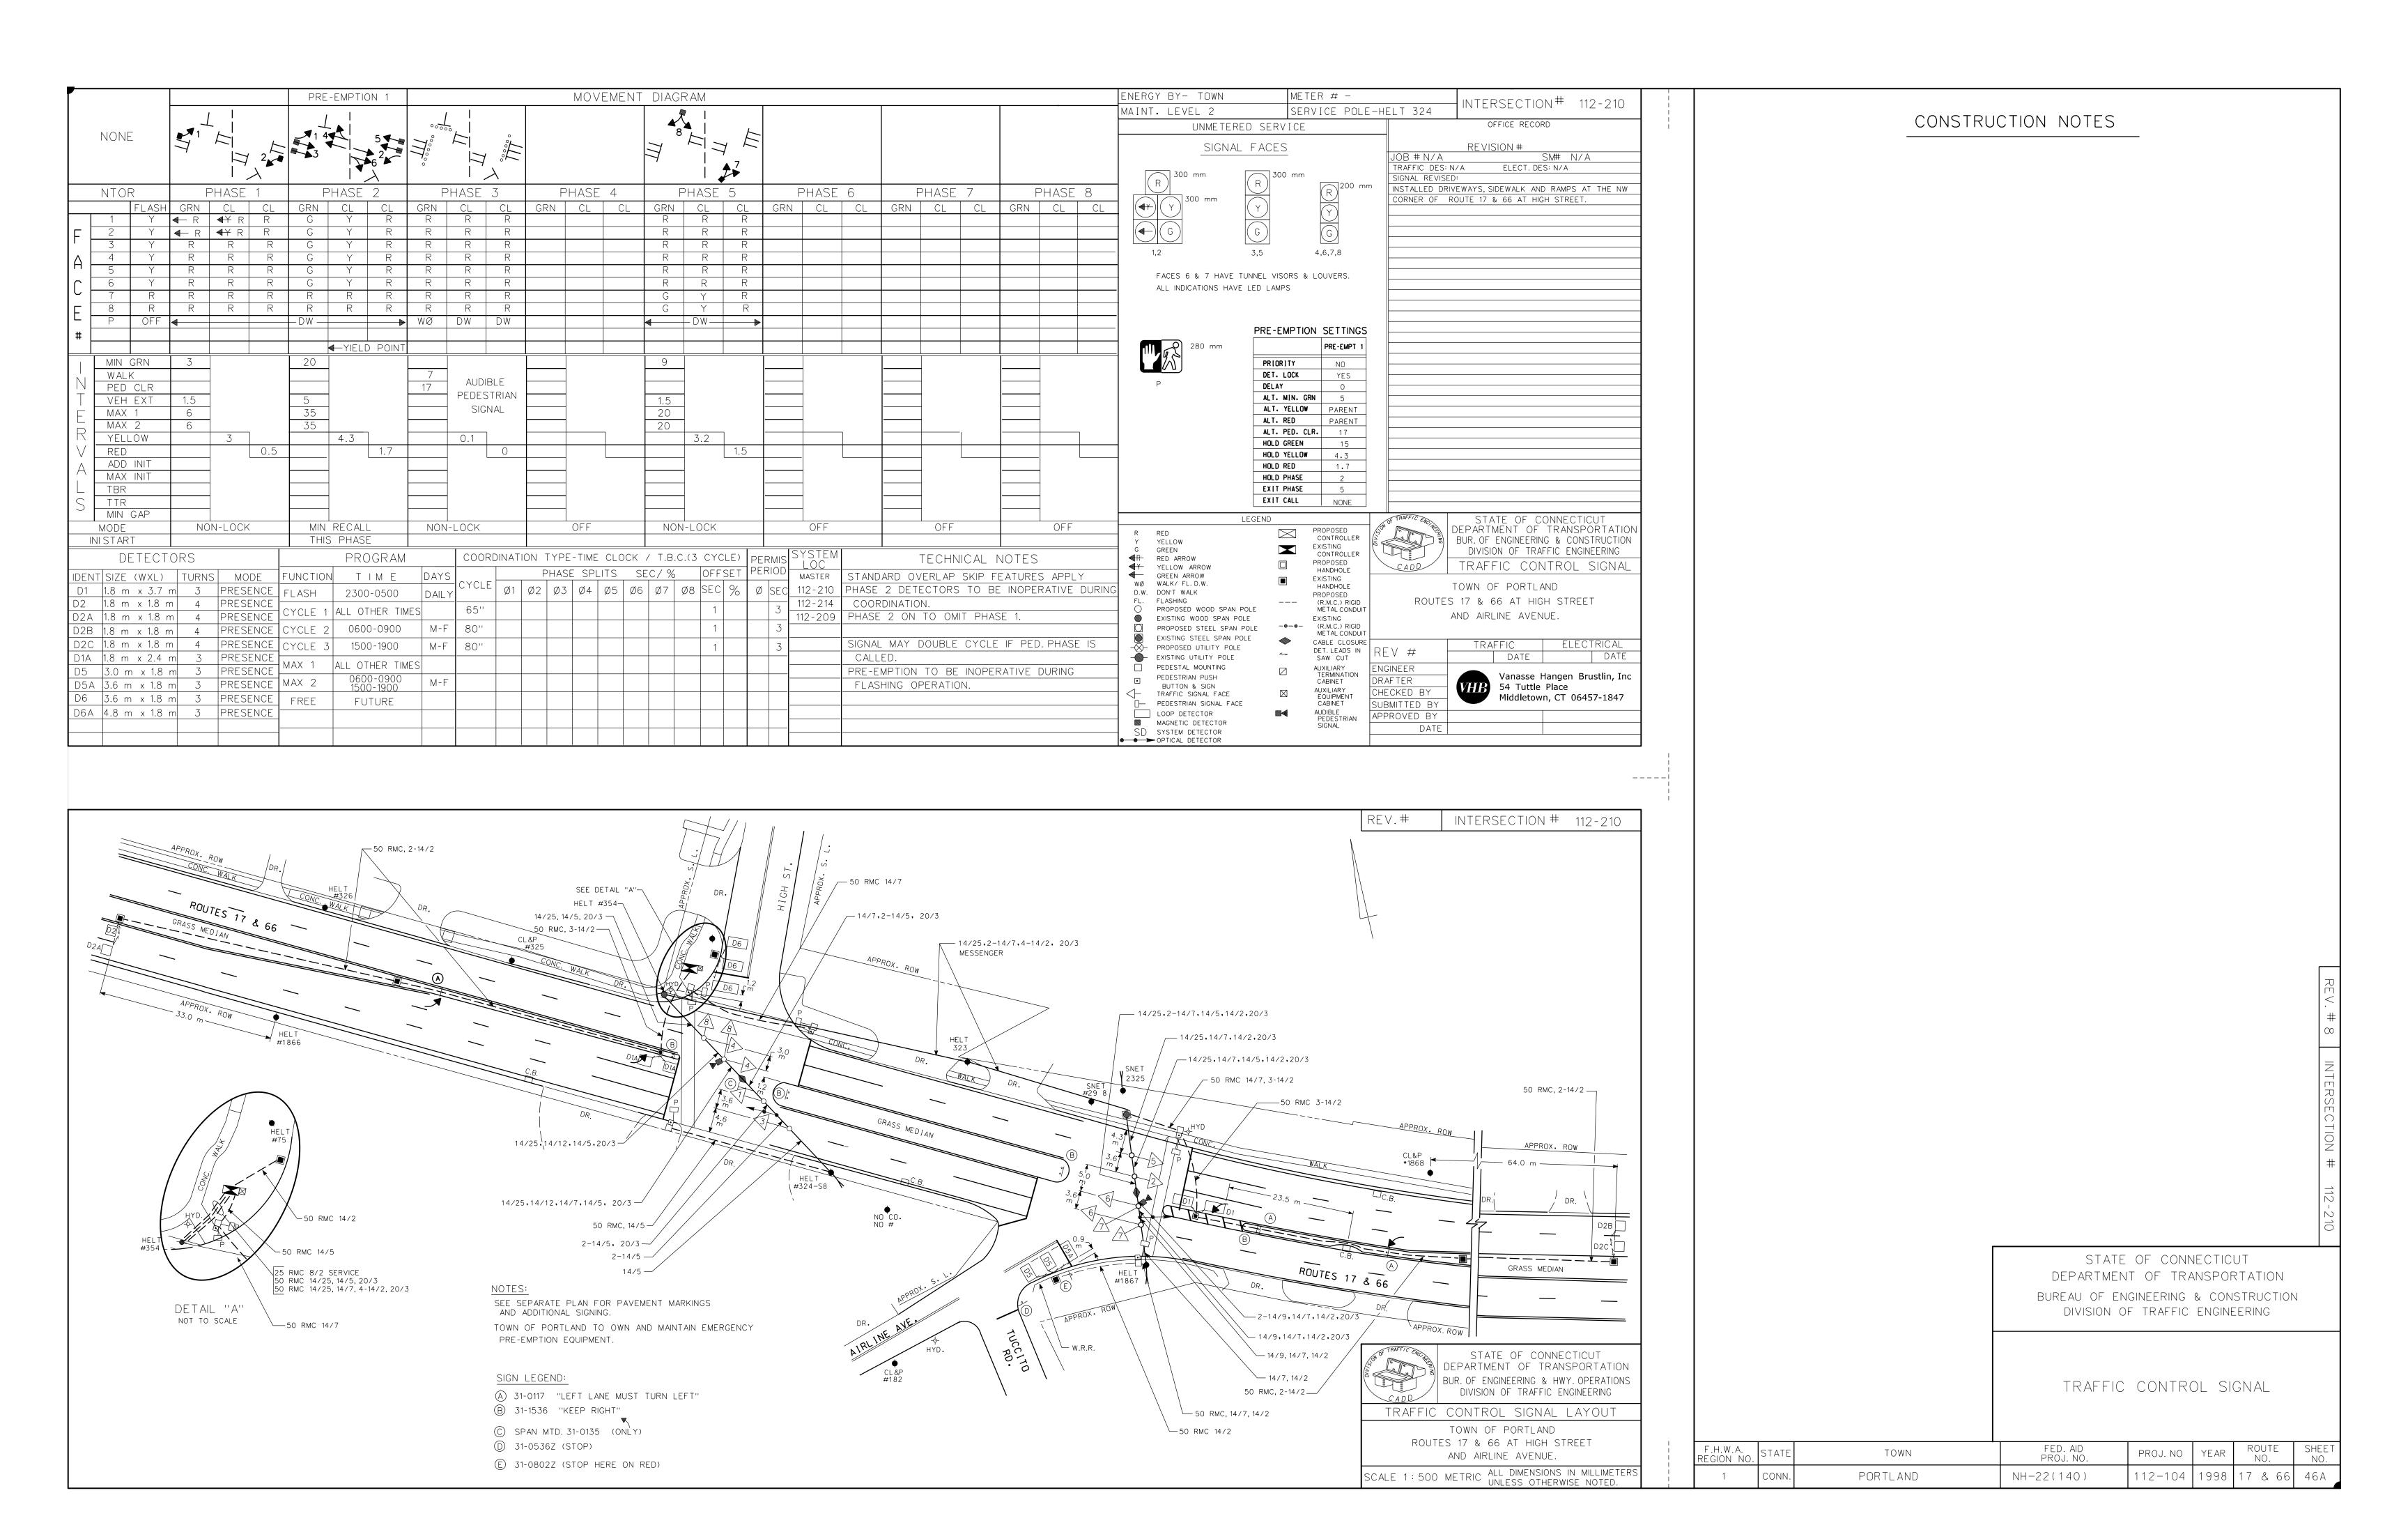

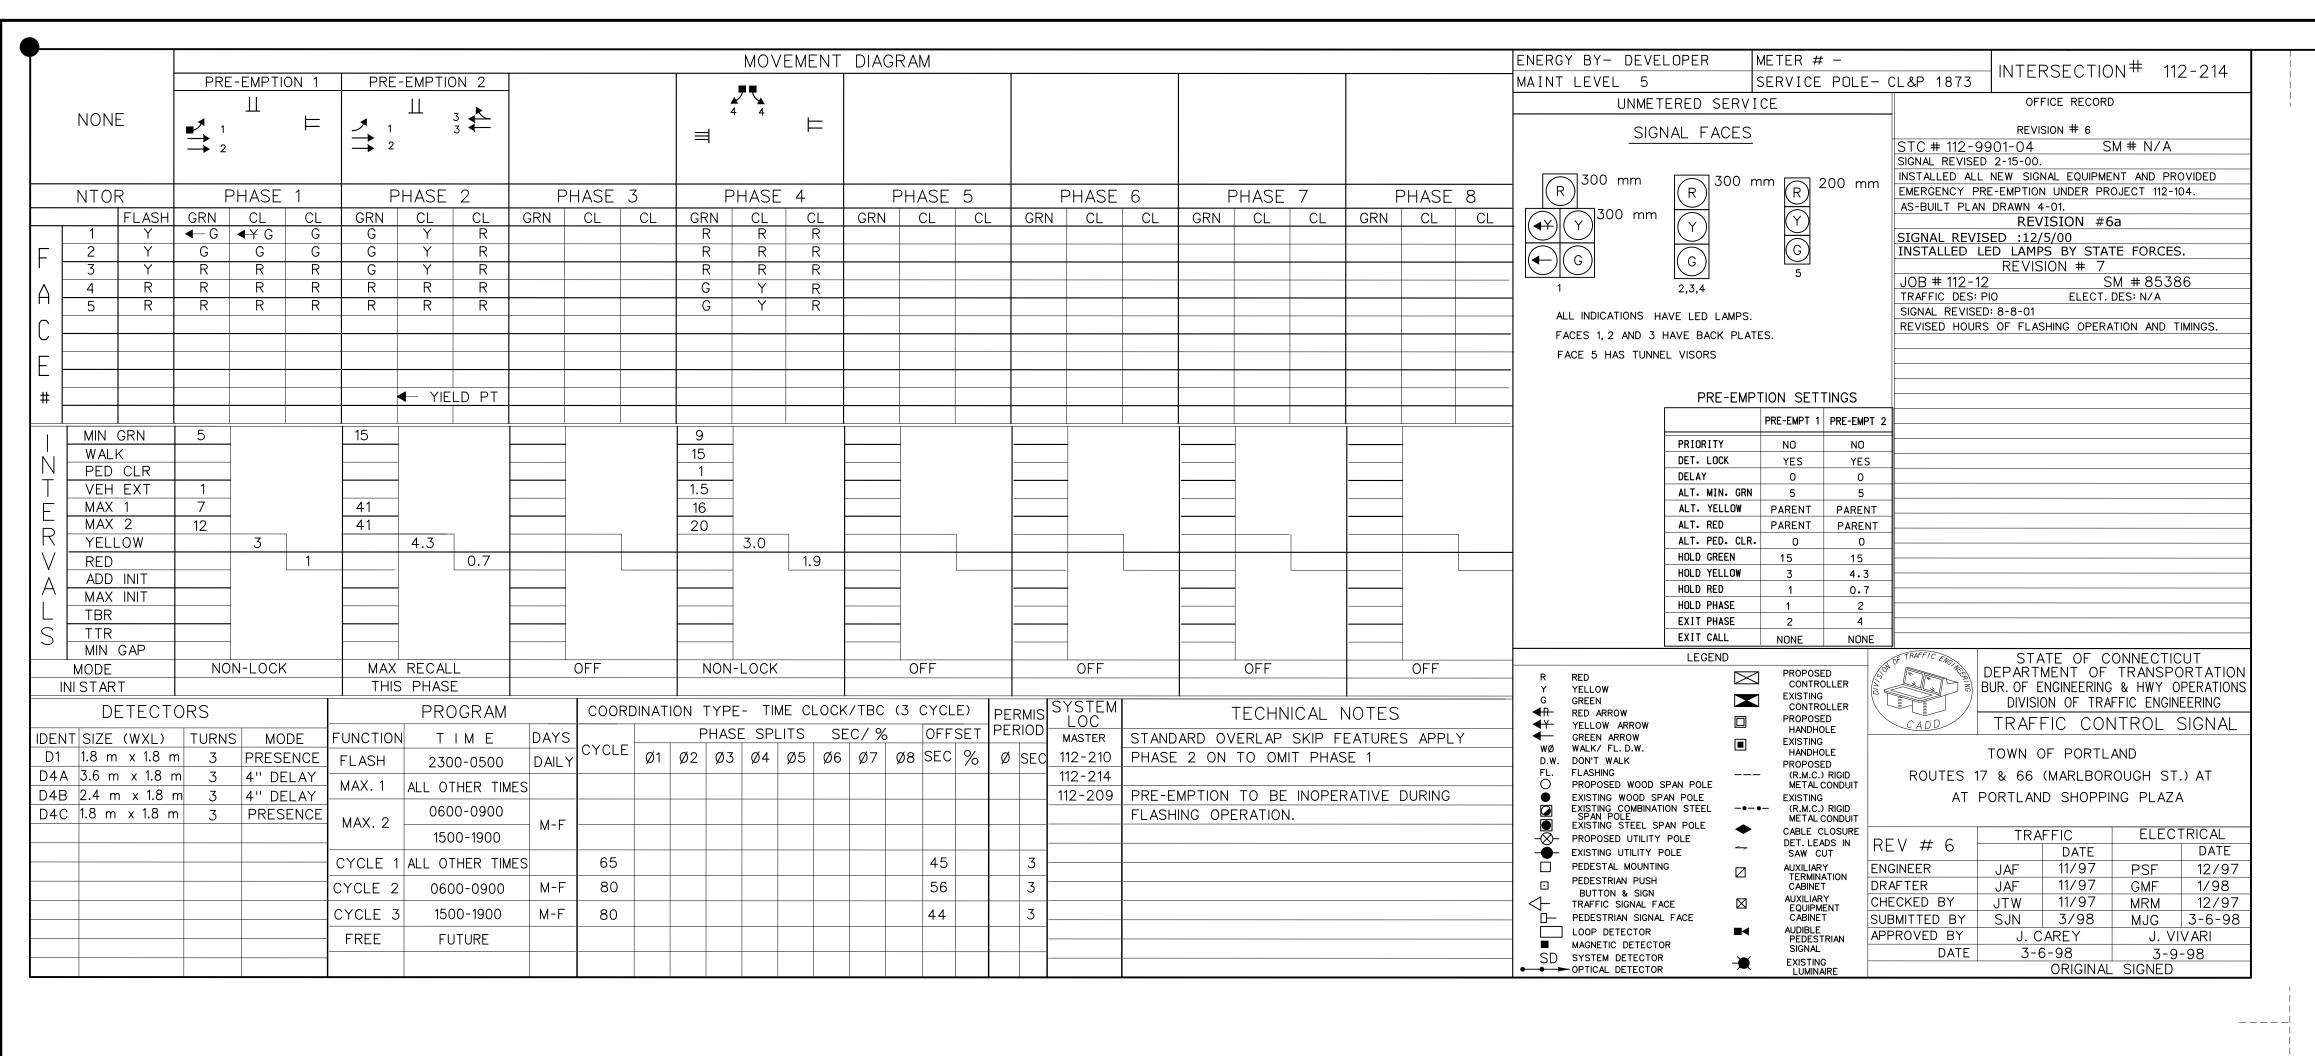

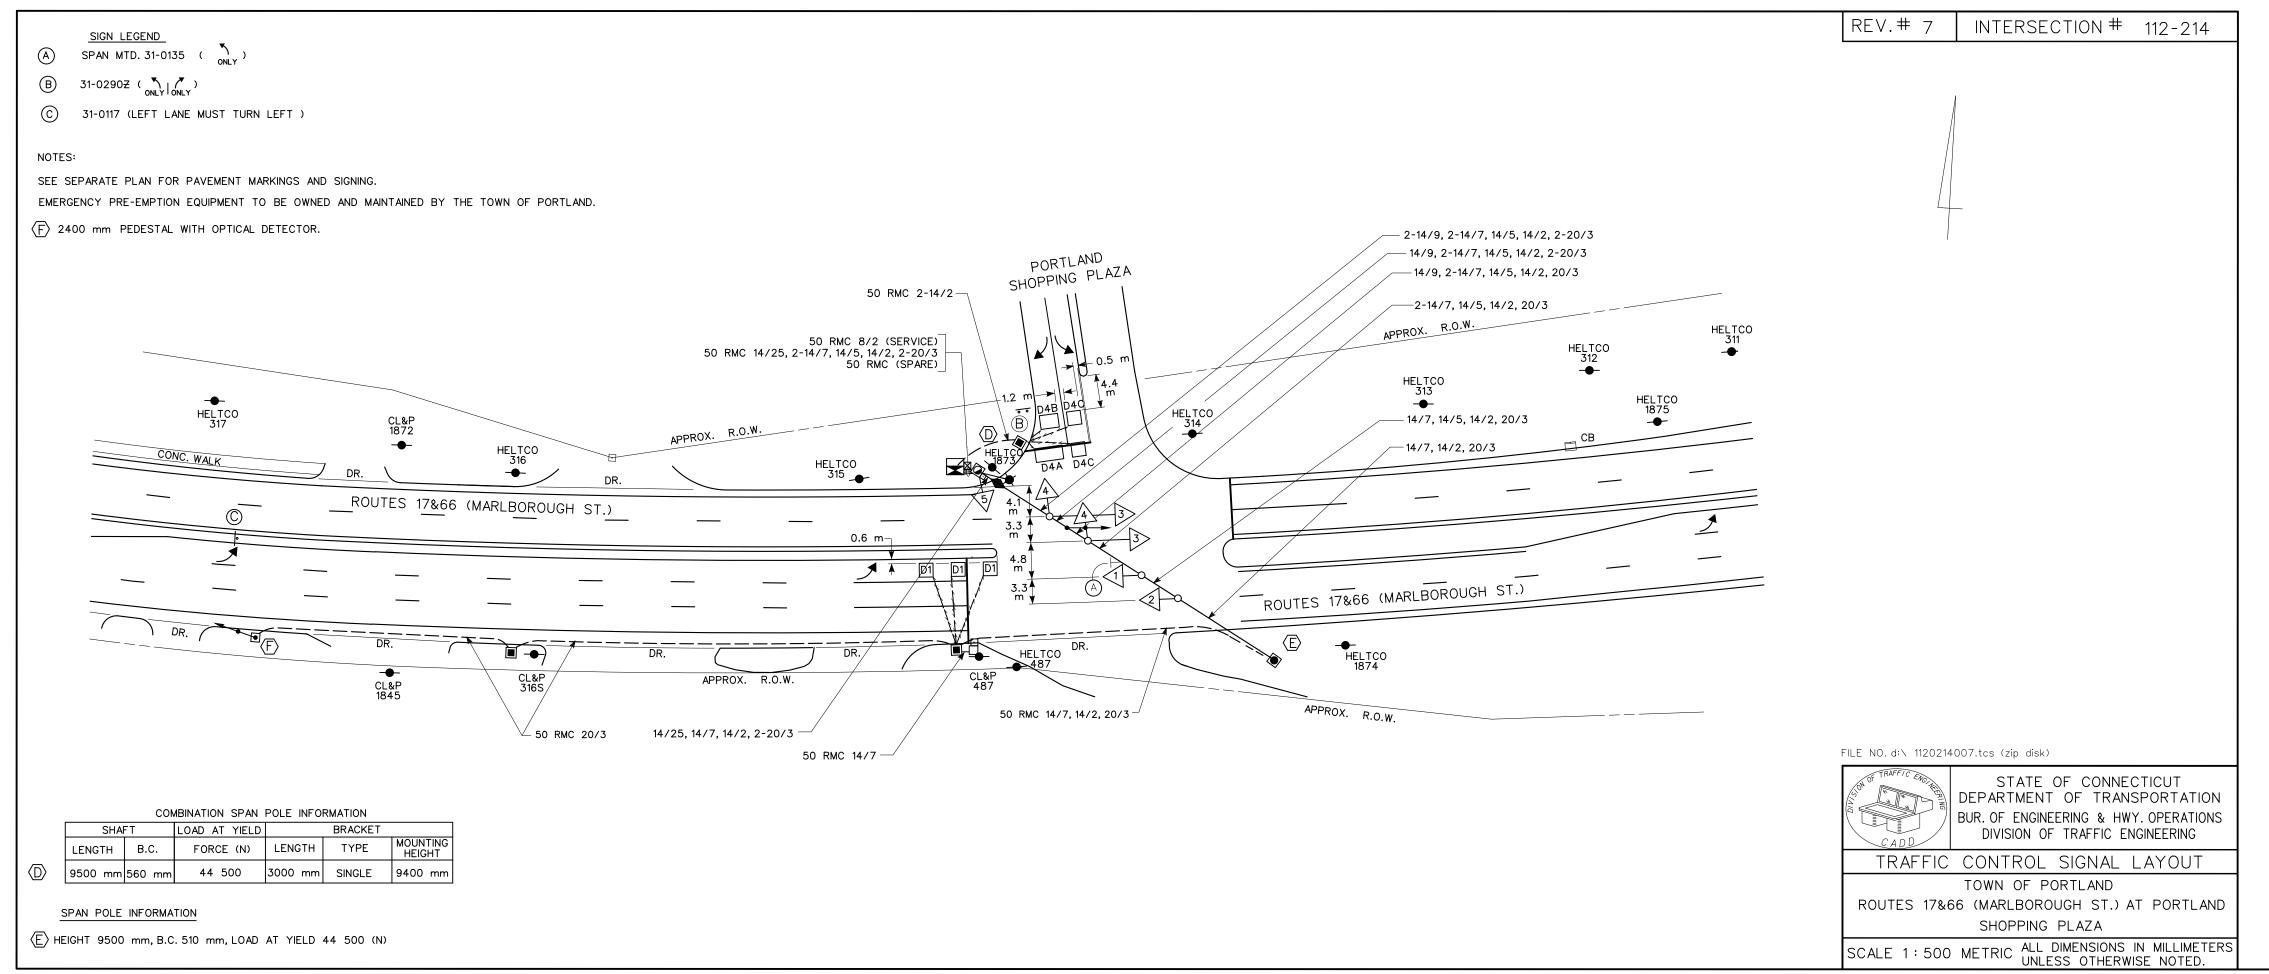

CONSTRUCTION NOTES

ALL TRAFFIC SIGNAL EQUIPMENT IS NEW.

STAKE ALL R.O.W. PRIOR TO EXCAVATION.

INSTALL HANDHOLES APPROX. 0.3 m BEHIND CURB OR EDGE OF ROAD UNLESS OTHERWISE SPECIFIED.

LOOP DETECTORS TO BE CENTERED IN LANE AND 2.4 m APPART UNLESS OTHERWISE SPECIFIED.

SEGMENTED LOOPS TO BE SPLICED IN SERIES.

INSTALL NEW 8 PHASE CONTROLLER ON A TYPE IV FOUNDATION.

CABINET DOOR TO OPEN FIELD SIDE.

INSTALL CONCRETE SIDEWALK ON CABINET DOOR SIDE OF CONTROLLER FOUNDATION AS SHOWN ON TYPICAL INSTALLATION DETAIL SHEET.

REMOVE ALL ABANDONED TRAFFIC SIGNAL EQUIPMENT INCLUDING, BUT NOT LIMITED TO FOUNDATIONS, HANDHOLES, CONDUIT RISERS & CABLE, MESSENGER & INTERCONNECT, STEEL POLES, AND WOOD POLES.

(D)INSTALL COMBINATION STEEL SPAN POLE FOUNDATION ADJACENT TO AND WEST OF HELTCO 1873 AS SHOWN, HELTCO 1873 TO BE REMOVED WHEN NEW TRAFFIC SIGNALS ARE PLACED INTO OPERATION, CL&P TO RELOCATE EXISTING LUMINAIRE TO NEW COMBINATION STEEL SPAN POLE.

TWO WEEKS PRIOR TO INSTALLATION CONTACT CL&P

REPRESENTATIVE ED ROBINSON AT (860) 638-2262 AND SNET

REPRESENTATIVE MATT LAPREAY AT (860) 725-1520.

TRAFFIC SIGNAL CABLE CLOSURE SHALL BE INSTALLED ON THE SPAN + 1.5 m FROM THE CURBLINE.

 $\langle F \rangle$ INSTALL 2400 mm PEDESTAL WITH OPTICAL DETECTOR AS SHOWN.

INSTALL AUXILIARY EQUIPMENT CABINET ON LEFT SIDE OF CONTROLLER CABINET.

INSTALL PRE-EMPTION EQUIPMENT IN AUXILIARY CABINET.

PRE-EMPTION IS TO OPERATE THROUGH THE INTERNAL PRE-EMPTION OF THE SIGNAL CONTROLLER.

THE CONTRACTOR IS TO INSTALL A SWITCH IN THE SIGNAL CABINET TO EFFECTIVELY DISCONNECT THE PRE-EMPTION EQUIPMENT FROM THE TRAFFIC SIGNAL CONTROLLER.

OPTICAL DETECTOR LOCATIONS ARE FOR ILLUSTRATION ONLY. EXACT LOCATIONS SHALL BE DETERMINED BY THE MANUFACTURER OR HIS DESIGNATED REPRESENTATIVE. DETECTOR CABLES ARE TO BE INSTALLED CONTINUOUS BETWEEN EACH OPTICAL DETECTOR AND THE AUXILIARY EQUIPMENT CABINET.

STATE OF CONNECTICUT


DEPARTMENT OF TRANSPORTATION


BUREAU OF ENGINEERING & HIGHWAY OPERATIONS

DIVISION OF TRAFFIC ENGINEERING

TRAFFIC CONTROL SIGNAL

F.H.W.A. REGION NO.	STATE	TOWN	FED. AID PROJ. NO.	PROJ. NO	YEAR	ROUTE NO.	SHEET NO.
1	CONN.	PORTLAND	NH-22(140)	112-104	1998	66&17	

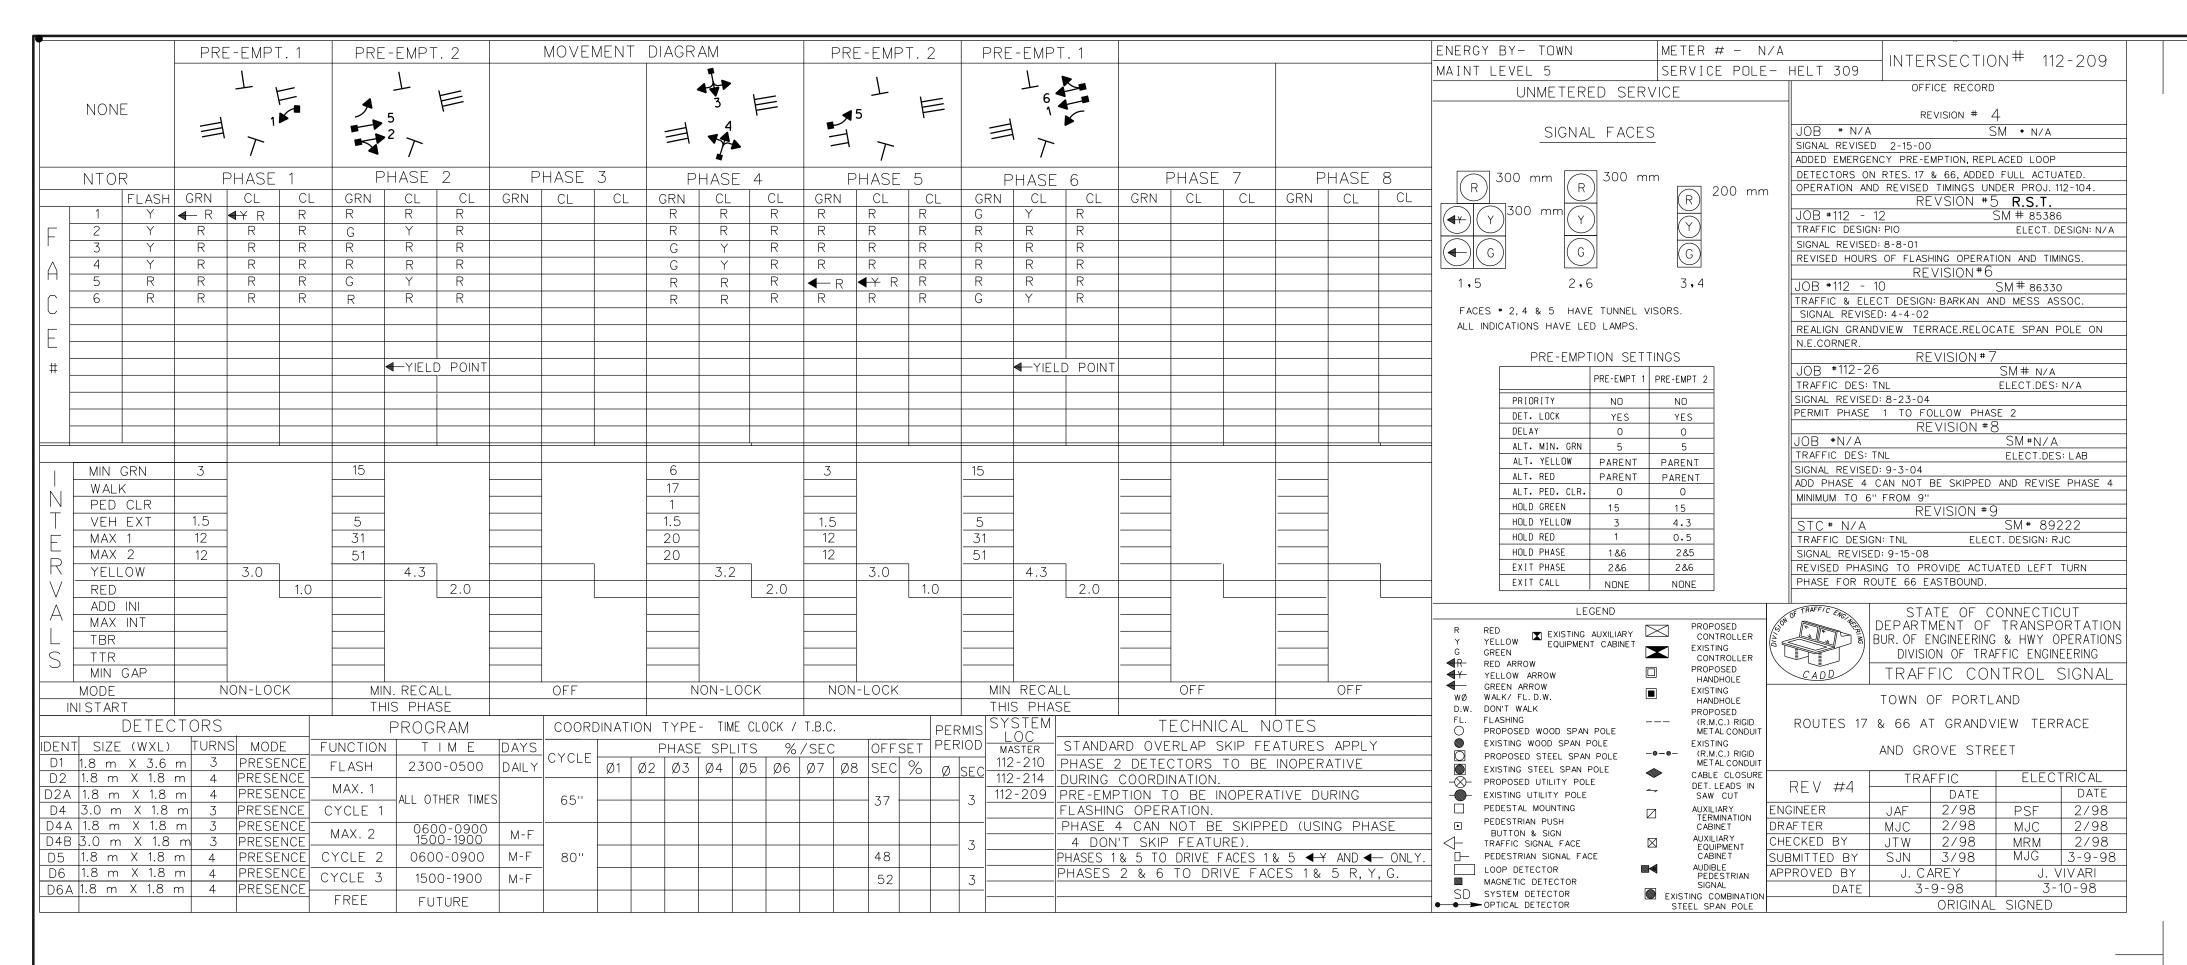

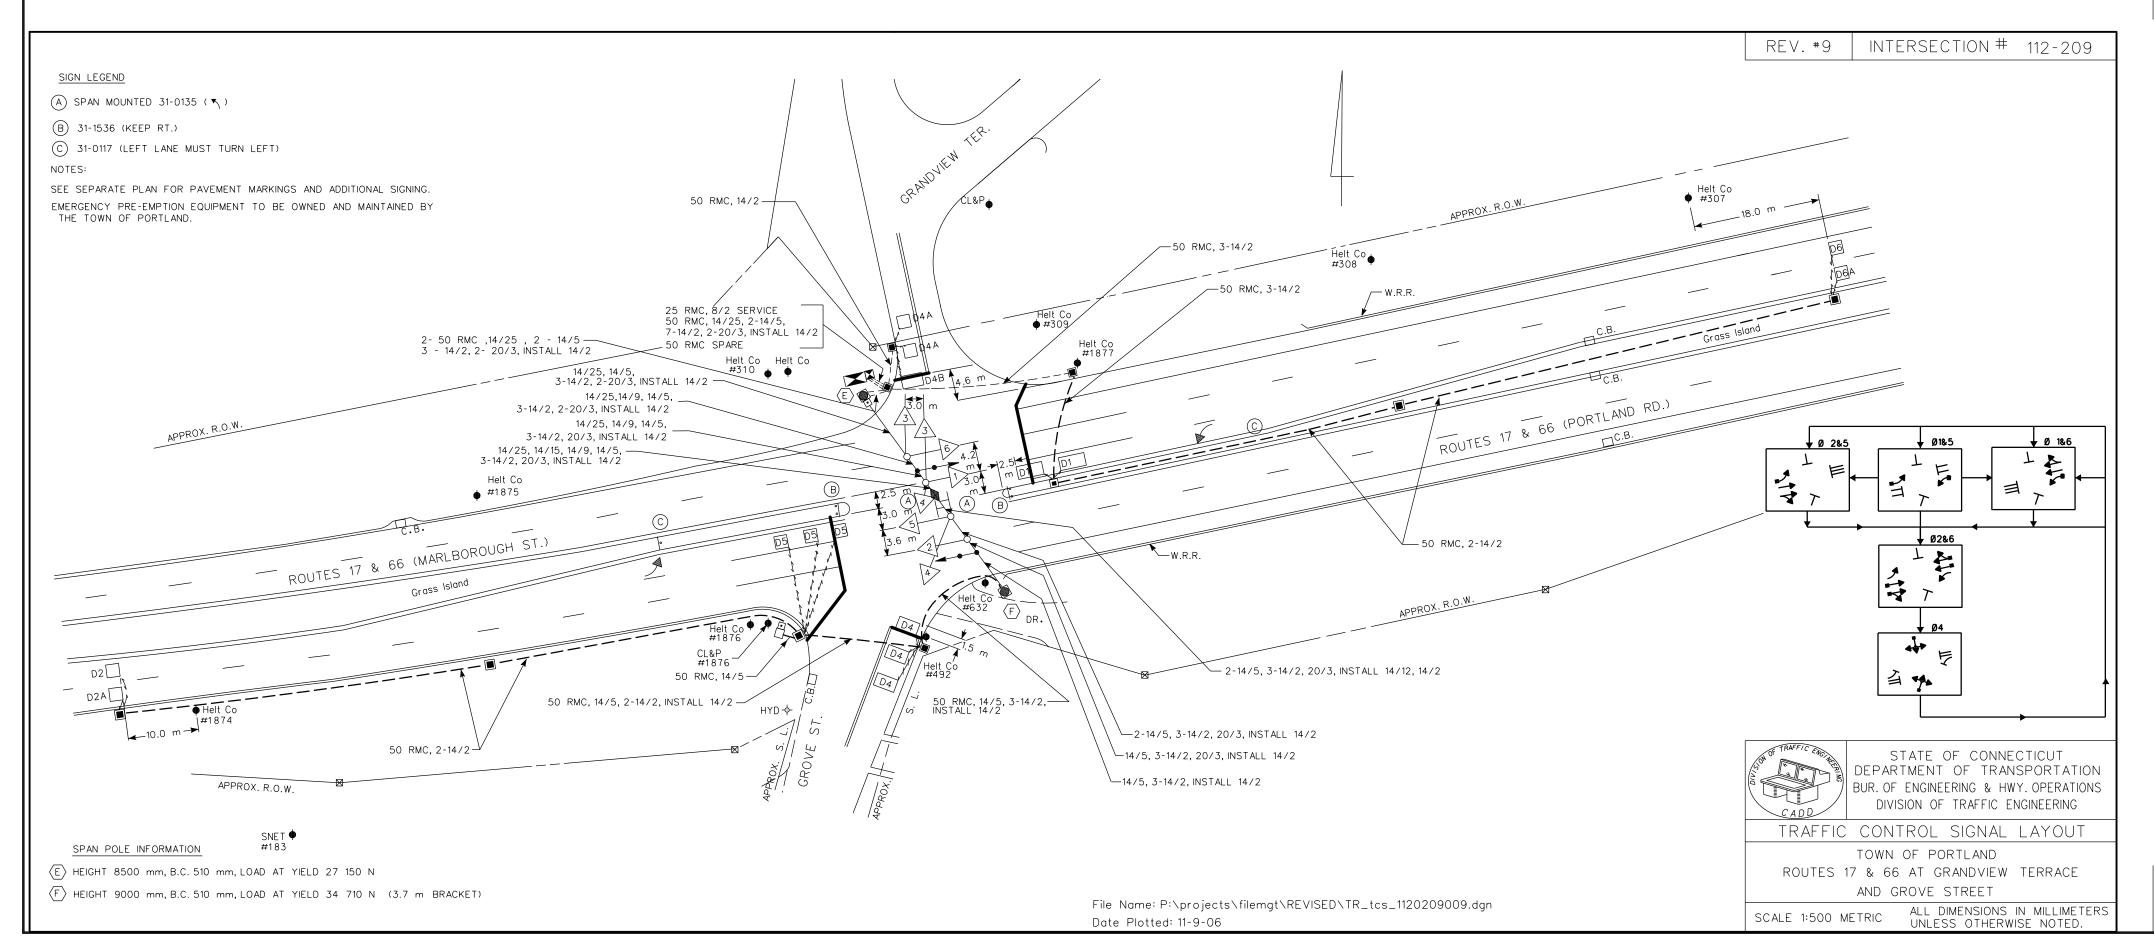

CONSTRUCTION NOTES - REV #9

ALL TRAFFIC SIGNAL EQUIPMENT IS EXISTING, EXCEPT AS NOTED.

INSTALL NEW LOOP DETECTORS D5 CENTERED IN LANE AND 2.4 m APART AS SHOWN ON PLAN. Install 14/2 cable from the controller to the existing handhole on the s.w. Corner of the intersection.

INSTALL NEW LOOP AMPLIFIER IN CABINET FOR THE NEW D5 LOOPS.

REPLACE EXISTING 3-SECTION SIGNAL HEAD #4 WITH A DOGHOUSE TYPE SIGNAL HEAD AND RE-NUMBER AS SIGNAL HEAD #5.

INSTALL NEW 14/12 CABLE FROM THE CABLE CLOSURE TO THE NEW 2-WAY SIGNAL HEAD ARRANGEMENT 5 & 4. REMOVE THE EXISTING 14/9 CABLE THAT WAS FOR THE EXISTING SIGNAL HEAD ARRANGEMENT AT THIS SPAN LOCATION.

RE-NUMBER SIGNAL HEADS AS FOLLOWS:
EXISTING SIGNAL HEADS #6 ARE NOW #3;
EXISTING SIGNAL HEAD #2 IS NOW #6;
EXISTING SIGNAL HEADS #5 ARE NOW #4;
EXISTING SIGNAL HEAD #3 IS NOW #2.

SUPPLY NEW WIRING DIAGRAMS IN CABINET FOR THIS REVISION.

REMOVE ALL ABANDONED TRAFFIC SIGNAL EQUIPMENT INCLUDING BUT NOT LIMITED TO FOUNDATIONS, HANDHOLES, CONDUIT RISERS & CABLE, MESSENGER AND INTERCONNECT, STEEL POLES, AND WOOD POLES

STATE OF CONNECTICUT

DEPARTMENT OF TRANSPORTATION


BUREAU OF ENGINEERING & HIGHWAY OPERATIONS


DIVISION OF TRAFFIC ENGINEERING

TRAFFIC CONTROL SIGNAL

REVISED 10/20/00

		112 1122 137 237 33					
F.H.W.A. REGION NO.	STATE	TOWN	FED. AID PROJ. NO.	PROJ. NO	YEAR	ROUTE NO.	SHEET NO.
1	CONN.	PORTL AND					

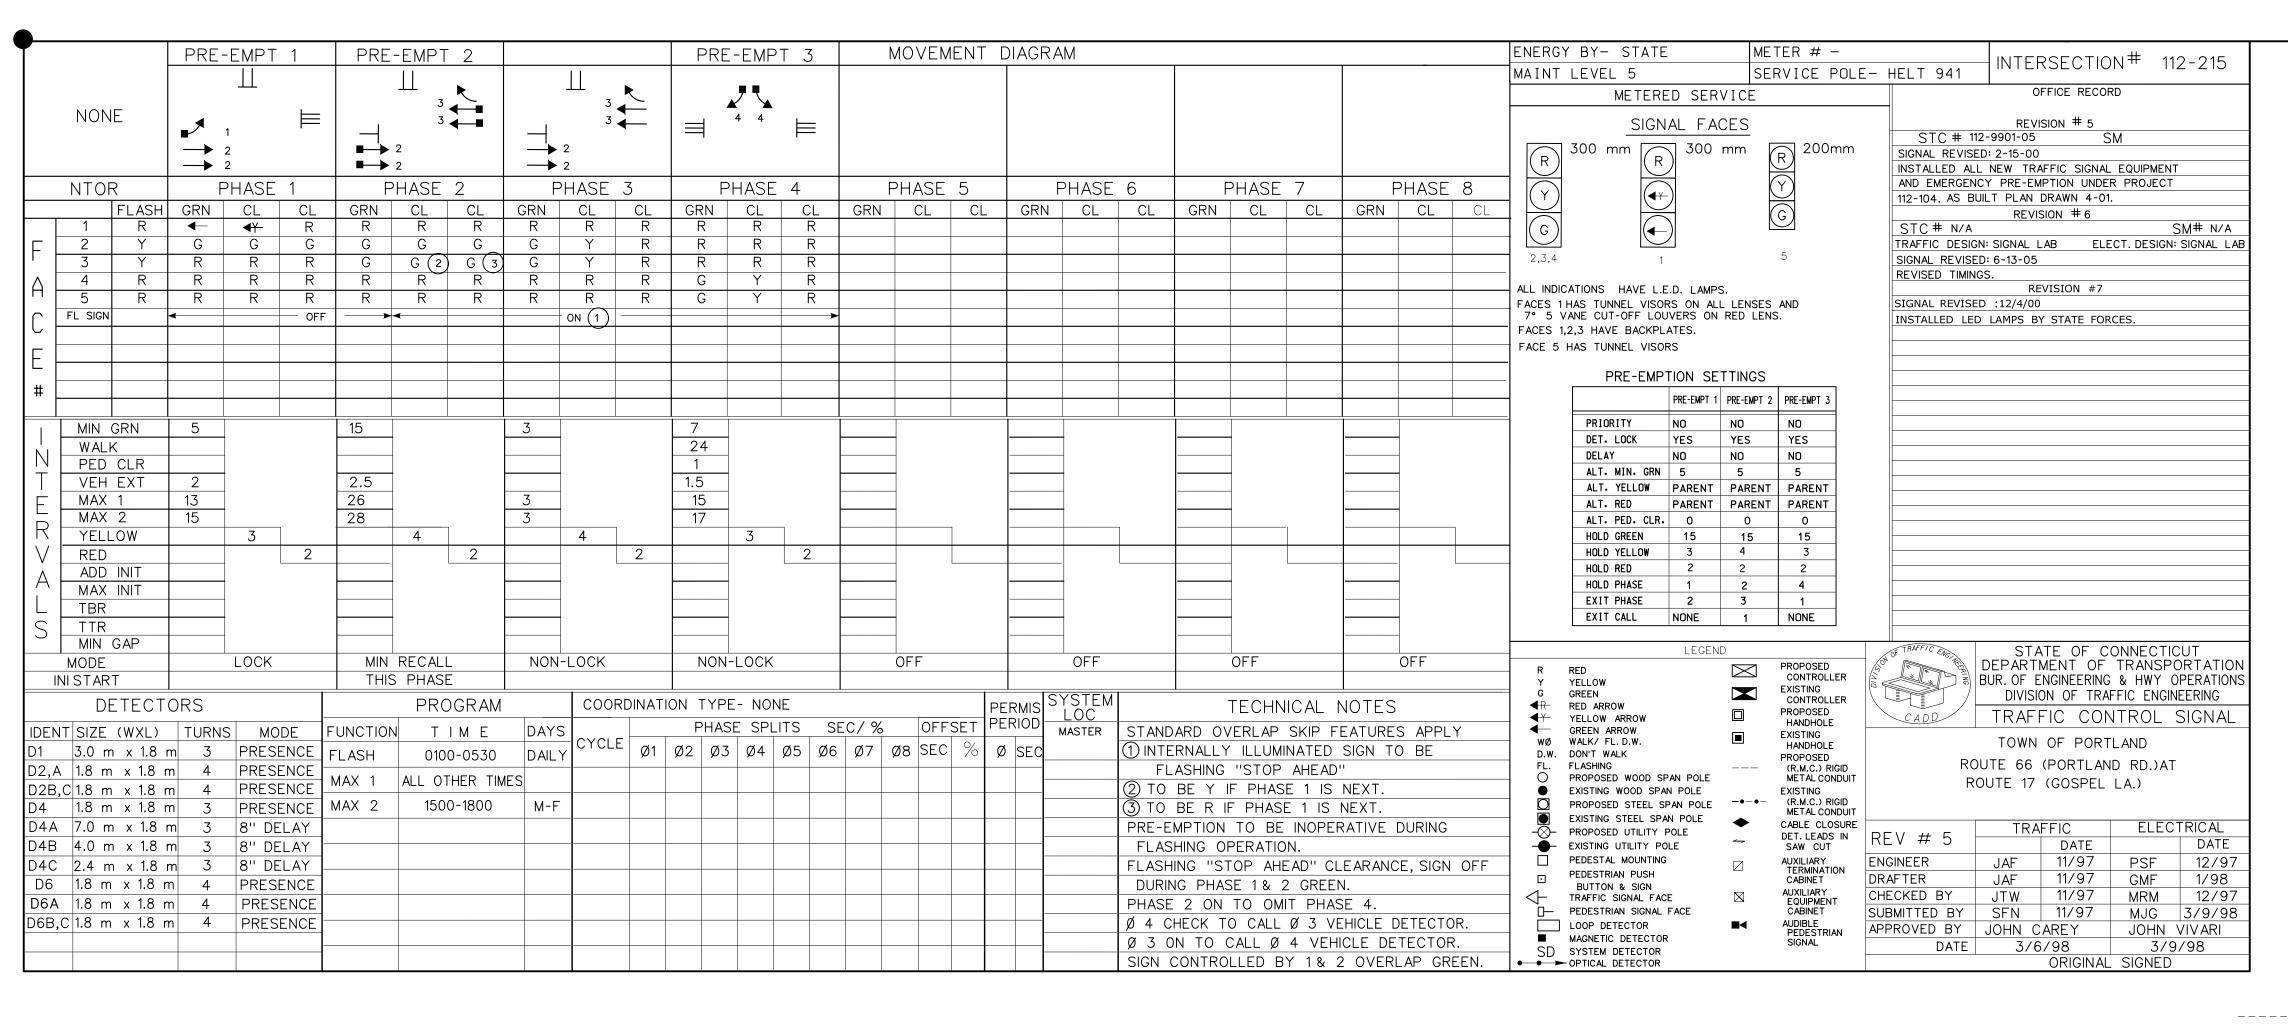

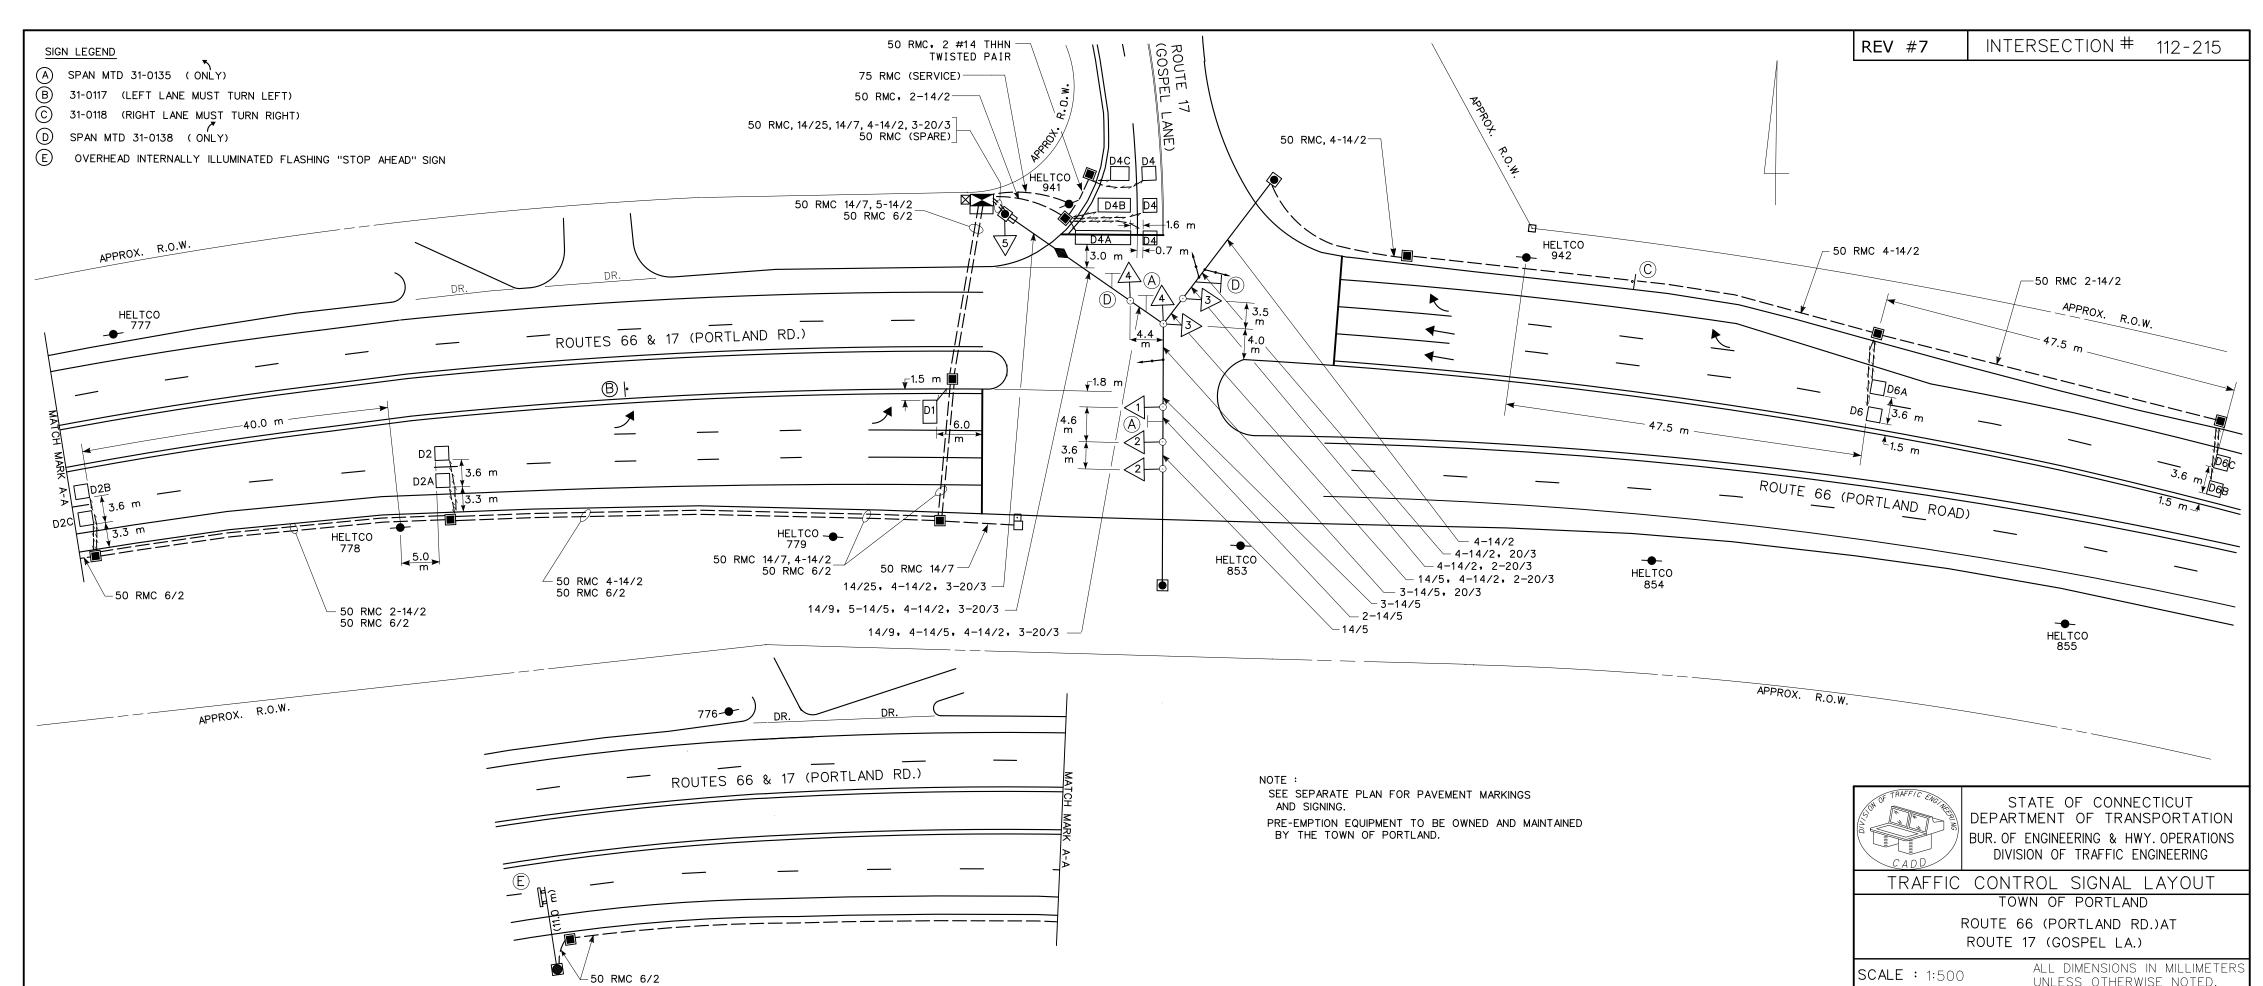

CONSTRUCTION NOTES

ALL TRAFFIC SIGNAL EQUIPMENT IS NEW EXCEPT AS NOTED.

SPAN POLES AND SPAN WIRE ARE EXISTING AND ARE TO BE REUSED.

EXISTING SPAN POLES CANNOT BE DOUBLE LOADED WITHOUT PROPER GUYING. STAKE ALL R.O.W. PRIOR TO EXCAVATION.

TEMPORARILY RELOCATE EXISTING CONTROLLER TO STEEL POLE TO FACILITATE FOUNDATION MODIFICATION AND UNTIL NEW CONTROLLER IS IN OPERATION.

(H) INSTALL NEW 8 PHASE CONTROLLER AND CABINET ON EXISTING FOUNDATION. CABINET DOOR TO OPEN STREET SIDE.

INSTALL CONCRETE SIDEWALK ON CABINET DOOR SIDE OF CONTROLLER FOUNDATION AS SHOWN ON TYPICAL INSTALLATION DETAIL SHEET.

- (J) REPLACE EXISTING HANDHOLE. EXTEND EXISTING RMC INTO NEW HANDHOLE. ALL CABLE TO BE NEW.
- $\langle \mathbb{W} \rangle$ install 760 mm x 760 mm handhole, all others type ii.

INSTALL HANDHOLES APPROX, 0,3 m BEHIND CURB OR EDGE OF ROAD UNLESS OTHERWISE SPECIFIED.

INSTALL LOOP DETECTORS 0.9 m OFF EDGE OF ROAD AND 2.4 m APART UNLESS OTHERWISE SPECIFIED.

SEGMENTED LOOPS TO BE SPLICED IN SERIES.

REMOVE ALL ABANDONED TRAFFIC SIGNAL EQUIPMENT INCLUDING, BUT NOT LIMITED TO FOUNDATIONS, HANDHOLES, CONDUIT RISERS & CABLE, MESSENGER & INTERCONNECT, STEEL POLES, AND WOOD POLES.

TWO WEEKS PRIOR TO INSTALLATION CONTACT CL&P REPRESENTATIVE ED ROBINSON AT (860) 638-2262 AND SNET REPRESENTATIVE MATT LAPREAY AT (860) 725-1520.

TRAFFIC SIGNAL CABLE CLOSURE SHALL BE INSTALLED ON THE SPAN + 1.5 m FROM THE CURBLINE.

INSTALL AUXILIARY EQUIPMENT CABINET ON SIDE OF CONTROLLER CABINET. INSTALL PRE-EMPTION EQUIPMENT IN AUXILIARY CABINET.

PRE-EMPTION IS TO OPERATE THROUGH THE INTERNAL PRE-EMPTION OF THE SIGNAL CONTROLLER.

THE CONTRACTOR IS TO INSTALL A SWITCH IN THE SIGNAL CABINET TO EFFECTIVELY DISCONNECT THE PRE-EMPTION EQUIPMENT FROM THE TRAFFIC SIGNAL CONTROLLER.


OPTICAL DETECTOR LOCATIONS ARE FOR ILLUSTRATION ONLY. EXACT LOCATIONS SHALL BE DETERMINED BY THE MANUFACTURER OR HIS DESIGNATED REPRESENTATIVE. DETECTOR CABLES ARE TO BE INSTALLED CONTINUOUS BETWEEN EACH OPTICAL DETECTOR AND THE AUXILIARY EQUIPMENT CABINET.

CONTACT MR. JAMES NESCI AT 258-0346 FOR ANY SEQUENCE QUESTIONS.

PHASE OVERLAP #1: 1+2+3

PHASE OVERLAP #2: 2+3

PHASE OVERLAP #3: 1+2 (SIGN)



F.H.W.A. STATE

CONN.

REGION NO.

SPARE SWITCH PACK TO SIGN

CONSTRUCTION NOTES FOR CHANGE ORDER SHT. #48B

(K) INSTALL 75 RMC W/PULL ROPE FOR SERVICE FROM HELT 941 TO CONTROLLER CABINET. CL&P TO INSTALL SERVICE CABLE AND POLE RISER.

METER SOCKET REVISED FROM 100 AMP TO 200 AMP AS INDICATED IN NEW SPECIFICATIONS.

TOWN

PORTLAND

				DEPARTMENT OF TRANSPORTATION
				BUREAU OF ENGINEERING & HIGHWAY OPERATIONS
			REVISIONS	DIVISION OF TRAFFIC ENGINEERING
NO.	DATE	INIT.	DESCRIPTION	
А	9/98	CRM	REVISED SEQUENCE, ADDED PHASE 3.	
В	1/99	MRM	REVISED SERVICE TO NEW CL&P	
			STANDARDS.	TRAFFIC CONTROL SIGNAL

FED. AID PROJ. NO


NH-22(140)


STATE OF CONNECTICUT

ROUTE NO.

YEAR

|12-104 | 1998 | 66&17

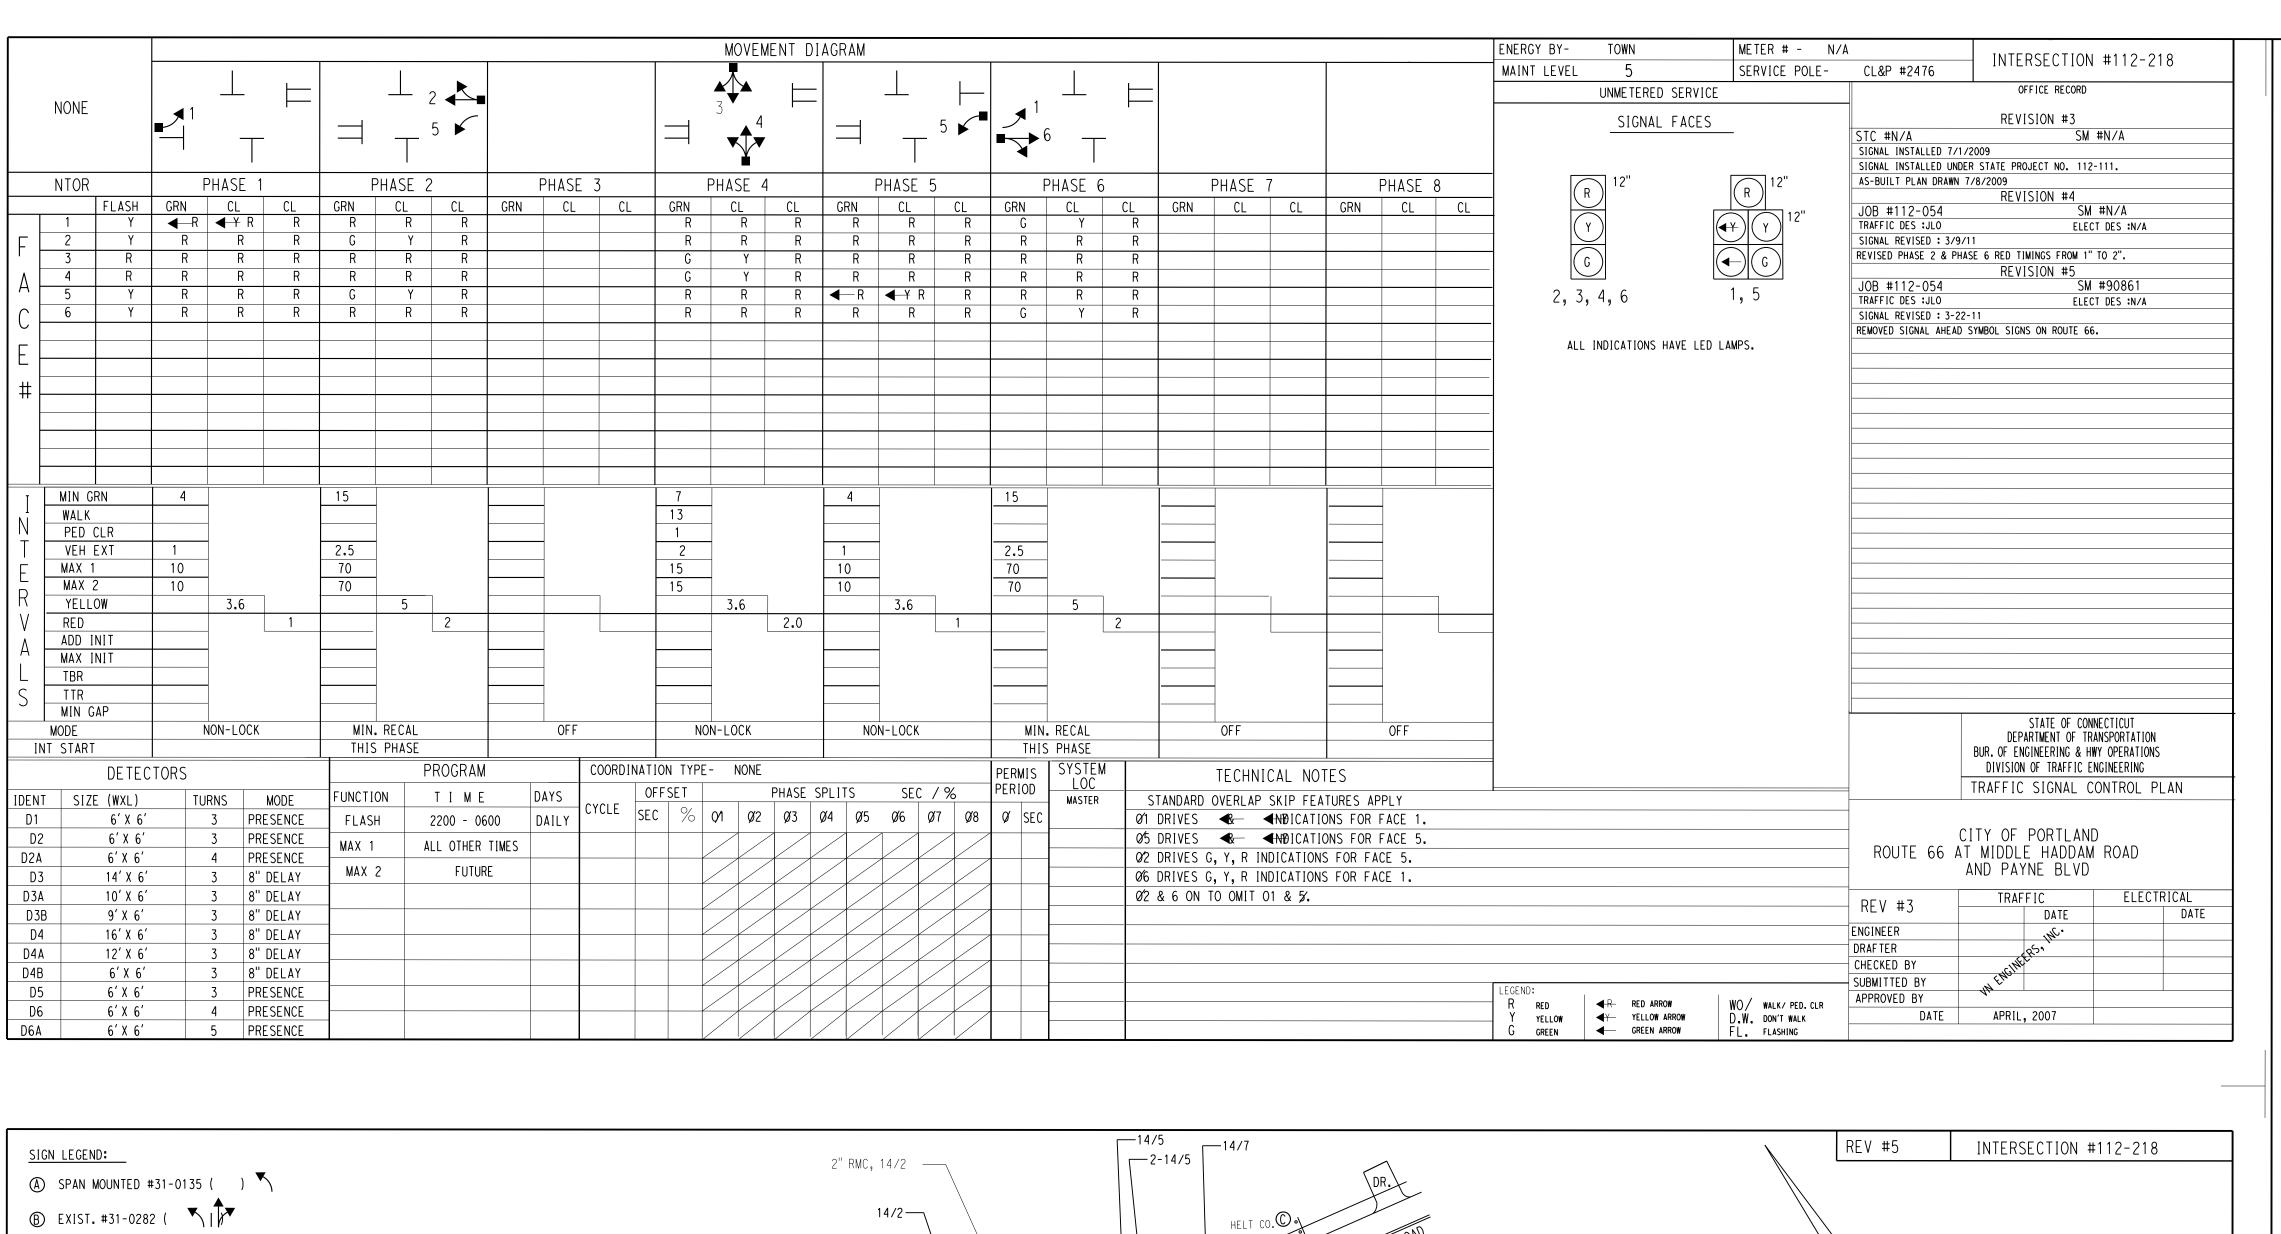

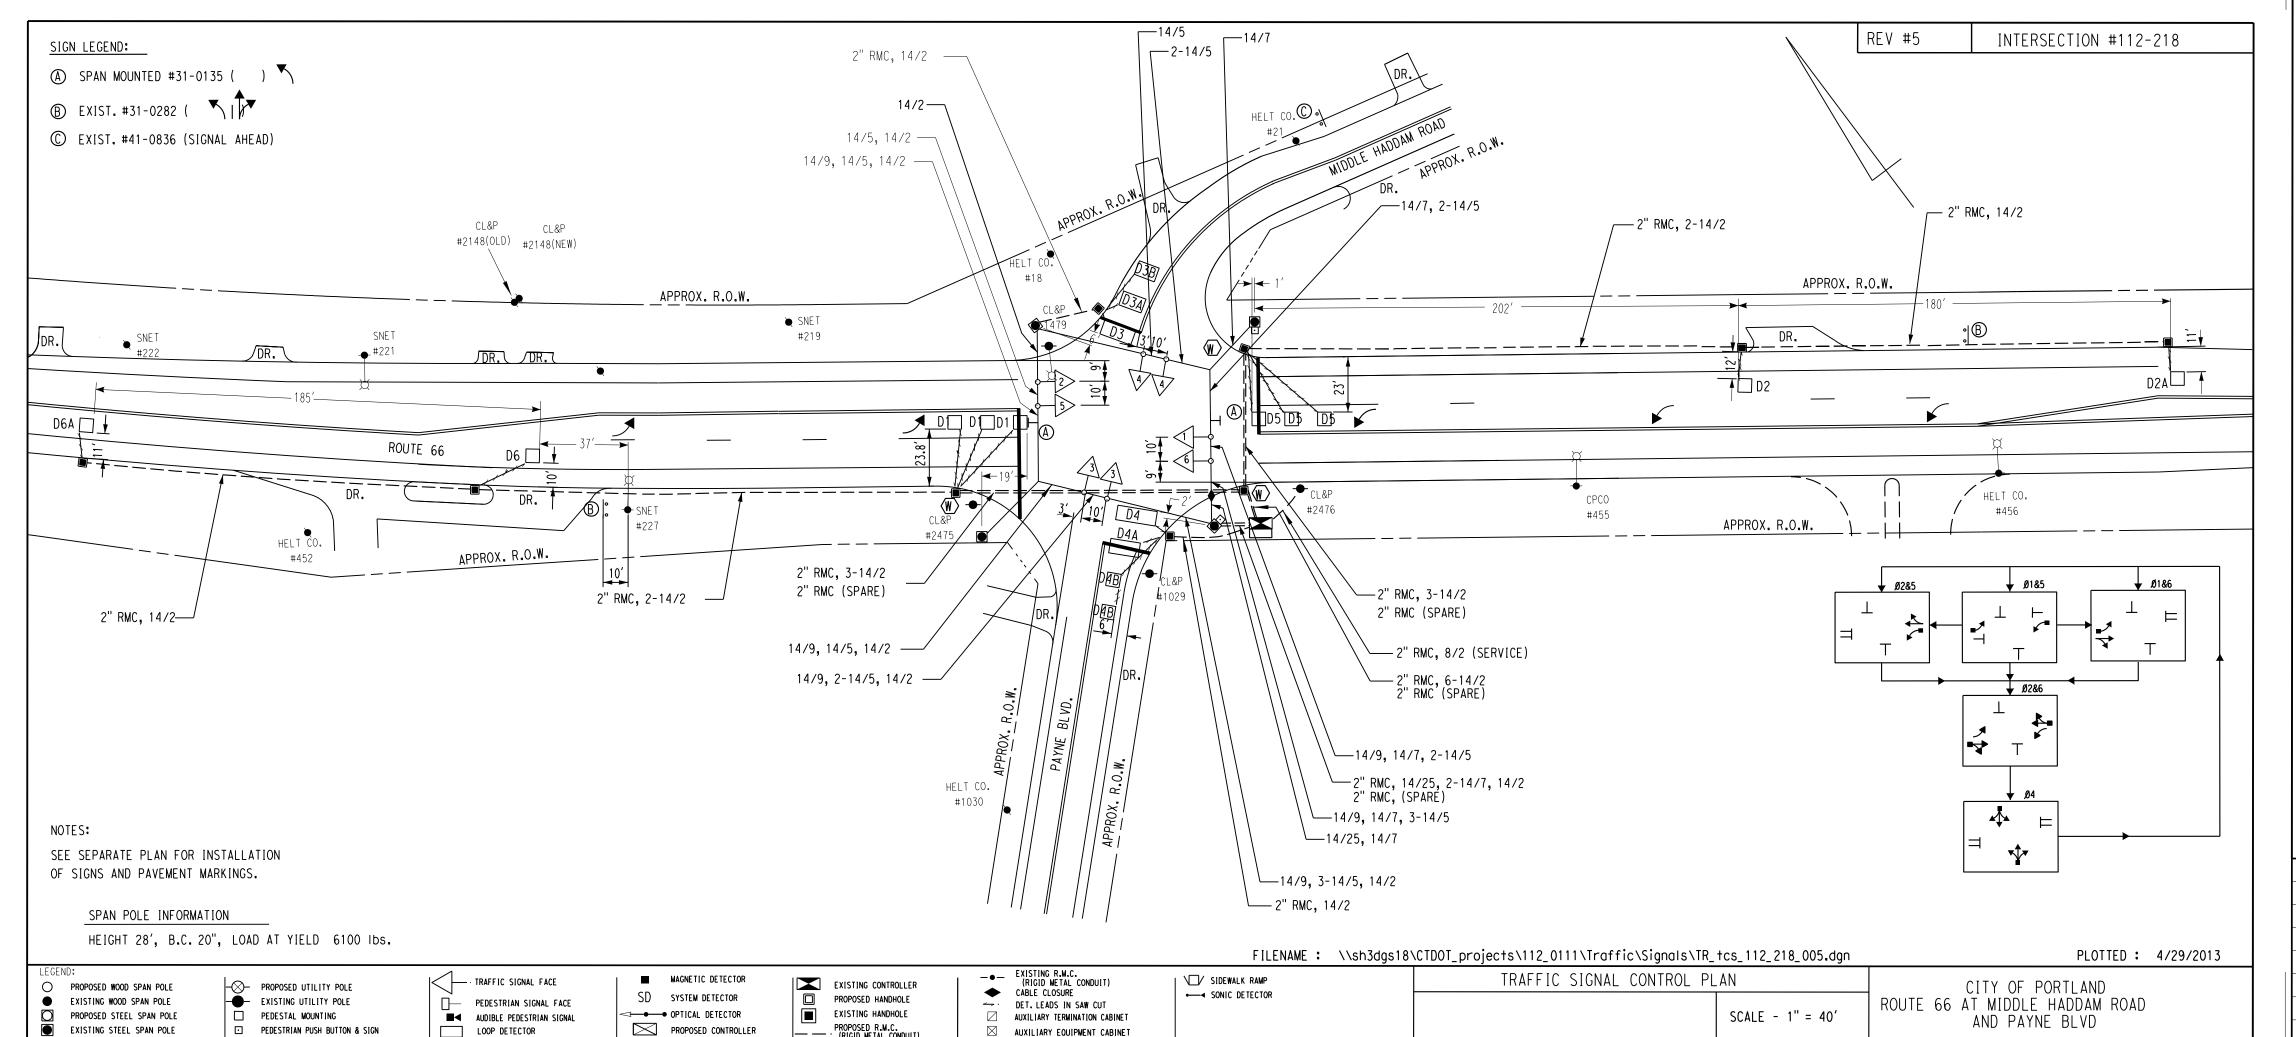

CONSTRUCTION NOTES

ALL TRAFFIC SIGNAL EQUIPMENT IS NEW.

STAKE ALL R.O.W. PRIOR TO EXCAVATION.

(W) INSTALL 2.5 FT X 2.5 FT HANDHOLE. ALL OTHERS TYPE II.

INSTALL HANDHOLES APPROX. 1 FT BEHIND CURB OR EDGE OF ROAD UNLESS OTHERWISE SPECIFIED.

INSTALL SPAN POLE AND CONTROLLER FOUNDATIONS AS SHOWN ON THE PLAN AND WITHIN THE R.O.W.

CABINET DOOR TO OPEN FIELD SIDE.

INSTALL CONCRETE SIDEWALK ON CABINET DOOR SIDE OF CONTROLLER FOUNDATION AS SHOWN ON TYPICAL INSTALLATION DETAIL SHEET.

TWO WEEKS PRIOR TO INSTALLATION CONTACT CL&P

REPRESENTATIVE TOM WORONIK AT (860) 267-3891.

INSTALL NEW SIGNAL IN OPERATION SIGN UPON ACTIVATION OF SIGNAL AND REMOVE AFTER 30 DAYS.

REMOVE EXISTING STOP SIGNS UPON ACTIVATION OF SIGNAL.

INSTALL LOOP DETECTORS 3'OFF EDGE OF ROAD AND 8'APART UNLESS OTHERWISE SPECIFIED.


LOOP DETECTORS D1 & D5 TO BE CENTERED IN LANE AND 8'APART AS SHOWN ON THE PLAN.


SERIES SPLICE SEGMENTED LOOPS PER LANE.


INSTALL 2" RISER ON CL&P #2476.


INSTALL TRAFFIC SIGNAL CABLE CLOSURE ON THE SPAN +/- 5' FROM CURBLINE.


(E) INSTALL PIEZO TYPE PEDESTRIAN PUSH BUTTONS ON SPAN POLE.

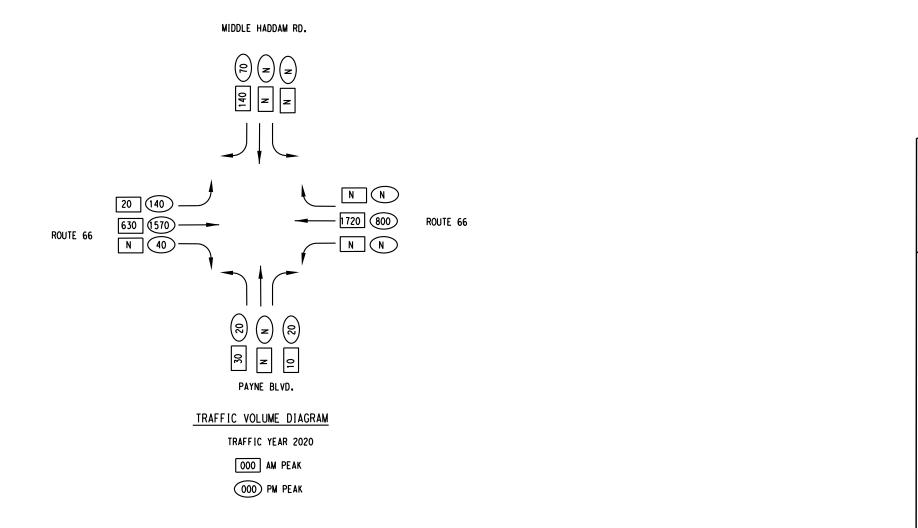


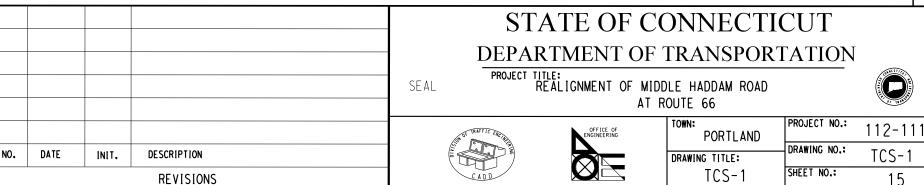


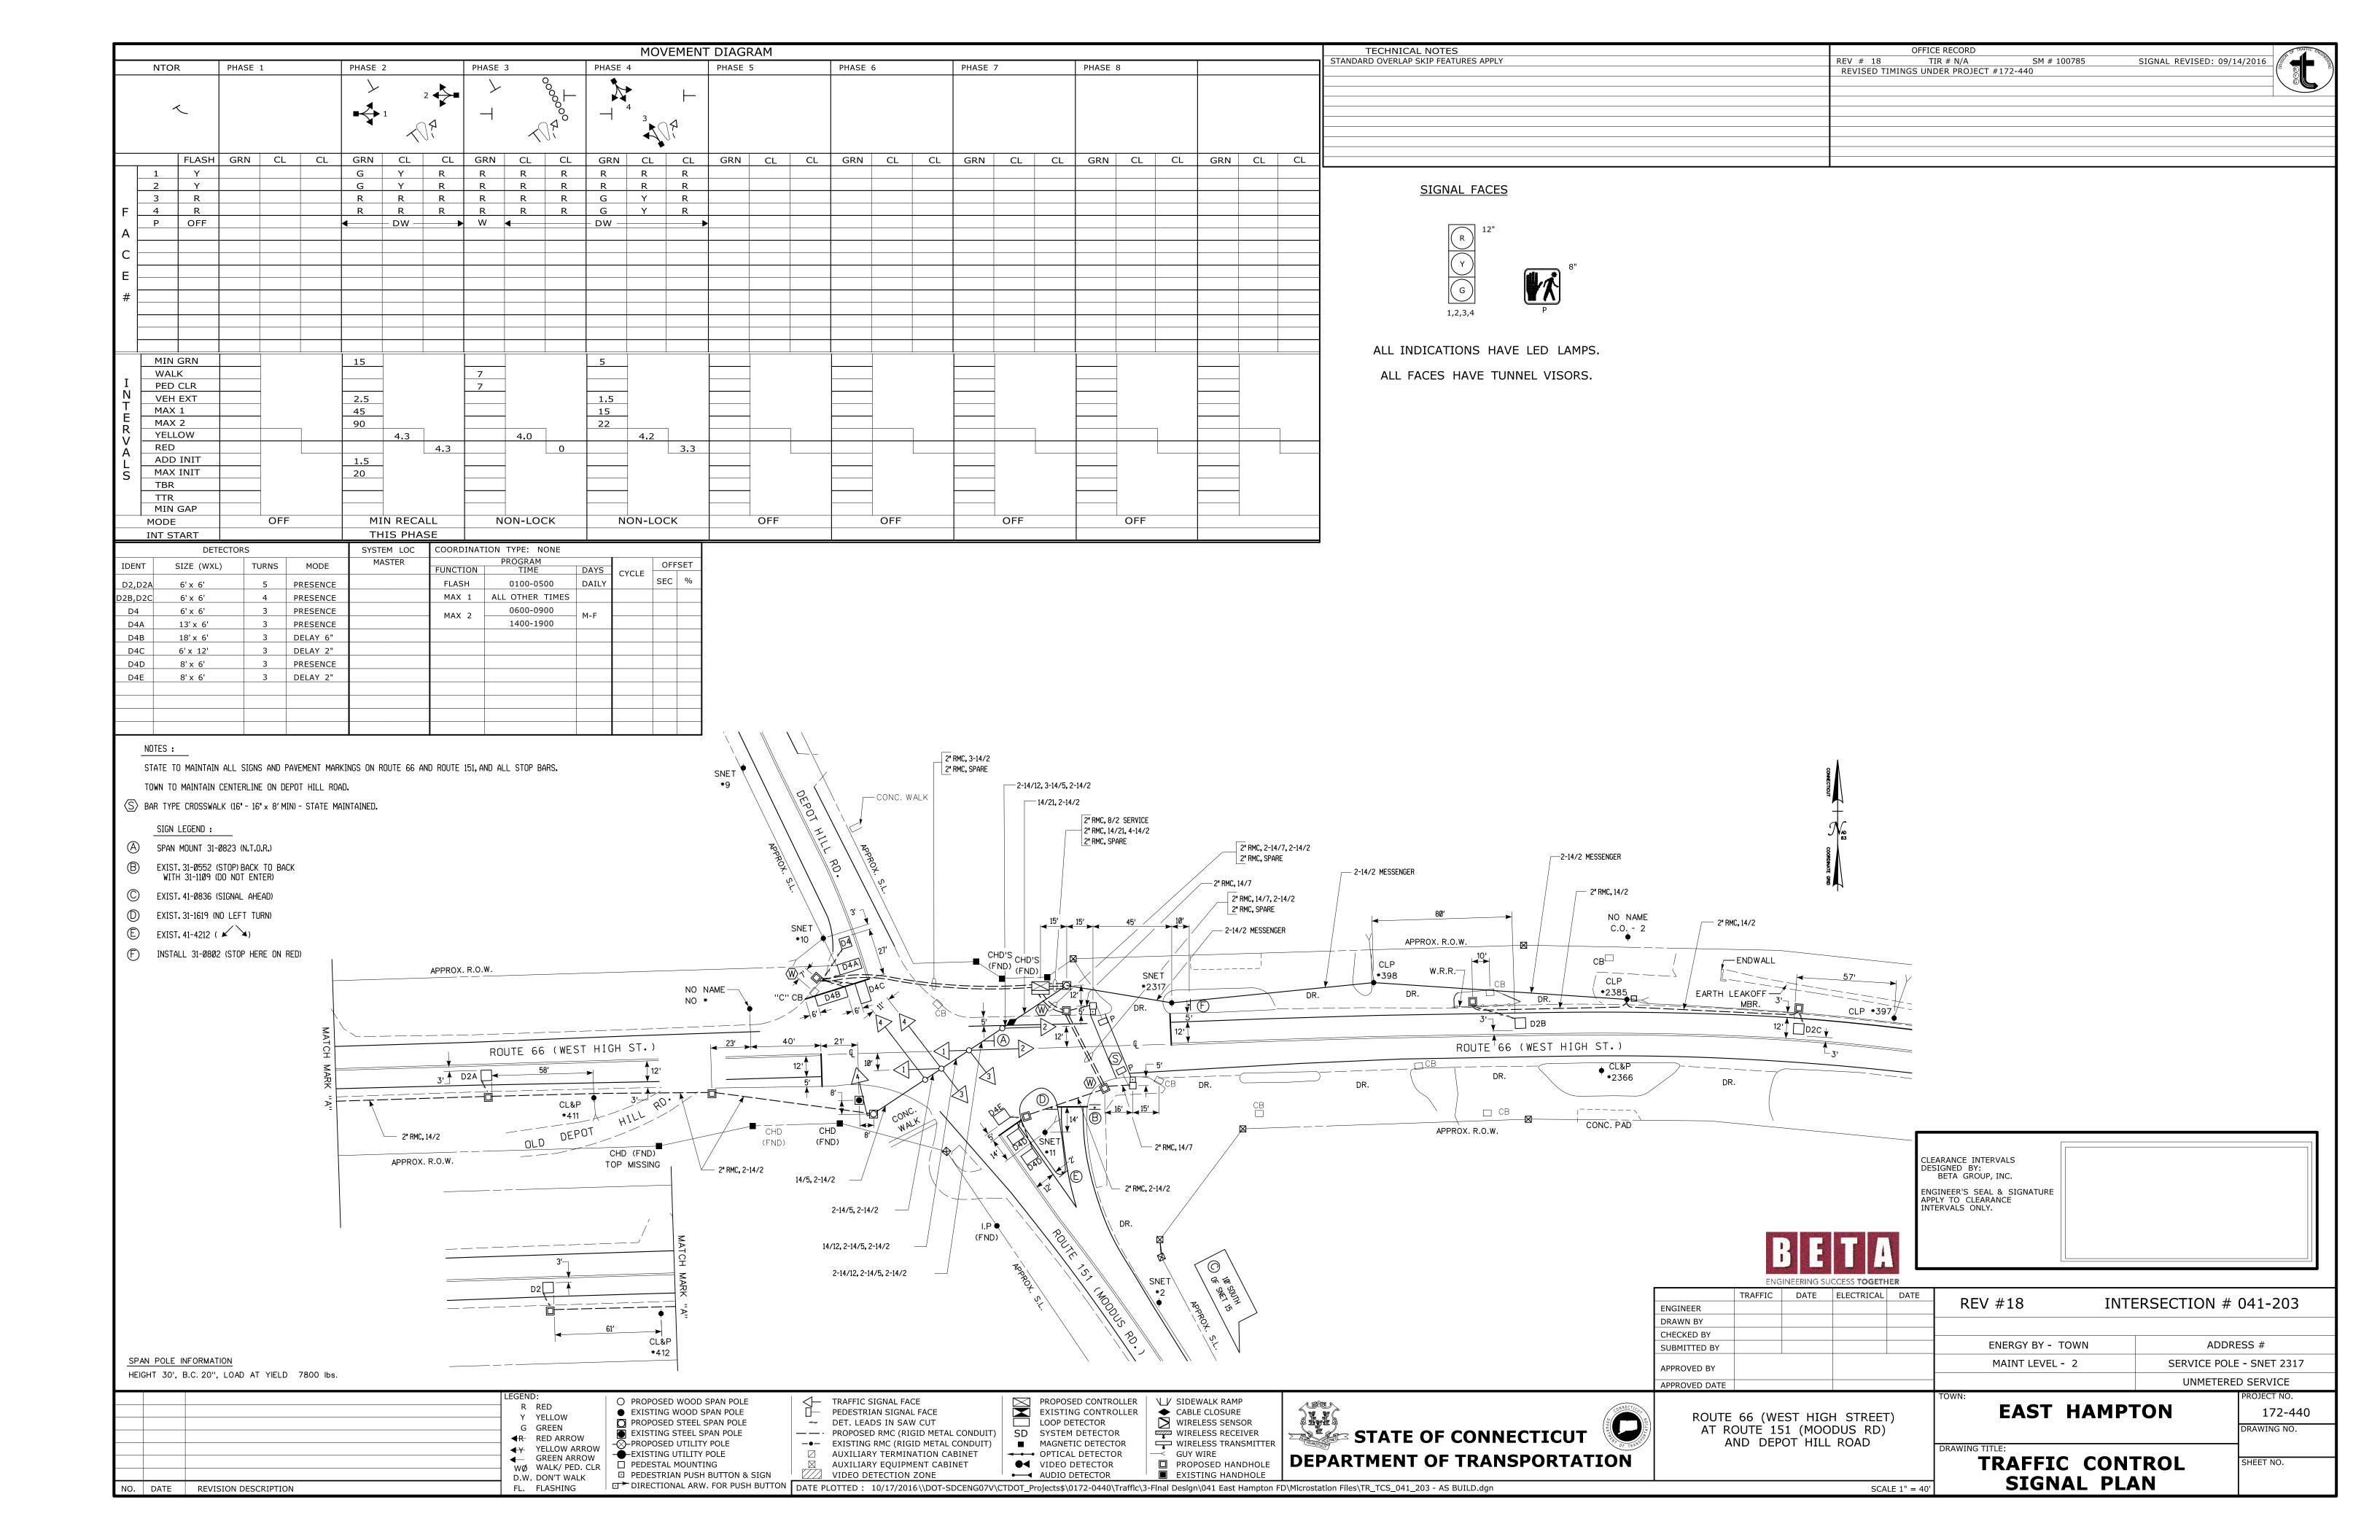


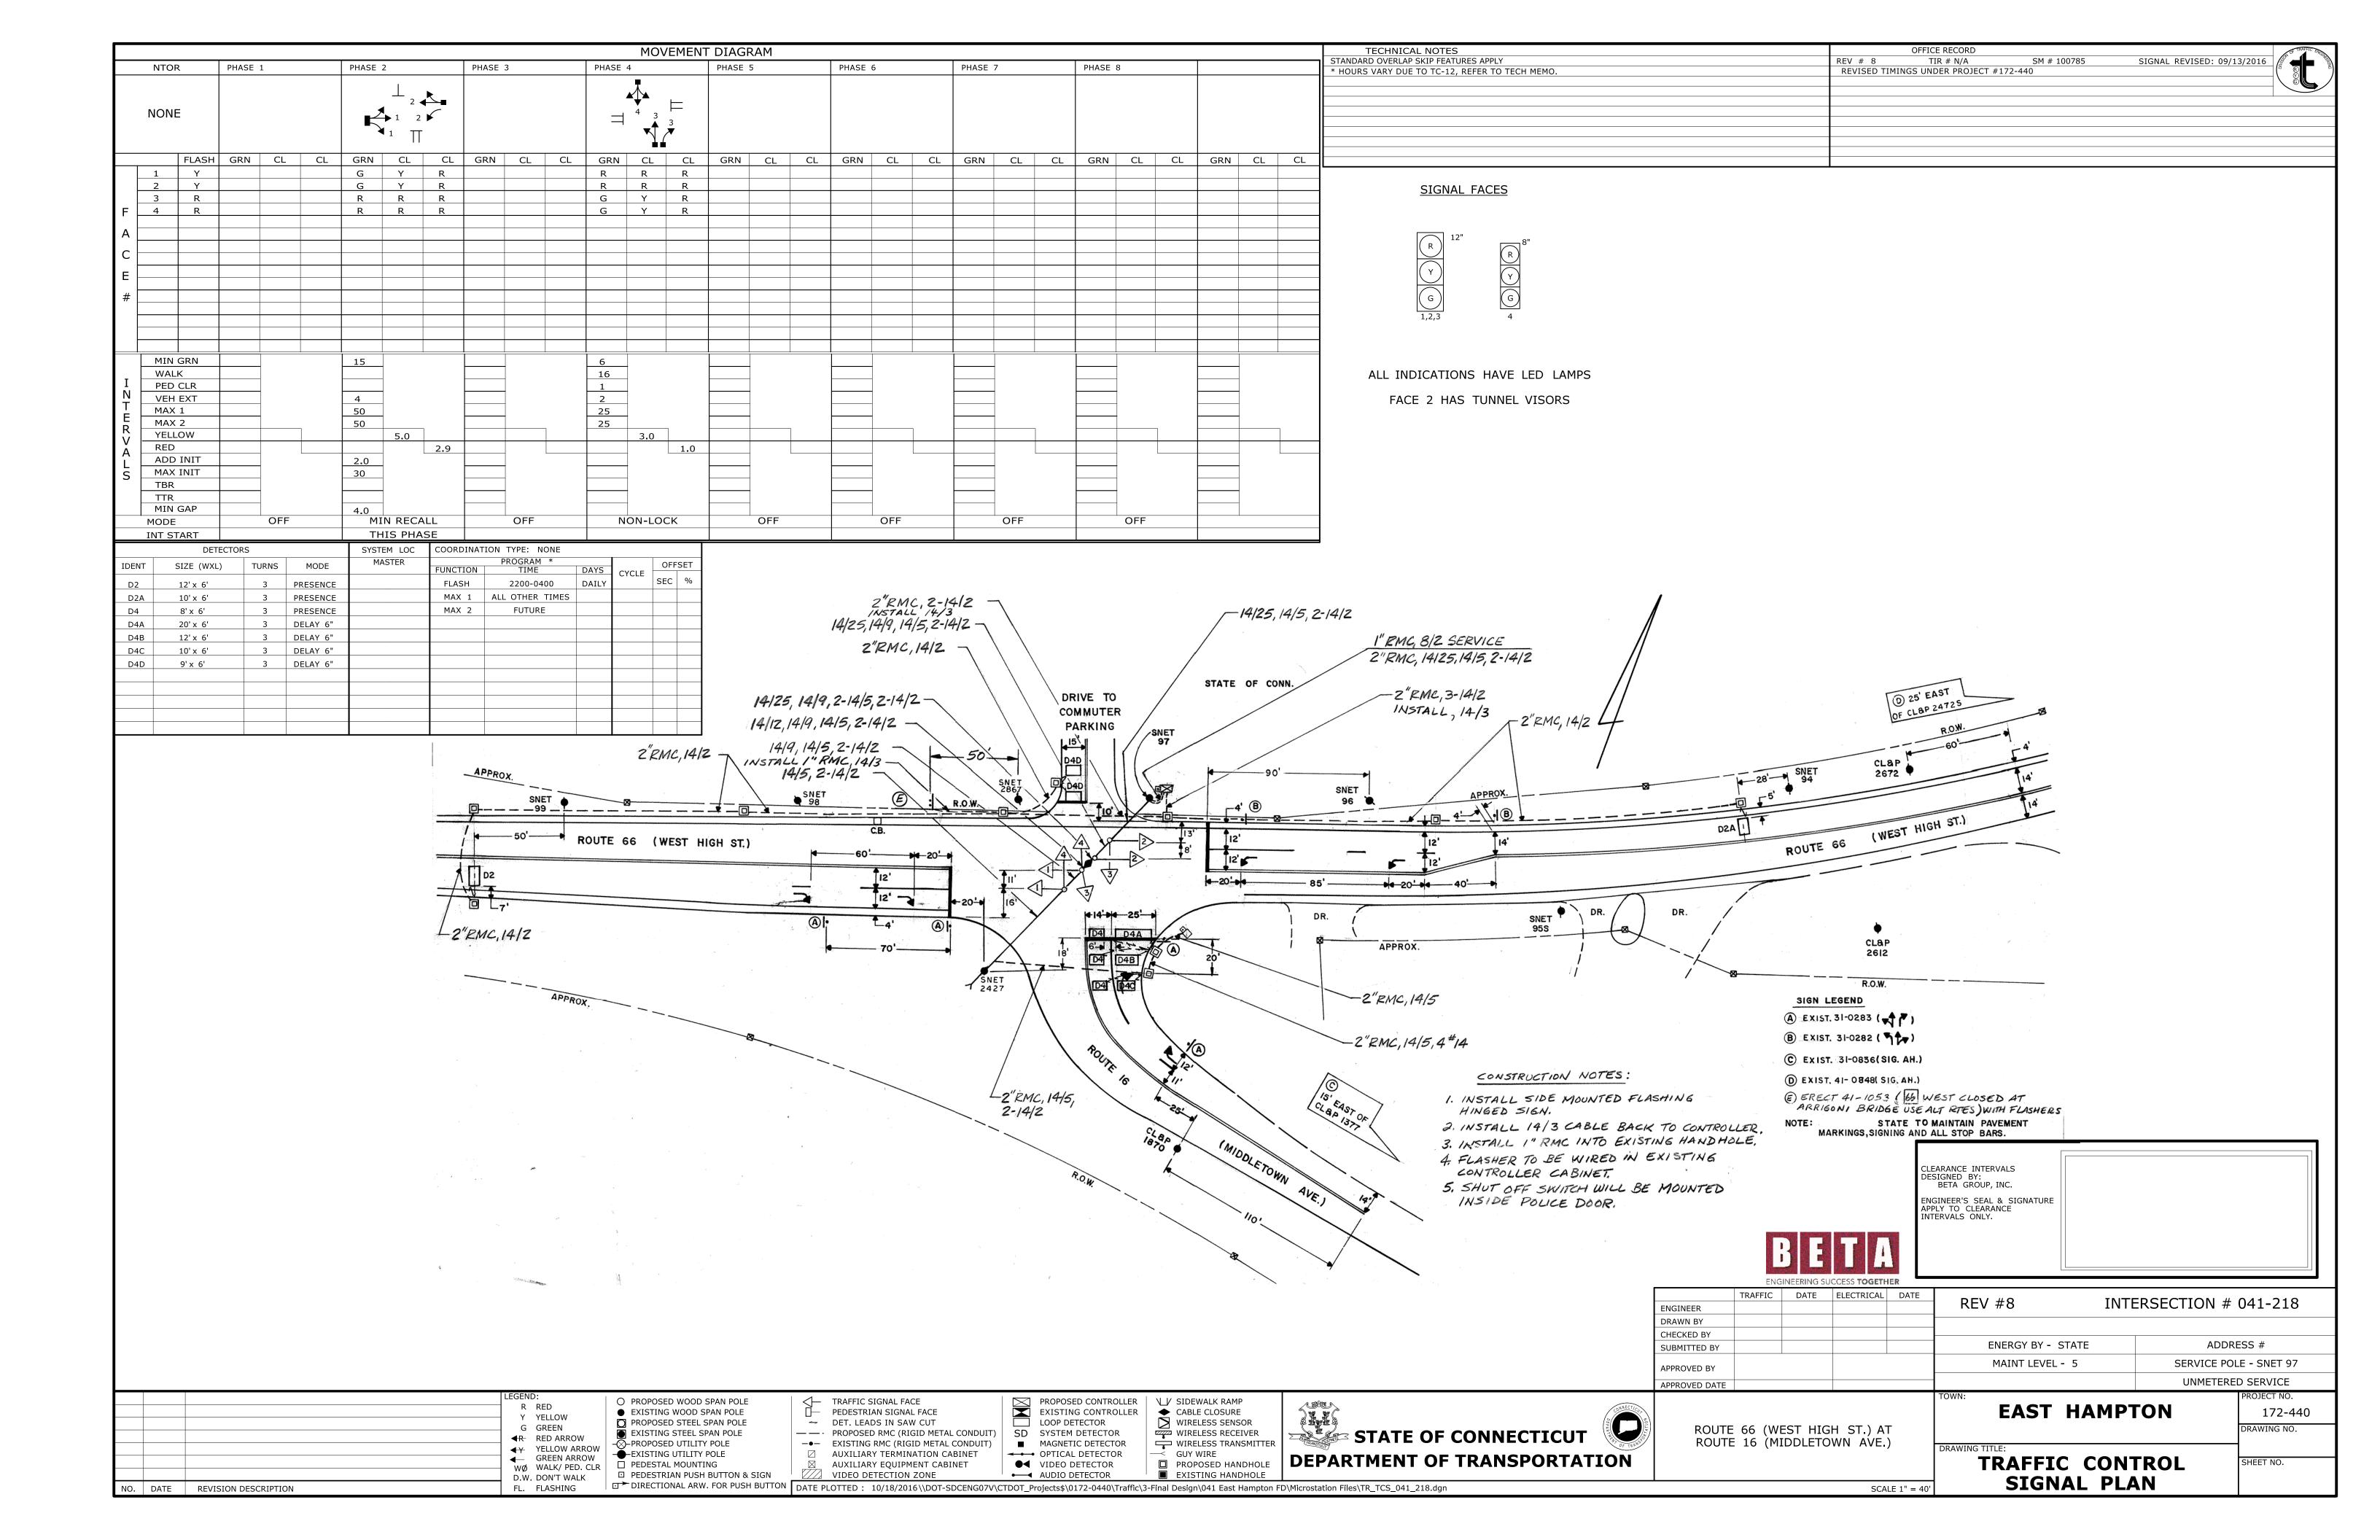

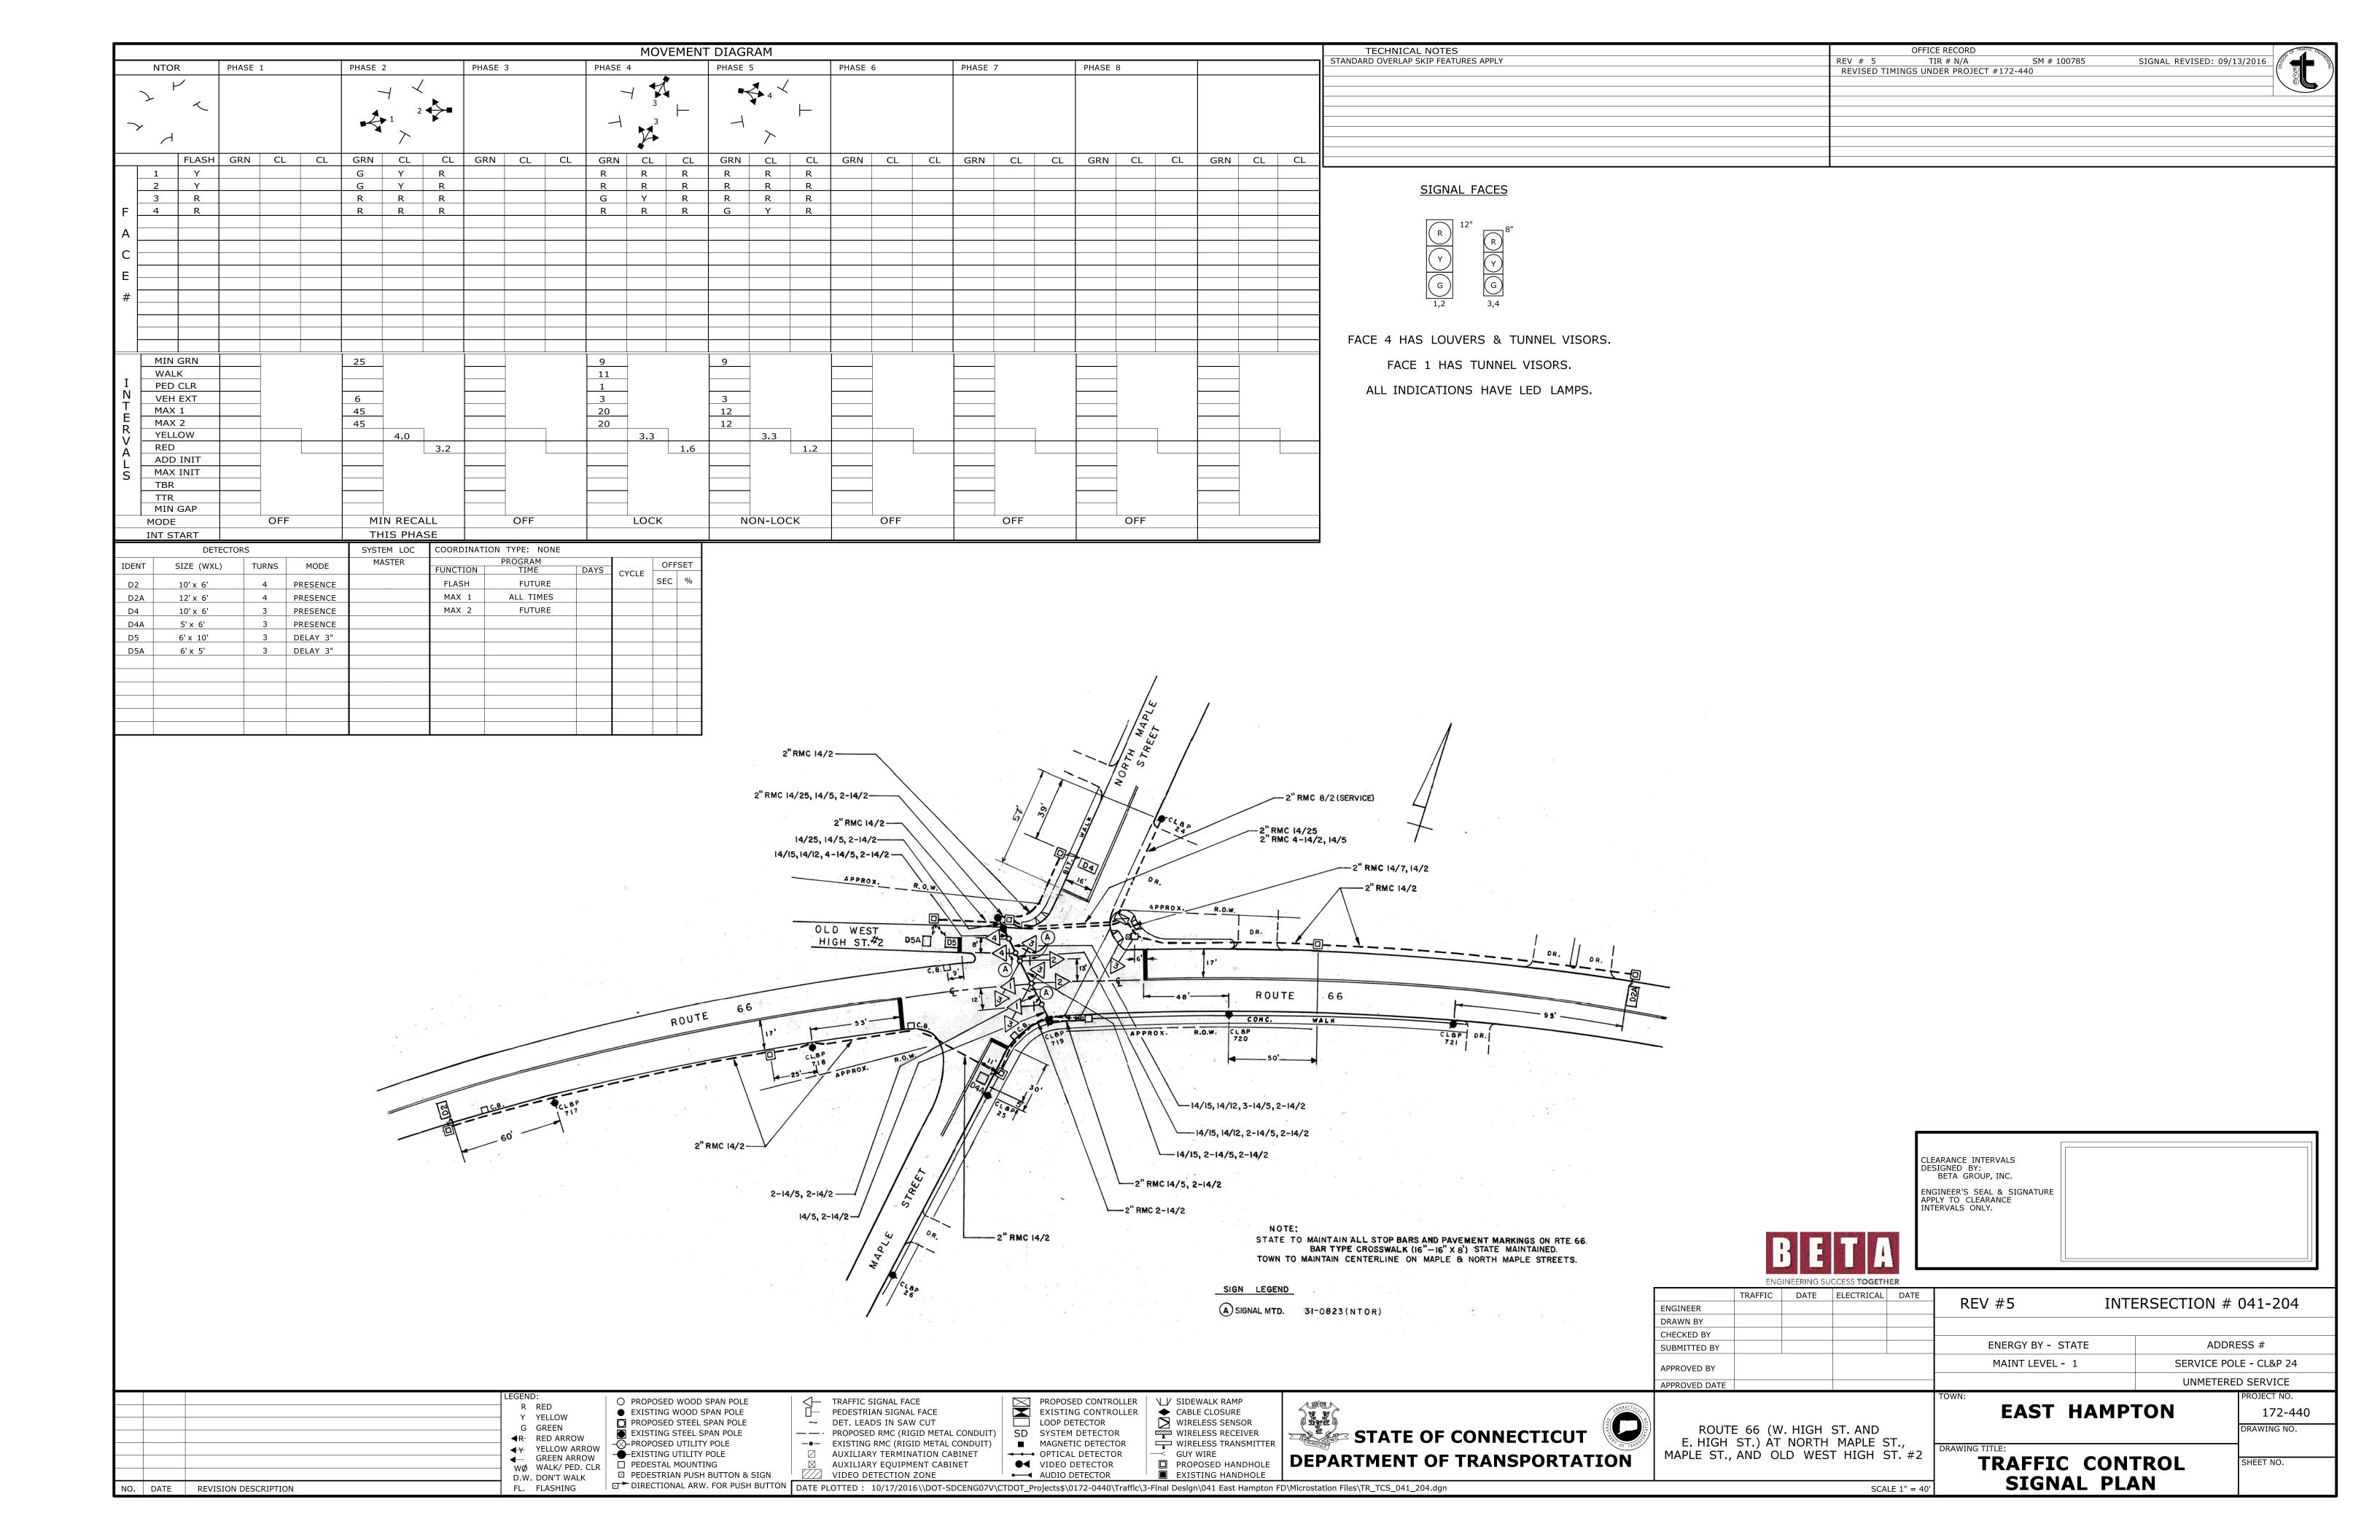

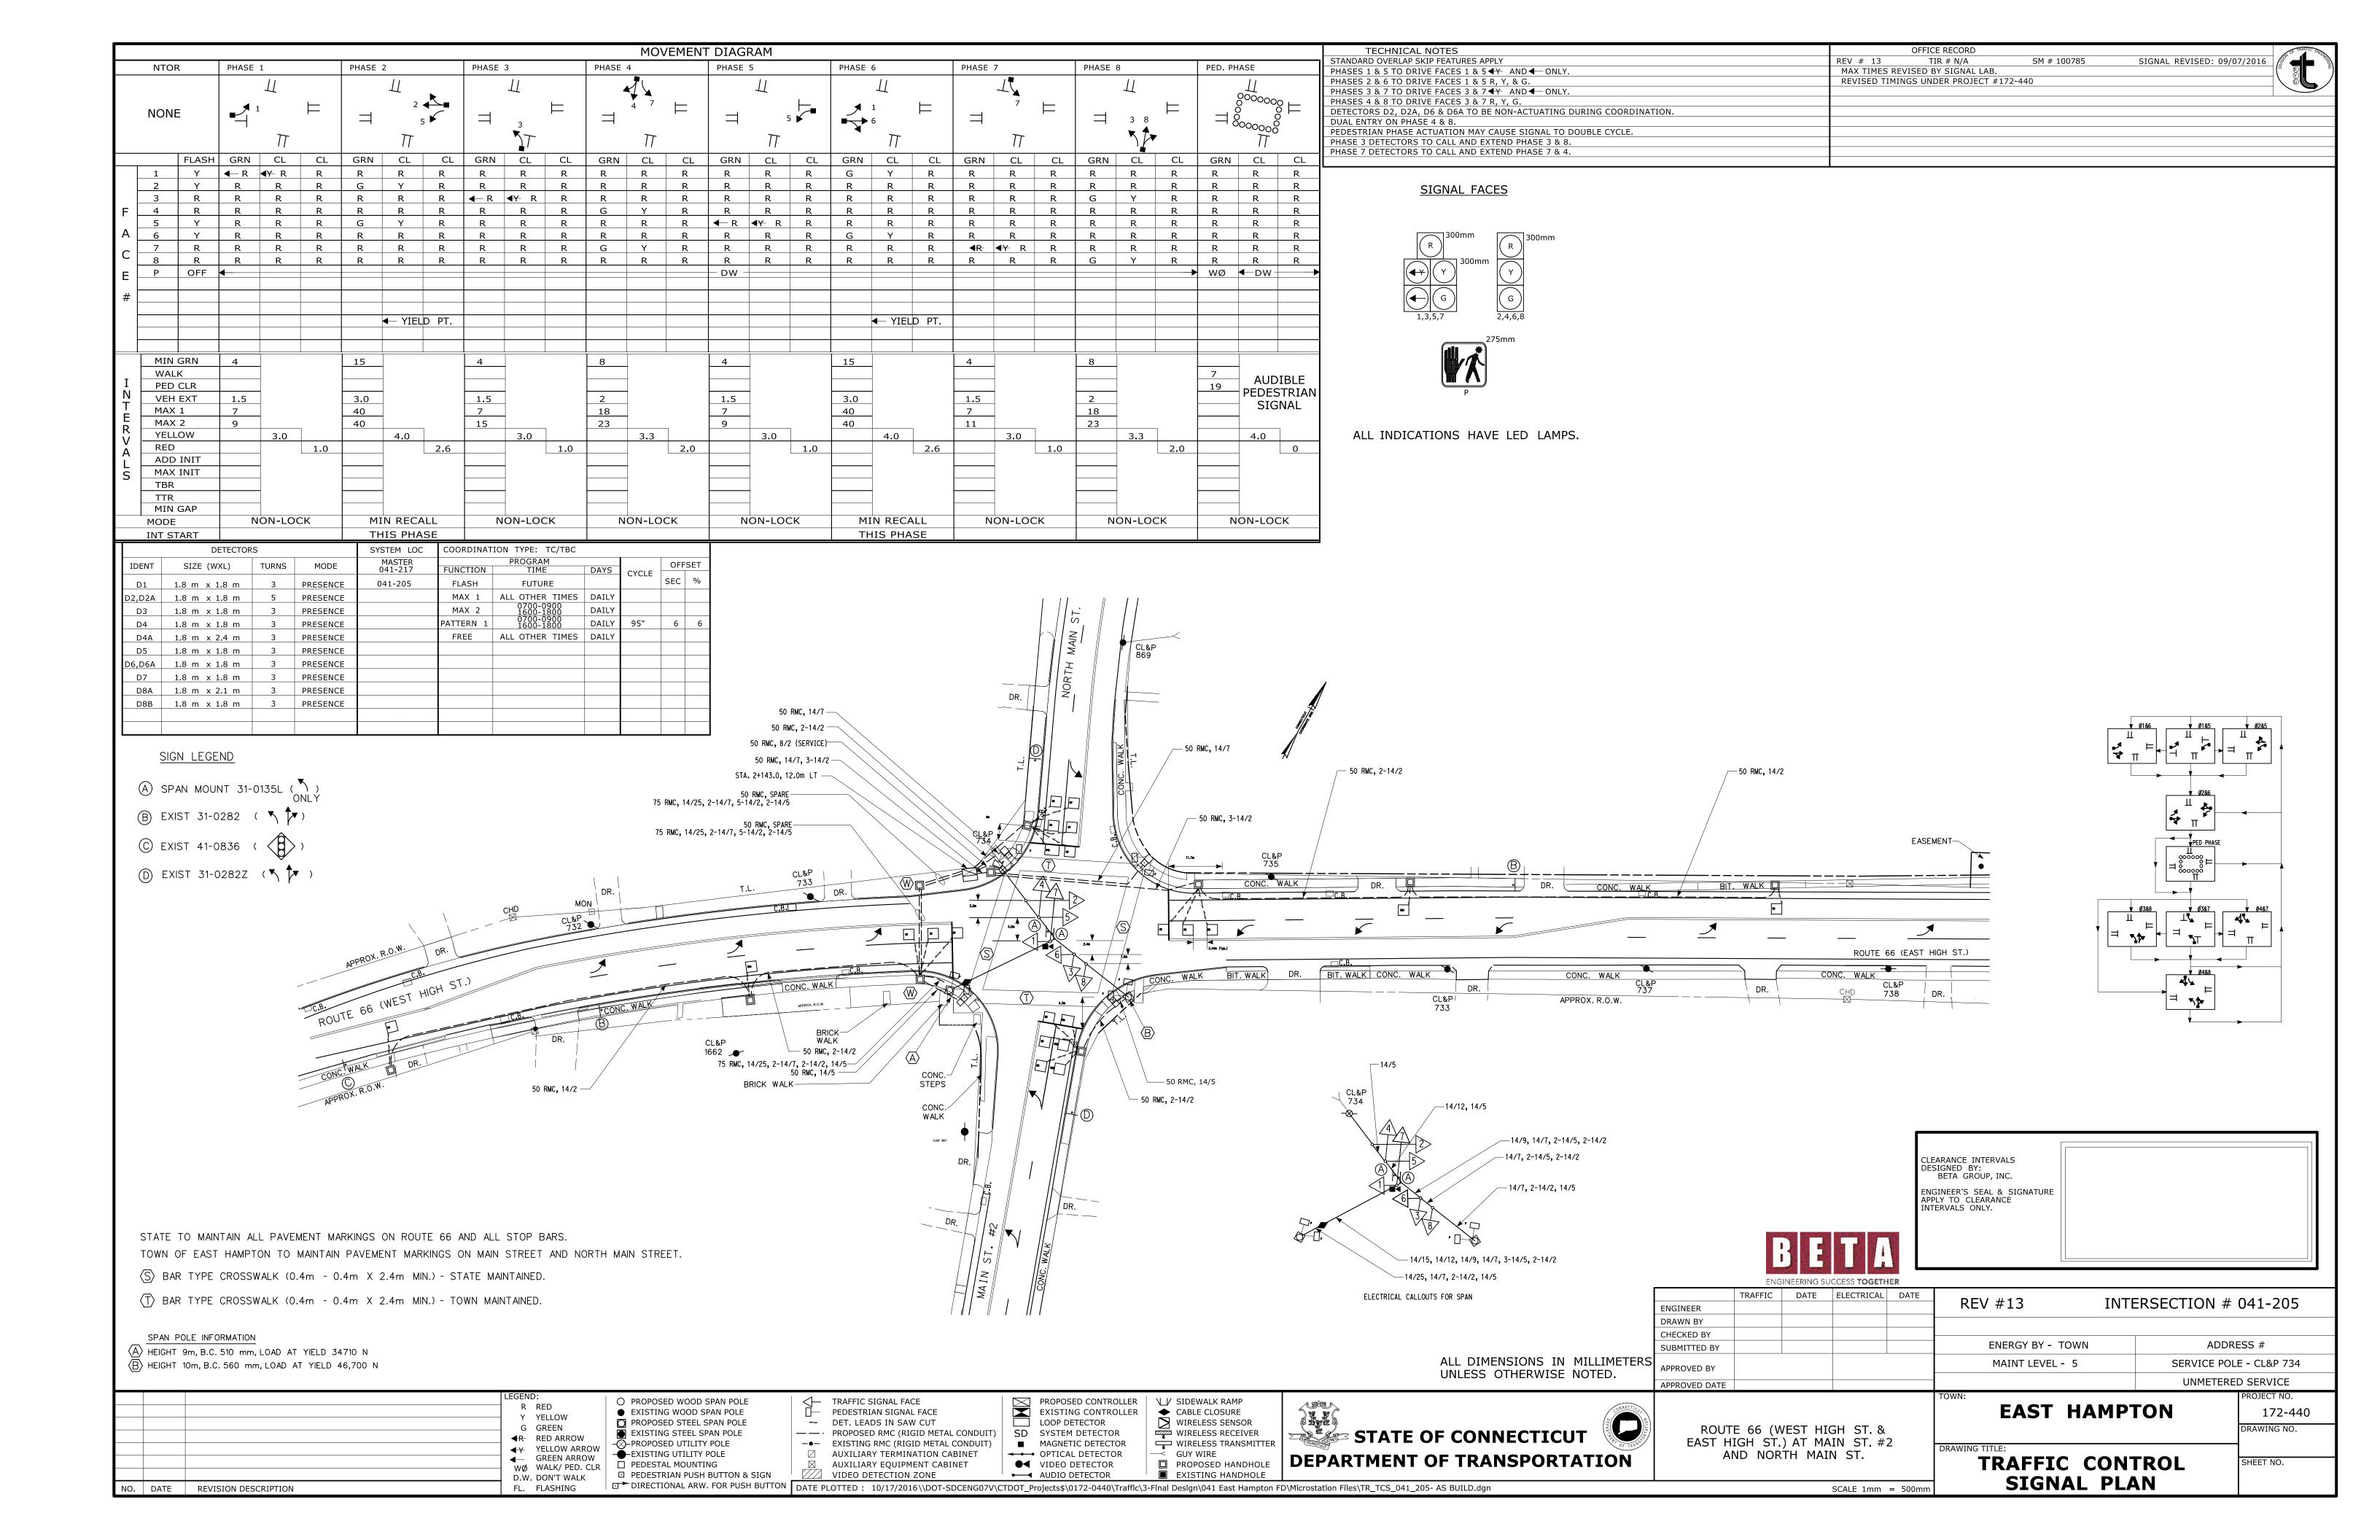

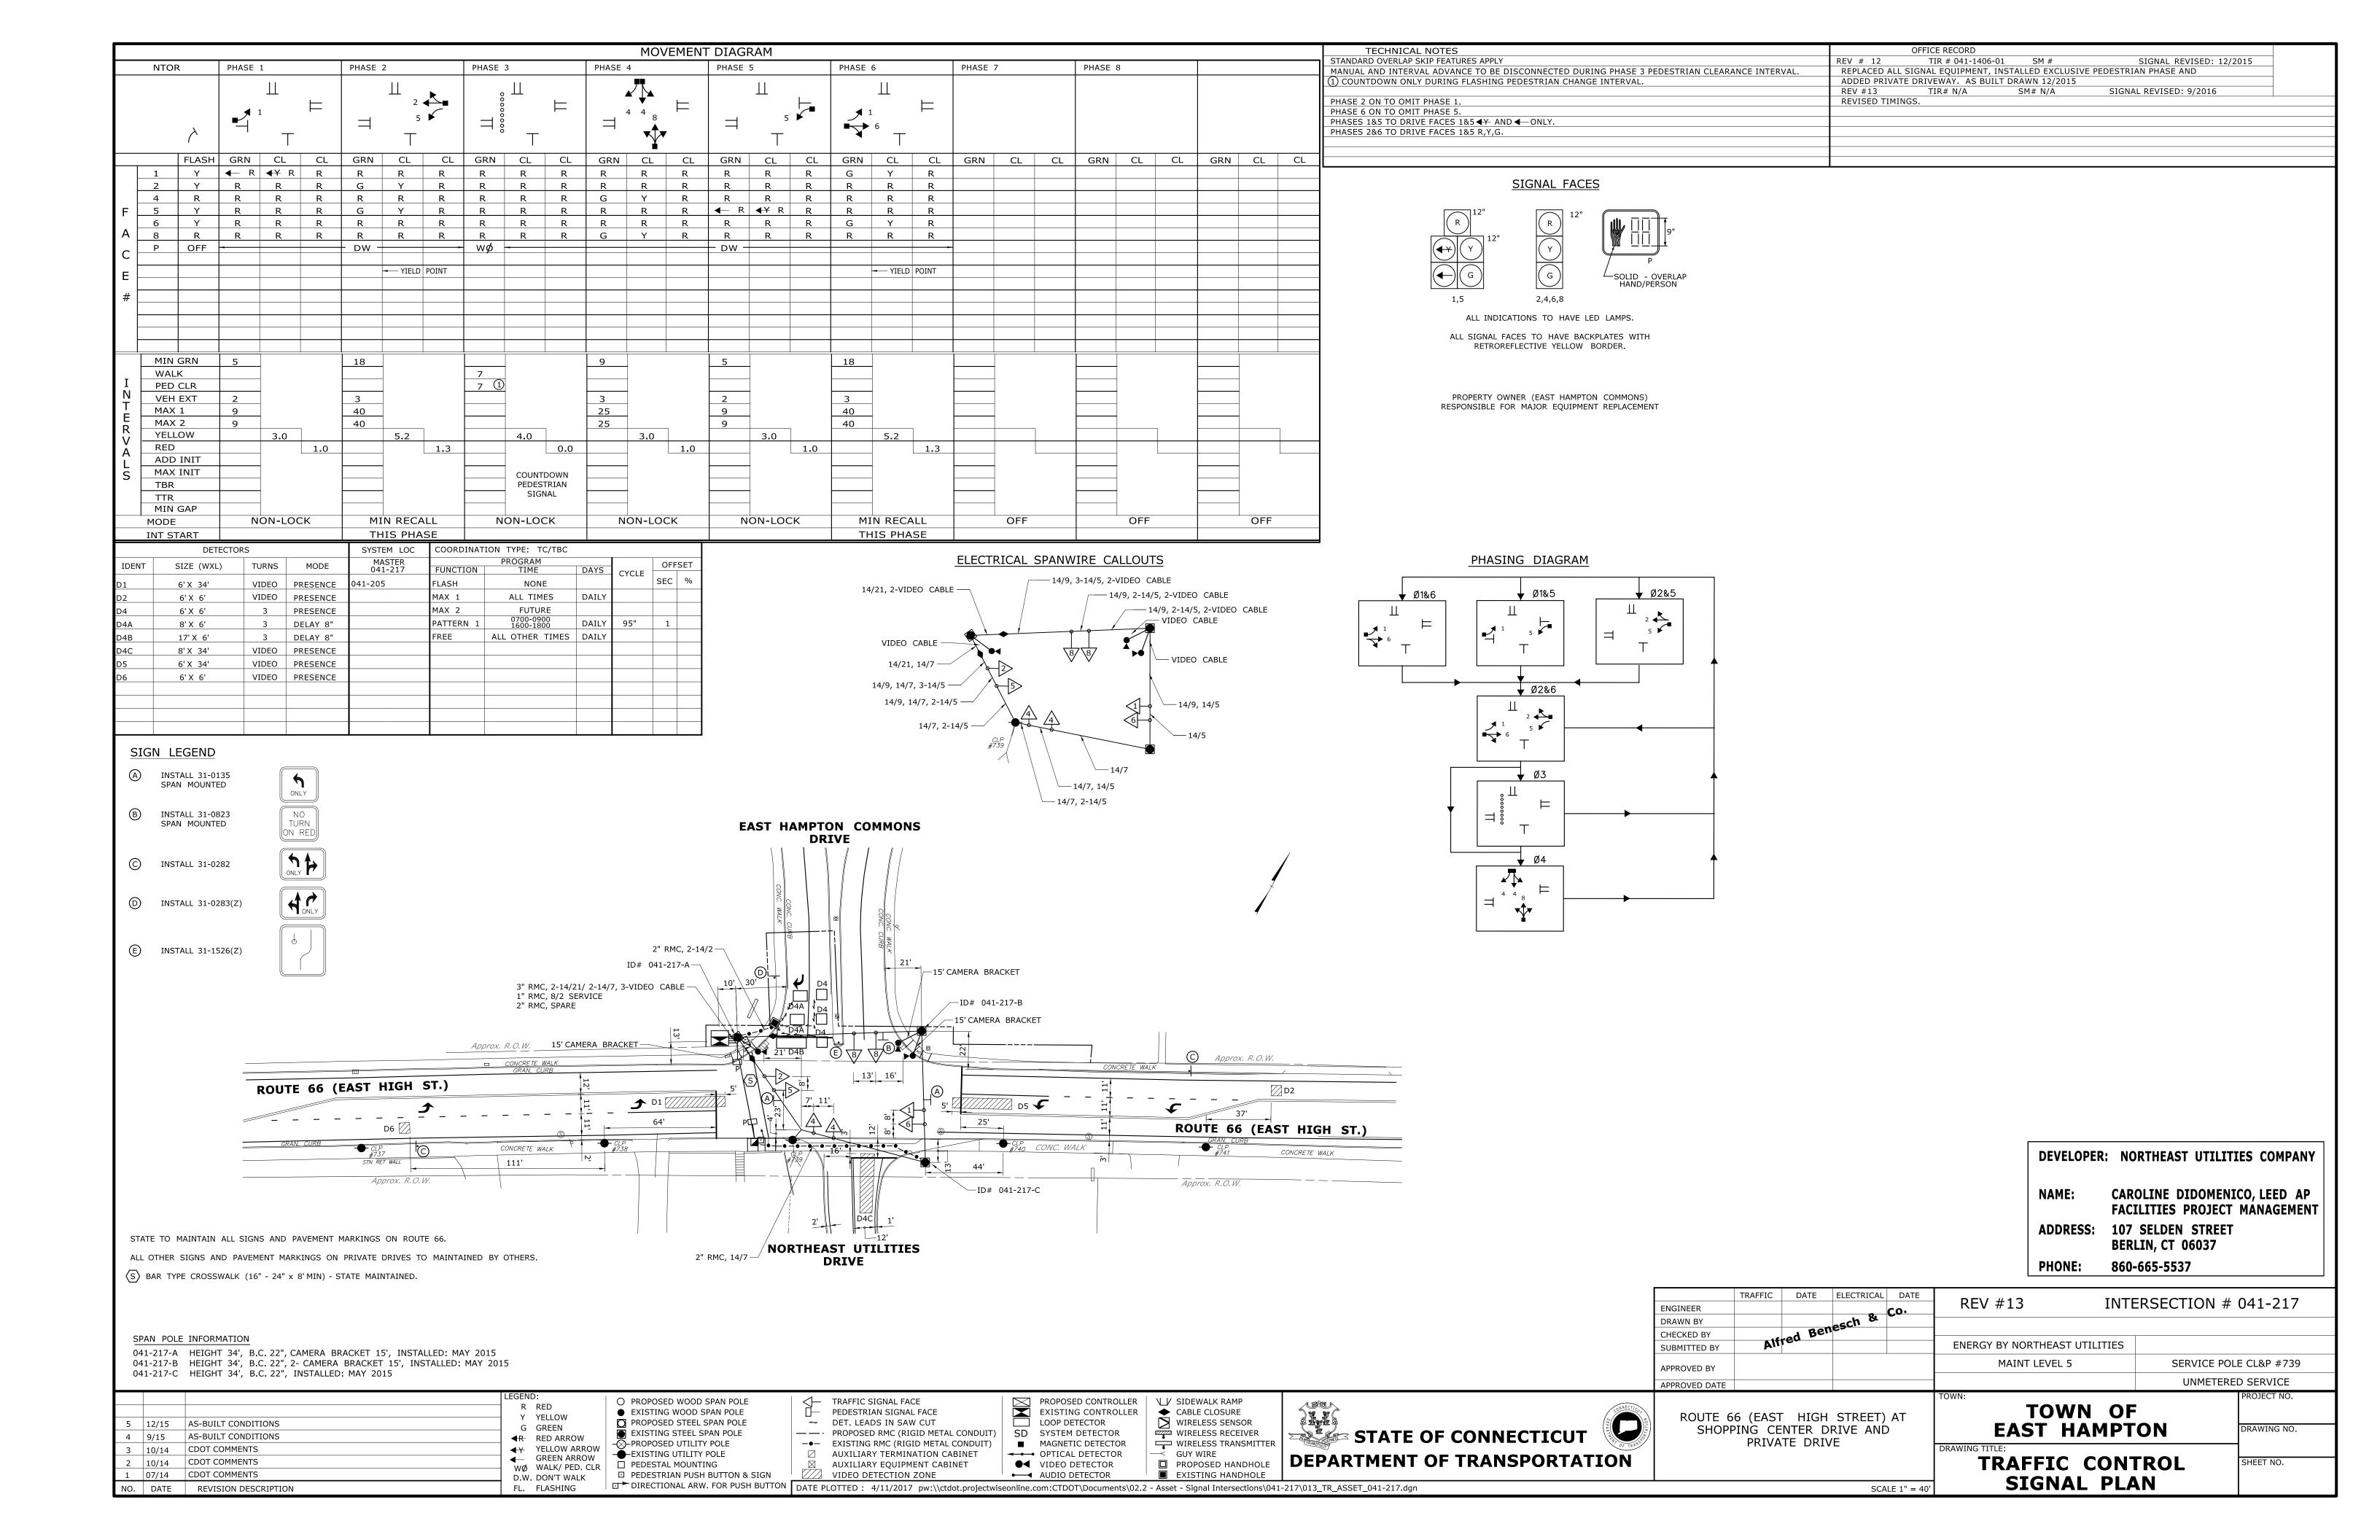

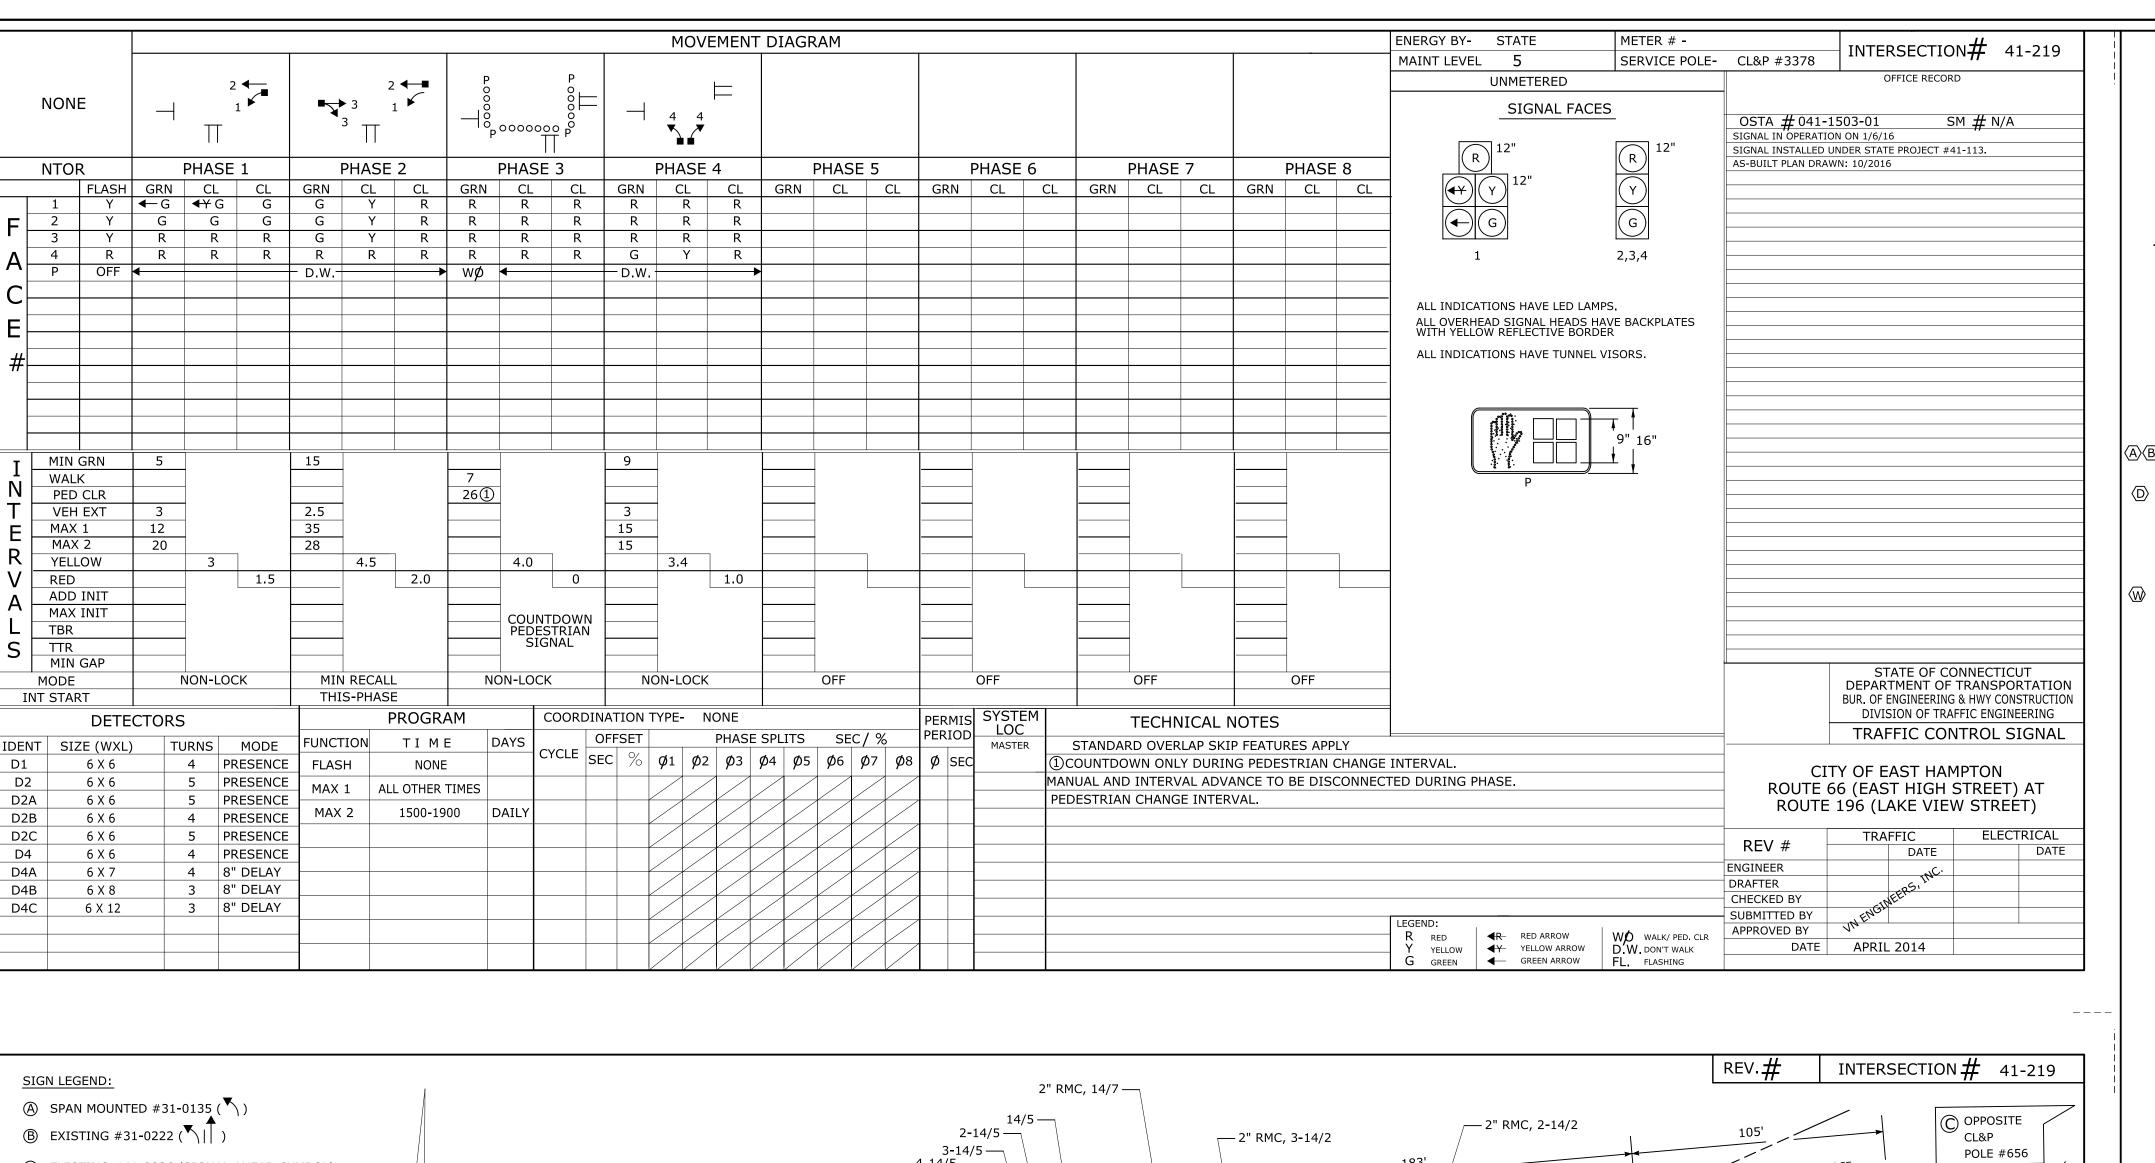

© EXISTING #41-0836 (SIGNAL AHEAD SYMBOL) © EXISTING #31-1526 (KEEP RIGHT SYMBOL) 14/5 —_\ EVERSOURCE 5**-**14/5 — 14/9, 5-14/5 — 14/21 — 2" RMC, 14/7 — 2" RMC, 14/7 (EAST HIGH STREET) 2" RMC, (SPARE) ROUTE 66 #3094 - 2" RMC, 14/7, 3-14/2 2" RMC, (SPARE) 2" RMC, 14/7 -— 2" RMC, 14/7 2" RMC, 3-14/7, 5-14/2 — — 2" RMC, 14/7, 2-14/2 2" RMC, (SPARE) — 2" RMC, 14/7 2" RMC, 2-14/7, 2-14/2 — 2" RMC, (SPARE) – 2" RMC, 2**-**14/2 12' WEST 2" RMC, 14/21, 14/7 — 2" RMC, 14/2 — OF CL&P 2" RMC, 2-14/2 — POLE #749 | 2" RMC, 14/21, 14/7 — STA. 16+48.3, 53.8'RT — 2" RMC, 8/2 (SERVICE) — STA. 16+82.3, 21.0' LT — **⊣∘∘∘∘∘**∘ SEE SEPARATE PLAN FOR INSTALLATION OF SIGNS AND PAVEMENT MARKINGS. 2" RMC, 3-14/7, 5-14/2 — 2" RMC, (SPARE) S BAR TYPE CROSSWALK (16" X 24" X 8') STATE MAINTAINED ⟨W⟩ 30" X 30" CONCRETE HANDHOLE SPAN POLE INFORMATION $\langle\! A \rangle$ HEIGHT 30', B.C. 20", LOAD AT YIELD 7800 lbs., YEAR INSTALLED: JANUARY 2016 HEIGHT 30', B.C. 20", LOAD AT YIELD 7800 lbs., YEAR INSTALLED: JANUARY 2016 (C) HEIGHT 30', B.C. 20", LOAD AT YIELD 7800 lbs., YEAR INSTALLED: JANUARY 2016 NEW SHEET ADDED BY DESIGN INITIATED CHANGE ORDER NO. 1 - 02/03/15

EXISTING CONTROLLER

PROPOSED HANDHOLE

EXISTING HANDHOLE

PROPOSED R.M.C

MAGNETIC DETECTOR

SD SYSTEM DETECTOR

TRAFFIC SIGNAL FACE

LOOP DETECTOR

PEDESTRIAN SIGNAL HEAD

■ AUDIBLE PEDESTRIAN SIGNAL OPTICAL DETECTOR

PROPOSED WOOD SPAN POLE

PROPOSED STEEL SPAN POLE

EXISTING STEEL SPAN POLE

EXISTING WOOD SPAN POLE

PROPOSED UTILITY POLE

- EXISTING UTILITY POLE

PEDESTAL MOUNTING

□ PEDESTRIAN PUSH BUTTON & SIGN

EXISTING R.M.C. (RIGID METAL CONDUIT)CABLE CLOSURE

DET. LEADS IN SAW CUT

● MICROWAVE DETECTOR

AUXILIARY TERMINATION CABINET

── STRAIN INSULATOR

TRAFFIC CONTROL SIGNAL LAYOUT

.\TR_MSH_TCS_041113_0041_0219_CO_01.dgn ALL DIMENSIONS IN FEET

SCALE - 1:40

UNLESS OTHERWISE NOTED

CADD FILE NAME:

DATE PLOTTED: 12/13/2016

CITY OF EAST HAMPTON

ROUTE 66 (EAST HIGH STREET) AT

ROUTE 196 (LAKE VIEW STREET)

NO. DATE INIT.

DESCRIPTION

REVISIONS

CONSTRUCTION NOTES

ALL TRAFFIC SIGNAL EQUIPMENT IS NEW.

ANY PROPOSED REVISIONS TO THE LOCATION OF THE APPURTENANCES SHOWN ON THE PLAN MUST BE SUBMITTED FOR REVIEW AND APPROVAL BY THE DIVISION OF TRAFFIC ENGINEERING PRIOR TO INSTALLATION.

THE LOCATION OF TRAFFIC SIGNAL APPURENANCES (SPAN POLES, PEDETALS & HAND HOLES) WHEN IN OR ADJACENT TO SIDEWALKS SHALL BE VERIFIED PRIOR TO INSTALLATION TO PROVIDE A FREE PATH OF NOT LESS THAN 4 FEET. IF A MINIMUM OF 4 FOOT FREE PATH IS UNAVAILABLE THE CONTRACTOR MUST CONTACT THE DIVISION OF TRAFFIC ENGINEERING.

STAKE ALL R.O.W. PRIOR TO EXCAVATION.

- ABINSTALL SPANPOLE FOUNDATION ADJACENT TO WALK AT BACK EDGE.
- (1) INSTALL PEDESTAL FOUNDATION ADJACENT TO WALK AT BACK EDGE.
- REPLACE ENTIRE SECTION OF SIDEWALK DAMAGED DUE TO INSTALLATION OF CONDUIT, HANDHOLE OR FOUNDATION.
- $|\hspace{.06cm} oxtless{oxed} \hspace{.04cm}$ INSTALL 30" X 30" HANDHOLE. ALL OTHERS TYPE II.

INSTALL HANDHOLES APPROX. 1 FT BEHIND CURB OR IF NO CURB, 2' BEHIND EDGE OF ROAD UNLESS OTHERWISE SPECIFIED.

CABINET DOOR TO OPEN STREET SIDE.

EXCEPT FOR TEST PURPOSES, KEEP SIGNALS BAGGED PRIOR TO THE FUNCTIONAL INSPECTION (FORM 816 SECT. 10.10.10). SIGNAL MAY BE PLACED IN FLASHING OPERATION NO MORE THAN 7 DAYS PRIOR TO PLACING IN NORMAL OPERATION.

TWO WEEKS PRIOR TO INSTALLATION CONTACT CL&P REPRESENTATIVE MATT NOWACK AT (860) 638-2331

INSTALL 2" RISER ON CL&P #3378.

SPAN ATTACHMENTS SHALL ALOW FOR SIGNAL HEADS TO BE 16' - 18' FROM ROAD SURFACE.

LOOP DETECTORS TO BE CENTERED IN LANE.


SERIES SPLICE SEGMENTED LOOPS PER LANE.


INSTALL SIGN #41-0836 (SIGNAL AHEAD SYMBOL) AND #41-0815 (NEW) AS A SUB-PLATE ON ROUTE 66 AND 196 APPROXIMATELY 400 FEET IN ADVANCE OF APPROACHING THE INTERSECTION. THESE SIGNS TO-BE REMOVED AFTER 14 CALENDAR DAYS FROM THE DATE THE SIGNAL IS PLACED IN OPERATION.

REMOVE EXISTING STOP SIGNS UPON ACTIVATION OF SIGNAL.

INSTALL TRAFFIC SIGNAL CABLE CLOSURE ON THE SPAN + 5' FROM CURBLINE.

PEDESTRIAN PUSH-BUTTONS AND SIGNS SHALL BE INSTALLED AS PER TRAFFIC STANDARD TR-1107_01 "PEDESTRIAN PUSH BUTTONS".

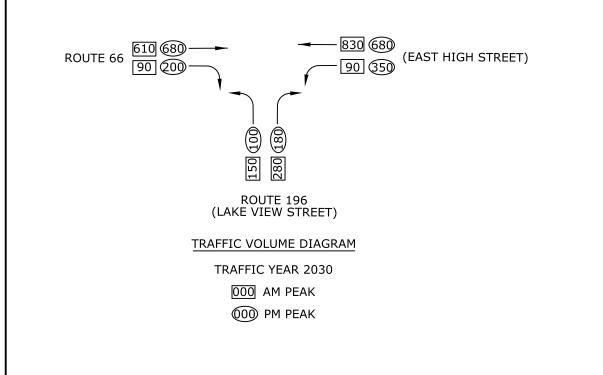

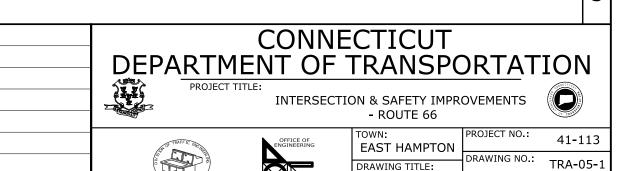

TRAFFIC SIGNAL SHEET NO. PLAN SHEET

APPENDIX E raffic Recorder Counts ning Movement Counts
Tighe&Bond

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

														Latitud	de: 0' 0.0000) Undefined
Start	09-Ju	I-18	Tu	ie	W	ed	Т	hu	F	-ri	Weekday	Average	S	at	Sı	ın
		Westbou	Eastboun		Eastboun			Westbou		Westbou	Eastboun	Westbou	Eastboun		Eastboun	Westbou
Time	Eastbound	nd	d	nd	d	nd	d	nd	d	nd	d	nd	d	nd	d	nd
12:00 AM	*	*	*	*	*	*	232	61	243	62	238	6 <mark>2</mark>	288	136	302	206
01:00	*	*	*	*	*	*	110	43	125	35	118	39	156	63	156	109
02:00	*	*	*	*	*	*	50	21	46	29	48	25	98	48	95	56
03:00	*	*	*	*	*	*	38	49	27	43	32	46	67	42	44	33
04:00	*	*	*	*	*	*	34	150	27	126	30	13 <mark>8</mark>	35	72	29	34
05:00	*	*	*	*	*	*	56	456	49	448	52	452	60	176	34	104
06:00	*	*	*	*	*	*	167	970	165	896	166	933	121	357	68	208
07:00	*	*	*	*	*	*	446	1257	437	1135	442	1196	262	466	201	310
08:00	*	*	*	*	*	*	757	1103	736	1144	746	1124	466	633	274	466
09:00	*	*	*	*	*	*	853	944	864	968	858	956	655	818	445	680
10:00	*	*	*	*	*	*	792	809	817	890	804	850	994	856	615	828
11:00	*	*	*	*	*	*	877	830	971	861	924	846	1056	923	782	886
12:00 PM	*	*	*	*	*	*	973	860	1133	888	1053	874	1191	921	1002	855
01:00	*	*	*	*	*	*	1036	854	1242	875	1139	864	1217	930	957	867
02:00	*	*	*	*	*	*	1043	865	1161	932	1102	898	1288	902	949	886
03:00	*	*	*	*	1093	887	1264	855	1288	960	1215	901	1211	872	901	835
04:00	*	*	*	*	1602	918	1562	955	1689	1014	1618	962	1156	838	1028	781
05:00	*	*	*	*	1657	951	1698	892	1841	920	1732	921	1058	892	864	736
06:00	*	*	*	*	1668	735	1665	732	1699	770	1677	746	969	762	793	688
07:00	*	*	*	*	1104	611	1178	638	1157	635	1146	628	852	643	718	587
08:00	*	*	*	*	862	502	863	618	839	575	855	565	712	519	576	457
09:00	*	*	*	*	764	320	808	362	671	426	748	369	626	551	511	283
10:00	*	*	*	*	508	223	582	307	589	351	560	294	491	491	372	208
11:00	*	*	*	*	284	131	359	149	420	241	354	174	394	290	227	104
Total	0	0	0	0	9542	5278	17443	14780	18236	15224	17657	14863	15423	13201	11943	11207
Day	0		0		148	20	322	23	334	160	325	20	286	24	231	50
AM Peak	-	-	-	-	-	-	11:00	07:00	11:00	08:00	11:00	07:00	11:00	11:00	11:00	11:00
Vol.		-	-	-	-	-	877	1257	971	1144	924	1196	1056	923	782	886
PM Peak	-	-	-	-	18:00	17:00	17:00	16:00	17:00	16:00	17:00	16:00	14:00	13:00	16:00	14:00
Vol.	-	-	-	-	1668	951	1698	955	1841	1014	1732	96 <mark>2</mark>	1288	930	1028	886
						L										

ADT: 32,842 EB: 17,840 WB: 15,002

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Start	16-Ju			ue	W	ed	TI		F		Weekday			at	Sı	
Time	Eastbound	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou
		nd	d	nd	d	nd	d	nd	d	nd	d	nd	d	nd	d	nd
12:00 AM	164	53	*	*	*	*	*	*	*	*	164	53	*	*	*	*
01:00	64	35	*	*	*	*	*	*	*	*	64	35	*	*	*	*
02:00	32	25	*	*	*	*	*	*	*	*	32	25	*	*	*	*
03:00	24	41	*	*	*	*	*	*	*	*	24	41	*	*	*	*
04:00	38	156	*	*	*	*	*	*	*	*	38	156	*	*	*	*
05:00	43	464	*	*	*	*	*	*	*	*	43	464	*	*	*	*
06:00	155	955	*	*	*	*	*	*	*	*	155	955	*	*	*	*
07:00	418	1182	*	*	*	*	*	*	*	*	418	1182	*	*	*	*
08:00	745	1202	*	*	*	*	*	*	*	*	745	1202	*	*	*	*
09:00	841	910	*	*	*	*	*	*	*	*	841	910	*	*	*	*
10:00	834	216	*	*	*	*	*	*	*	*	834	216	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12:00 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	3358	5239	0	0	0	0	0	0	0	0	3358	5239	0	0	0	0
Day			0		0		0		0		859		0	ı	0	
AM Peak	09:00	08:00	-	-	-	-	-	-	-	-	09:00	08:00	-	-	-	_
Vol.	841	1202	-	-	-	-	-	-	-	-	841	1202	-	-	-	-
PM Peak	-	-	-	-	-	_	_	-	-	-	-	-	-	-	-	-
Vol.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0 1																
Comb. Total	85	97		0	1-	4820	3	2223	3	3460	4	1117	2	8624	2	3150
ADT	AD	T 32,842	AAD	T 32,842												

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Latitude: 0' 0.0000 Undefined Thu Sat Start 28-May-18 Tue Wed Fri Sun Week Average Time Eastbound Westbou Eastboun Westbou 12:00 AM 01:00 02:00 03:00 04:00 05:00 06:00 07:00 08:00 09:00 10:00 11:00 12:00 PM 01:00 02:00 03:00 04:00 05:00 06:00 07:00 08:00 09:00 10:00 11:00 Lane Day AM Peak 11:00 07:00 11:00 07:00 11:00 11:00 00:00 00:00 11:00 07:00 Vol. PM Peak 16:00 17:00 16:00 16:00 17:00 15:00 12:00 15:00 16:00 15:00 Vol. Comb. Total ADT ADT 24.687 AADT 24,687 24,690 vpd

12,770 EB 11,920 WB

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Latitude: 0' 0.0000 Undefined

Start	28-Ma	ıy-18	Tu	ue	W	ed	TI	hu	F	ri	S	at	S	un	Week A	Average
Time	Eastbound		Eastboun	Westbou	Eastboun											
12:00 AM	*	*	*	*	*	*	94	37	113	52	174	126	130	133	128	87
01:00	*	*	*	*	*	*	55	29	55	33	88	82	77	61	69	51
02:00	*	*	*	*	*	*	19	25	21	23	57	46	56	47	38	35
03:00	*	*	*	*	*	*	24	29	17	27	34	28	26	36	25	30
04:00	*	*	*	*	*	*	31	88	34	88	27	47	23	44	29	67
05:00	*	*	*	*	*	*	79	321	91	332	57	143	47	71	68	217
06:00	*	*	*	*	*	*	260	799	270	807	118	261	110	169	190	509
07:00	*	*	*	*	*	*	558	1254	537	1175	293	436	203	258	398	781
08:00	*	*	*	*	*	*	480	1073	487	984	415	521	287	395	417	743
09:00	*	*	*	*	*	*	526	789	490	766	568	703	434	592	504	712
10:00	*	*	*	*	*	*	527	644	542	663	681	789	547	611	574	677
11:00	*	*	*	*	*	*	637	603	622	599	788	804	738	702	696	677
12:00 PM	*	*	*	*	664	636	680	638	648	651	881	747	772	753	729	685
01:00	*	*	*	*	640	642	655	617	723	668	877	731	817	710	742	674
02:00	*	*	*	*	719	663	761	720	843	675	805	713	765	732	779	701
03:00	*	*	*	*	1105	683	1043	718	1105	756	787	746	755	765	959	734
04:00	*	*	*	*	1252	645	1223	733	1255	673	768	693	684	654	1036	680
05:00	*	*	*	*	1226	708	1238	686	1298	662	673	676	614	660	1010	678
06:00	*	*	*	*	937	588	888	630	998	594	624	559	612	602	812	595
07:00	*	*	*	*	676	479	649	480	616	509	495	420	433	456	574	469
08:00	*	*	*	*	544	354	556	323	549	435	459	370	361	343	494	365
09:00	*	*	*	*	391	231	405	255	442	377	404	298	265	254	381	283
10:00	*	*	*	*	227	181	249	175	321	231	306	350	172	155	255	218
11:00	*	*	*	*	183	106	187	107	241	229	264	210	135	105	202	151
Lane	0	0	0	0	8564	5916	11824	11773	12318	12009	10643	10499	9063	9308	11109	10819
Day	0		0		144	80	235	-	243		211		183		219	
AM Peak	-	-	-	-	-	-	11:00	07:00	11:00	07:00	11:00	11:00	11:00	11:00	11:00	07:00
Vol.	-	-	-	-	-	-	637	1254	622	1175	788	804	738	702	696	781
PM Peak	-	-	-	-	16:00	17:00	17:00	16:00	17:00	15:00	12:00	12:00	13:00	15:00	16:00	15:00
Vol.	-	-	-	-	1252	708	1238	733	1298	756	881	747	817	765	1036	734

23,960 vpd 12,070 EB 11,890 WB

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Start	04-Ju	n-18	Tu	ue	W	ed	Т	hu	F	ri	S	at	S	un	Week A	verage
Time	Eastbound	Westbou						Westbou					Eastboun		Eastboun	Westbou
12:00 AM	71	44	*	*	*	*	*	*	*	*	*	*	*	*	71	44
01:00	28	33	*	*	*	*	*	*	*	*	*	*	*	*	28	33
02:00	22	26	*	*	*	*	*	*	*	*	*	*	*	*	22	26
03:00	22	28	*	*	*	*	*	*	*	*	*	*	*	*	22	28
04:00	21	86	*	*	*	*	*	*	*	*	*	*	*	*	21	86
05:00	66	323	*	*	*	*	*	*	*	*	*	*	*	*	66	323
06:00	199	729	*	*	*	*	*	*	*	*	*	*	*	*	199	729
07:00	478	1063	*	*	*	*	*	*	*	*	*	*	*	*	478	1063
08:00	415	890	*	*	*	*	*	*	*	*	*	*	*	*	415	890
09:00	443	667	*	*	*	*	*	*	*	*	*	*	*	*	443	667
10:00	195	255	*	*	*	*	*	*	*	*	*	*	*	*	195	255
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12:00 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	1960	4144	0	0	0	0	0	0	0	0	0	0	0	0	1960	4144
Day			0		0		0		0		0		0	1	610	
AM Peak	07:00	07:00	-	-	-	-	-	-	-	-	-	-	-	-	07:00	07:00
Vol.	478	1063	-	-	-	-	-	-	-	-	-	-	-	-	478	1063
PM Peak	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Vol.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Comb. Total	61	04		0	1	4480	2	3597	2	4327	2	1142	1	8371	2	8032
ADT	AD	T 23,962	AAD	T 23,962												

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Latitude: 0' 0.0000 Undefined

Start	28-Ma	ıy-18	Tu	ıe	W	ed	Т	hu	F	ri	S	at	Sı	un	Week A	Average
Time	Eastbound	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou
12:00 AM	*	*	*	*	*	*	96	29	99	43	154	116	109	122	114	78
01:00	*	*	*	*	*	*	47	25	46	28	75	67	57	58	56	44
02:00	*	*	*	*	*	*	23	22	25	21	47	41	54	41	37	31
03:00	*	*	*	*	*	*	17	15	15	22	31	23	24	32	22	23
04:00	*	*	*	*	*	*	25	80	28	75	23	40	17	41	23	59
05:00	*	*	*	*	*	*	86	280	83	285	51	129	43	74	66	192
06:00	*	*	*	*	*	*	218	701	235	706	105	230	98	132	164	442
07:00	*	*	*	*	*	*	445	1192	432	1120	262	406	176	236	329	738
08:00	*	*	*	*	*	*	475	1055	456	967	385	488	239	356	389	716
09:00	*	*	*	*	*	*	476	767	419	746	519	692	377	524	448	682
10:00	*	*	*	*	*	*	464	629	506	597	659	760	491	558	530	636
11:00	*	*	*	*	*	*	552	570	549	570	674	784	661	652	609	644
12:00 PM	*	*	*	*	579	5 <mark>37</mark>	594	560	601	561	856	755	726	719	671	626
01:00	*	*	*	*	572	6 <mark>07</mark>	629	526	651	614	796	668	745	711	679	625
02:00	*	*	*	*	656	5 <mark>81</mark>	658	630	760	568	805	698	727	687	721	633
03:00	*	*	*	*	976	6 <mark>00</mark>	982	681	977	656	754	696	701	691	878	665
04:00	*	*	*	*	1176	6 <mark>24</mark>	1125	668	1202	648	757	659	642	614	980	643
05:00	*	*	*	*	1166	7 <mark>02</mark>	1202	670	1219	628	656	651	579	643	964	659
06:00	*	*	*	*	861	5 <mark>64</mark>	848	560	1017	603	597	525	590	570	783	564
07:00	*	*	*	*	643	4 <mark>26</mark>	619	416	598	470	485	410	427	429	554	430
08:00	*	*	*	*	535	3 <mark>11</mark>	542	323	542	365	456	351	343	309	484	332
09:00	*	*	*	*	392	1 <mark>94</mark>	384	205	388	334	386	256	237	218	357	241
10:00	*	*	*	*	223	1 <mark>65</mark>	217	151	298	209	274	325	141	142	231	198
11:00	*	*	*	*	156	87	161	97	201	191	246	184	112	86	175	129
Lane	0	0	0	0	7935	53 <mark>98</mark>	10885	10852	11347	11027	10053	9954	8316	8645	10264	10030
Day	' 0		0		133	33	217	-	223		200	-	169	-	202	
AM Peak	-	-	-	-	-	-	11:00	07:00	11:00	07:00	11:00	11:00	11:00	11:00	11:00	07:00
Vol.	-	-	-	-	-		552	1192	549	1120	674	784	661	652	609	738
PM Peak	-	-	-	-	16:00	17: <mark>0</mark> 0	17:00	15:00	17:00	15:00	12:00	12:00	13:00	12:00	16:00	15:00
Vol.	-	-	-	-	1176	702	1202	681	1219	656	856	755	745	719	980	665

22,055 vpd 11,115 EB 10,940 WB

Site Code:

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 East of Grandview Terrace Portland, Connecticut

Station ID: 4679

Start	04-Ju	n-18	Tu			ed	TI	hu		ri		at		un	Week A	verage
Time	Eastbound	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	
12:00 AM	53	34	*	*	*	*	*	*	*	*	*	*	*	*	53	34
01:00	26	28	*	*	*	*	*	*	*	*	*	*	*	*	26	28
02:00	18	16	*	*	*	*	*	*	*	*	*	*	*	*	18	16
03:00	18	21	*	*	*	*	*	*	*	*	*	*	*	*	18	21
04:00	16	67	*	*	*	*	*	*	*	*	*	*	*	*	16	67
05:00	66	279	*	*	*	*	*	*	*	*	*	*	*	*	66	279
06:00	203	722	*	*	*	*	*	*	*	*	*	*	*	*	203	722
07:00	447	1040	*	*	*	*	*	*	*	*	*	*	*	*	447	1040
08:00	500	1024	*	*	*	*	*	*	*	*	*	*	*	*	500	1024
09:00	458	691	*	*	*	*	*	*	*	*	*	*	*	*	458	691
10:00	289	387	*	*	*	*	*	*	*	*	*	*	*	*	289	387
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12:00 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	2094	4309	0	0	0	0	0	0	0	0	0	0	0	0	2094	4309
Day	640		0		0		0	ı	0	1	0		0	l	640	
AM Peak	08:00	07:00	-	-	-	-	-	-	-	-	-	-	-	-	08:00	07:00
Vol.	500	1040	-	_	-	-	-	-	-	_	-	-	-	-	500	1040
PM Peak	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Vol.		-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Comb.	64	വദ		0	1	3333	2	1737	2	2374	2	0007	1	6961	20	6697
Total	04	00		U	'	0000	2		2	2017	2	0001	'	0001	21	0001
ADT	AD	T 22,056	AAD	T 22,056												

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

														Latitu	de: 0' 0.0000) Undefined
Start	23-Ap	or-18	Tı	ie	W	/ed	Т	'hu		Fri	S	at	S	un	Week A	verage
Time	Eastbound		Eastboun		Eastboun							Westbou	Eastboun			
12:00 AM	*	*	*	*	*	*	64	25	85	29	157	14	106	0	103	17
01:00	*	*	*	*	*	*	39	13	41	29	77	4	62	0	55	12
02:00	*	*	*	*	*	*	10	16	25	18	33	4	47	1	29	10
03:00	*	*	*	*	*	*	18	18	20	29	39	2	22	0	25	12
04:00	*	*	*	*	*	*	19	90	32	87	28	7	11	0	22	46
05:00	*	*	*	*	*	*	67	272	71	293	62	15	40	0	60	145
06:00	*	*	*	*	*	*	216	805	234	806	153	35	106	1	177	412
07:00	*	*	*	*	*	*	403	1168	441	1126	329	75	154	2	332	593
08:00	*	*	*	*	*	*	455	986	415	918	432	129	258	2	390	509
09:00	*	*	*	*	*	*	408	720	433	687	594	146	437	0	468	388
10:00	*	*	*	*	141	177	427	625	442	612	651	186	605	0	453	320
11:00	*	*	*	*	471	499	479	523	549	592	672	86	721	2	578	340
12:00 PM	*	*	*	*	503	435	529	531	689	400	822	132	689	3	646	300
01:00	*	*	*	*	503	457	609	526	1092	14	802	125	685	12	738	227
02:00	*	*	*	*	617	481	667	575	1180	13	907	83	674	31	809	237
03:00	*	*	*	*	858	517	965	576	1421	37	845	122	600	25	938	255
04:00	*	*	*	*	1058	579	1118	645	1614	38	780	84	577	5	1029	270
05:00	*	*	*	*	1049	546	1150	646	1635	43	810	61	497	2	1028	260
06:00	*	*	*	*	710	386	899	570	1317	62	612	36	472	5	802	212
07:00	*	*	*	*	527	242	591	400	788	41	535	8	366	8	561	140
08:00	*	*	*	*	376	205	481	316	703	27	433	4	288	0	456	110
09:00	*	*	*	*	272	133	335	186	496	12	393	0	178	0	335	66
10:00	*	*	*	*	145	77	209	134	393	20	275	1	127	0	230	46
11:00	*	*	*	*	115	66	141	75	265	24	202	0	91	0	163	33
Lane	0	0	0	0	7345	4800	10299	10441	14381	5957	10643	1359	7813	99	10427	4960
Day	, 0		0		121	45	207	' 40	203	338	120	02	79	12	153	87
AM Peak	-	-	-	-	11:00	11:00	11:00	07:00	11:00	07:00	11:00	10:00	11:00	07:00	11:00	07:00
Vol.	-	-	=	-	471	499	479	1168	549	1126	672	186	721	2	578	593
PM Peak	-	-	-	-	16:00	16:00	17:00	17:00	17:00	12:00	14:00	12:00	12:00	14:00	16:00	12:00
Vol.	-	-	-	-	1058	579	1150	646	1635	400	907	132	689	31	1029	300



Route 66 West of Route 17 Portland, Connecticut


Site Code: Station ID: 4638

Start	30-Ap	or-18		ne		ed	Th	าน	F	ri	S	at		un	Week A	verage
Time	Eastbound .	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou
12:00 AM	53	0	*	*	*	*	*	*	*	*	*	*	*	*	53	0
01:00	21	0	*	*	*	*	*	*	*	*	*	*	*	*	21	0
02:00	11	0	*	*	*	*	*	*	*	*	*	*	*	*	11	0
03:00	14	0	*	*	*	*	*	*	*	*	*	*	*	*	14	0
04:00	25	1	*	*	*	*	*	*	*	*	*	*	*	*	25	1
05:00	81	1	*	*	*	*	*	*	*	*	*	*	*	*	81	1
06:00	218	2	*	*	*	*	*	*	*	*	*	*	*	*	218	2
07:00	401	3	*	*	*	*	*	*	*	*	*	*	*	*	401	3
08:00	415	8	*	*	*	*	*	*	*	*	*	*	*	*	415	8
09:00	380	1	*	*	*	*	*	*	*	*	*	*	*	*	380	1
10:00	383	3	*	*	*	*	*	*	*	*	*	*	*	*	383	3
11:00	456	1	*	*	*	*	*	*	*	*	*	*	*	*	456	1
12:00 PM	487	3	*	*	*	*	*	*	*	*	*	*	*	*	487	3
01:00	492	21	*	*	*	*	*	*	*	*	*	*	*	*	492	21
02:00	622	3	*	*	*	*	*	*	*	*	*	*	*	*	622	3
03:00	928	2	*	*	*	*	*	*	*	*	*	*	*	*	928	2
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	4987	49	0	0	0	0	0	0	0	0	0	0	0	0	4987	49
Day	503	36	0		0		0		0		0		0		503	6
AM Peak	11:00	08:00	-	-	-	-	-	-	-	-	-	-	-	-	11:00	08:00
Vol.	456	8	-	-	-	-	-	-	-	-	-	-	-	-	456	8_
PM Peak	15:00	13:00	-	-	-	-	-	-	-	-	-	-	-	-	15:00	13:00
Vol.	928	21	-	-	-	-	-	-	-	-	-	-	-	-	928	21
Comb. Total	50	36		0	1	2145	2	0740	2	0338	1	2002	7	7912	2	0423
ADT	AD	T 20,539	AAD	T 20,539												

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

													1			
Start	28-Ma	ıv-18	Tı	ie –	We	ed	TI	าน	F	ri	S	at	S	un	Week A	verage
Time	Eastbound			Westbou	Eastboun	Westbo		Westbou	Eastboun	 Westbou	_	Westbou	Eastboun	Westbou	Eastboun	
12:00 AM	*	*	*	*	*	*	83	31	93	44	147	105	107	114	108	74
01:00	*	*	*	*	*	*	51	18	44	25	70	65	56	61	55	42
02:00	*	*	*	*	*	*	17	20	23	21	42	40	45	38	32	30
03:00	*	*	*	*	*	*	19	21	16	22	30	26	26	37	23	26
04:00	*	*	*	*	*	*	26	83	31	85	22	42	17	42	24	63
05:00	*	*	*	*	*	*	85	296	84	295	51	132	45	70	66	198
06:00	*	*	*	*	*	*	233	770	247	744	111	251	98	152	172	479
07:00	*	*	*	*	*	*	458	1133	438	1118	264	398	182	244	336	723
08:00	*	*	*	*	*	*	454	1016	448	918	396	501	235	366	383	700
09:00	*	*	*	*	*	*	481	714	428	682	503	675	380	520	448	648
10:00	*	*	*	*	*	*	433	564	475	570	640	756	491	557	510	612
11:00	*	*	*	*	*	*	562	531	519	541	666	742	647	626	598	610
12:00 PM	*	*	*	*	*	*	578	541	573	536	837	699	708	687	674	616
01:00	*	*	*	*	585	572	624	533	641	582	811	640	749	703	682	606
02:00	*	*	*	*	646	568	669	617	736	557	761	663	740	696	710	620
03:00	*	*	*	*	999	591	978	646	1006	623	755	668	686	655	885	637
04:00	*	*	*	*	1172	616	1164	661	1169	588	739	645	636	599	976	622
05:00	*	*	*	*	1117	665	1177	625	1233	634	635	612	566	629	946	633
06:00	*	*	*	*	830	534	814	543	946	546	578	499	583	548	750	534
07:00	*	*	*	*	628	381	610	400	588	462	466	405	391	412	537	412
08:00	*	*	*	*	520	291	521	294	507	365	433	332	329	283	462	313
09:00	*	*	*	*	373	191	356	207	382	307	381	262	238	204	346	234
10:00	*	*	*	*	210	156	205	148	273	215	269	317	133	134	218	194
11:00	*	*	*	*	159	79	154	86	203	186	233	167	101	80	170	120
Lane	0	0	0	0	7239	4644	10752	10498	11103	10666	9840	9642	8189	8457	10111	9746
Day	0		0		118	83	212		217		194		166		198	
AM Peak	-	-	-	-	-	-	11:00	07:00	11:00	07:00	11:00	10:00	11:00	11:00	11:00	07:00
Vol.	-	-	-	-	-	-	562	1133	519	1118	666	756	647	626	598	723
PM Peak	-	-	-	-	16:00	17:00	17:00	16:00	17:00	17:00	12:00	12:00	13:00	13:00	16:00	15:00
Vol.	-	-	-	-	1172	665	1177	661	1233	634	837	699	749	703	976	637



Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Start	04-Ju	n-18	Tı	ue	W	ed	Т	hu	F	ri	S	at	S	un	Week A	verage
Time	Eastbound	Westbou	Eastboun		Eastboun			Westbou	Eastboun					Westbou	Eastboun	Westbou
12:00 AM	54	33	*	*	*	*	*	*	*	*	*	*	*	*	54	33
01:00	24	28	*	*	*	*	*	*	*	*	*	*	*	*	24	28
02:00	19	15	*	*	*	*	*	*	*	*	*	*	*	*	19	15
03:00	18	23	*	*	*	*	*	*	*	*	*	*	*	*	18	23
04:00	17	85	*	*	*	*	*	*	*	*	*	*	*	*	17	85
05:00	67	287	*	*	*	*	*	*	*	*	*	*	*	*	67	287
06:00	190	754	*	*	*	*	*	*	*	*	*	*	*	*	190	754
07:00	418	1125	*	*	*	*	*	*	*	*	*	*	*	*	418	1125
08:00	429	1025	*	*	*	*	*	*	*	*	*	*	*	*	429	1025
09:00	429	646	*	*	*	*	*	*	*	*	*	*	*	*	429	646
10:00	348	455	*	*	*	*	*	*	*	*	*	*	*	*	348	455
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12:00 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	2013	4476	0	0	0	0	0	0	0	0	0	0	0	0	2013	4476
Day			0		0		0		0		0		0)	648	
AM Peak	08:00	07:00	-	-	-	-	-	-	-	-	-	-	-	-	08:00	07:00
Vol.	429	1125	-	-	-	-	-	-	-	-	-	-	-	-	429	1125
PM Peak	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Vol.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Comb. Total	64	189		0	1	1883	2	1250	2	1769	1	9482	1	6646	2	6346
ADT	AD	T 21,510	AAD	T 21,510												

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

				Γ]			Latitud	de: 0' 0.000	0 Undefined
Start	23-An	40	т.	ue		Ved		hu		-ri		at		un	\\/	Average
Time	23-Ap Westboun	-	-	ue Eastbour		ved Eastboun	Westbou	nu Eastbour		-rı Eastboun		aเ Eastboun		un Eastboun		
12:00 AM	westboun *	Easiboun *	Westbou	Easibour				56		77	47	114	74	101		Eastboun
01:00	*	*	*		12 18	68 28	23 10	30	22 24	34	33	61	74 44	53	26	83 41
02:00	*	*	*		16	15	15	9	20	22	22	28	25	36	20	22
03:00	*	*	*		32	17	24	18	31	24	29	27	25	16	28	20
04:00	*	*	*		115	30	105	15	93	28	43	22	27	12	77	21
05:00	*	*	*	*	353	68	372	72	385	79	120	57	69	42	260	64
06:00	*	*	*		862	201	859	212	885	243	271	108	164	89	608	171
07:00	*	*	*		1116	364	1110	384	1052	392	376	275	198	153	770	314
08:00	*	*	*	*	802	403	843	396	774	388	478	381	334	236	646	361
09:00	*	*	*	*	561	298	604	347	617	374	597	451	422	313	560	357
10:00	*	*	*	*	479	325	489	370	484	386	629	524	579	370	532	395
11:00	*	*	*	*	396	412	444	446	497	480	582	597	632	458	510	479
12:00 PM	*	*	*	*	378	420	454	481	441	516	623	720	590	556	497	539
01:00	*	*	*	*	421	453	450	517	484	543	546	682	557	584	492	556
02:00	*	*	*	+	397	554	494	608	482	661	648	687	484	590	501	620
03:00	*	*	442	858	439	788	494	916	495	873	660	677	492	523	504	772
04:00	*	*	455	1029	447	944	559	1014	503	1055	599	634	477	525	507	867
05:00	*	*	483	982	432	945	515	1023	505	959	627	596	410	463	495	828
06:00	*	*	404	681	342	615	451	791	419	747	498	540	326	400	407	629
07:00	*	*	251	439	185	456	337	543	288	447	368	393	255	327	281	434
08:00	*	*	192	317	168	319	239	416	229	414	233	376	182	243	207	348
09:00	*	*	99	243	105	251	150	318	152	299	189	315	114	152	135	263
10:00	*	*	89	157	81	117	115	178	144	227	183	284	88	113	117	179
11:00	*	*	57	99	61	103	63	122	108	167	112	185	45	75	74	125
Lane	0	0	2472	4805	8218	8194	9219	9282	9134	9435	8513	8734	6613	6430	8290	8488
Day	0)	727	77	164	412	185	01	185	569	172	47	130	143	167	78
AM Peak	-	-	-	+	07:00	11:00	07:00	11:00	07:00	11:00	10:00	11:00	11:00	11:00	07:00	11:00
Vol.	-	-	-		1116	412	1110	446	1052	480	629	597	632	458	770	479
PM Peak	-	-	17:00	16:00	16:00	17:00	16:00	17:00	17:00	16:00	15:00	12:00	12:00	14:00	16:00	16:00
Vol.	-	-	483	1029	447	945	559	1023	505	1055	660	720	590	590	507	867
				L							J					

17,830 vpd 8,970 EB 8,860 WB

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut


Site Code: Station ID: 4629

Start	30-Ar	or-18	Т	ue	W	/ed	Т	hu .	F	-ri	5	Sat	S	un	Week A	Average
Time	Westboun	Eastboun	Westbou	Eastboun		Eastboun	Westbou			Eastboun				Eastboun		
12:00 AM	21	43	*	*	*	*	*	*	*	*	*	*	*	*	21	43
01:00	19	18	*	*	*	*	*	*	*	*	*	*	*	*	19	18
02:00	6	10	*	*	*	*	*	*	*	*	*	*	*	*	6	10
03:00	30	10	*	*	*	*	*	*	*	*	*	*	*	*	30	10
04:00	110	25	*	*	*	*	*	*	*	*	*	*	*	*	110	25
05:00	367	71	*	*	*	*	*	*	*	*	*	*	*	*	367	71
06:00	896	223	*	*	*	*	*	*	*	*	*	*	*	*	896	223
07:00	1137	364	*	*	*	*	*	*	*	*	*	*	*	*	1137	364
08:00	801	373	*	*	*	*	*	*	*	*	*	*	*	*	801	373
09:00	504	345	*	*	*	*	*	*	*	*	*	*	*	*	504	345
10:00	476	335	*	*	*	*	*	*	*	*	*	*	*	*	476	335
11:00	377	414	*	*	*	*	*	*	*	*	*	*	*	*	377	414
12:00 PM	445	425	*	*	*	*	*	*	*	*	*	*	*	*	445	425
01:00	428	421	*	*	*	*	*	*	*	*	*	*	*	*	428	421
02:00	427	541	*	*	*	*	*	*	*	*	*	*	*	*	427	541
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	6044	3618	0	0	0	0	0	0	0	0	0	0	0	0	6044	3618
Day	_	-	0)	C)	()	C)	()	C)	966	
AM Peak	07:00	11:00	-	-	-	-	-	-	-	-	-	-	-	-	07:00	11:00
Vol.	1137	414	-	-	-	-	-	-	-	-	-	-		-	1137	414
PM Peak	12:00	14:00	-	-	-	-	-	-	-	-	-	-	-	-	12:00	14:00
Vol.	445	541	-	-	-	-	-	-		-	-	-	-	-	445	541
Comb. Total	96	662	-	7277	1	6412	1	8501	1	8569	1	7247	1	3043	2	26440
ADT	ΑC	OT 17,827	AAD	OT 17,827												

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

													l	Latitud	de: 0' 0.000	O Undefined
Start	23-Ap		T	ue	-	/ed	Т	hu	-	ri		at		un		Average
Time	Westboun	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun		Eastboun
12:00 AM	*	*	*	*	19	79	22	62	26	80	60	117	73	102	40	88
01:00	*	*	*	*	16	25	7	27	19	37	25	61	44	49	22	40
02:00	*	*	*	*	11	19	14	11	18	17	20	27	30	38	19	22
03:00	*	*	*	*	29	10	17	13	24	19	28	27	21	15	24	17
04:00	*	*	*	*	66	25	65	12	65	30	34	20	22	7	50	19
05:00	*	*	*	*	257	55	237	40	248	54	96	45	52	15	178	42
06:00	*	*	*	*	622	146	673	160	657	176	198	86	136	50	457	124
07:00	*	*	*	*	891	249	915	293	861	317	307	234	161	121	627	243
08:00	*	*	*	*	706	354	732	359	686	378	404	340	268	185	559	323
09:00	*	*	*	*	507	316	535	332	536	321	479	424	364	273	484	333
10:00	*	*	*	*	412	285	439	322	430	361	556	451	467	344	461	353
11:00	*	*	*	*	353	365	393	365	441	451	506	546	501	419	439	429
12:00 PM	*	*	*	*	332	377	412	429	415	487	523	573	488	494	434	472
01:00	*	*	*	*	337	406	402	441	451	485	482	636	472	524	429	498
02:00	*	*	*	*	362	454	424	503	416	553	502	624	464	514	434	530
03:00	*	*	436	767	386	653	435	786	454	761	565	572	443	484	453	670
04:00	*	*	431	937	437	858	494	895	468	929	548	561	413	498	465	780
05:00	*	*	449	93 1	406	973	484	998	480	943	521	614	362	448	450	818
06:00	*	*	397	677	302	608	428	756	436	752	447	524	311	412	387	622
07:00	*	*	259	43 <mark>4</mark>	188	412	320	522	294	476	349	372	251	310	277	421
08:00	*	*	181	29 <mark>2</mark>	163	328	247	393	216	368	214	349	169	224	198	326
09:00	*	*	103	256	117	213	155	319	146	286	175	286	110	150	134	252
10:00	*	*	80	137	67	118	115	183	141	200	178	224	78	103	110	161
11:00	*	*	58	88	62	87	58	113	112	150	103	221	52	70	74	122
Lane	0	0	2394	451 <mark>9</mark>	7048	7415	8023	8334	8040	8631	7320	7934	5752	5849	7205	7705
Day	0		69	13		463	163		166		152		116		149	
AM Peak	-	-	-	-	07:00	11:00	07:00	11:00	07:00	11:00	10:00	11:00	11:00	11:00	07:00	11:00
Vol.	-	-	-	-	891	365	915	365	861	451	556	546	501	419	627	429
PM Peak	-	-	17:00	16:0 <mark>0</mark>	16:00	17:00	16:00	17:00	17:00	17:00	15:00	13:00	12:00	13:00	16:00	17:00
Vol.	-	-	449	937	437	973	494	998	480	943	565	636	488	524	465	818
											<u></u>					



Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Start	30-Ap	or-18	Т	ue	V	/ed		hu		ri		at		un	Week A	Average
Time	Westboun '	Eastboun		Eastboun	Westbou	Eastboun	Westbou					Eastboun		Eastboun	Westbou	Eastboun
12:00 AM	24	47	*	*	*	*	*	*	*	*	*	*	*	*	24	47
01:00	14	20	*	*	*	*	*	*	*	*	*	*	*	*	14	20
02:00	8	7	*	*	*	*	*	*	*	*	*	*	*	*	8	7
03:00	15	8	*	*	*	*	*	*	*	*	*	*	*	*	15	8
04:00	69	17	*	*	*	*	*	*	*	*	*	*	*	*	69	17
05:00	239	52	*	*	*	*	*	*	*	*	*	*	*	*	239	52
06:00	668	149	*	*	*	*	*	*	*	*	*	*	*	*	668	149
07:00	909	311	*	*	*	*	*	*	*	*	*	*	*	*	909	311
08:00	757	362	*	*	*	*	*	*	*	*	*	*	*	*	757	362
09:00	447	338	*	*	*	*	*	*	*	*	*	*	*	*	447	338
10:00	434	296	*	*	*	*	*	*	*	*	*	*	*	*	434	296
11:00	337	372	*	*	*	*	*	*	*	*	*	*	*	*	337	372
12:00 PM	384	378	*	*	*	*	*	*	*	*	*	*	*	*	384	378
01:00	361	392	*	*	*	*	*	*	*	*	*	*	*	*	361	392
02:00	375	446	*	*	*	*	*	*	*	*	*	*	*	*	375	446
03:00	347	550	*	*	*	*	*	*	*	*	*	*	*	*	347	550
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	5388	3745	0	0	0	0	0	0	0	0	0	0	0	0	5388	3745
Day	91		C)	()	C)	0		C	<u> </u>	0		913	
AM Peak	07:00	11:00	-	-	-	-	-	-	-	-	-	-	-	-	07:00	11:00
Vol.	909	372	-	-	-	-	-	-	-	-	-	-	-	-	909	372
PM Peak	12:00	15:00	-	-	-	-	-	-	-	-	-	-	-	-	12:00	15:00
Vol	384	550	-	-	-	-	-	-	-	-	-	-	-	-	384	<u>550</u>
Comb. Total	9′	133		6913	1	14463	1	6357	1	6671	1	5254	1	1601	2	4043
ADT	ΑD	T 15,830	AAD	T 15,830												

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Latitude: 0' 0.0000 Und

				Г]					
Start	23-Ar	or-18	Т	ue	V	/ed	Т	hu	F	-ri	5	Sat	S	un	Week A	Average
Time	Westboun	Eastboun	Westbou	Eastbour	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastbour	Westbou	Eastboun		Eastboun
12:00 AM	*	*	*	*	10	44	9	31	15	56	33	67	33	54	20	50
01:00	*	*	*	*	10	9	6	18	10	16	12	30	17	28	11	20
02:00	*	*	*	*	3	6	6	2	7	10	13	12	13	20	8	10
03:00	*	*	*	*	20	10	7	7	11	9	8	11	8	5	11	8
04:00	*	*	*	*	37	13	41	8	42	16	18	11	17	3	31	10
05:00	*	*	*	*	144	28	142	21	138	30	60	28	42	11	105	24
06:00	*	*	*	*	367	109	405	115	410	124	115	42	85	27	276	83
07:00	*	*	*	*	563	228	581	249	558	267	206	147	110	88	404	196
08:00	*	*	*	*	423	237	458	240	419	268	249	221	180	119	346	217
09:00	*	*	*	*	322	196	312	224	345	205	326	280	260	170	313	215
10:00	*	*	*	*	244	192	279	244	292	238	387	321	335	237	307	246
11:00	*	*	*	*	236	235	281	254	326	299	341	324	349	303	307	283
12:00 PM	*	*	*	*	254	236	294	302	292	341	374	350	347	338	312	313
01:00	*	*	*	*	235	255	290	282	307	322	340	368	346	358	304	317
02:00	*	*	119	125	256	275	299	330	287	335	338	390	335	354	272	302
03:00	*	*	310	511	280	423	316	513	293	502	391	356	307	325	316	438
04:00	*	*	308	57 <mark>1</mark>	307	500	341	510	335	556	360	373	275	319	321	472
05:00	*	*	353	566	302	546	367	567	368	587	348	390	248	294	331	492
06:00	*	*	283	3 <mark>9</mark> 9	204	352	270	453	299	478	247	333	211	265	252	380
07:00	*	*	186	267	122	247	202	294	199	270	215	215	160	185	181	246
08:00	*	*	120	17 <mark>5</mark>	123	194	139	231	157	212	140	203	104	128	130	190
09:00	*	*	76	147	80	123	87	178	110	164	108	183	66	94	88	148
10:00	*	*	60	68 57	44	71	71	104	87	117	104	138	53	57	70	92
11:00	*	*	29	57	32	55	36	61	65	79	52	107	23	43	40	67
Lane	0	0	1844	288 <mark>6</mark>	4618	4584	5239	5238	5372	5501	4785	4900	3924	3825	4756	4819
Day	, O	1	473	30	92	-	104		108		96		77		957	
AM Peak	-	-	-	-	07:00	08:00	07:00	11:00	07:00	11:00	10:00	11:00	11:00	11:00	07:00	11:00
Vol.	-	-	-	-	563	237	581	254	558	299	387	324	349	303	404	283
PM Peak	-	-	17:00	16:0 <mark></mark> 0	16:00	17:00	17:00	17:00	17:00	17:00	15:00	14:00	12:00	13:00	17:00	17:00
Vol.	-	-	353	57 <mark>1</mark>	307	546	367	567	368	587	391	390	347	358	331	492
											J					



Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Start	30-Ap	or-18	Т	ue		/ed	Т	hu	F	-ri		at		un	Week A	Average
Time	Westboun	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun
12:00 AM	6	20	*	*	*	*	*	*	*	*	*	*	*	*	6	20
01:00	12	12	*	*	*	*	*	*	*	*	*	*	*	*	12	12
02:00	1	4	*	*	*	*	*	*	*	*	*	*	*	*	1	4
03:00	10	2	*	*	*	*	*	*	*	*	*	*	*	*	10	2
04:00	39	8	*	*	*	*	*	*	*	*	*	*	*	*	39	8
05:00	128	31	*	*	*	*	*	*	*	*	*	*	*	*	128	31
06:00	406	105	*	*	*	*	*	*	*	*	*	*	*	*	406	105
07:00	571	242	*	*	*	*	*	*	*	*	*	*	*	*	571	242
08:00	449	244	*	*	*	*	*	*	*	*	*	*	*	*	449	244
09:00	268	210	*	*	*	*	*	*	*	*	*	*	*	*	268	210
10:00	318	193	*	*	*	*	*	*	*	*	*	*	*	*	318	193
11:00	241	247	*	*	*	*	*	*	*	*	*	*	*	*	241	247
12:00 PM	266	256	*	*	*	*	*	*	*	*	*	*	*	*	266	256
01:00	244	269	*	*	*	*	*	*	*	*	*	*	*	*	244	269
02:00	276	287	*	*	*	*	*	*	*	*	*	*	*	*	276	287
03:00	177	267	*	*	*	*	*	*	*	*	*	*	*	*	177	267
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	3412	2397	0	0	0	0	0	0	0	0	0	0	0	0	3412	2397
Day	580		0)	C)	0)	C)	C)	C)	580	
AM Peak	07:00	11:00	-	-	-	-	_	-	-	-	-	-	-	-	07:00	11:00
Vol	571	247	-	-	-			-	-	-	-	-	-	-	571	247
PM Peak	14:00	14:00	-	-	-	-	-	-	-	-	-	-	-	-	14:00	14:00
Vol	276	287	-	-	-	-	-	-	-	-	-	-	-	-	276	287
Comb.																
Total	58	309		4730	!	9202	1	0477	1	10873	!	9685	•	7749	1	5384
iolai																
ADT	AD	OT 10,184	AAD	T 10,184												

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

				_												
Start	23-Ap	-	-	ue		/ed	-	'hu		ri	_	at	-	un		Average
Time	Westboun	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastbour	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun
12:00 AM	*	*	*	*	12	6	9	15	9	12	18	28	28	30	15	18
01:00	*	*	*	*	3	5	6	3	6	9	9	15	13	10	7	8
02:00	*	*	*	*	17	14	11	12	7	15	6	11	8	5	10	11
03:00	*	*	*	*	26	17	33	11	36	20	13	9	18	6	25	13
04:00	*	*	*	*	107	42	106	34	112	49	49	27	35	12	82	33
05:00	*	*	*	*	293	177	307	163	322	173	97	81	71	41	218	127
06:00	*	*	*	*	520	374	524	383	526	408	174	175	93	119	367	292
07:00	*	*	*	*	385	322	407	344	391	357	246	254	183	147	322	285
08:00	*	*	*	*	300	242	301	273	350	271	347	341	272	225	314	270
09:00	*	*	*	*	238	213	279	273	298	273	393	369	332	287	308	283
10:00	*	*	*	*	261	260	290	250	331	333	371	378	363	346	323	313
11:00	*	*	*	*	274	249	317	306	329	346	429	363	384	358	347	324
12:00 PM	*	*	*	*	244	265	296	275	346	302	394	379	383	374	333	319
01:00	*	*	284	236	315	264	367	316	336	370	368	385	361	355	338	321
02:00	*	*	363	455	326	378	351	491	345	461	409	370	352	311	358	411
03:00	*	*	416	527	411	476	467	501	440	533	389	370	297	338	403	458
04:00	*	*	467	556	413	514	484	524	492	559	373	393	302	318	422	477
05:00	*	*	360	426	310	342	383	423	346	421	288	343	238	258	321	369
06:00	*	*	263	271	188	230	236	298	241	271	261	234	182	175	228	246
07:00	*	*	174	178	150	181	197	213	212	202	179	194	116	117	171	181
08:00	*	*	104	137	99	108	122	158	126	143	128	164	76	89	109	133
09:00	*	*	72	50	61	70	80	99	91	107	136	125	56	47	83	83
10:00	*	*	34	49	39	50	45	52	77	71	67	108	28	43	48	62
11:00	*	*	15	32	12	29	16	43	47	59	40	49	10	17	23	38
Lane	0	0	2552	2917	5004	4828	5634	5460	5816	5765	5184	5165	4201	4028	5175	5075
Day	C)	54	69	98	32	110)94	115	81	103	49	82	29	102	:50
AM Peak	-	-	-		06:00	06:00	06:00	06:00	06:00	06:00	11:00	10:00	11:00	11:00	06:00	11:00
Vol.	-	-	-	-	520	374	524	383	526	408	429	378	384	358	367	324
PM Peak	-	-	16:00	16:00	16:00	16:00	16:00	16:00	16:00	16:00	14:00	16:00	12:00	12:00	16:00	16:00
Vol.	-	-	467	556	413	514	484	524	492	559	409	393	383	374	422	477



Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633


Start	30-A	or-18	Т	ue	V	/ed	Т	hu	F	-ri	S	at	S	un	Week A	verage
Time	Westboun	Eastboun				Eastboun	Westbou									
12:00 AM	12	9	*	*	*	*	*	*	*	*	*	*	*	*	12	9
01:00	3	4	*	*	*	*	*	*	*	*	*	*	*	*	3	4
02:00	8	5	*	*	*	*	*	*	*	*	*	*	*	*	8	5
03:00	33	14	*	*	*	*	*	*	*	*	*	*	*	*	33	14
04:00	99	42	*	*	*	*	*	*	*	*	*	*	*	*	99	42
05:00	312	168	*	*	*	*	*	*	*	*	*	*	*	*	312	168
06:00	529	377	*	*	*	*	*	*	*	*	*	*	*	*	529	377
07:00	410	359	*	*	*	*	*	*	*	*	*	*	*	*	410	359
08:00	268	249	*	*	*	*	*	*	*	*	*	*	*	*	268	249
09:00	311	216	*	*	*	*	*	*	*	*	*	*	*	*	311	216
10:00	266	262	*	*	*	*	*	*	*	*	*	*	*	*	266	262
11:00	298	289	*	*	*	*	*	*	*	*	*	*	*	*	298	289
12:00 PM	275	279	*	*	*	*	*	*	*	*	*	*	*	*	275	279
01:00	340	312	*	*	*	*	*	*	*	*	*	*	*	*	340	312
02:00	151	190	*	*	*	*	*	*	*	*	*	*	*	*	151	190
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	3315	2775	0	0	0	0	0	0	0	0	0	0	0	0	3315	2775
Day	60		0)	()))	0)	0	1	609	
AM Peak	06:00	06:00	-	-	-	-	-	-	-	-	-	-	-	-	06:00	06:00
Vol.	529	377	-	-	-	-	-	-	-	-	-	-	-	-	529	377
PM Peak	13:00	13:00	-	-	-	-	-	-	-	-	-	-	-	-	13:00	13:00
Vol	340	312	-	-	-	-	-	-	-	-	-	-	-	-	340	312
Comb.	60	090		5469		9832	1	1094	1	1581	1	0349	5	8229	1	6340
Total			`	0.00		0002			'			00.0	`	J		00.0
		T 10 000		T 40 000												
ADT	AL	OT 10,836	AAD	T 10,836												

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Latitude:	0'	0.0000	Undefined
-----------	----	--------	-----------

				Г							1					
Start	23-Ar	or-18	T	ue	V	/ed	Т	hu	F	ri	S	at	S	un	Week /	Average
Time	Westboun	-	Westbou	Eastboun		Eastboun	Westbou	Eastboun		Eastbour		Eastboun	Westbou	Eastboun		Eastboun
12:00 AM	*	*	*	*	19	29	18	21	25	37	48	42	45	50	31	36
01:00	*	*	*	*	14	8	10	12	10	13	21	21	36	29	18	17
02:00	*	*	*	* [5	5	6	4	8	8	13	13	18	9	10	8
03:00	*	*	*	*	16	13	15	15	13	16	10	13	9	6	13	13
04:00	*	*	*	*	35	43	39	34	35	35	14	18	13	12	27	28
05:00	*	*	*	*	93	111	101	96	110	113	51	62	36	28	78	82
06:00	*	*	*	*	260	309	271	323	287	344	106	159	72	71	199	241
07:00	*	*	*	*	402	517	404	531	427	559	198	313	106	176	307	419
08:00	*	*	*	*	351	476	358	483	355	462	302	422	218	269	317	422
09:00	*	*	*	*	272	349	294	344	329	420	407	538	264	348	313	400
10:00	*	*	*	*	275	324	304	425	313	439	423	573	392	461	341	444
11:00	*	*	*	*	284	382	369	381	389	453	434	549	355	506	366	454
12:00 PM	*	*	*	*	343	402	387	462	407	474	485	557	407	517	406	482
01:00	*	*	1	1	297	369	367	429	371	441	448	508	391	502	312	375
02:00	*	*	414	460	320	390	388	454	347	488	437	492	399	440	384	454
03:00	*	*	466	539	426	498	453	548	455	552	434	477	394	430	438	507
04:00	*	*	536	588	513	518	558	576	536	558	419	504	386	418	491	527
05:00	*	*	613	565	510	549	532	520	563	533	390	462	365	387	496	503
06:00	*	*	399	494	384	389	431	416	428	467	346	371	269	344	376	414
07:00	*	*	264	330	239	279	264	319	262	302	276	313	204	232	252	296
08:00	*	*	192	226	172	196	216	274	206	251	204	230	160	148	192	221
09:00	*	*	135	130	129	120	135	158	144	158	151	164	90	113	131	140
10:00	*	*	91	57	82	66	93	95	117	116	148	119	68	51	100	84
11:00	*	*	37	34	34	58	40	54	91	72	84	99	29	41	52	60
Lane	0	0	3148	3424	5475	6400	6053	6974	6228	7311	5849	7019	4726	5588	5650	6627
Day	0		657	72	118	375	130	27	135	39	128	68	103	14	122	:77
AM Peak	-	-	-	+	07:00	07:00	07:00	07:00	07:00	07:00	11:00	10:00	10:00	11:00	11:00	11:00
Vol.		-	-		402	517	404	531	427	559	434	573	392	506	366	454
PM Peak	-	-	17:00	16:00	16:00	17:00	16:00	16:00	17:00	16:00	12:00	12:00	12:00	12:00	17:00	16:00
Vol.	-	-	613	588	513	549	558	576	563	558	485	557	407	517	496	527
													•			



Site Code:

Station ID: 4640

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693


Route 66 East of Main Street # 2 East Hampton, Connecticut

Start	30-Ap	or-18	Т	ue	V	/ed	Т	hu .	F	-ri	S	at	S	un	Week A	Average
Time	Westboun	Eastboun		Eastboun		Eastboun	Westbou	Eastboun		Eastboun				Eastboun	Westbou	Eastboun
12:00 AM	14	10	*	*	*	*	*	*	*	*	*	*	*	*	14	10
01:00	15	9	*	*	*	*	*	*	*	*	*	*	*	*	15	9
02:00	4	4	*	*	*	*	*	*	*	*	*	*	*	*	4	4
03:00	10	11	*	*	*	*	*	*	*	*	*	*	*	*	10	11
04:00	36	27	*	*	*	*	*	*	*	*	*	*	*	*	36	27
05:00	91	112	*	*	*	*	*	*	*	*	*	*	*	*	91	112
06:00	284	320	*	*	*	*	*	*	*	*	*	*	*	*	284	320
07:00	420	535	*	*	*	*	*	*	*	*	*	*	*	*	420	535
08:00	386	475	*	*	*	*	*	*	*	*	*	*	*	*	386	475
09:00	268	352	*	*	*	*	*	*	*	*	*	*	*	*	268	352
10:00	300	354	*	*	*	*	*	*	*	*	*	*	*	*	300	354
11:00	290	379	*	*	*	*	*	*	*	*	*	*	*	*	290	379
12:00 PM	358	435	*	*	*	*	*	*	*	*	*	*	*	*	358	435
01:00	330	400	*	*	*	*	*	*	*	*	*	*	*	*	330	400
02:00	356	447	*	*	*	*	*	*	*	*	*	*	*	*	356	447
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	3162	3870	0	0	0	0	0	0	0	0	0	0	0	0	3162	3870
Day	703		C)	()	())	C	1)	703	
AM Peak	07:00	07:00	-	-	-	-	-	-	-	-	-	-	-	-	07:00	07:00
Vol.	420	535	-	-	-	-	-	-	-	-	-	-	-	-	420	535
PM Peak	12:00	14:00	-	-	-	-	-	-	-	-	-	-	-	-	12:00	14:00
Vol	358	447	-	-	-	-	-	-	-	-	-	-	-	-	358	447
Comb. Total	7032		6572		11875		13027		13539		12868		10314		19309	
ADT	ADT 12,814		AAD	OT 12,814												

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

									_							
Start	28-Ma		Tu		_ W			hu		ri		at		un		Average
Time	Eastbound	Westbou	Eastboun	Westbou	Eastboun	Westbo		Westbou	Eastboun	Westbou		Westbou		Westbou	Eastboun	
12:00 AM	*	*	*	*	*		46	39	43	34	66	57	44	52	50	46
01:00	*	1	*		*	,	13	12	16	16	18	18	20	23	17	17
02:00	*	*	•	*	*	·	5	6	10	7	18	14	10	23	11	12
03:00	*	*	*	*	*		10	9	15	9	10	10	5	15	10	11
04:00	*	*	*		*		44	21	43	27	25	21	15	10	32	20
05:00	*	*	*	*	*	, ,	137	73	131	105	67	55	37	33	93	66
06:00	*	*	*	*	*		420	240	443	258	124	99	85	56	268	163
07:00	*	*	*		*	,	642	459	611	437	279	210	155	139	422	311
08:00	*	*	*	*	*	,	601	477	612	451	386	343	269	193	467	366
09:00	*	*	*	*	*	,	446	347	418	381	452	458	342	335	414	380
10:00	*	*	*	*	*		356	390	389	386	563	525	432	478	435	445
11:00	*	*	*		*	,	369	393	416	391	525	561	475	442	446	447
12:00 PM	*	*	*	*	*		447	435	435	452	533	521	500	533	479	485
01:00	*	*	*	*		4.40	428	369	421	434	491	531	494	500	458	458
02:00	*	*	*	*	442	446	442	477	457	499	518	551	504	469	473	488
03:00	*	*	*	*	527	570	520	542	554	623	490	470	418	494	502	540
04:00	*	*	*	*	598	715	538	687	626	705	401	456	443	472	521	607
05:00	*	*	*	*	533	720	562	799	579	750	403	377	379	388	491	607
06:00	*	*	*	*	439	586	468	523	496	501	344	340	336	358	417	462
07:00	*	*	*	*	345	348	343	379	356	323	257	260	267	270	314	316
08:00	*	*	*	*	278	267	227	261	261	320	190	206	217	211	235	253
09:00	*	*	*		136	179	147	188	192	247	163	178	104	120	148	182
10:00	*	*	*	*	99	117	103	124	142	141	134	116	63	86	108	117
11:00					49 3446	56	65	57	114	101	85	100	40 5654	50	71	73
Lane	0	0	0	0		4004	7379	7307	7780	7598	6542	6477		5750	6882	6872
Day	U		0		745	00	146		153		130	-	114	-	137	
AM Peak Vol.	-	-	-	-	-	-	07:00	08:00 477	08:00 612	08:00	10:00	11:00	11:00	10:00	08:00	11:00
	-	-	-	-	16:00	17.00	642			451	563	561	475	478	467	447
PM Peak Vol.	-	-	-	-	16:00 598	17:00 720	17:00 562	17:00 799	16:00 626	17:00 750	12:00 533	14:00 551	14:00 504	12:00 533	16:00 521	16:00 607
VOI.	-	-	-	-	598	720	562	799	626	750	533	551	504	533	521	607



Route 66 East of Route 196 East Hampton, Connecticut


Site Code: Station ID: 4678

Start	04-Ju	n-18	Tu	ue	W	ed	Т	hu	F	ri	S	at	S	un	Week Average	
Time	Eastbound	Westbou						Westbou	Eastboun				Eastboun			Westbou
12:00 AM	18	22	*	*	*	*	*	*	*	*	*	*	*	*	18	22
01:00	10	15	*	*	*	*	*	*	*	*	*	*	*	*	10	15
02:00	5	6	*	*	*	*	*	*	*	*	*	*	*	*	5	6
03:00	18	9	*	*	*	*	*	*	*	*	*	*	*	*	18	9
04:00	44	22	*	*	*	*	*	*	*	*	*	*	*	*	44	22
05:00	130	67	*	*	*	*	*	*	*	*	*	*	*	*	130	67
06:00	380	254	*	*	*	*	*	*	*	*	*	*	*	*	380	254
07:00	617	433	*	*	*	*	*	*	*	*	*	*	*	*	617	433
08:00	571	403	*	*	*	*	*	*	*	*	*	*	*	*	571	403
09:00	382	341	*	*	*	*	*	*	*	*	*	*	*	*	382	341
10:00	354	310	*	*	*	*	*	*	*	*	*	*	*	*	354	310
11:00	92	87	*	*	*	*	*	*	*	*	*	*	*	*	92	87
12:00 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	2621	1969	0	0	0	0	0	0	0	0	0	0	0	0	2621	1969
Day	459		0		0		0)	0		0)	0	l	459	
AM Peak	07:00	07:00	-	-	-	-	-	-	-	-	-	-	-	-	07:00	07:00
Vol	617	433	-	-	-	-	-	-	-	-	-	-	-	-	617	433
PM Peak	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Vol.	-	-	=	-		-	-	-		-	-	-	=	-	-	
Comb.	AE	4590		0		7450		4686	4	5378	13019		11404		18344	
Total	40	190		U		430	'	4000	1	JJ10	ı	3018	I	1404	ı	0344
ADT	ADT 15,032		AAD	T 15,032												

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Start	23-Ap	or-18	Т	ue		/ed	-	'hu	-	-ri	_	at		un	Week	Average
Time	Westboun	Eastboun	Westbou	Eastbour	n Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastbou	n Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastboun
12:00 AM	*	*	*	*	24	27	29	16	28	26	52	41	50	47	37	31
01:00	*	*	*	*	15	6	13	14	13	10	32	27	39	23	22	16
02:00	*	*	*	*	7	7	8	3	12	5	17	10	14	5	12	6
03:00	*	*	*	*	13	9	14	14	15	21	10	18	10	8	12	14
04:00	*	*	*	*	34	51	30	43	28	48	10	17	8	10	22	34
05:00	*	*	*	*	85	131	103	125	99	131	48	49	25	19	72	91
06:00	*	*	*	*	273	428	278	420	305	451	109	132	66	62	206	299
07:00	*	*	*	*	433	628	476	652	487	615	245	227	101	129	348	450
08:00	*	*	*	*	415	514	398	516	400	510	355	343	220	236	358	424
09:00	*	*	*	*	326	362	313	345	346	387	452	487	287	325	345	381
10:00	*	*	*	*	299	315	322	371	340	390	439	459	405	405	361	388
11:00	*	*	*	*	308	333	358	333	366	375	495	510	380	429	381	396
12:00 PM	*	*	*	*	340	348	378	390	421	402	523	499	465	449	425	418
01:00	*	*	326	315	337	340	385	366	398	410	487	455	403	423	389	385
02:00	*	*	451	39 <mark>1</mark>	379	333	434	376	400	406	501	491	402	403	428	400
03:00	*	*	547	51 <mark>8</mark>	506	476	544	506	561	542	465	477	420	377	507	483
04:00	*	*	739	54 <mark>8</mark>	650	490	699	525	682	541	434	481	387	372	598	493
05:00	*	*	752	53 <mark>1</mark>	667	558	726	512	723	535	389	436	344	348	600	487
06:00	*	*	448	447	470	372	494	383	483	455	355	363	283	282	422	384
07:00	*	*	314	302	243	238	315	286	279	301	272	269	202	206	271	267
08:00	*	*	204	19 <mark>7</mark>	183	164	250	261	200	217	205	210	159	124	200	196
09:00	*	*	168	9 <mark>2</mark>	163	95	150	139	159	139	155	152	84	89	146	118
10:00	*	*	79	5 <mark>9</mark>	79	54	89	79	146	117	162	115	56	34	102	76
11:00	*	*	49	25	37	46	46	55	97	72	81	82	33	36	57	53
Lane	0	0	4077	342 <mark>5</mark>	6286	6325	6852	6730	6988	7106	6293	6350	4843	4841	6321	6290
Day	C)	750	02	126		135	-	140		126	-	96	-	126	
AM Peak	-	-	-	-	07:00	07:00	07:00	07:00	07:00	07:00	11:00	11:00	10:00	11:00	11:00	07:00
Vol.	-	-	-	-	433	628	476	652	487	615	495	510	405	429	381	450
PM Peak	-	-	17:00	16:0 <mark></mark> 0	17:00	17:00	17:00	16:00	17:00	15:00	12:00	12:00	12:00	12:00	17:00	16:00
Vol.	-	-	752	54 <mark>8</mark>	667	558	726	525	723	542	523	499	465	449	600	493



Route 66 at Paul & Sandy's Too East Hampton, Connecticut


Site Code: Station ID: 4632

Start	30-Ap	or-18	Т	ue	W	'ed	Т		F	ri	8	at	S	un	Week A	Average
Time	Westboun	Eastboun	Westbou	Eastboun		Eastboun	Westbou			Eastboun	Westbou	Eastboun		Eastboun		Eastboun
12:00 AM	14	18	*	*	*	*	*	*	*	*	*	*	*	*	14	18
01:00	18	7	*	*	*	*	*	*	*	*	*	*	*	*	18	7
02:00	4	5	*	*	*	*	*	*	*	*	*	*	*	*	4	5
03:00	9	13	*	*	*	*	*	*	*	*	*	*	*	*	9	13
04:00	28	41	*	*	*	*	*	*	*	*	*	*	*	*	28	41
05:00	97	140	*	*	*	*	*	*	*	*	*	*	*	*	97	140
06:00	277	416	*	*	*	*	*	*	*	*	*	*	*	*	277	416
07:00	448	641	*	*	*	*	*	*	*	*	*	*	*	*	448	641
08:00	436	532	*	*	*	*	*	*	*	*	*	*	*	*	436	532
09:00	291	392	*	*	*	*	*	*	*	*	*	*	*	*	291	392
10:00	331	303	*	*	*	*	*	*	*	*	*	*	*	*	331	303
11:00	300	350	*	*	*	*	*	*	*	*	*	*	*	*	300	350
12:00 PM	356	344	*	*	*	*	*	*	*	*	*	*	*	*	356	344
01:00	347	359	*	*	*	*	*	*	*	*	*	*	*	*	347	359
02:00	361	354	*	*	*	*	*	*	*	*	*	*	*	*	361	354
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	3317	3915	0	0	0	0	0	0	0	0	0	0	0	0	3317	3915
Day			0)	C)	C)	0	1	C)	0)	723	
AM Peak	07:00	07:00	-	-	-	-	-	-	-	-	-	-	-	-	07:00	07:00
Vol.	448	641	-	-	-	-	-	-	-	-	-	-	-	-	448	641
PM Peak	14:00	13:00	-	-	-	-	-	-	-	-	-	-	-	-	14:00	13:00
Vol.	361	359	-	-	-	-	-	-	-	-	-	-	-	-	361	359
Comb.	7232		7502		12611		13582		14094		12643		9684		19843	
Total				-				-	_	-		-		•	-	-
ADT	A F	T 40 400	^ ^ -	NT 40 400												
ADT	AL	T 13,429	AAL	OT 13,429												

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

				Г												
Start	23-Ar	or-18	Т	ue	V	/ed	Т	hu	F	ri	S	at	S	un	Week	Average
Time	Westboun	Eastboun	Westbou	Eastbour	Westbou	Eastboun	Westbou	Eastboun	Westbou	Eastbour	ı Westbou	Eastbour	n Westbou	Eastboun		Eastboun
12:00 AM	*	*	*	*	21	19	23	18	22	23	32	35	45	28	29	25
01:00	*	*	*	*	12	3	10	9	15	7	30	16	31	14	20	10
02:00	*	*	*	*	11	9	11	5	7	9	14	10	10	4	11	7
03:00	*	*	*	*	13	12	14	16	17	24	7	21	8	4	12	15
04:00	*	*	*	*	29	66	27	56	31	56	16	22	10	15	23	43
05:00	*	*	*	*	94	209	103	214	111	213	48	77	26	28	76	148
06:00	*	*	*	*	249	498	274	507	263	507	96	153	60	73	188	348
07:00	*	*	*	*	312	567	317	557	348	539	233	242	113	123	265	406
08:00	*	*	*	*	281	461	315	419	259	418	297	316	189	208	268	364
09:00	*	*	*	*	249	285	250	311	264	340	357	437	234	300	271	335
10:00	*	*	*	*	257	269	269	318	319	342	365	409	345	360	311	340
11:00	*	*	*	*	283	280	323	282	310	323	414	426	325	370	331	336
12:00 PM	*	*	*	*	278	297	306	330	362	331	434	400	358	415	348	355
01:00	*	*	*	*	278	289	318	275	322	327	399	391	331	332	330	323
02:00	*	*	435	332	333	258	408	324	419	346	396	371	348	330	390	327
03:00	*	*	532	390	536	371	534	431	537	419	390	381	346	297	479	382
04:00	*	*	652	426	576	392	616	407	581	412	365	375	354	299	524	385
05:00	*	*	626	368	586	360	598	373	578	409	317	355	269	262	496	354
06:00	*	*	342	283	336	245	396	278	386	328	293	270	231	215	331	270
07:00	*	*	243	209	225	168	263	222	231	221	248	185	164	143	229	191
08:00	*	*	186	129	168	125	228	157	174	153	157	146	124	101	173	135
09:00	*	*	126	75	121	71	116	98	142	112	151	128	72	53	121	90
10:00	*	*	69	41	65	41	78	59	127	90	117	100	47	28	84	60
11:00	*	*	34	25	31	26	35	40	78	52	68	61	31	26	46	38
Lane	0	0	3245	2278	5344	5321	5832	5706	5903	6001	5244	5327	4071	4028	5356	5287
Day	C)	55	23	106		115		119		105		809		106	
AM Peak	-	-	-	-	07:00	07:00	11:00	07:00	07:00	07:00	11:00	09:00	10:00	11:00	11:00	07:00
Vol.	-	-	-	-	312	567	323	557	348	539	414	437	345	370	331	406
PM Peak	-	-	16:00	16:00	17:00	16:00	16:00	15:00	16:00	15:00	12:00	12:00	12:00	12:00	16:00	16:00
Vol.	-	-	652	426	586	392	616	431	581	419	434	400	358	415	524	385
				_												



Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Latitude: 0' 0.0000 Undefined

Start	30-A	or-18	Т	ue	W	'ed	Т	hu	F	-ri		Sat	S	un	Week /	Average
Time	Westboun	Eastboun	Westbou	Eastboun		Eastboun	Westbou			Eastboun				Eastboun	Westbou	Eastboun
12:00 AM	15	11	*	*	*	*	*	*	*	*	*	*	*	*	15	11
01:00	12	7	*	*	*	*	*	*	*	*	*	*	*	*	12	7
02:00	5	7	*	*	*	*	*	*	*	*	*	*	*	*	5	7
03:00	13	18	*	*	*	*	*	*	*	*	*	*	*	*	13	18
04:00	19	53	*	*	*	*	*	*	*	*	*	*	*	*	19	53
05:00	103	205	*	*	*	*	*	*	*	*	*	*	*	*	103	205
06:00	270	504	*	*	*	*	*	*	*	*	*	*	*	*	270	504
07:00	337	571	*	*	*	*	*	*	*	*	*	*	*	*	337	571
08:00	271	436	*	*	*	*	*	*	*	*	*	*	*	*	271	436
09:00	264	326	*	*	*	*	*	*	*	*	*	*	*	*	264	326
10:00	255	280	*	*	*	*	*	*	*	*	*	*	*	*	255	280
11:00	257	267	*	*	*	*	*	*	*	*	*	*	*	*	257	267
12:00 PM	306	296	*	*	*	*	*	*	*	*	*	*	*	*	306	296
01:00	274	292	*	*	*	*	*	*	*	*	*	*	*	*	274	292
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Lane	2401	3273	0	0	0	0	0	0	0	0	0	0	0	0	2401	3273
Day			C)			()	0)	()	C)	56	
AM Peak	07:00	07:00	-	-	-	-	-	-	-	-	-	-	-	-	07:00	07:00
Vol.	337	571	-	-	-	-	-	-	-	-	-	-	-	-	337	571
PM Peak	12:00	12:00	-	-	-	-	-	-	-	-	-	-	-	-	12:00	12:00
Vol.	306	296	-	-	-	-	-	-	-	-	-	-	-	-	306	296
Comb. Total	56	674		5523	1	0665	1	1538	1	1904	1	0571	:	8099	1	6317
iotai																
ADT	ΑD	T 11,369	AAD	OT 11,369												

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Main Street Portland, Connecticut

File Name: 17235 Site Code: 17235

Start Date : 4/26/2018


Page No : 1

			ain St		'			Route					Route					vate D			
		<u>, Fr</u>	om No	orth			F	rom E	ast			<u> </u>	om So	outh			Fr	om W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
07:00 AM	0	136	4	0	140	10	0	310	0	320	87	50	0	0	137	0	0	0	3	3	600
07:15 AM	0	143	9	0	152	8	0	361	0	369	137	47	0	0	184	0	0	0	4	4	709
07:30 AM	0	164	10	0	174	7	0	324	0	331	137	76	0	0	213	1	0	0	1	2	720
07:45 AM	0	129	11_	0	140	10	0	323	0	333	123	82	0	0	205	0	0	0	3_	3	681
Total	0	572	34	0	606	35	0	1318	0	1353	484	255	0	0	739	1	0	0	11	12	2710
08:00 AM	0	129	9	0	138	9	0	284	0	293	114	74	0	0	188	0	0	0	1	1	620
08:15 AM	0	129	16	0	145	5	0	287	0	292	115	67	0	0	182	0	0	0	0	0	619
08:30 AM	0	86	4	0	90	6	0	296	1	303	117	44	1	0	162	1	0	0	1	2	557
08:45 AM	2	91	10	0	103	11	0	247	0	258	116	65	0	0	181	0	0	0	0	0	542
Total	2	435	39	0	476	31	0	1114	1	1146	462	250	1	0	713	1	0	0	2	3	2338
Grand Total	2	1007	73	0	1082	66	0	2432	1	2499	946	505	1	0	1452	2	0	0	13	15	5048
Apprch %	0.2	93.1	6.7	0		2.6	0	97.3	0		65.2	34.8	0.1	0		13.3	0	0	86.7		
Total %	0	19.9	1.4	0	21.4	1.3	0	48.2	0	49.5	18.7	10	0	0	28.8	0	0	0	0.3	0.3	
Lights	2	985	63	0	1050	64	0	2365													
% Lights	100	97.8	86.3	0	97	97	0	97.2	0	97.2	91.5	94.5	0	0	92.5	100	0	0	0	13.3	95.6
Buses	0	5	4	0	9	1	0	10	0	11	6	6	0	0	12	0	0	0	0	0	32
% Buses	0	0.5	5.5	0	0.8	1.5	0	0.4	0	0.4	0.6	1.2	0	0	0.8	0	0	0	0	0	0.6
Trucks	0	17	6	0	23	1	0	57	0	58	74	22	1	0	97	0	0	0	0	0	178
% Trucks	0	1.7	8.2	0_	2.1	1.5	0_	2.3	0_	2.3	7.8	4.4	100	0_	6.7	0	0	0	0_	0	3.5
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	7.7	6.7	0
Pedestrians	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	12	12	13
% Pedestrians	0	0	0	0	0	0	0	0	100	0	0	0	0	0	0	0	0	0	92.3	80	0.3

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17235 Site Code : 17235 Start Date : 4/26/2018

			ain Sti					Route rom E					Route om Sc					vate D			
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	n 07:00	0 AM t	o 08:45	AM - I	Peak 1	of 1													
Peak Hour fo	or Enti	re Inte	rsection	n Beg	ins at 0	7:15 A	M														
07:15 AM	0	143	9	0	152	8	0	361	0	369	137	47	0	0	184	0	0	0	4	4	709
07:30 AM	0	164	10	0	174	7	0	324	0	331	137	76	0	0	213	1	0	0	1	2	720
07:45 AM	0	129	11	0	140	10	0	323	0	333	123	82	0	0	205	0	0	0	3	3	681
08:00 AM	0	129	9	0	138	9	0	284	0	293	114	74	0	0	188	0	0	0	1	1	620
Total Volume	0	565	39	0	604	34	0	1292	0	1326	511	279	0	0	790	1	0	0	9	10	2730
% App. Total	0	93.5	6.5	0		2.6	0	97.4	0		64.7	35.3	0	0		10	0	0	90		
PHF	000	861	886	000	868	850	000	805	000	898	032	851	000	000	927	250	000	000	563	625	948

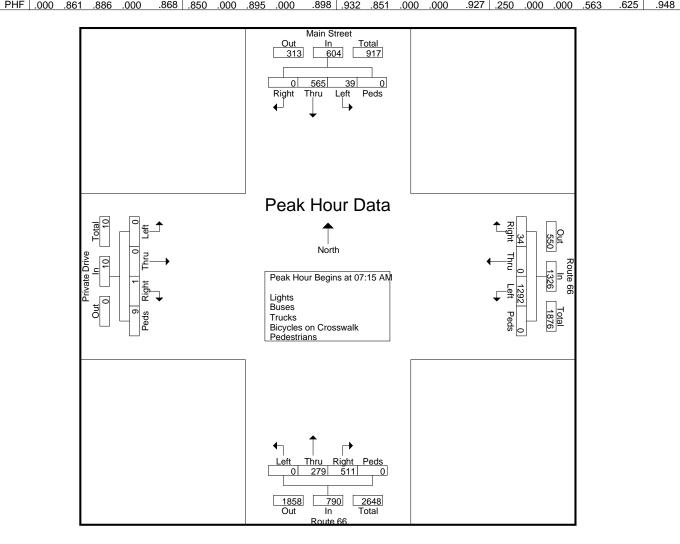


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17235 Site Code : 17235 Start Date : 4/26/2018

Page No : 3

			ain Str					Route rom E				-	Route om Sc					vate D			
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	า 07:00	0 AM t	o 08:45	AM - I	Peak 1	of 1													
Peak Hour fo	or Eac	h Appr	oach l	Begins	at:	1															1
	07:00 AN	I				07:00 AM					07:15 AN	1				07:00 AM	1				
+0 mins.	0	136	4	0	140	10	0	310	0	320	137	47	0	0	184	0	0	0	3	3	
+15 mins.	0	143	9	0	152	8	0	361	0	369	137	76	0	0	213	0	0	0	4	4	
+30 mins.	0	164	10	0	174	7	0	324	0	331	123	82	0	0	205	1	0	0	1	2	
+45 mins.	0	129	11	0	140	10	0	323	0	333	114	74	0	0	188	0	0	0	3	3	
Total Volume	0	572	34	0	606	35	0	1318	0	1353	511	279	0	0	790	1	0	0	11	12	

% App. Total

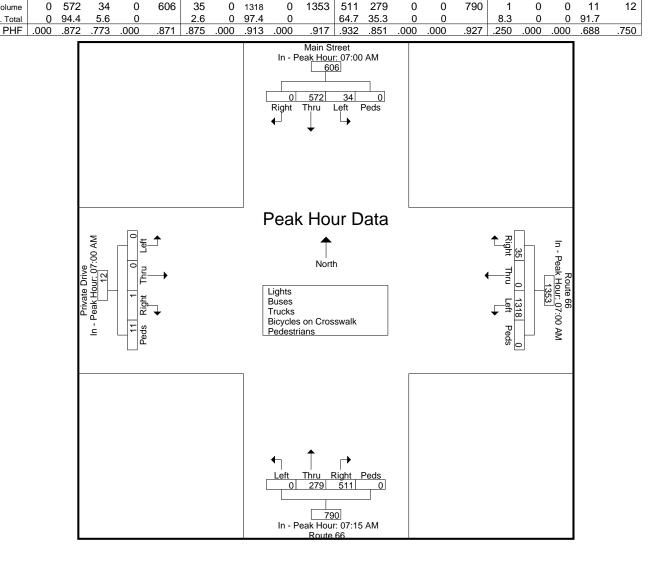

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Main Street Portland, Connecticut

File Name: 17236 Site Code: 17236

Start Date : 4/26/2018


Page No : 1

		М	ain St	reet	'		F	Route	66			F	Route	66			Pri	vate D	Drive		
		Fr	om N	orth			F	rom E	ast			Fr	om So	outh			F	rom W	/est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	0	80	19	3	102	22	0	162	0	184	295	125	0	0	420	0	1	0	2	3	709
04:15 PM	1	101	17	2	121	18	0	189	1	208	292	144	1	0	437	1	0	0	3	4	770
04:30 PM	1	92	12	3	108	14	0	187	1	202	308	142	1	0	451	0	0	0	2	2	763
04:45 PM	2	94	16	1_	113	21	0	173	2	196	327	156	0	0	483	0	0	1_	4	5	797
Total	4	367	64	9	444	75	0	711	4	790	1222	567	2	0	1791	1	1	1	11	14	3039
05:00 PM	2	96	13	7	118	19	0	189	0	208	317	165	0	0	482	0	0	0	2	2	810
05:15 PM	0	101	10	1	112	14	0	140	2	156	309	178	0	0	487	0	0	0	4	4	759
05:30 PM	0	99	15	0	114	14	1	140	0	155	267	146	0	0	413	2	0	2	2	6	688
05:45 PM	0	88	25	0	113	18	0	194	0	212	270	140	2	0	412	1	0	0	1_	2	739
Total	2	384	63	8	457	65	1	663	2	731	1163	629	2	0	1794	3	0	2	9	14	2996
																					ı
Grand Total	6	751	127	17	901	140	1	1374	6	1521	2385	1196	4	0	3585	4	1	3	20	28	6035
Apprch %	0.7	83.4	14.1	1.9		9.2	0.1	90.3	0.4		66.5	33.4	0.1	0		14.3	3.6	10.7	71.4		
Total %	0.1	12.4	2.1	0.3	14.9	2.3	0	22.8	0.1	25.2	39.5	19.8	0.1	0	59.4	0.1	0	0	0.3	0.5	
Lights	6	736	127	0	869	137		1326	_		2360	1184		_					_		
<u>% Lights</u>	100	98	100	0	96.4	97.9	100	96.5	0	96.3	99	99	100	0	99	100	100	100	0	28.6	97.6
Buses	0	2	0	0	2	1	0	10	0	11	7	2	0	0	9	0	0	0	0	0	22
% Buses	0	0.3	0	0	0.2	0.7	0	0.7	0	0.7 40	0.3	0.2	0	0	0.3 28	0	0	0	0	0	0.4
Trucks % Trucks	0	13 1.7	0	0 0	13 1.4	1.4	0	38 2.8	0	2.6	0.8	0.8	0	0	0.8	0	0	0	0	0	81 1.3
	0	1./			1.4	1.4		2.0		2.0	0.6	0.6			0.6	0					1.3
Bicycles on Crosswalk % Bicycles on	_	_	_			_	_	_	_	_	_	_	_	_	_	_	_	_			
% Bicycles on Crosswalk	0	0	0	11.8	0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	10	7.1	0.1
Pedestrians																					
% Pedestrians	0	0	0	88.2	1.7	0	0	0	100	0.4	0	0	0	0	0	0	0	0	90	64.3	0.6

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17236 Site Code : 17236 Start Date : 4/26/2018


			ain Sti					Route					Route					vate D			
			om No	ortn				rom E	ast			FI	om So	outn				rom W	est		
Start	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Time	rtigrit	IIIIu	L	i cus	App. Total	rtigiit	Tillu	LCIT	i cus	App. Total	rtigiit	111114	LCIT	i cus	Арр. готаг	rtigitt	IIIIu	LCIL	1 003	App. Total	IIII. TOLA
Peak Hour A	nalysi	s Fron	n 04:00	OPM t	o 05:45	PM - I	Peak 1	of 1													
Peak Hour fe	or Enti	re Inte	rsection	n Beg	ins at 0	4:15 P	M														
04:15 PM	1	101	17	2	121	18	0	189	1	208	292	144	1	0	437	1	0	0	3	4	770
04:30 PM	1	92	12	3	108	14	0	187	1	202	308	142	1	0	451	0	0	0	2	2	763
04:45 PM	2	94	16	1	113	21	0	173	2	196	327	156	0	0	483	0	0	1	4	5	797
05:00 PM	2	96	13	7	118	19	0	189	0	208	317	165	0	0	482	0	0	0	2	2	810
Total Volume	6	383	58	13	460	72	0	738	4	814	1244	607	2	0	1853	1	0	1	11	13	3140
_ % App. Total	1.3	83.3	12.6	2.8		8.8	0	90.7	0.5		67.1	32.8	0.1	0		7.7	0	7.7	84.6		
PHF	750	948	853	464	950	857	000	976	500	978	951	920	500	000	959	250	000	250	688	650	969

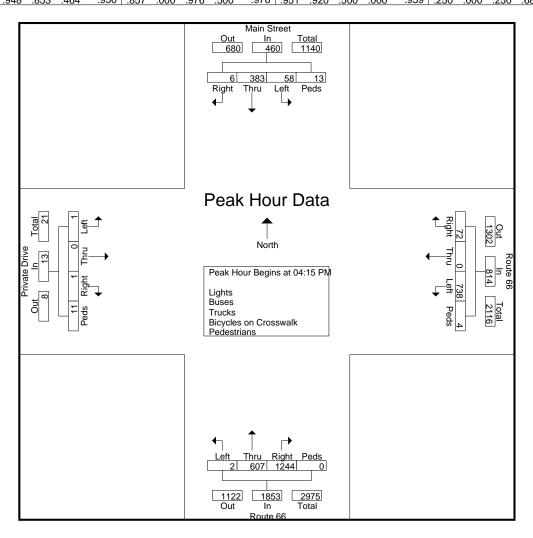

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17236 Site Code : 17236 Start Date : 4/26/2018

			ain Stı					Route				F	Route	66				vate D			
		Fr	rom No	orth			F	rom E	ast			Fr	om So	outh			Fi	rom W	est		
Start	Diales	Thru	Left	Dada		Diales	Thru	Left	Dada		District	Thru	Left	Dada		District	There	Left	Dada		
Time	Right	Iniu	Leit	Peds	App. Total	Right	Thru	Leit	Peds	App. Total	Right	Thru	Leit	Peds	App. Total	Right	Thru	Leit	Peds	App. Total	Int
Peak Hour A	nalysi	s Fron	n 04:00	O PM t	o 05:45	PM - I	Peak 1	of 1													
Peak Hour f	or Eac	h Appı	roach l	Begins	at:																
	04:15 PN	Л				04:15 PM	1				04:30 PM	1				04:45 PM					
+0 mins.	1	101	17	2	121	18	0	189	1	208	308	142	1	0	451	0	0	1	4	5	
+15 mins.	1	92	12	3	108	14	0	187	1	202	327	156	0	0	483	0	0	0	2	2	
+30 mins.	2	94	16	1	113	21	0	173	2	196	317	165	0	0	482	0	0	0	4	4	
+45 mins.	2	96	13	7	118	19	0	189	0	208	309	178	0	0	487	2	0	2	2	6	
Total Volume	6	383	58	13	460	72	0	738	4	814	1261	641	1	0	1903	2	0	3	12	17	

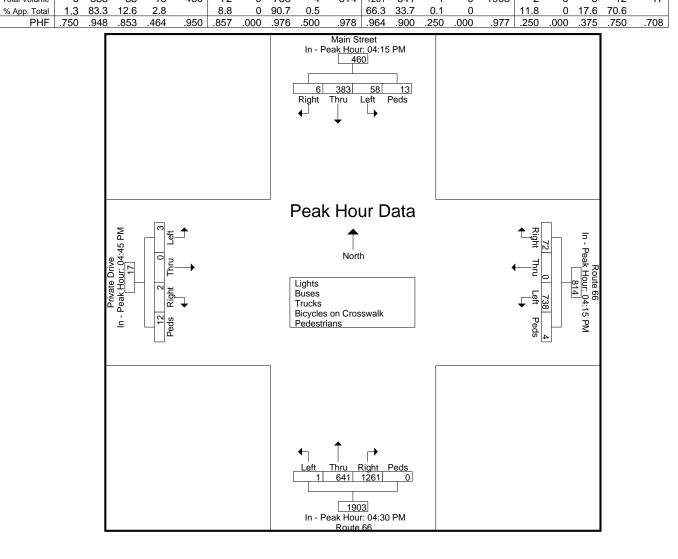

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at High Street Portland, Connecticut

File Name: 17237 Site Code: 17237

Start Date : 4/26/2018


Page No : 1

			Street	i iiiitea Lig	into Bao		Route 66		Orosswan	1 000011		te 66		
			North				rom Eas					West		
Start Time	Diabt	Left	Peds	A T-4-1	Diabt	Thru	Left		A T-4-1	Thru	Left	Peds	A T-4-1	Int. Total
	Right			App. Total	Right		Leit	Peds	App. Total				App. Total	
07:00 AM	20	11	0	31	27	255	1	0	283	69	23	0	92	406
07:15 AM	28	24	1	53	36	285	0	0	321	97	31	0	128	502
07:30 AM	37	16	0	53	42	284	0	0	326	116	34	0	150	529
07:45 AM	22	16	0	38	46	277	0	0	323	118	21	0	139	500
Total	107	67	1	175	151	1101	1	0	1253	400	109	0	509	1937
08:00 AM	18	15	0	33	40	261	0	1	302	103	23	0	126	461
08:15 AM	28	20	0	48	28	223	0	0	251	105	25	0	130	429
08:30 AM	19	27	0	46	36	230	0	0	266	98	22	0	120	432
08:45 AM	20	18	0	38	26	230	0	0	256	111	16	1	128	422
Total	85	80	0	165	130	944	0	1	1075	417	86	1	504	1744
Grand Total	192	147	1	340	281	2045	1	1	2328	817	195	1	1013	3681
Apprch %	56.5	43.2	0.3		12.1	87.8	0	0		80.7	19.2	0.1		
Total %	5.2	4	0	9.2	7.6	55.6	0	0	63.2	22.2	5.3	0	27.5	
Lights	186	137	0	323	270	1999	1	0	2270	737	186	0	923	3516
% Lights	96.9	93.2	0	95	96.1	97.8	100	0	97.5	90.2	95.4	0	91.1	95.5
Buses	1	0	0	1	6	9	0	0	15	10	1	0	11	27
% Buses	0.5	0	0	0.3	2.1	0.4	0	0	0.6	1.2	0.5	0	1.1	0.7
Trucks	5	10	0	15	5	37	0	0	42	70	8	0	78	135
% Trucks	2.6	6.8	0	4.4	1.8	1.8	0	0	1.8	8.6	4.1	0	7.7	3.7
Bicycles on Crosswalk	0	0	1	1	0	0	0	0	0	0	0	0	0	1
% Bicycles on Crosswalk	0	0	100	0.3	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	1	1	0	0	1	1	2
% Pedestrians	0	0	0	0	0	0	0	100	0	0	0	100	0.1	0.1

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17237 Site Code : 17237 Start Date : 4/26/2018

		_	Street				Route 66					te 66		
		From	North				From Eas	ડા			From	West		
Start Time	Right	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analys	is From 0	7:00 AM	to 08:45	AM - Peak	1 of 1									
Peak Hour for Ent	ire Interse	ction Be	gins at 0	7:15 AM										
07:15 AM	28	24	1	53	36	285	0	0	321	97	31	0	128	502
07:30 AM	37	16	0	53	42	284	0	0	326	116	34	0	150	529
07:45 AM	22	16	0	38	46	277	0	0	323	118	21	0	139	500
08:00 AM	18	15	0	33	40	261	0	1	302	103	23	0	126	461
Total Volume	105	71	1	177	164	1107	0	1	1272	434	109	0	543	1992
% App. Total	59.3	40.1	0.6		12.9	87	0	0.1		79.9	20.1	0		
PHF	.709	.740	.250	.835	.891	.971	.000	.250	.975	.919	.801	.000	.905	.941

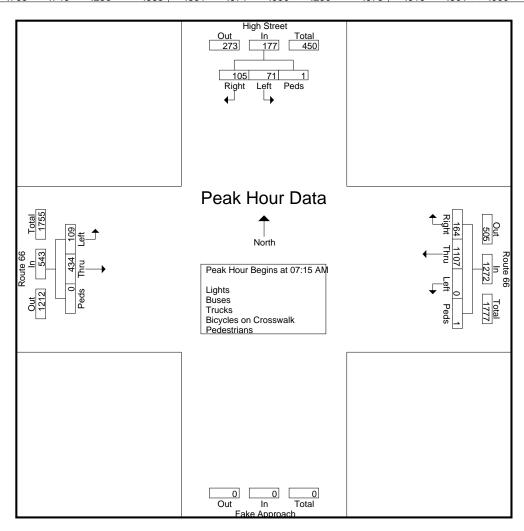

Kensington, Connecticut 06037 (860) 828-1693


File Name : 17237 Site Code : 17237 Start Date : 4/26/2018

.908

Page No : 3

														,
		High \$	Street				Route 66	i			Rou	te 66		
		From	North				From Eas	t			From	West		
Start Time	Right	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analys	is From 07	MA 00:	to 08:45	AM - Peak	(1 of 1									
Peak Hour for Each	ch Approac	h Begin	s at:											_
	07:15 AM	_			07:15 AM					07:30 AM				
+0 mins.	28	24	1	53	36	285	0	0	321	116	34	0	150	
+15 mins.	37	16	0	53	42	284	0	0	326	118	21	0	139	
+30 mins.	22	16	0	38	46	277	0	0	323	103	23	0	126	
+45 mins.	18	15	0	33	40	261	0	1	302	105	25	0	130	
Total Volume	105	71	1	177	164	1107	0	1	1272	442	103	0	545	

% App. Total

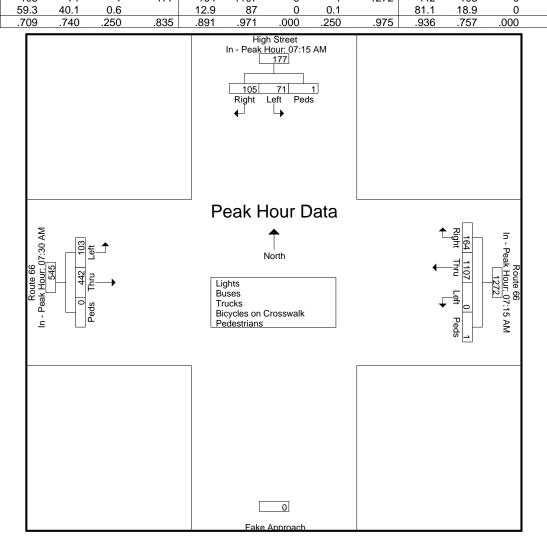

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at High Street Portland, Connecticut

File Name: 17238 Site Code: 17238

Start Date : 4/26/2018


Page No : 1

				ited Ligitio	Duoco		•	OII OIOOOW	unt i cuc				
		High	Street			Rout	te 66			Rou	te 66		
		From	North			From	East			From	West		
Start Time	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	23	41	1	65	29	165	0	194	287	34	0	321	580
04:15 PM	25	42	0	67	35	167	0	202	310	18	0	328	597
04:30 PM	33	27	0	60	44	159	0	203	297	26	1	324	587
04:45 PM	14	31	0	45	37	153	0	190	324	27	0	351	586
Total	95	141	1	237	145	644	0	789	1218	105	1	1324	2350
									_				
05:00 PM	20	41	2	63	48	152	0	200	303	28	1	332	595
05:15 PM	18	36	2	56	41	168	0	209	306	36	0	342	607
05:30 PM	12	27	0	39	26	124	0	150	260	26	2	288	477
05:45 PM	10	34	0	44	34	159	0	193	261	39	1	301	538
Total	60	138	4	202	149	603	0	752	1130	129	4	1263	2217
Grand Total	155	279	5	439	294	1247	0	1541	2348	234	5	2587	4567
Apprch %	35.3	63.6	1.1		19.1	80.9	0		90.8	9	0.2		
Total %	3.4	6.1	0.1	9.6	6.4	27.3	0	33.7	51.4	5.1	0.1	56.6	
Lights	152	273	0	425	287	1209	0	1496	2314	231	0	2545	4466
% Lights	98.1	97.8	0	96.8	97.6	97	0	97.1	98.6	98.7	0	98.4	97.8
Buses	2	0	0	2	0	3	0	3	4	1	0	5	10
% Buses	1.3	0	0	0.5	0	0.2	0	0.2	0.2	0.4	0	0.2	0.2
Trucks	1	6	0	7	7	35	0	42	30	2	0	32	81
% Trucks	0.6	2.2	0	1.6	2.4	2.8	0	2.7	1.3	0.9	0	1.2	1.8
Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0_
Pedestrians	0	0	5	5	0	0	0	0	0	0	5	5	10
% Pedestrians	0	0	100	1.1	0	0	0	0	0	0	100	0.2	0.2

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17238 Site Code : 17238 Start Date : 4/26/2018

		0	Street				te_66				te 66		
		From	North			From	n East			From	West		
Start Time	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis	s From 04:0	00 PM to	05:45 PI	M - Peak 1 d	of 1								
Peak Hour for Entir	e Intersect	ion Begi	ns at 04:3	30 PM									
04:30 PM	33	27	0	60	44	159	0	203	297	26	1	324	587
04:45 PM	14	31	0	45	37	153	0	190	324	27	0	351	586
05:00 PM	20	41	2	63	48	152	0	200	303	28	1	332	595
05:15 PM	18	36	2	56	41	168	0	209	306	36	0	342	607
Total Volume	85	135	4	224	170	632	0	802	1230	117	2	1349	2375
% App. Total	37.9	60.3	1.8		21.2	78.8	0		91.2	8.7	0.1		
PHF	.644	.823	.500	.889	.885	.940	.000	.959	.949	.813	.500	.961	.978

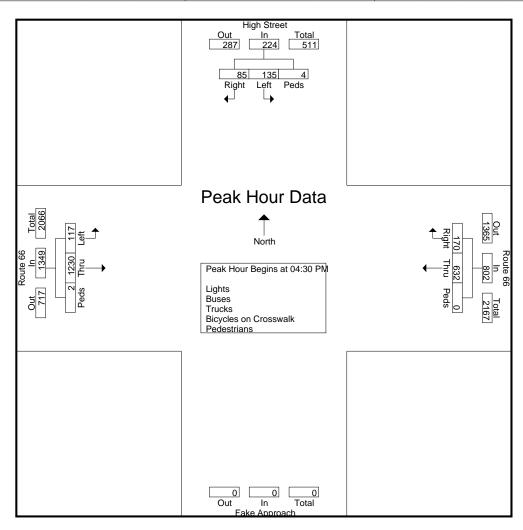


Kensington, Connecticut 06037 (860) 828-1693

File Name : 17238 Site Code : 17238 Start Date : 4/26/2018

			High S	Street		Rou	te 66			Rou	te 66		
			From	North		From	n East			From	West		
	Start Time	Right	Left	Peds App. To	tal Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
F	Peak Hour Analysis	s From 04:00	PM to	05:45 PM - Peak	1 of 1								
E	Peak Hour for Each	n Approach E	Begins a	t:									
		04.00 DM	•		04.00 DM				04.00 DM				

	04:00 PM				04:30 PM				04:30 PM			
+0 mins.	23	41	1	65	44	159	0	203	297	26	1	324
+15 mins.	25	42	0	67	37	153	0	190	324	27	0	351
+30 mins.	33	27	0	60	48	152	0	200	303	28	1	332
+45 mins.	14	31	0	45	41	168	0	209	306	36	0	342
Total Volume	95	141	1	237	170	632	0	802	1230	117	2	1349
% App. Total	40.1	59.5	0.4		21.2	78.8	0		91.2	8.7	0.1	
PHF	.720	.839	.250	.884	.885	.940	.000	.959	.949	.813	.500	.961

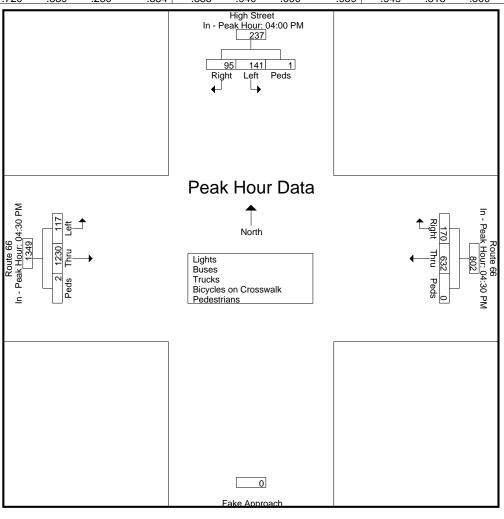

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Airline Avenue Portland, Connecticut

File Name: 17239 Site Code: 17239

Start Date : 4/26/2018


Page No : 1

			nieu- Lignis	Duscs			OII OIOSSW	ant i cuc				
	Rou	te 66										
	From	n East			From	South			From	West		
Thru	Left	Peds	App. Total	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Int. Total
275	2	0	277	3	8	0	11	0	81	0	81	369
327	5	0	332	7	9	0	16	4	115	0	119	467
308	8	0	316	4	10	0	14	0	139	0	139	469
324	5	0	329	4	11	0	15	5	114	0	119	463
1234	20	0	1254	18	38	0	56	9	449	0	458	1768
278	6	0	284	4	11	0	15	5	119	0	124	423
238	4	2	244	6	10	0	16	6	117	0	123	383
265	1	0	266	1	6	0	7	3	110	0	113	386
246	1_	0	247	3	4	0	7	4	134	0	138	392
1027	12	2	1041	14	31	0	45	18	480	0	498	1584
2261	32	2	2295	32	69	0	101	27	929	0	956	3352
98.5	1.4	0.1		31.7	68.3	0		2.8	97.2	0		
67.5	1_	0.1	68.5	1	2.1	0	3	0.8	27.7	0	28.5	
2205	29	0	2234	30	65	0	95	25	840	0	865	3194
97.5	90.6	0	97.3	93.8	94.2	0	94.1	92.6	90.4	0	90.5	95.3
14	2	0	16	1	3	0	4	1	7	0	8	28
0.6	6.2	0	0.7	3.1	4.3	0	4	3.7	0.8	0	0.8	0.8
	1	0	43	1	1	-		1	-	0		128
1.9	3.1	0	1.9	3.1	1.4		2	3.7	8.8	0	8.7	3.8
0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0_
0	0	_		0	0	0	0	0	0	0	0	2
0	0	100	0.1	0	0	0	0	0	0	0	0	0.1
	275 327 308 324 1234 278 238 265 246 1027 2261 98.5 67.5 2205 97.5 14 0.6 42 1.9 0	Rou From Thru Left 275 2 327 5 308 8 324 5 1234 20 278 6 238 4 265 1 246 1 1027 12 2261 32 98.5 1.4 67.5 1 2205 29 97.5 90.6 14 2 0.6 6.2 42 1 1.9 3.1 0 0 0 0 0 0 0 0 0	Route 66 From East Thru Left Peds 275 2 0 327 5 0 308 8 0 324 5 0 1234 20 0 278 6 0 238 4 2 265 1 0 1027 12 2 2261 32 2 98.5 1.4 0.1 67.5 1 0.1 2205 29 0 97.5 90.6 0 0 6.2 0 42 1 0 1.9 3.1 0 0 0 0 0 0 0 0 0 0	Route 66	Route 66	Route 66 From East From Thru Left Peds App. Total Right Left 275 2 0 277 3 8 327 5 0 332 7 9 308 8 0 316 4 10 324 5 0 329 4 11 1234 20 0 1254 18 38 278 6 0 284 4 11 238 4 2 244 6 10 265 1 0 266 1 6 246 1 0 247 3 4 1027 12 2 1041 14 31 2261 32 2 2295 32 69 98.5 1.4 0.1 31.7 68.3 67.5 1 0.1 68.5 <	Route 66 From East Airline Ave From South Thru Left Peds App. Total Right Left Peds 275 2 0 277 3 8 0 327 5 0 332 7 9 0 308 8 0 316 4 10 0 324 5 0 329 4 11 0 1234 20 0 1254 18 38 0 278 6 0 284 4 11 0 0 238 4 2 244 6 10 0 0 265 1 0 266 1 6 0 0 246 1 0 247 3 4 0 98.5 1.4 0.1 31.7 68.3 0 67.5 1 0.1 68.5 1 2.1<	Route 66 From East Airline Ave From South Thru Left Peds App. Total Right Left Peds App. Total 275 2 0 277 3 8 0 11 327 5 0 332 7 9 0 16 308 8 0 316 4 10 0 14 324 5 0 329 4 11 0 15 1234 20 0 1254 18 38 0 56 278 6 0 284 4 11 0 15 238 4 2 244 6 10 0 16 265 1 0 266 1 6 0 7 246 1 0 247 3 4 0 7 1027 12 2 1041 14 3	Route 66	Route 66	Route 66	Route 66

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17239 Site Code : 17239 Start Date : 4/26/2018

			te 66 n East				e Ave South				te 66 West		
Start Time	Thru	Left	Peds	App. Total	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Int. Total
Peak Hour Analysis	s From 07:0	00 AM to	08:45 AN	И - Peak 1 с	of 1				-				
Peak Hour for Entire	e Intersect	ion Begir	ns at 07:1										
07:15 AM	327	5	0	332	7	9	0	16	4	115	0	119	467
07:30 AM	308	8	0	316	4	10	0	14	0	139	0	139	469
07:45 AM	324	5	0	329	4	11	0	15	5	114	0	119	463
08:00 AM	278	6	0	284	4	11	0	15	5	119	0	124	423
Total Volume	1237	24	0	1261	19	41	0	60	14	487	0	501	1822
% App. Total	98.1	1.9	0		31.7	68.3	0		2.8	97.2	0		
PHF	.946	.750	.000	.950	.679	.932	.000	.938	.700	.876	.000	.901	.971

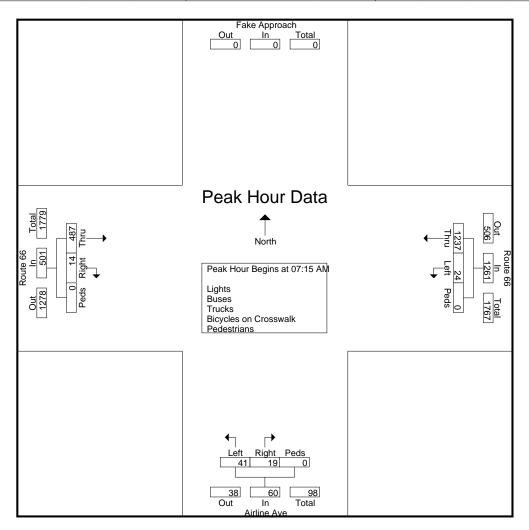


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17239 Site Code : 17239 Start Date : 4/26/2018

> > .908

			te 66 ı East				e Ave South				te 66 West		
Start Time	Thru	Left	Peds	App. Total	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Int. Total
Peak Hour Analysis	s From 07:0	0 AM to	08:45 Al	M - Peak 1	of 1				_				
Peak Hour for Each	n Approach	Begins a	at:										ī
	07:15 AM				07:15 AM				07:30 AM				
+0 mins.	327	5	0	332	7	9	0	16	0	139	0	139	
+15 mins.	308	8	0	316	4	10	0	14	5	114	0	119	
+30 mins.	324	5	0	329	4	11	0	15	5	119	0	124	
+45 mins.	278	6	0	284	4	11	0	15	6	117	0	123	
Total Volume	1237	24	0	1261	19	41	0	60	16	489	0	505	
% App. Total	98.1	1.9	0		31.7	68.3	0		3.2	96.8	0		

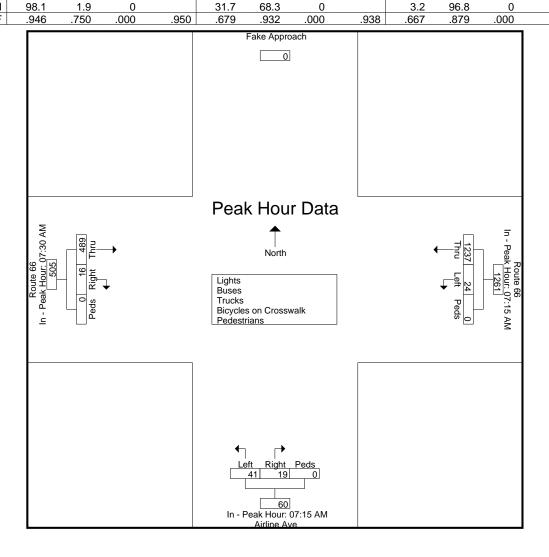

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Airline Avenue Portland, Connecticut

File Name: 17240 Site Code: 17240

Start Date : 4/26/2018


Page No : 1

				nieu- Lignis	- buses -		•	OH CIUSSW	aik - reue				
			te 66				e Ave				te 66		
		From	n East			From	South			From	West		
Start Time	Thru	Left	Peds	App. Total	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Int. Total
04:00 PM	191	2	0	193	7	12	0	19	11	328	0	339	551
04:15 PM	180	6	0	186	3	5	0	8	11	328	0	339	533
04:30 PM	193	5	0	198	10	17	0	27	2	323	0	325	550
04:45 PM	192	8	0	200	8	13	0	21	11	341	0	352	573
Total	756	21	0	777	28	47	0	75	35	1320	0	1355	2207
05:00 PM	200	5	0	205	10	10	0	20	5	330	0	335	560
05:15 PM	190	3	0	193	11	10	0	21	10	309	0	319	533
05:30 PM	153	5	0	158	9	7	0	16	5	273	0	278	452
05:45 PM	206	5	0	211	10	7	0	17	6	298	0	304	532
Total	749	18	0	767	40	34	0	74	26	1210	0	1236	2077
Grand Total	1505	39	0	1544	68	81	0	149	61	2530	0	2591	4284
Apprch %	97.5	2.5	0		45.6	54.4	0		2.4	97.6	0		
Total %	35.1	0.9	0	36	1.6	1.9	0	3.5	1.4	59.1	0	60.5	
Lights	1454	37	0	1491	67	78	0	145	61	2483	0	2544	4180
Lights	96.6	94.9	0	96.6	98.5	96.3	0	97.3	100	98.1	0	98.2	97.6
Buses	8	0	0	8	0	0	0	0	0	5	0	5	13
% Buses	0.5	0	0	0.5	0	0	0	0	0	0.2	0	0.2	0.3
Trucks	43	2	0	45	1	3	0	4	0	42	0	42	91
% Trucks	2.9	5.1	0	2.9	1.5	3.7	0	2.7	0	1.7	0	1.6	2.1
Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0_
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17240 Site Code : 17240 Start Date : 4/26/2018

		Rou	te 66			Airlin	e Ave			Rou	te 66		
		From	n East			From	South			From	West		
Start Time	Thru	Left	Peds	App. Total	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Int. Total
Peak Hour Analysis	s From 04:0	00 PM to	05:45 PI	M - Peak 1 d	of 1								
Peak Hour for Entir	e Intersect	ion Begir	ns at 04:1	15 PM									
04:15 PM	180	6	0	186	3	5	0	8	11	328	0	339	533
04:30 PM	193	5	0	198	10	17	0	27	2	323	0	325	550
04:45 PM	192	8	0	200	8	13	0	21	11	341	0	352	573
05:00 PM	200	5	0	205	10	10	0	20	5	330	0	335	560
Total Volume	765	24	0	789	31	45	0	76	29	1322	0	1351	2216
% App. Total	97	3	0		40.8	59.2	0		2.1	97.9	0		
PHF	.956	.750	.000	.962	.775	.662	.000	.704	.659	.969	.000	.960	.967

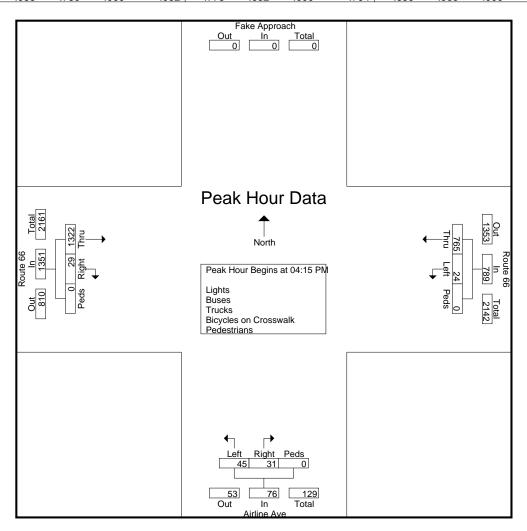


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17240 Site Code : 17240 Start Date : 4/26/2018

> > .962

			te_66				e Ave				te 66		
		From	East			From	South			From	West		
Start Time	Thru	Left	Peds	App. Total	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Int. Total
Peak Hour Analysis	s From 04:00	O PM to	05:45 PI	M - Peak 1 o	of 1								
Peak Hour for Each	h Approach I	Begins a	at:										1
	04:30 PM				04:30 PM				04:00 PM				
+0 mins.	193	5	0	198	10	17	0	27	11	328	0	339	
+15 mins.	192	8	0	200	8	13	0	21	11	328	0	339	
+30 mins.	200	5	0	205	10	10	0	20	2	323	0	325	
+45 mins.	190	3	0	193	11	10	0	21	11	341	0	352	
Total Volume	775	21	0	796	39	50	0	89	35	1320	0	1355	
% App. Total	97.4	2.6	0		43.8	56.2	0		2.6	97.4	0		

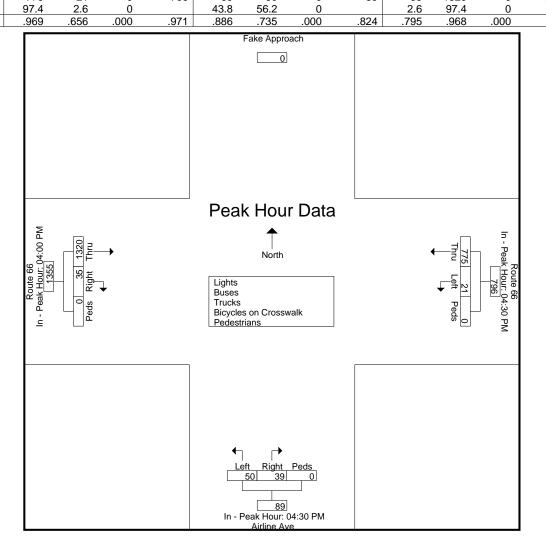

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Portland Shopping Ctr Dr Portland, Connecticut

File Name : 17241 Site Code : 17241 Start Date : 4/26/2018


Page No : 1

				G	roups r	rinted	ı- Lign	<u>ts - Bl</u>	ıses -	Trucks	- Bicy	cies or	1 Cros	<u>swaik</u>	- Pedes	strians	5				
	Portl	and S	hoppir	ng Cen	ter Dr		F	Route	66			Р	rivate	Dr			F	Route	66		
		Fı	rom No	orth			F	rom E	ast			Fre	om So	outh			F	rom W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
06:45 AM	1	0	1	0	2	2	250	0	0	252	0	0	0	0	0	0	90	7	0	97	351
Total	1	0	1	0	2	2	250	0	0	252	0	0	0	0	0	0	90	7	0	97	351
07:00 AM	0	0	2	0	2	1	281	0	0	282	0	0	0	0	0	0	78	2	0	80	364
07:15 AM	1	0	1	0	2	5	322	0	0	327	0	0	0	0	0	0	115	3	0	118	447
07:30 AM	0	0	1	0	1	2	329	0	0	331	0	0	0	0	0	0	124	7	0	131	463
07:45 AM	0	0	1	0	1	7	319	0	0	326	1	0	0	0	1	0	120	11	0	131	459
Total	1	0	5	0	6	15	1251	0	0	1266	1	0	0	0	1	0	437	23	0	460	1733
08:00 AM	2	0	4	0	6	16	266	0	0	282	0	0	0	0	0	0	117	4	0	121	409
08:15 AM	1	0	6	0	7	4	234	0	0	238	0	0	0	0	0	0	118	10	0	128	373
08:30 AM	2	0	3	0	5	6	264	0	0	270	0	0	0	0	0	1	107	11	0	119	394
_08:45 AM	4	0	0	0	4	7	239	0	0	246	0	0	0	0	0	0	117	11	0	128	378
Total	9	0	13	0	22	33	1003	0	0	1036	0	0	0	0	0	1	459	36	0	496	1554
09:00 AM	5	0	4	0	9	2	177	0	0	179	0	0	0	1	1	0	99	20	1	120	309
Grand Total	16	0	23	0	39	52	2681	0	0	2733	1	0	0	1	2	1	1085	86	1	1173	3947
Apprch %	41	0	59	0		1.9	98.1	0	0		50	0	0	50		0.1	92.5	7.3	0.1		
Total %	0.4	0	0.6	0	1	1.3	67.9	0	0	69.2	0	0	0	0	0.1	0	27.5	2.2	0	29.7	
Lights	13	0	21	0	34	47	2614														
% Lights	81.2	0	91.3	0	87.2	90.4	97.5	0	0	97.4	100	0	0	0	50	0	90.7	96.5	0	91	95.3
Buses	0	0	0	0	0	0	16	0	0	16	0	0	0	0	0	0	11	1	0	12	28
<u>% Buses</u>	0	0	0	0	0	0	0.6	0	0_	0.6	0	0_	0	0	0	0	1_	1.2	0	1_	0.7
Trucks	3	0	2	0	5	5	51	0	0	56	0	0	0	0	0	1	90	2	0	93	154
% Trucks	18.8	0	8.7	0	12.8	9.6	1.9	0	0	2	0	0	0	0	0	100	8.3	2.3	0	7.9	3.9
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	1	1	2
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	Õ	0	100	50	0	0	0	100	0.1	0.1

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17241 Site Code : 17241 Start Date : 4/26/2018

	Portl	and S	hoppir	ng Cer	nter Dr		F	Route	66			F	rivate	Dr			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	Analysi	s Fron	า 06:4	5 AM to	o 09:00	AM -	Peak 1	of 1													
Peak Hour fo	or Enti	re Inte	rsection	n Beg	ins at 0	7:15 A	M														
07:15 AM	1	0	1	0	2	5	322	0	0	327	0	0	0	0	0	0	115	3	0	118	447
07:30 AM	0	0	1	0	1	2	329	0	0	331	0	0	0	0	0	0	124	7	0	131	463
07:45 AM	0	0	1	0	1	7	319	0	0	326	1	0	0	0	1	0	120	11	0	131	459
08:00 AM	2	0	4	0	6	16	266	0	0	282	0	0	0	0	0	0	117	4	0	121	409
Total Volume	3	0	7	0	10	30	1236	0	0	1266	1	0	0	0	1	0	476	25	0	501	1778
_ % App. Total	30	0	70	0		2.4	97.6	0	0		100	0	0	0		0	95	5	0		
PHF	.375	.000	.438	.000	.417	.469	.939	.000	.000	.956	.250	.000	.000	.000	.250	.000	.960	.568	.000	.956	.960

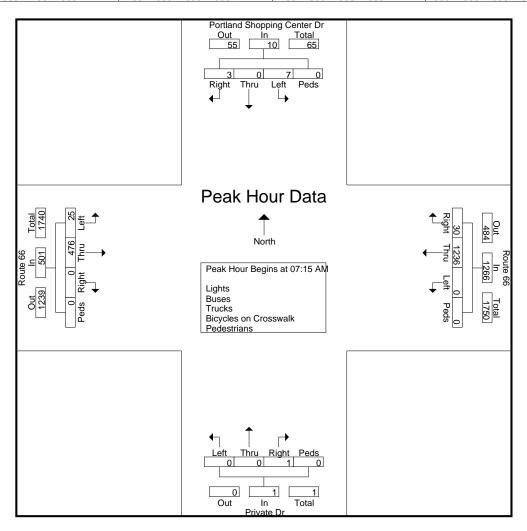


Kensington, Connecticut 06037 (860) 828-1693

File Name : 17241 Site Code : 17241 Start Date : 4/26/2018

	Portla	and Sh	noppir	ng Cer	nter Dr		Route 66 From East						rivate	Dr			F	Route	66	l	
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			F	rom W	est_		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour	eak Hour Analysis From 06:45 AM to 09:00 AM - Peak 1 of 1																				
Peak Hour	for Each	n Appr	oach l	Begins	at:																
	08:15 AM					07:00 AN	И				07:00 AM					07:30 AM				J	
+0 mins.	1	0	6	0	7	1	281	0	0	282	0	0	0	0	0	0	124	7	0	131	
+15 mins	2	0	3	0	5	5	322	0	0	327	0	0	0	0	0	0	120	11	0	131	[

	00.15 AIVI					07.00 741					07.00 AIV					07.00 741				
+0 mins.	1	0	6	0	7	1	281	0	0	282	0	0	0	0	0	0	124	7	0	131
+15 mins.	2	0	3	0	5	5	322	0	0	327	0	0	0	0	0	0	120	11	0	131
+30 mins.	4	0	0	0	4	2	329	0	0	331	0	0	0	0	0	0	117	4	0	121
+45 mins.	5	0	4	0	9	7	319	0	0	326	1	0	0	0	1	0	118	10	0	128
Total Volume	12	0	13	0	25	15	1251	0	0	1266	1	0	0	0	1	0	479	32	0	511
% App. Total	48	0	52	0		1.2	98.8	0	0		100	0	0	0		0	93.7	6.3	0	
PHF	.600	.000	.542	.000	.694	.536	.951	.000	.000	.956	.250	.000	.000	.000	.250	.000	.966	.727	.000	.975
										d Shoppi eak Hou 2										

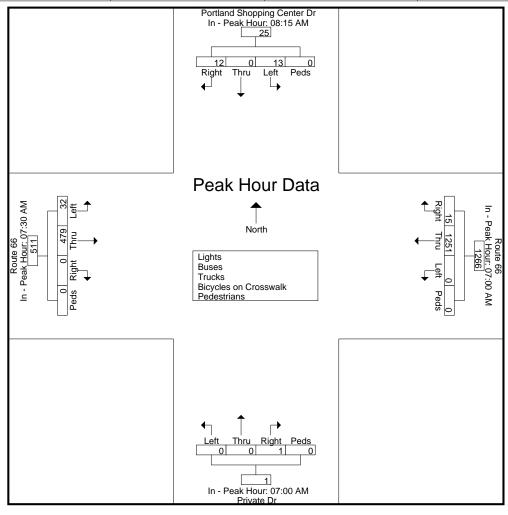

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Portland Shopping Ctr Dr Portland, Connecticut

File Name: 17242 Site Code: 17242

Start Date : 4/26/2018


Page No : 1

	D	l I O	la a a a la		tan Da	1 111110				TTUCKS	Dicyc				Leacsii	iario		5 4	00		ſ
	Port	land S			iter Dr			Route_0					rivate					Route			ł
			om No					rom E					om Sc					rom W			
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	11	0	24	0	35	14	154	0	0	168	0	0	1	0	1	0	271	43	0	314	518
04:15 PM	10	0	19	0	29	23	168	0	0	191	0	0	0	0	0	0	292	44	0	336	556
04:30 PM	12	0	28	0	40	21	163	0	0	184	0	0	0	0	0	0	282	40	0	322	546
04:45 PM	16	0	31	0	47	19	165	0	0	184	0	0	0	0	0	0	307	38	1	346	577
Total	49	0	102	0	151	77	650	0	0	727	0	0	1	0	1	0	1152	165	1	1318	2197
05:00 PM	10	0	28	0	38	18	173	0	0	191	0	0	0	2	2	0	317	32	0	349	580
05:15 PM	6	0	24	0	30	12	175	0	0	187	0	0	0	1	1	0	312	36	1	349	567
05:30 PM	10	0	27	0	37	22	139	0	0	161	0	0	0	0	0	0	262	31	0	293	491
05:45 PM	10	0	18	0	28	21	172	0	0	193	0	0	0	0	0	0	264	39	0	303	524
Total	36	0	97	0	133	73	659	0	0	732	0	0	0	3	3	0	1155	138	1	1294	2162
Grand Total	85	0	199	0	284	150	1309	0	0	1459	0	0	1	3	4	0	2307	303	2	2612	4359
Apprch %	29.9	0	70.1	0		10.3	89.7	0	0		0	0	25	75		0	88.3	11.6	0.1		
Total %	1.9	0	4.6	0	6.5	3.4	30	0	0	33.5	0	0	0	0.1	0.1	0	52.9	7	0	59.9	
Lights	81	0	199	0	280	147	1260	0	0	1407	0	0	1	0	1	0	2260	299	0	2559	4247
% Lights	95.3	0	100	0	98.6	98	96.3	0	0	96.4	0	0	100	0	25	0	98	98.7	0	98	97.4
Buses	0	0	0	0	0	0	6	0	0	6	0	0	0	0	0	0	6	0	0	6	12
% Buses	0	0	0	0	0	0	0.5	0	0	0.4	0	0	0	0	0	0	0.3	0	0	0.2	0.3
Trucks	4	0	0	0	4	3	43	0	0	46	0	0	0	0	0	0	41	4	0	45	95
% Trucks	4.7	0	0	0	1.4	2	3.3	0	0	3.2	0	0	0	0	0	0	1.8	1.3	0	1.7	2.2
Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	1	1	2
% Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0	33.3	25	0	0	0	50	0	0_
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	2	2	0	0	0	1	1	3
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	66.7	50	0	0	0	50	0	0.1

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17242 Site Code : 17242 Start Date : 4/26/2018

	Port	land S	hoppir	ng Cen	ter Dr		F	Route	66			F	rivate	Dr			ı	Route	66		
		Fı	om No	orth			F	rom E	ast			Fr	om Sc	outh			F	rom W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysis	From	04:00	PM to	05:45 PI	M - Pea	ak 1 of	1													
Peak Hour fo	r Entire	e Inters	section	Begin	s at 04:3	30 PM															
04:30 PM	12	0	28	0	40	21	163	0	0	184	0	0	0	0	0	0	282	40	0	322	546
04:45 PM	16	0	31	0	47	19	165	0	0	184	0	0	0	0	0	0	307	38	1	346	577
05:00 PM	10	0	28	0	38	18	173	0	0	191	0	0	0	2	2	0	317	32	0	349	580
05:15 PM	6	0	24	0	30	12	175	0	0	187	0	0	0	1	1	0	312	36	1	349	567
Total Volume	44	0	111	0	155	70	676	0	0	746	0	0	0	3	3	0	1218	146	2	1366	2270
% App. Total	28.4	0	71.6	0		9.4	90.6	0	0		0	0	0	100		0	89.2	10.7	0.1		
PHF	688	000	895	000	824	833	966	000	000	976	000	000	000	375	375	000	961	913	500	979	978

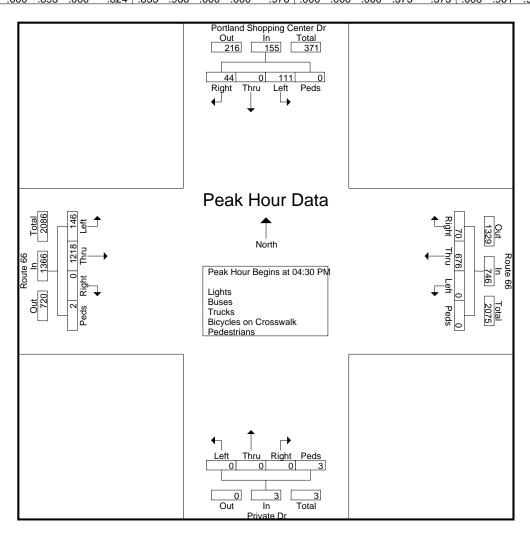


Kensington, Connecticut 06037 (860) 828-1693

> File Name: 17242 Site Code: 17242 Start Date : 4/26/2018

	Port	land S	hoppir	ng Cer	nter Dr		F	Route	66			F	rivate	Dr			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			F	rom W	/est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalveie	From	$04 \cdot 00$	PM to	05:45 PI	M - Pa	ak 1 ∩f	1													

Peak Hour fo	r Each	Appro	ach Be	egins at	:															
	04:30 PM					04:15 PN	Л				04:30 PN	4				04:30 PN	1			
+0 mins.	12	0	28	0	40	23	168	0	0	191	0	0	0	0	0	0	282	40	0	322
+15 mins.	16	0	31	0	47	21	163	0	0	184	0	0	0	0	0	0	307	38	1	346
+30 mins.	10	0	28	0	38	19	165	0	0	184	0	0	0	2	2	0	317	32	0	349
+45 mins.	6	0	24	0	30	18	173	0	0	191	0	0	0	1	1	0	312	36	1	349
Total Volume	44	0	111	0	155	81	669	0	0	750	0	0	0	3	3	0	1218	146	2	1366
% App. Total	28.4	0	71.6	0		10.8	89.2	0	0		0	0	0	100		0	89.2	10.7	0.1	
PHF	.688	.000	.895	.000	.824	.880	.967	.000	.000	.982	.000	.000	.000	.375	.375	.000	.961	.913	.500	.979

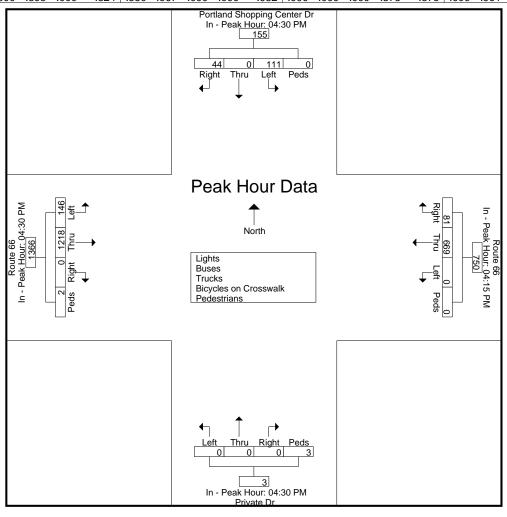

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Grove St/Johnson Farm Rd Portland, Connecticut

File Name : 17243 Site Code : 17243

Start Date : 4/26/2018


Page No : 1

					i oupo i	HILLOC	z Ligii	10 0	1000	TTUONO	, Dicy	OICO O	11 0100	ovvan	ı cuc	Juliania	<u>' </u>				
		Johns	on Far	m Roa	ad		F	Route	66			Gr	ove S	treet			F	Route	66		
		Fı	rom No	orth			F	rom E	ast			Fı	rom So	outh			F	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
07:00 AM	1	0	0	0	1	1	298	1	0	300	4	0	3	0	7	2	84	3	0	89	397
07:15 AM	0	0	0	0	0	0	314	0	0	314	3	0	6	0	9	2	116	1	0	119	442
07:30 AM	3	0	3	0	6	0	328	2	1	331	1	0	5	0	6	2	134	1	0	137	480
07:45 AM	6	0	3	0	9	0	315	0	0	315	4	0	4	0	8	7	102	1_	0	110	442
Total	10	0	6	0	16	1	1255	3	1	1260	12	0	18	0	30	13	436	6	0	455	1761
08:00 AM	2	0	0	0	2	1	261	1	0	263	1	0	4	0	5	0	115	2	0	117	387
08:15 AM	1	0	2	0	3	1	228	0	0	229	1	0	6	0	7	4	122	2	0	128	367
08:30 AM	1	0	2	0	3	1	276	1	0	278	6	1	3	0	10	3	109	2	0	114	405
08:45 AM	2	0	2	0	4	2	216	0	0	218	1	0	1	0	2	2	103	0	0	105	329
Total	6	0	6	0	12	5	981	2	0	988	9	1	14	0	24	9	449	6	0	464	1488
Grand Total	16	0	12	0	28	6	2236	5	1	2248	21	1	32	0	54	22	885	12	0	919	3249
Apprch %	57.1	0	42.9	0		0.3	99.5	0.2	0		38.9	1.9	59.3	0		2.4	96.3	1.3	0		
Total %	0.5	0	0.4	0	0.9	0.2	68.8	0.2	0	69.2	0.6	0	1	0	1.7	0.7	27.2	0.4	0	28.3	
Lights	15	0	11	0	26	5	2180														
% Lights	93.8	0	91.7	0	92.9	83.3	97.5	100	0	97.4	81	0	96.9	0	88.9	90.9	90.8	83.3	0	90.8	95.4
Buses	1	0	0	0	1	0	12	0	0	12	1	0	1	0	2	0	8	1	0	9	24
% Buses	6.2	0	0	0	3.6	0	0.5	0	0	0.5	4.8	0	3.1	0	3.7	0	0.9	8.3	0	1	0.7
Trucks	0	0	1	0	1	1	44	0	0	45	3	1	0	0	4	2	73	1	0	76	126
<u>% Trucks</u>	0	0	8.3	0_	3.6	16.7	2	0	0_	2	14.3	100	0	0	7.4	9.1	8.2	8.3	0_	8.3	3.9
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	0		1	0	0	0	0	0	0	0	0	0	0	1
	0	0	0	0	0	0	0	0	100	0	0	0	0	0	0	0	0	0	0	0	1
% Pedestrians	1 0	U	U	U	U		U	U	100	U	1 0	U	U	U	U	ı U	U	U	U	U	U

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17243 Site Code : 17243 Start Date : 4/26/2018

		Johnso	on Far	m Roa	ad		F	Route	66			Gr	ove St	reet			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	n 07:00	O AM to	08:45	AM -	Peak 1	of 1													
Peak Hour fo	or Entii	re Inte	rsection	n Beg	ins at 0	7:00 A	M														
07:00 AM	1	0	0	0	1	1	298	1	0	300	4	0	3	0	7	2	84	3	0	89	397
07:15 AM	0	0	0	0	0	0	314	0	0	314	3	0	6	0	9	2	116	1	0	119	442
07:30 AM	3	0	3	0	6	0	328	2	1	331	1	0	5	0	6	2	134	1	0	137	480
07:45 AM	6	0	3	0	9	0	315	0	0	315	4	0	4	0	8	7	102	1	0	110	442
Total Volume	10	0	6	0	16	1	1255	3	1	1260	12	0	18	0	30	13	436	6	0	455	1761
% App. Total	62.5	0	37.5	0		0.1	99.6	0.2	0.1		40	0	60	0		2.9	95.8	1.3	0		
PHF	.417	.000	.500	.000	.444	.250	.957	.375	.250	.952	.750	.000	.750	.000	.833	.464	.813	.500	.000	.830	.917

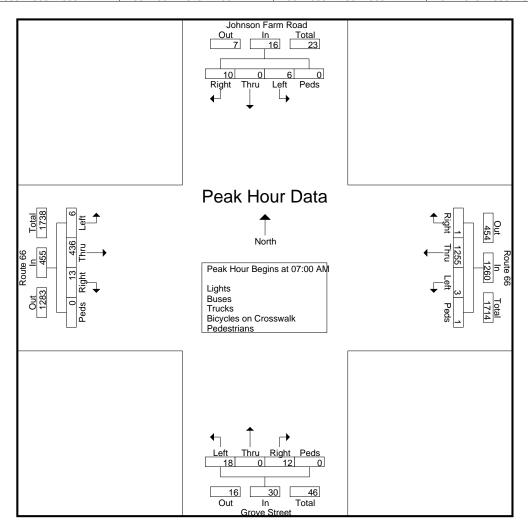


Kensington, Connecticut 06037 (860) 828-1693

File Name : 17243 Site Code : 17243 Start Date : 4/26/2018

	J	Johnsc	on Far	m Roa	ad		F	Route	66			Gro	ove St	reet			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om Sc	outh			Fı	om W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s From	07:0	0 AM t	o 08:45	AM - I	Peak 1	of 1													

Peak Hour fo	or Each	n Appı	oach l	<u>Begins</u>	at:															
	07:30 AM					07:00 AN	1				07:00 AN	1				07:30 AN	1			
+0 mins.	3	0	3	0	6	1	298	1	0	300	4	0	3	0	7	2	134	1	0	137
+15 mins.	6	0	3	0	9	0	314	0	0	314	3	0	6	0	9	7	102	1	0	110
+30 mins.	2	0	0	0	2	0	328	2	1	331	1	0	5	0	6	0	115	2	0	117
+45 mins.	1	0	2	0	3	0	315	0	0	315	4	0	4	0	8	4	122	2	0	128
Total Volume	12	0	8	0	20	1	1255	3	1	1260	12	0	18	0	30	13	473	6	0	492
% App. Total	60	0	40	0		0.1	99.6	0.2	0.1		40	0	60	0		2.6	96.1	1.2	0	
PHF	.500	.000	.667	.000	.556	.250	.957	.375	.250	.952	.750	.000	.750	.000	.833	.464	.882	.750	.000	.898

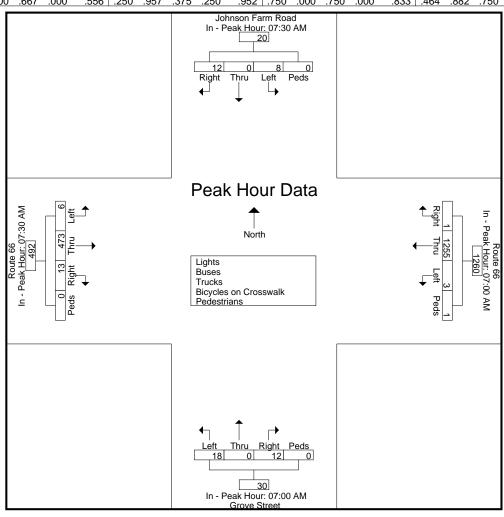

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Grove St/Johnson Farm Rd Portland, Connecticut

File Name: 17244 Site Code: 17244

Start Date : 4/26/2018


Page No : 1

							HILLOC	Ligii	13 0	1303	TTUCKS	Dicy				- I cuc	Striario					
			Johnso			ad			Route				_	ove St				-	Route			
			Fr	om No	orth			F	rom E	ast			Fr	om So	puth			Fr	rom W	est		
	art Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04	1:00 PM	4	0	0	0	4	1	153	3	0	157	3	0	0	0	3	9	305	7	0	321	485
04	1:15 PM	3	0	0	0	3	2	188	4	0	194	5	0	2	0	7	6	293	4	0	303	507
04	1:30 PM	10	0	1	0	11	1	181	2	0	184	3	0	3	0	6	7	322	3	0	332	533
04	1:45 PM	3	0	1	1_	5	2	166	3	0	171	6	0	3	0	9	8	322	3	0	333	518
	Total	20	0	2	1	23	6	688	12	0	706	17	0	8	0	25	30	1242	17	0	1289	2043
05	5:00 PM	3	1	0	0	4	0	184	3	0	187	5	0	4	0	9	8	336	4	0	348	548
05	:15 PM	6	0	0	0	6	0	158	2	0	160	1	0	7	0	8	9	288	9	0	306	480
05	:30 PM	2	0	1	0	3	0	161	6	0	167	4	1	2	0	7	7	274	4	0	285	462
05	:45 PM	4	0	1	0	5	0	174	3	0	177	3	1	9	0	13	10	277	4	0	291	486
	Total	15	1	2	0	18	0	677	14	0	691	13	2	22	0	37	34	1175	21	0	1230	1976
Gra	and Total	35	1	4	1	41	6	1365	26	0	1397	30	2	30	0	62	64	2417	38	0	2519	4019
Ap	prch %	85.4	2.4	9.8	2.4		0.4	97.7	1.9	0		48.4	3.2	48.4	0		2.5	96	1.5	0		
	Total %	0.9	0	0.1	0	1	0.1	34	0.6	0	34.8	0.7	0	0.7	0	1.5	1.6	60.1	0.9	0	62.7	
	Lights	34	0	4	0	38	6	1319										2370				
%	6 Lights	97.1	0	100	0	92.7	100	96.6	96.2	0	96.6	100	100	90	0	95.2	93.8	98.1	100	0	98	97.4
	Buses	0	0	0	0	0	0	6	0	0	6	0	0	0	0	0	0	6	0	0	6	12
9	6 Buses	0	0	0	0	0	0	0.4	0	0	0.4	0	0	0	0	0	0	0.2	0	0_	0.2	0.3
	Trucks	1	1	0	0	2	0	40	1	0	41	0	0	3	0	3	4	41	0	0	45	91
%	Trucks	2.9	100	0	0_	4.9	0	2.9	3.8	0_	2.9	0	0	10	0_	4.8	6.2	1.7	0	0_	1.8	2.3
Bicyc	les on Crosswalk																					
	% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
- Doc	destrians	0	0	0		- 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
		0	0	0	100	2.4	0	0	0	0	0	0	0	0	0	0	0	0	-	0	0	
% P	Pedestrians	l U	U	U	100	∠.4	U	U	U	U	U	l U	U	U	U	U	l U	U	0	U	U	l U

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17244 Site Code : 17244 Start Date : 4/26/2018

		Johnso	n Far	m Roa	ad		F	Route	66			Gr	ove S	treet			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	า 04:00	O PM to	o 05:45	PM -	Peak 1	of 1													
Peak Hour fo	or Entii	re Inte	rsectio	n Beg	ins at 0	4:15 P	M														
04:15 PM	3	0	0	0	3	2	188	4	0	194	5	0	2	0	7	6	293	4	0	303	507
04:30 PM	10	0	1	0	11	1	181	2	0	184	3	0	3	0	6	7	322	3	0	332	533
04:45 PM	3	0	1	1	5	2	166	3	0	171	6	0	3	0	9	8	322	3	0	333	518
05:00 PM	3	1	0	0	4	0	184	3	0	187	5	0	4	0	9	8	336	4	0	348	548
Total Volume	19	1	2	1	23	5	719	12	0	736	19	0	12	0	31	29	1273	14	0	1316	2106
_ % App. Total	82.6	4.3	8.7	4.3		0.7	97.7	1.6	0		61.3	0	38.7	0		2.2	96.7	1.1	0		
PHF	.475	.250	.500	.250	.523	.625	.956	.750	.000	.948	.792	.000	.750	.000	.861	.906	.947	.875	.000	.945	.961

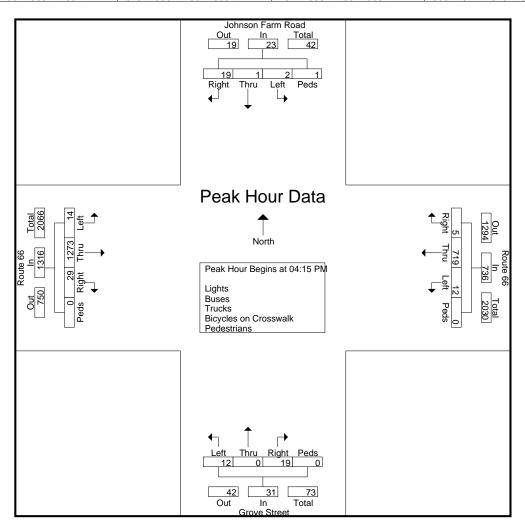


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17244 Site Code : 17244 Start Date : 4/26/2018

		Johnso	on Far	m Roa	ad		F	Route	66			Gr	ove St	treet			F	Route	66		i
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fr	om W	/est		İ
Start Time	e Right Thru Left Peds App. Total Right Thru Left Peds App. T											Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s From	า 04:0	0 PM t	o 05:45	PM - I	Peak 1	of 1													
Peak Hour fo	or Eacl	h Appr	oach	Begins	at:																

I Galt I loai I	<u> </u>	117 (PP)	oaoii i	<u>Doginio</u>	ui.															
	04:30 PM	1		_		04:15 PM	1				05:00 PM	Į.				04:30 PM	1			
+0 mins.	10	0	1	0	11	2	188	4	0	194	5	0	4	0	9	7	322	3	0	332
+15 mins.	3	0	1	1	5	1	181	2	0	184	1	0	7	0	8	8	322	3	0	333
+30 mins.	3	1	0	0	4	2	166	3	0	171	4	1	2	0	7	8	336	4	0	348
+45 mins.	6	0	0	0	6	0	184	3	0	187	3	1	9	0	13	9	288	9	0	306
Total Volume	22	1	2	1	26	5	719	12	0	736	13	2	22	0	37	32	1268	19	0	1319
% App. Total	84.6	3.8	7.7	3.8		0.7	97.7	1.6	0		35.1	5.4	59.5	0		2.4	96.1	1.4	0	
PHF	.550	.250	.500	.250	.591	.625	.956	.750	.000	.948	.650	.500	.611	.000	.712	.889	.943	.528	.000	.948

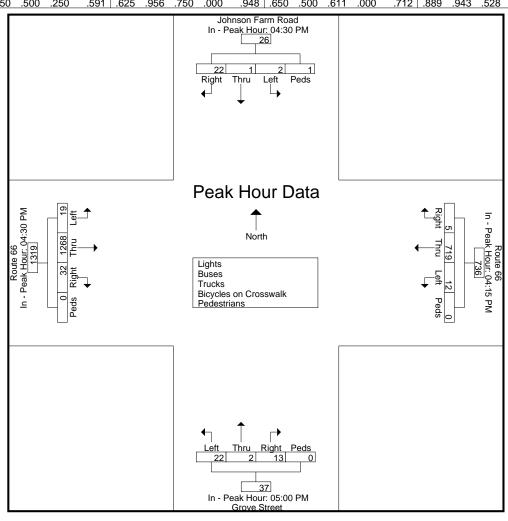

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Gospel Lane Portland, Connecticut

File Name: 17245 Site Code: 17245

Start Date : 4/26/2018


Page No : 1

	Gospel Lane Route 66 Route 66												
			el Lane				te 66						
		From	North			From	East			From	West		
Start Time	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
07:00 AM	22	16	0	38	49	231	0	280	57	16	0	73	391
07:15 AM	32	27	0	59	61	257	0	318	91	20	0	111	488
07:30 AM	30	19	0	49	44	294	0	338	95	21	0	116	503
07:45 AM	20	19	0	39	62	210	0	272	97	15	0	112	423
Total	104	81	0	185	216	992	0	1208	340	72	0	412	1805
08:00 AM	28	18	0	46	29	202	0	231	97	19	0	116	393
08:15 AM	19	23	0	42	37	203	0	240	99	16	0	115	397
08:30 AM	21	25	0	46	31	231	0	262	93	14	0	107	415
08:45 AM	13	12	0	25	41	186	0	227	104	17	0	121	373
Total	81	78	0	159	138	822	0	960	393	66	0	459	1578
Grand Total	185	159	0	344	354	1814	0	2168	733	138	0	871	3383
Apprch %	53.8	46.2	0		16.3	83.7	0		84.2	15.8	0		
 Total %	5.5	4.7	0	10.2	10.5	53.6	0	64.1	21.7	4.1	0	25.7	
Lights	180	140	0	320	326	1767	0	2093	654	128	0	782	3195
% Lights	97.3	88.1	0	93	92.1	97.4	0	96.5	89.2	92.8	0	89.8	94.4
Buses	0	9	0	9	9	9	0	18	7	0	0	7	34
% Buses	0	5.7	0	2.6	2.5	0.5	0	0.8	1	0	0	0.8	1
Trucks	5	10	0	15	19	38	0	57	72	10	0	82	154
% Trucks	2.7	6.3	0	4.4	5.4	2.1	0	2.6	9.8	7.2	0	9.4	4.6
Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17245 Site Code : 17245 Start Date : 4/26/2018

			el Lane				te 66						
		From	North			From	n East		From West				
Start Time	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1													
Peak Hour for Entire	e Intersecti	on Begir	ns at 07:1	I5 AM									
07:15 AM	32	27	0	59	61	257	0	318	91	20	0	111	488
07:30 AM	30	19	0	49	44	294	0	338	95	21	0	116	503
07:45 AM	20	19	0	39	62	210	0	272	97	15	0	112	423
08:00 AM	28	18	0	46	29	202	0	231	97	19	0	116	393
Total Volume	110	83	0	193	196	963	0	1159	380	75	0	455	1807
% App. Total	57	43	0		16.9	83.1	0		83.5	16.5	0		
PHF	.859	.769	.000	.818	.790	.819	.000	.857	.979	.893	.000	.981	.898

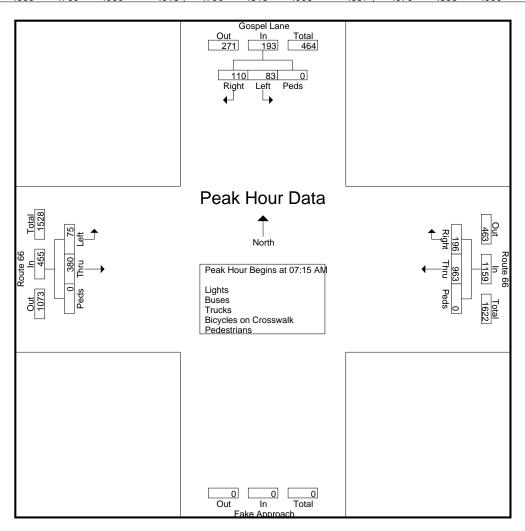


Kensington, Connecticut 06037 (860) 828-1693

File Name : 17245 Site Code : 17245 Start Date : 4/26/2018

			Gospe	el Lane			Rou	te 66			I			
			From			From	n East			<u> </u>				
	Start Time	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1														
Peak Hour for Each Approach Begins at:														
		07:15 AM	l			07:00 AM				07:30 AM	I			

	07:15 AM	_			07:00 AM				07:30 AM			
+0 mins.	32	27	0	59	49	231	0	280	95	21	0	116
+15 mins.	30	19	0	49	61	257	0	318	97	15	0	112
+30 mins.	20	19	0	39	44	294	0	338	97	19	0	116
+45 mins.	28	18	0	46	62	210	0	272	99	16	0	115
Total Volume	110	83	0	193	216	992	0	1208	388	71	0	459
% App. Total	57	43	0		17.9	82.1	0		84.5	15.5	0	
PHF	.859	.769	.000	.818	.871	.844	.000	.893	.980	.845	.000	.989

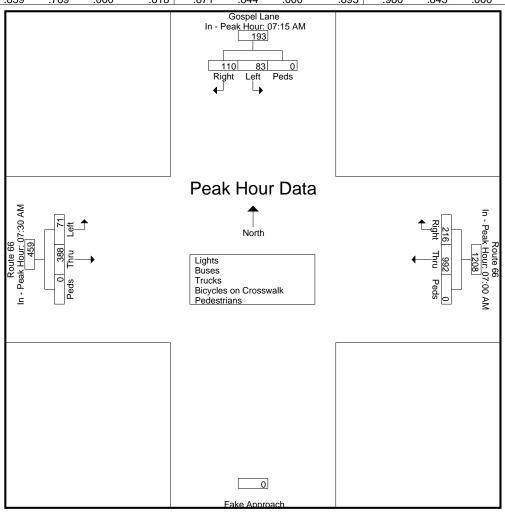

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Gospel Lane Portland, Connecticut

File Name: 17246 Site Code: 17246

Start Date : 4/26/2018


Page No : 1

	Groups Printed- Lights - Buses - Trucks - Bicycles on Crosswalk - Pedestrians												
		Gospe	l Lane	-		Rout	e 66			Rout	te 66		
		From	North			From	East			From	West		
Start Time	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	20	27	0	47	25	140	0	165	238	33	0	271	483
04:15 PM	24	33	0	57	37	136	0	173	265	35	0	300	530
04:30 PM	21	32	0	53	35	149	0	184	244	45	0	289	526
04:45 PM	16	36	0	52	30	152	0	182	302	36	0	338	572
Total	81	128	0	209	127	577	0	704	1049	149	0	1198	2111
05:00 PM	24	36	0	60	27	144	0	171	295	40	0	335	566
05:15 PM	27	35	0	62	26	128	0	154	290	25	0	315	531
05:30 PM	29	28	0	57	28	123	0	151	246	25	0	271	479
05:45 PM	28	43	0	71	23	141	0	164	225	40	0	265	500
Total	108	142	0	250	104	536	0	640	1056	130	0	1186	2076
Grand Total	189	270	0	459	231	1113	0	1344	2105	279	0	2384	4187
Apprch %	41.2	58.8	0		17.2	82.8	0		88.3	11.7	0		
Total %	4.5	6.4	0	11	5.5	26.6	0	32.1	50.3	6.7	0	56.9	
Lights	185	263	0	448	224	1072	0	1296	2070	278	0	2348	4092
% Lights	97.9	97.4	0	97.6	97	96.3	0	96.4	98.3	99.6	0	98.5	97.7
Buses	1	1	0	2	0	6	0	6	6	1	0	7	15
% Buses	0.5	0.4	0	0.4	0	0.5	0	0.4	0.3	0.4	0	0.3	0.4
Trucks	3	6	0	9	7	35	0	42	29	0	0	29	80
% Trucks	1.6	2.2	0	2	3	3.1	0	3.1	1.4	0	0	1.2	1.9
Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bicycles on Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0_
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17246 Site Code : 17246 Start Date : 4/26/2018

			el Lane				te 66						
		From	North			From East				From West			
Start Time	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1													
Peak Hour for Entir	e Intersect	ion Begii	ns at 04:3	30 PM									
04:30 PM	21	32	0	53	35	149	0	184	244	45	0	289	526
04:45 PM	16	36	0	52	30	152	0	182	302	36	0	338	572
05:00 PM	24	36	0	60	27	144	0	171	295	40	0	335	566
05:15 PM	27	35	0	62	26	128	0	154	290	25	0	315	531
Total Volume	88	139	0	227	118	573	0	691	1131	146	0	1277	2195
% App. Total	38.8	61.2	0		17.1	82.9	0		88.6	11.4	0		
PHF	.815	.965	.000	.915	.843	.942	.000	.939	.936	.811	.000	.945	.959

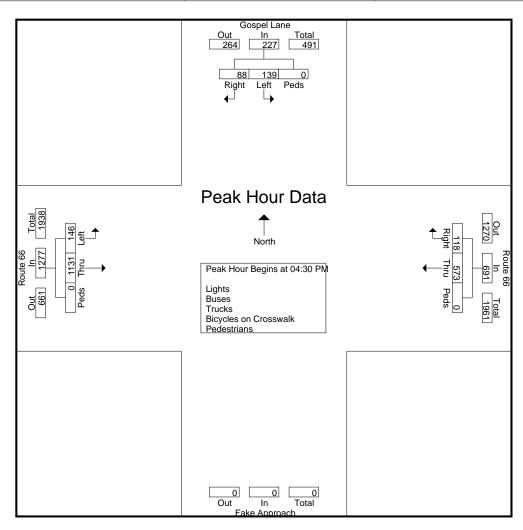


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17246 Site Code : 17246 Start Date : 4/26/2018

Page No : 3

		Gospe	l Lane			Rou	ıte 66			Rou	te 66	ļ	
		From	North			Fron	n East			From	West		
Start Time	Right	Left	Peds	App. Total	Right	Thru	Peds	App. Total	Thru	Left	Peds	App. Total	Int. Total
Peak Hour Analysis	From 04:0	0 PM to	05:45 P	M - Peak 1 c	of 1								
Peak Hour for Each	Approach	Begins a	at:										

04:30 PM 05:00 PM 04:15 PM +0 mins. +15 mins. +30 mins. +45 mins. **Total Volume** 43.2 56.8 18.2 88.6 % App. Total 11.4 81.8 PHF .945

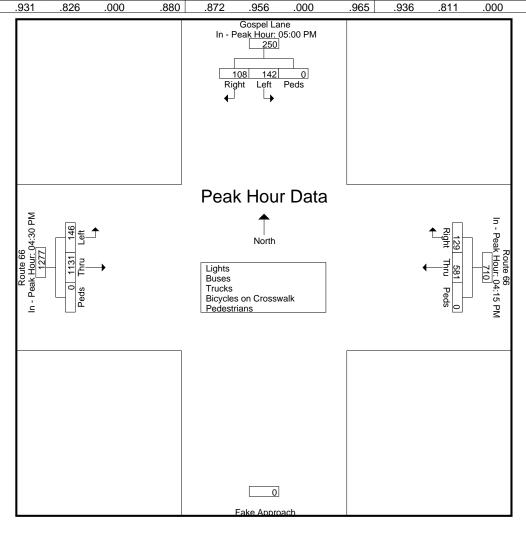

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Middle Haddam Rd/Payne Blvd Portland, Connecticut

Site Code: 17247

File Name: 17247

Start Date : 4/26/2018


Page No : 1

					dam R	d			Route					ayne E					Route			
			Fr	rom N	orth			F	rom E				Fr	om So				Fı	rom W	est_		
Į	Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
	07:00 AM	23	0	2	0	25	0	259	0	0	259	2	0	7	0	9	0	66	2	0	68	361
	07:15 AM	26	0	0	0	26	0	275	0	0	275	2	0	7	0	9	1	99	7	0	107	417
	07:30 AM	23	0	0	0	23	0	294	0	0	294	1	0	10	0	11	1	101	8	0	110	438
	07:45 AM	28	0	3	0	31	0	277	2	0	279	2	0	4	0	6	0	121	1	0	122	438
	Total	100	0	5	0	105	0	1105	2	0	1107	7	0	28	0	35	2	387	18	0	407	1654
	08:00 AM	25	0	0	0	25	0	212	0	0	212	0	0	1	0	1	0	102	2	0	104	342
	08:15 AM	17	0	0	0	17	1	208	0	0	209	0	0	5	0	5	0	113	6	0	119	350
	08:30 AM	21	0	0	0	21	0	238	1	0	239	0	0	5	0	5	1	98	4	0	103	368
	08:45 AM	18	0	1	0	19	0	195	0	0	195	0	0	2	0	2	0	107	8	0	115	331
•	Total	81	0	1	0	82	1	853	1	0	855	0	0	13	0	13	1	420	20	0	441	1391
	Grand Total	181	0	6	0	187	1	1958	3	0	1962	7	0	41	0	48	3	807	38	0	848	3045
	Apprch %	96.8	0	3.2	0		0.1	99.8	0.2	0		14.6	0	85.4	0		0.4	95.2	4.5	0		
	Total %	5.9	0	0.2	0	6.1	0	64.3	0.1	0	64.4	0.2	0	1.3	0	1.6	0.1	26.5	1.2	0	27.8	
	Lights	178	0	4	0	182	1	1906														
	% Lights	98.3	0	66.7	0	97.3	100	97.3	100	0	97.3	100	0	97.6	0	97.9	66.7	91.7	97.4	0	91.9	95.8
	Buses	2	0	2	0	4	0	11	0	0	11	0	0	0	0	0	1	4	1	0	6	21
	% Buses	1.1	0	33.3	0	2.1	0	0.6	0	0	0.6	0	0	0	0	0	33.3	0.5	2.6	0	0.7	0.7
	Trucks	1	0	0	0	1	0	41	0	0	41	0	0	1	0	1	0	63	0	0	63	106
	% Trucks	0.6	0	0	0	0.5	0	2.1	0	0	2.1	0	0	2.4	0	2.1	0	7.8	0	0	7.4	3.5
	Bicycles on Crosswalk																					
	% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Crosswalk						_															
	Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	% Pedestrians	1 0	Ω	Ω	Ω	0	0	Ω	Ω	Ω	0	1 0	Ω	Ω	Ω	0	0	Ω	Ω	Ω	0	0

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17247 Site Code : 17247 Start Date : 4/26/2018

		Middle	Hado	dam R	d		F	Route	66			P	ayne E	Blvd			F	Route	66]
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	/est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s From	n 07:00	O AM to	o 08:45	AM -	Peak 1	of 1													
Peak Hour fo	or Entii	re Inte	rsectio	n Beg	ins at 0	7:00 A	M														
07:00 AM	23	0	2	0	25	0	259	0	0	259	2	0	7	0	9	0	66	2	0	68	361
07:15 AM	26	0	0	0	26	0	275	0	0	275	2	0	7	0	9	1	99	7	0	107	417
07:30 AM	23	0	0	0	23	0	294	0	0	294	1	0	10	0	11	1	101	8	0	110	438
07:45 AM	28	0	3	0	31	0	277	2	0	279	2	0	4	0	6	0	121	1	0	122	438
Total Volume	100	0	5	0	105	0	1105	2	0	1107	7	0	28	0	35	2	387	18	0	407	1654
_ % App. Total	95.2	0	4.8	0		0	99.8	0.2	0		20	0	80	0		0.5	95.1	4.4	0		
PHF	.893	.000	.417	.000	.847	.000	.940	.250	.000	.941	.875	.000	.700	.000	.795	.500	.800	.563	.000	.834	.944

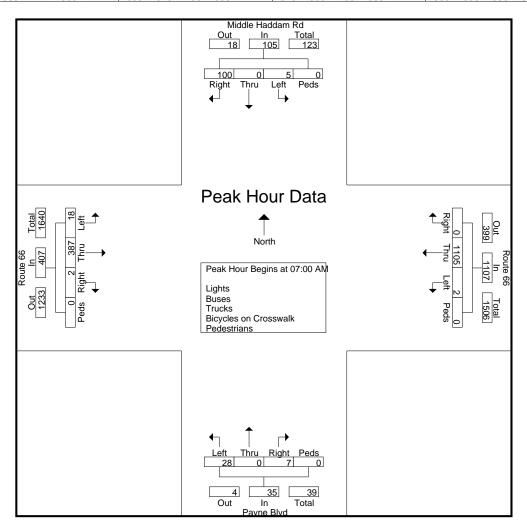


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17247 Site Code : 17247 Start Date : 4/26/2018

Page No : 3

		Middle	e Hado	dam R	ld .		F	Route	66			Pa	ayne E	3lvd			F	Route	66		i	
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	est		İ	
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total	
Start Time Right Thru Left Peds App. Total Right Thru Left R																						
Peak Hour fo	or Eacl	h Appr	oach l	Begins	at:																,	
	07:00 AM			-		07:00 AM					07:00 AM	1				07:30 AM	1			ļ	i	

+0 mins. +15 mins. +30 mins. +45 mins. Total Volume 99.8 95.2 0.2 4.8 0.2 3.7 % App. Total PHF .893 .000 .417 .000 .847 .000 .940 .250 .000 .941 .875 .000 .700 .000 .795 .250 .903 .531 .932

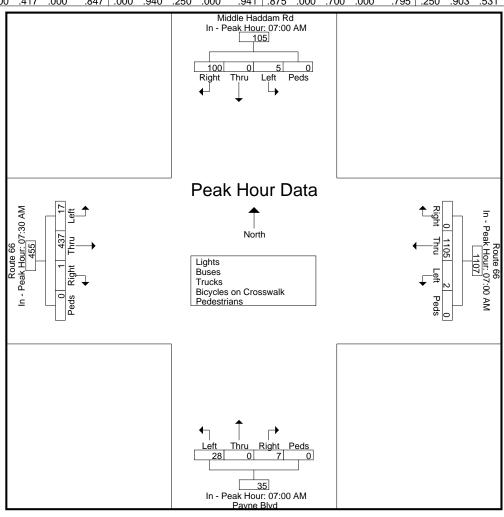

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Middle Haddam Rd/Payne Blvd Portland, Connecticut

Site Code : 17248 Start Date : 4/26/2018

File Name: 17248


Page No : 1

																					1
		Middle	e Hade	dam R	d		F	Route	66			Pa	ayne E	3lvd			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fr	rom W	/est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	6	0	2	0	8	0	140	1	0	141	0	0	2	0	2	3	240	29	0	272	423
04:15 PM	10	0	0	0	10	0	147	4	0	151	1	0	5	0	6	7	267	11	0	285	452
04:30 PM	6	0	1	0	7	0	160	1	0	161	1	0	4	0	5	1	239	24	0	264	437
04:45 PM	18	0	1	0	19	2	145	2	0	149	1	0	4	0	5	2	289	31	0	322	495
Total	40	0	4	0	44	2	592	8	0	602	3	0	15	0	18	13	1035	95	0	1143	1807
						'										'					
05:00 PM	17	0	0	0	17	0	149	0	0	149	1	0	3	0	4	6	299	28	0	333	503
05:15 PM	13	0	1	0	14	0	135	0	0	135	0	2	3	0	5	9	278	34	0	321	475
05:30 PM	12	1	0	0	13	2	126	1	0	129	1	1	1	0	3	10	235	16	0	261	406
05:45 PM	10	0	0	0	10	1	142	1	0	144	1	0	5	0	6	2	234	31	0	267	427
Total	52	1	1	0	54	3	552	2	0	557	3	3	12	0	18	27	1046	109	0	1182	1811
Grand Total	92	1	5	0	98	5	1144	10	0	1159	6	3	27	0	36	40	2081	204	0	2325	3618
Apprch %	93.9	1	5.1	0		0.4	98.7	0.9	0		16.7	8.3	75	0		1.7	89.5	8.8	0		
Total %	2.5	0	0.1	0	2.7	0.1	31.6	0.3	0	32	0.2	0.1	0.7	0	1	1.1	57.5	5.6	0	64.3	
Lights	90	1	5	0	96	5	1101										2048				
% Lights	97.8	100	100	0	98	100	96.2	100	0	96.3	100	100	96.3	0	97.2	95	98.4	100	0	98.5	97.8
Buses	0	0	0	0	0	0	6	0	0	6	0	0	1	0	1	0	5	0	0	5	12
% Buses	0	0	0	0	0	0	0.5	0	0	0.5	0	0	3.7	0	2.8	0	0.2	0	0	0.2	0.3
Trucks	2	0	0	0	2	0	37	0	0	37	0	0	0	0	0	2	28	0	0	30	69
% Trucks	2.2	0	0	0	2	0	3.2	0	0	3.2	0	0	0	0	0	5	1.3	0	0	1.3	1.9
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17248 Site Code : 17248 Start Date : 4/26/2018

		Middle	Hado	dam R	d		F	Route	66			Pa	ayne E	Blvd			F	Route	66		1
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	n 04:00	O PM to	o 05:45	PM - I	Peak 1	of 1													
Peak Hour fo	or Entii	re Inte	rsectio	n Beg	ins at 0	4:30 P	M														
04:30 PM	6	0	1	0	7	0	160	1	0	161	1	0	4	0	5	1	239	24	0	264	437
04:45 PM	18	0	1	0	19	2	145	2	0	149	1	0	4	0	5	2	289	31	0	322	495
05:00 PM	17	0	0	0	17	0	149	0	0	149	1	0	3	0	4	6	299	28	0	333	503
05:15 PM	13	0	1	0	14	0	135	0	0	135	0	2	3	0	5	9	278	34	0	321	475
Total Volume	54	0	3	0	57	2	589	3	0	594	3	2	14	0	19	18	1105	117	0	1240	1910
% App. Total	94.7	0	5.3	0		0.3	99.2	0.5	0		15.8	10.5	73.7	0		1.5	89.1	9.4	0		
PHF	.750	.000	.750	.000	.750	.250	.920	.375	.000	.922	.750	.250	.875	.000	.950	.500	.924	.860	.000	.931	.949

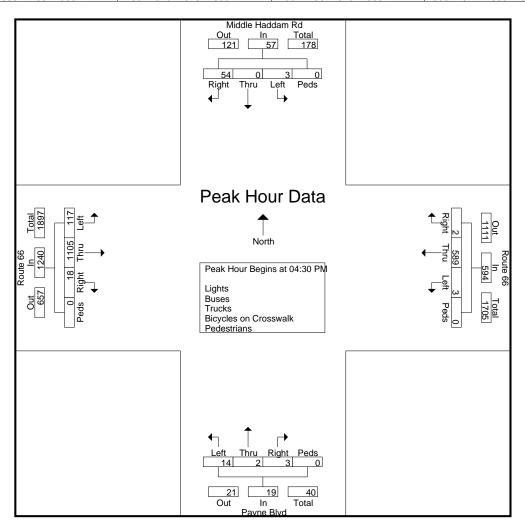


Kensington, Connecticut 06037 (860) 828-1693

> File Name: 17248 Site Code: 17248 Start Date : 4/26/2018

		Middle	e Had	dam R	ld.		F	Route	66			Pa	ayne E	Blvd			F	Route	66		
		Fr	rom N	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	e Right Miu Leit Peas App. Tota r Analysis From 04:00 PM to 05:4						Peak 1	of 1													

Peak Hour to	or ⊵acı	n Appi	oach i	<u>Begins</u>	at:															
	04:45 PM					04:15 PM	1				04:15 PM					04:30 PM				
+0 mins.	18	0	1	0	19	0	147	4	0	151	1	0	5	0	6	1	239	24	0	264
+15 mins.	17	0	0	0	17	0	160	1	0	161	1	0	4	0	5	2	289	31	0	322
+30 mins.	13	0	1	0	14	2	145	2	0	149	1	0	4	0	5	6	299	28	0	333
+45 mins.	12	1	0	0	13	0	149	0	0	149	1	0	3	0	4	9	278	34	0	321
Total Volume	60	1	2	0	63	2	601	7	0	610	4	0	16	0	20	18	1105	117	0	1240
% App. Total	95.2	1.6	3.2	0		0.3	98.5	1.1	0		20	0	80	0		1.5	89.1	9.4	0	
PHF	.833	.250	.500	.000	.829	.250	.939	.438	.000	.947	1.000	.000	.800	.000	.833	.500	.924	.860	.000	.931

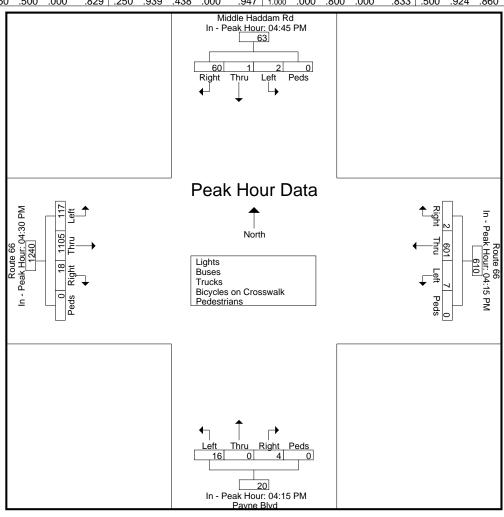

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Depot Hill Rd/Rte 151 East Hampton, Connecticut

File Name: 17249 Site Code: 17249

Start Date : 4/26/2018


Page No : 1

		Dep	ot Hill	Road	'		F	Route	66			R	Route 1	151			F	Route	66		
		Ėr	rom No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	/est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
07:00 AM	6	4	6	0	16	0	236	2	0	238	2	2	33	0	37	8	53	0	0	61	352
07:15 AM	8	1	10	0	19	0	237	0	0	237	2	2	48	0	52	10	77	0	0	87	395
07:30 AM	4	2	12	0	18	1	269	0	0	270	1	3	44	0	48	11	101	0	0	112	448
_07:45 AM	7	3	6	0	16	0	208	2	0	210	0	4	28	0	32	5	111	0	0	116	374
Total	25	10	34	0	69	1	950	4	0	955	5	11	153	0	169	34	342	0	0	376	1569
																					1
08:00 AM	5	5	10	0	20	1	186	1	0	188	0	3	32	0	35	7	84	1	0	92	335
08:15 AM	1	1	4	0	6	0	186	6	0	192	5	1	24	0	30	18	90	1	0	109	337
08:30 AM	6	1	5	0	12	0	179	1	0	180	2	1	38	0	41	10	81	4	0	95	328
08:45 AM	2	1	6	0	9	1	154	1	0	156	1	4	36	0	41	20	84	3	0	107	313
Total	14	8	25	0	47	2	705	9	0	716	8	9	130	0	147	55	339	9	0	403	1313
						ı															ı
Grand Total	39	18	59	0	116	3	1655	13	0	1671	13	20	283	0	316	89	681	9	0	779	2882
Apprch %	33.6	15.5	50.9	0		0.2	99	0.8	0		4.1	6.3	89.6	0		11.4	87.4	1.2	0		
Total %	1.4	0.6	2	0	4	0.1	57.4	0.5	0	58	0.5	0.7	9.8	0	11	3.1	23.6	0.3	0	27	
Lights	36	17	57	0	110	3	1612		_					_					_		
% Lights	92.3	94.4	96.6	0	94.8	100	97.4	100	0	97.4	100	90	99.3	0	98.7	86.5	92.2	100	0	91.7	95.9
Buses	2	1	0	0	3	0	8	0	0	8	0	1	0	0	1	1	3	0	0	4	16
% Buses	5.1	5.6	2	0	2.6	0	0.5	0	0	0.5 35	0	5	0 2	0	0.3	1.1	0.4 50	0	<u>0</u> 0	0.5	0.6
Trucks % Trucks	2.6	0	3.4	0	2.6	0	35 2.1	0	0	35 2.1	0	5	0.7	0	0.9	11 12.4	7.3	0	0	61 7.8	102 3.5
	2.0		3.4	0	2.0	U				۷.۱	U	<u> </u>	0.7	<u> </u>	0.9	12.4	1.3			1.0	3.3
Bicycles on Crosswalk % Bicycles on		•	_		_		-	_	-	_		_	_	-	_		•	_	_	_	
Crosswalk	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17249 Site Code : 17249 Start Date : 4/26/2018

		Dep	ot Hill	Road			F	Route	66			R	loute 1	151			F	Route	66]
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	n 07:00	O AM to	o 08:45	AM -	Peak 1	of 1													
Peak Hour fo	or Enti	re Inte	rsection	n Beg	ins at 0	7:00 A	M														
07:00 AM	6	4	6	0	16	0	236	2	0	238	2	2	33	0	37	8	53	0	0	61	352
07:15 AM	8	1	10	0	19	0	237	0	0	237	2	2	48	0	52	10	77	0	0	87	395
07:30 AM	4	2	12	0	18	1	269	0	0	270	1	3	44	0	48	11	101	0	0	112	448
07:45 AM	7	3	6	0	16	0	208	2	0	210	0	4	28	0	32	5	111	0	0	116	374
Total Volume	25	10	34	0	69	1	950	4	0	955	5	11	153	0	169	34	342	0	0	376	1569
% App. Total	36.2	14.5	49.3	0		0.1	99.5	0.4	0		3	6.5	90.5	0		9	91	0	0		
PHF	.781	.625	.708	.000	.908	.250	.883	.500	.000	.884	.625	.688	.797	.000	.813	.773	.770	.000	.000	.810	.876

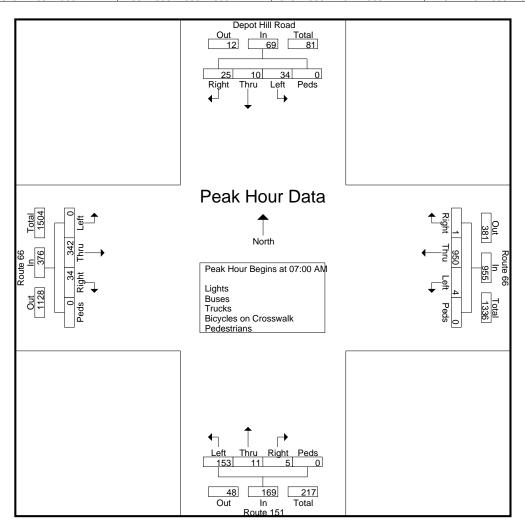

Kensington, Connecticut 06037 (860) 828-1693


> File Name: 17249 Site Code: 17249 Start Date : 4/26/2018

Page No : 3

		Dep	ot Hill	Road			F	Route	66			R	oute 1	51			F	Route	66		
	From North						F	rom E	ast			Fr	om Sc	outh			Fr	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s From	า 07:00	O AM t	o 08:45	AM - F	Peak 1	of 1													

Peak Hour for Each Approach Begins at:

Peak Hour to	or Eaci	п Аррі	roach	begins	aı.															
	07:15 AM					07:00 AN	1				07:00 AM	1				07:30 AM	1			
+0 mins.	8	1	10	0	19	0	236	2	0	238	2	2	33	0	37	11	101	0	0	112
+15 mins.	4	2	12	0	18	0	237	0	0	237	2	2	48	0	52	5	111	0	0	116
+30 mins.	7	3	6	0	16	1	269	0	0	270	1	3	44	0	48	7	84	1	0	92
+45 mins.	5	5	10	0	20	0	208	2	0	210	0	4	28	0	32	18	90	1	0	109
Total Volume	24	11	38	0	73	1	950	4	0	955	5	11	153	0	169	41	386	2	0	429
% App. Total	32.9	15.1	52.1	0		0.1	99.5	0.4	0		3	6.5	90.5	0		9.6	90	0.5	0	
PHF	.750	.550	.792	.000	.913	.250	.883	.500	.000	.884	.625	.688	.797	.000	.813	.569	.869	.500	.000	.925

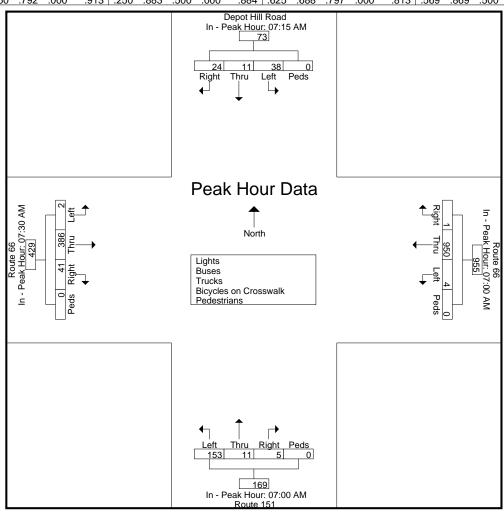

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Depot Hill Rd/Middle Haddam Portland, Connecticut

Site Code: 17250 Start Date : 4/26/2018

File Name: 17250


Page No : 1

					i oupo i	THILOC	<u> </u>	10 D	4000	TTUONO	_ Dioy	JICO 01	ii Oioc	OVVAIIN	ı cuc	Juliano	<u>' </u>				
		Dep	ot Hill	Road	-		F	Route	66			Middle	e Had	dam R	d		F	Route	66		
		<u>Ė</u>	rom No	orth			F	rom E	ast			Fr	om So	outh			F	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	2	1	12	0	15	2	120	0	0	122	3	0	22	0	25	24	204	5	0	233	395
04:15 PM	3	1	10	0	14	1	121	2	0	124	0	1	26	0	27	33	219	1	0	253	418
04:30 PM	6	7	8	0	21	2	131	1	0	134	0	0	17	0	17	29	217	6	0	252	424
_04:45 PM	1	2	14	0	17	1	118	3	0	122	0	2	15	0	17	28	245	4	0	277	433
Total	12	11	44	0	67	6	490	6	0	502	3	3	80	0	86	114	885	16	0	1015	1670
05:00 PM	1	2	13	0	16	2	135	0	0	137	0	1	20	0	21	40	258	6	0	304	478
05:15 PM	1	4	8	0	13	0	107	2	0	109	3	1	10	0	14	36	245	7	0	288	424
05:30 PM	1	6	14	0	21	1	124	0	0	125	2	2	16	0	20	20	225	6	0	251	417
05:45 PM	0	3	7	0	10	6	120	1	0	127	2	3	18	0	23	32	203	7	0	242	402
Total	3	15	42	0	60	9	486	3	0	498	7	7	64	0	78	128	931	26	0	1085	1721
Grand Total	15	26	86	0	127	15	976	9	0	1000	10	10	144	0	164	242	1816	42	0	2100	3391
Apprch %	11.8	20.5	67.7	0		1.5	97.6	0.9	0		6.1	6.1	87.8	0		11.5	86.5	2	0		
Total %	0.4	0.8	2.5	0	3.7	0.4	28.8	0.3	0	29.5	0.3	0.3	4.2	0	4.8	7.1	53.6	1.2	0	61.9	
Lights	14	26	85	0	125	15	940	9	0	964	10	10	139	0	159	237	1786				
% Lights	93.3	100	98.8	0	98.4	100	96.3	100	0	96.4	100	100	96.5	0	97	97.9	98.3	97.6	0	98.3	97.7
Buses	0	0	0	0	0	0	6	0	0	6	0	0	0	0	0	1	5	0	0	6	12
% Buses	0	0	0	0	0	0	0.6	0	0	0.6	0	0	0	0	0	0.4	0.3	0	0	0.3	0.4
Trucks	1	0	1	0	2	0	30	0	0	30	0	0	5	0	5	4	25	1	0	30	67
% Trucks	6.7	0	1.2	0	1.6	0	3.1	0	0	3	0	0	3.5	0	3	1.7	1.4	2.4	0	1.4	2
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
/o r edesilialis		U	U	U	U		U	U	U	U		U	U	U	U		U	U	U	U	

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17250 Site Code : 17250 Start Date : 4/26/2018

		Dep	ot Hill	Road			Route 66 From East					Middle	e Had	dam R	d		F	Route	66		
		Fr	rom No	orth			F	rom E	ast			Fr	om So	outh			F	rom W	/est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	n 04:0	0 PM t	o 05:45	PM -	Peak 1	of 1													
Peak Hour fo	or Enti	re Inte	rsection	n Beg	ins at 0	4:30 P	M														
04:30 PM	6	7	8	0	21	2	131	1	0	134	0	0	17	0	17	29	217	6	0	252	424
04:45 PM	1	2	14	0	17	1	118	3	0	122	0	2	15	0	17	28	245	4	0	277	433
05:00 PM	1	2	13	0	16	2	135	0	0	137	0	1	20	0	21	40	258	6	0	304	478
05:15 PM	1	4	8	0	13	0	107	2	0	109	3	1	10	0	14	36	245	7	0	288	424
Total Volume	9	15	43	0	67	5	491	6	0	502	3	4	62	0	69	133	965	23	0	1121	1759
% App. Total	13.4	22.4	64.2	0		1	97.8	1.2	0		4.3	5.8	89.9	0		11.9	86.1	2.1	0		
PHF	.375	.536	.768	.000	.798	.625	.909	.500	.000	.916	.250	.500	.775	.000	.821	.831	.935	.821	.000	.922	.920

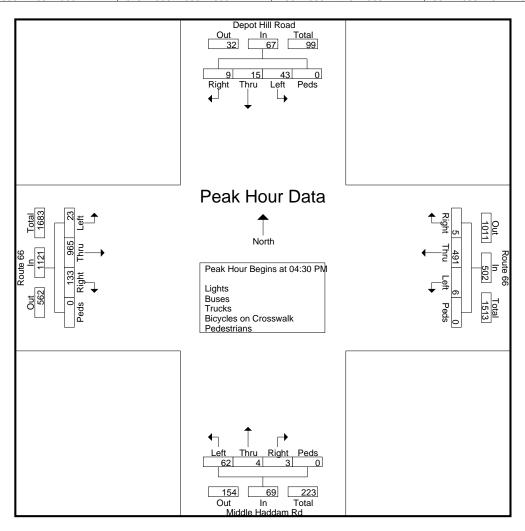

Kensington, Connecticut 06037 (860) 828-1693


File Name : 17250 Site Code : 17250 Start Date : 4/26/2018

Page No : 3

		Dep	ot Hill	Road			F	Route	66			Middle	e Hado	dam R	d		F	Route	66		
	From North						F	rom E	ast			Fr	om Sc	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	T 1-6 - ·				Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total	

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1

Peak Hour fo	<u>or Eacl</u>	h Appı	roach E	Begins	at:															
	04:15 PM	1		_		04:15 PM	1				04:00 PM					04:30 PM	1			
+0 mins.	3	1	10	0	14	1	121	2	0	124	3	0	22	0	25	29	217	6	0	252
+15 mins.	6	7	8	0	21	2	131	1	0	134	0	1	26	0	27	28	245	4	0	277
+30 mins.	1	2	14	0	17	1	118	3	0	122	0	0	17	0	17	40	258	6	0	304
+45 mins.	1	2	13	0	16	2	135	0	0	137	0	2	15	0	17	36	245	7	0	288
Total Volume	11	12	45	0	68	6	505	6	0	517	3	3	80	0	86	133	965	23	0	1121
% App. Total	16.2	17.6	66.2	0		1.2	97.7	1.2	0		3.5	3.5	93	0		11.9	86.1	2.1	0	

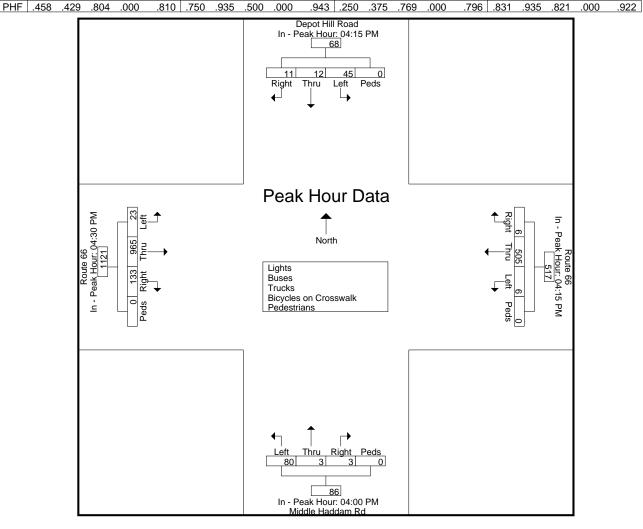

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Middletown Ave/Park & Ride East Hampton, Connecticut

File Name: 17251 Site Code: 17251

Start Date : 4/26/2018


Page No : 1

					i oupo i	THITCO	ı Ligii	<u> </u>	<u> </u>	TTUONO	Dioy.	DICO CI	1 0100	JUVVUIIN	i cac	Juliania					
		Par	k And	Ride	,		F	Route	66			Mid	dletow	n Ave			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fr	om W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
07:00 AM	0	0	0	0	0	0	157	0	0	157	0	0	98	0	98	19	50	0	0	69	324
07:15 AM	0	0	0	0	0	0	130	0	0	130	1	0	111	0	112	32	70	0	0	102	344
07:30 AM	0	0	0	0	0	0	178	1	0	179	1	0	98	0	99	59	71	0	0	130	408
07:45 AM	0	0	0	0	0	0	128	3	0	131	0	0	96	0	96	53	77	0	0	130	357
Total	0	0	0	0	0	0	593	4	0	597	2	0	403	0	405	163	268	0	0	431	1433
08:00 AM	1	0	0	0	1	1	108	0	0	109	0	0	87	0	87	44	59	0	0	103	300
08:15 AM	0	0	0	0	0	0	119	3	0	122	2	0	74	0	76	49	64	0	0	113	311
08:30 AM	0	0	0	0	0	0	114	0	0	114	1	0	93	0	94	39	51	0	0	90	298
08:45 AM	0	0	0	0	0	0	102	2	0	104	0	0	64	0	64	43	52	1_	0	96	264
Total	1	0	0	0	1	1	443	5	0	449	3	0	318	0	321	175	226	1	0	402	1173
Grand Total	1	0	0	0	1	1	1036	9	0	1046	5	0	721	0	726	338	494	1	0	833	2606
Apprch %	100	0	0	0		0.1	99	0.9	0		0.7	0	99.3	0		40.6	59.3	0.1	0		
Total %	0	0	0	0	0	0	39.8	0.3	0	40.1	0.2	0	27.7	0	27.9	13	19	0	0	32	
Lights	1	0	0	0	1	1	1004														
% Lights	100	0	0	0_	100	100	96.9	100	0	96.9	100	0	97.6	0	97.7	93.2	91.7	100	0	92.3	95.7
Buses	0	0	0	0	0	0	6	0	0	6	0	0	4	0	4	4	5	0	0	9	19
% Buses	0	0	0	0	0	0	0.6	0	0	0.6	0	0	0.6	0	0.6	1.2	1_	0	0	1.1	0.7
Trucks	0	0	0	0	0	0	26	0	0	26	0	0	13	0	13	19	36	0	0	55	94
% Trucks	0	0	0	0	0	0	2.5	0	0	2.5	0	0	1.8	0	1.8	5.6	7.3	0	00	6.6	3.6
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
/₀ reuesinans	ı	U	U	U	U	U	U	U	U	U	U	U	U	U	U	ı	U	U	U	U	U

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17251 Site Code : 17251 Start Date : 4/26/2018

		Par	k And	Ride			F	Route	66			Mide	dletow	n Ave			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s From	า 07:00	O AM to	08:45	AM -	Peak 1	of 1													
Peak Hour fo	or Entii	re Inte	rsectio	n Beg	ins at 0	7:00 A	M														
07:00 AM	0	0	0	0	0	0	157	0	0	157	0	0	98	0	98	19	50	0	0	69	324
07:15 AM	0	0	0	0	0	0	130	0	0	130	1	0	111	0	112	32	70	0	0	102	344
07:30 AM	0	0	0	0	0	0	178	1	0	179	1	0	98	0	99	59	71	0	0	130	408
07:45 AM	0	0	0	0	0	0	128	3	0	131	0	0	96	0	96	53	77	0	0	130	357
Total Volume	0	0	0	0	0	0	593	4	0	597	2	0	403	0	405	163	268	0	0	431	1433
_ % App. Total	0	0	0	0		0	99.3	0.7	0		0.5	0	99.5	0		37.8	62.2	0	0		
PHF	.000	.000	.000	.000	.000	.000	.833	.333	.000	.834	.500	.000	.908	.000	.904	.691	.870	.000	.000	.829	.878

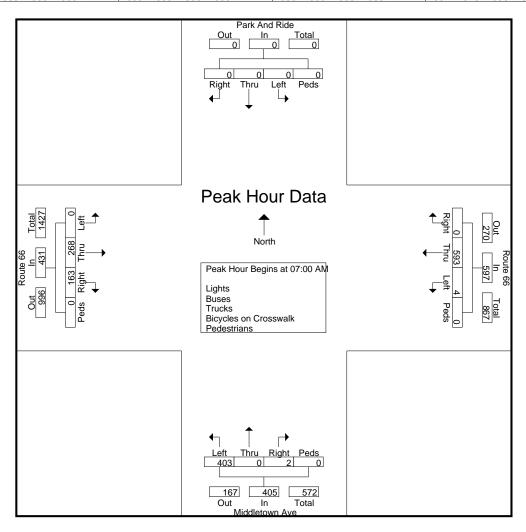


Kensington, Connecticut 06037 (860) 828-1693

> File Name: 17251 Site Code: 17251 Start Date : 4/26/2018

		Par	k And	Ride			F	Route	66			Midd	dletow	n Ave			F	Route	66		ĺ
		Fr	rom No	orth		From East Total Right Thru Left Peds App.						Fr	om Sc	outh			Fı	rom W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	n 07:0	0 AM t	o 08:45	AM - I	Peak 1	of 1													
Peak Hour fo	or Eacl	h Appı	roach	Begins	at:																_

Peak Hour to	or ⊨aci	n Appi	roach i	Begins	at:															
	07:15 AM					07:00 AN	1				07:00 AM					07:30 AN	1			
+0 mins.	0	0	0	0	0	0	157	0	0	157	0	0	98	0	98	59	71	0	0	130
+15 mins.	0	0	0	0	0	0	130	0	0	130	1	0	111	0	112	53	77	0	0	130
+30 mins.	0	0	0	0	0	0	178	1	0	179	1	0	98	0	99	44	59	0	0	103
+45 mins.	1	0	0	0	1	0	128	3	0	131	0	0	96	0	96	49	64	0	0	113
Total Volume	1	0	0	0	1	0	593	4	0	597	2	0	403	0	405	205	271	0	0	476
% App. Total	100	0	0	0		0	99.3	0.7	0		0.5	0	99.5	0		43.1	56.9	0	0	
PHF	.250	.000	.000	.000	.250	.000	.833	.333	.000	.834	.500	.000	.908	.000	.904	.869	.880	.000	.000	.915

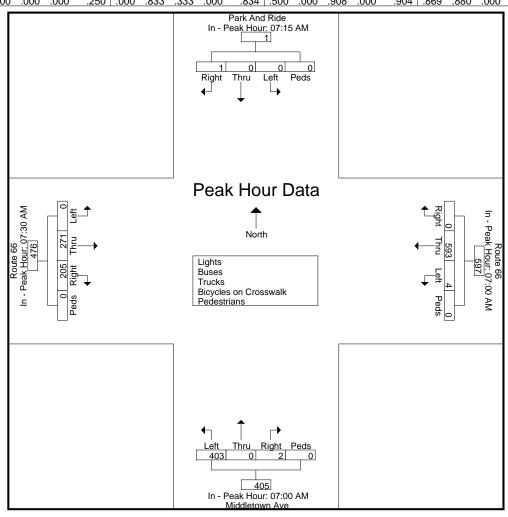

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Middletown Ave/Park & Ride East Hampton, Connecticut

File Name : 17252 Site Code : 17252

Start Date : 4/26/2018


Page No : 1

					i oupo i	THITCO	<u> </u>	<u> D</u>	<u> </u>	TTUONO	_ Dioy ·	01000	II OIOC	owant	i cac	Juliania					
		Par	k And	Ride	,		F	Route	66			Mid	dletow	n Ave			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fr	rom W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	0	2	0	0	2	0	88	1	0	89	0	0	60	0	60	99	120	1	0	220	371
04:15 PM	0	0	0	0	0	0	77	0	0	77	4	0	58	0	62	107	118	0	0	225	364
04:30 PM	0	0	0	0	0	0	87	0	0	87	4	0	74	0	78	109	133	0	0	242	407
04:45 PM	0	2	0	0	2	1	81	1	0	83	0	0	62	0	62	100	156	2	0	258	405
Total	0	4	0	0	4	1	333	2	0	336	8	0	254	0	262	415	527	3	0	945	1547
05:00 PM	1	0	0	0	1	1	100	1	0	102	1	4	49	0	54	113	151	1	0	265	422
05:15 PM	1	2	1	0	4	0	96	1	0	97	1	0	37	0	38	109	155	0	0	264	403
05:30 PM	0	0	0	0	0	1	89	0	0	90	2	0	62	0	64	105	136	0	0	241	395
05:45 PM	2	0	0	0	2	0	78	1_	0	79	1	0	55	0	56	89	106	2	0	197	334
Total	4	2	1	0	7	2	363	3	0	368	5	4	203	0	212	416	548	3	0	967	1554
Grand Total	4	6	1	0	11	3	696	5	0	704	13	4	457	0	474	831	1075	6	0	1912	3101
Apprch %	36.4	54.5	9.1	0		0.4	98.9	0.7	0		2.7	8.0	96.4	0		43.5	56.2	0.3	0		
Total %	0.1	0.2	0	0	0.4	0.1	22.4	0.2	0	22.7	0.4	0.1	14.7	0	15.3	26.8	34.7	0.2	0	61.7	
Lights	4	6	1	0	11	3	674	5	0	682	13	4	444	0	461	817	1057				
% Lights	100	100	100	0	100	100	96.8	100	0	96.9	100	100	97.2	0	97.3	98.3	98.3	100	0	98.3	97.8
Buses	0	0	0	0	0	0	4	0	0	4	0	0	1	0	1	2	5	0	0	7	12
% Buses	0	0	0	0	0	0	0.6	0	0	0.6	0	0	0.2	0	0.2	0.2	0.5	0	0	0.4	0.4
Trucks	0	0	0	0	0	0	18	0	0	18	0	0	12	0	12	12	13	0	0	25	55
<u>% Trucks</u>	0	0_	0	0_	0	0	2.6	0	0_	2.6	0	0	2.6	0	2.5	1.4	1.2	0	0_	1.3	1.8
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Pedestrians	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% redestrians	1 0	U	U	U	U	U	U	U	U	U	1 0	U	U	U	U		U	U	U	U	

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17252 Site Code : 17252 Start Date : 4/26/2018

		Par	k And	Ride			F	Route	66			Mide	dletow	n Ave			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	n 04:00	O PM to	05:45	PM -	Peak 1	of 1													-
Peak Hour fo	or Enti	re Inte	rsection	n Beg	ins at 0	4:30 P	M														
04:30 PM	0	0	0	0	0	0	87	0	0	87	4	0	74	0	78	109	133	0	0	242	407
04:45 PM	0	2	0	0	2	1	81	1	0	83	0	0	62	0	62	100	156	2	0	258	405
05:00 PM	1	0	0	0	1	1	100	1	0	102	1	4	49	0	54	113	151	1	0	265	422
05:15 PM	1	2	1	0	4	0	96	1	0	97	1	0	37	0	38	109	155	0	0	264	403
Total Volume	2	4	1	0	7	2	364	3	0	369	6	4	222	0	232	431	595	3	0	1029	1637
_ % App. Total	28.6	57.1	14.3	0		0.5	98.6	0.8	0		2.6	1.7	95.7	0		41.9	57.8	0.3	0		
PHF	.500	.500	.250	.000	.438	.500	.910	.750	.000	.904	.375	.250	.750	.000	.744	.954	.954	.375	.000	.971	.970

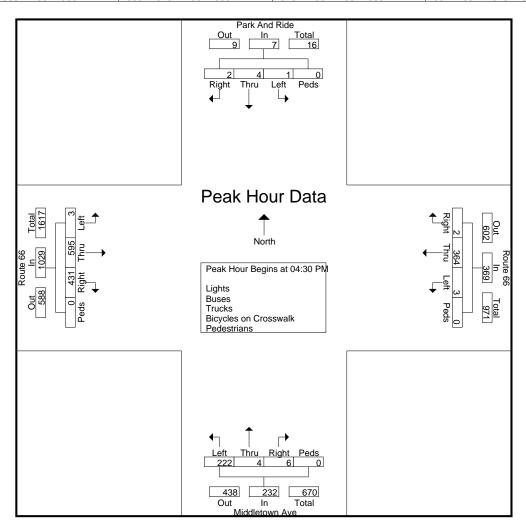


Kensington, Connecticut 06037 (860) 828-1693

File Name : 17252 Site Code : 17252 Start Date : 4/26/2018

Page No : 3

		Par	k And	Ride			F	Route	66			Mid	dletow	n Ave			F	Route	66		i
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	/est		İ
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	า 04:0	0 PM t	o 05:45	PM - I	Peak 1	of 1													
Peak Hour fo	or Eacl	h Appr	oach	Begins	at:																

+0 mins. +15 mins. +30 mins. +45 mins. Total Volume 14.3 28.6 57.1 8.0 98.4 3.1 96.9 <u>41.9</u> 57.8 0.3 8.0 % App. Total PHF .500 .500 .250 .000 .438 .750 .915 .750 .912 .500 .000 .858 .840 .954 .954 .375 .971

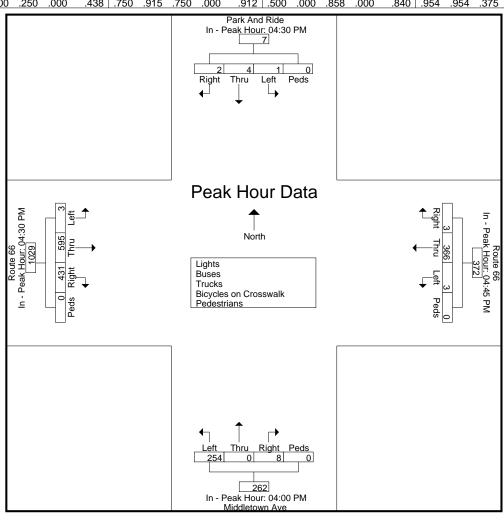

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at N. Maple/Maple Street East Hampton, Connecticut

File Name : 17253 Site Code : 17253 Start Date : 4/26/2018


G	oups Pri	nted- L	∟ights -	Buses -	Trucks -	Bicyc	les on	Crosswalk	 Pedestrians 	

			Map rom		treet rth	İ				ite 6	-	5		M		Stre Sou	eet	100 01			Rou	ite 66 n We	3	nano			Аррі	roac	ounc h west		
Start Time	Hard Right	Right	Thru	Left	Peds	App.	Right	Bear Right	Thru	Left	Peds	App. Total	Right	Thru	Bear Left	Left	Peds	App.	Right	Thru	Left	Hard Left	Peds	App. Total	Hard Right	Bear Right	Bear Left	Hard Left	Peds	App.	Int. Total
07:00 AM	0	11	7	14	0	32	0	0	101	1	1	103	6	11	0	2	0	19	0	70	21	0	0	91	0	0	0	1	0	1	246
07:15 AM	0	23	11	22	0	56	4	0	111	1	1	117	2	39	0	2	0	43	0	72	32	0	0	104	0	0	0	0	0	0	320
07:30 AM	0	17	6	9	0	32	3	0	133	2	0	138	3	7	0	3	0	13	1	74	6	0	0	81	0	0	0	0	0	0	264
07:45 AM	0	8	3	0	0	_11	1	0	113	3	0	117	4	2	0	5	0	11	0	119	4	0	0	123	0	0	0	0	0	0	262
Total	0	59	27	45	0	131	8	0	458	7	2	475	15	59	0	12	0	86	1	335	63	0	0	399	0	0	0	1	0	1	1092
08:00 AM	0	3	1	0	1	5	1	0	96	3	1	101	5	1	0	0	0	6	0	78	1	0	0	79	0	1	0	0	0	1	192
08:15 AM	0	3	3	2	0	8	0	0	90	1	0	91	4	2	0	1	0	7	1	86	2	0	0	89	0	0	0	0	0	0	195
08:30 AM	0	3	2	3	0	8	1	1	94	9	0	105	5	0	0	3	0	8	1	72	2	0	0	75	0	0	2	0	1	3	199
08:45 AM	0	7	2	1_	0	10	2	1	78	_ 7	1_	89	1	1_	0	1_	0	3	0	64	3	0	0	67	0	0	1_	0	0	1	170
Total	0	16	8	6	1	31	4	2	358	20	2	386	15	4	0	5	0	24	2	300	8	0	0	310	0	1	3	0	1	5	756
Grand Total	0	75	35	51	1	162	12	2	816	27	4	861	30	63	0	17	0	110	3	635	71	0	0	709	0	1	3	1	1	6	1848
Apprch %	0	46.3	21.6	31.5	0.6		1.4	0.2	94.8	3.1	0.5		27.3	57.3	0	15.5	0		0.4	89.6	10	0	0		0	16.7	50	16.7	16.7		
Total %	0	4.1	1.9	2.8	0.1	8.8	0.6	0.1	44.2	1.5	0.2	46.6	1.6	3.4	0	0.9	0	6	0.2	34.4	3.8	0	0	38.4	0	0.1	0.2	0.1	0.1	0.3	
Lights	0	70	30	49	0	149	11	2	780	26	0	819	27	60	0	17	0	104	3	591	67	0	0	661	0	0	3	1	0	4	1737
% Lights	0	93.3	85.7	96.1	0	92	91.7	100	95.6	96.3	0	95.1	90	95.2	0	100	0	94.5	100	93.1	94.4	0	0	93.2	0	0	100	100	0	66.7	94
Buses	0	5	4	2	0	11	0	0	8	0	0	8	2	2	0	0	0	4	0	9	4	0	0	13	0	1	0	0	0	1	37
% Buses	0	6.7	11.4	3.9	0	6.8	0	0	1	0	0	0.9	6.7	3.2	0	0	0	3.6	0	1.4	5.6	0	0	1.8	0	100	0	0	0	16.7	2
Trucks	0	0	1	0	0	1	1	0	28	1	0	30	1	1	0	0	0	2	0	35	0	0	0	35	0	0	0	0	0	0	68
% Trucks	0	0	2.9	0	0	0.6	8.3	0	3.4	3.7	0	3.5	3.3	1.6	0	0	0	1.8	0	5.5	0	0	0	4.9	0	0	0	0	0	0	3.7
Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Crosswalk	Ĭ	·	Ū	·	Ū	Ū	•	·	·	·	·	Ū	ľ	·	·	·	Ū	Ū	"	Ü	Ū	Ū	Ū	·	ľ	·	Ū	·	·	•	
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Crosswalk	0	0	0	0	1	1	0	0	0	0	4	4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	6
Pedestrians		0	0	0	- 1	0.6	-	•	0	_	•	0.5	-	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0		-	0.3
% Pedestrians	0	U	U	U	100	ט.ט	0	0	U	0	100	U.S	0	U	U	U	U	0	l U	U	U	U	U	0	ı U	U	U	U	100	16.7	0.3

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17253 Site Code : 17253 Start Date : 4/26/2018

	N. Maple Street												•	Stre Sou						ite 60 1 We	-				ithea Appr m No	oacl	h				
Start Time		Right	Thru	Left	Peds		Right		Thru	Left	Peds	l	Right	Thru	Bear Left	Left	Peds	App.	Right	Thru	Left	Hard Left	Peds	App. Total	Hard Right	Bear Right	Bear Left	Hard Left	Peds	App.	Int. Total
Peak Ho	ur A	naly	sis F	rom	07:0	0 AM	to 0	8:45	AM	- Pe	eak 1	of 1																			
Peak Ho	ur fo	r En	itire I	nters	secti	on Be	gins	at 0	7:00) AM	l																				
07:00 AM	0	11	7	14	0	32	0	0	101	1	1	103	6	11	0	2	0	19	0	70	21	0	0	91	0	0	0	1	0	1	246
07:15 AM	0	23	11	22	0	56	4	0	111	1	1	117	2	39	0	2	0	43	0	72	32	0	0	104	0	0	0	0	0	0	320
07:30 AM	0	17	6	9	0	32	3	0	133	2	0	138	3	7	0	3	0	13	1	74	6	0	0	81	0	0	0	0	0	0	264
07:45 AM	0	8	3	0	0	11	1	0	113	3	0	117	4	2	0	5	0	11	0	119	4	0	0	123	0	0	0	0	0	0	262
Total Volume	0	59	27	45	0	131	8	0	458	7	2	475	15	59	0	12	0	86	1	335	63	0	0	399	0	0	0	1	0	1	1092
% App. Total	0	45	20.6	34.4	0		1.7	0	96.4	1.5	0.4		17.4	68.6	0	14	0		0.3	84	15.8	0	0		0	0	0	100	0		
PHF	000	6/1	614	511	000	585	500	000	861	583	500	861	625	378	000	600	000	500	250	704	402	000	000	811	000	000	000	250	000	250	853

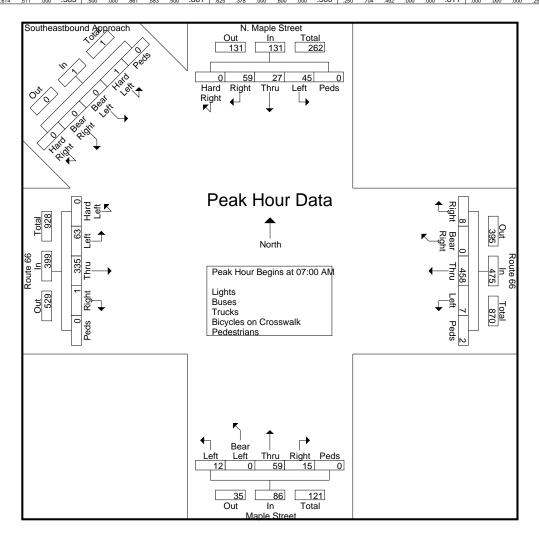

Kensington, Connecticut 06037 (860) 828-1693


File Name : 17253 Site Code : 17253 Start Date : 4/26/2018

Page No : 3

				le S Nor				l	Rou From		-					Str Sou				F		ite 6 1 We	-				App	roac	ound h west		
Start Time	Hard Right	Right	Thru	Left	Peds	App. Total	Right	Bear Right	Thru	Left	Peds	App. Total	Right	Thru	Bear Left	Left	Peds	App.	Right	Thru	Left	Hard Left	Peds	App. Total	Hard Right	Bear Right	Bear Left	Hard Left	Peds	App.	Int. Total

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1

Реак Но	ur to	ır ⊨a	cn A	.ppro	acn	Begir	ns at																							
	07:00 A	M					07:00 A	М					07:00 A	М					07:00 A	M					08:00 A	М				
+0 mins.	0	11	7	14	0	32	0	0	101	1	1	103	6	11	0	2	0	19	0	70	21	0	0	91	0	1	0	0	0	1
+15 mins.	0	23	11	22	0	56	4	0	111	1	1	117	2	39	0	2	0	43	0	72	32	0	0	104	0	0	0	0	0	0
+30 mins.	0	17	6	9	0	32	3	0	133	2	0	138	3	7	0	3	0	13	1	74	6	0	0	81	0	0	2	0	1	3
+45 mins.	0	8	3	0	0	11	1	0	113	3	0	117	4	2	0	5	0	11	0	119	4	0	0	123	0	0	1	0	0	1
Total Volume	0	59	27	45	0	131	8	0	458	7	2	475	15	59	0	12	0	86	1	335	63	0	0	399	0	1	3	0	1	5
% App. Total	0	45	20.6	34.4	0		1.7	0	96.4	1.5	0.4		17.4	68.6	0	14	0		0.3	84	15.8	0	0		0	20	60	0	20	
PHF	.000	.641	.614	.511	.000	.585	.500	.000	.861	.583	.500	.861	.625	.378	.000	.600	.000	.500	.250	.704	.492	.000	.000	.811	.000	.250	.375	.000	.250	.417

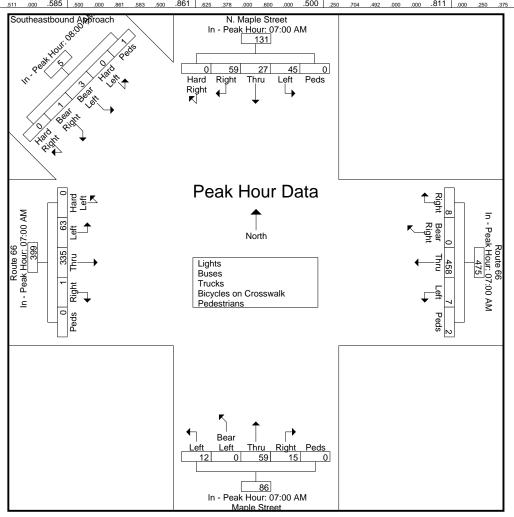

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at N. Maple/Maple Street East Hampton, Connecticut

File Name: 17254 Site Code: 17254

Start Date : 4/26/2018


Page No : 1

							<u> </u>	иро		icu_	Ligii	10 D			I GOIL	<u> </u>	icyc	100 01		000 V	vanc	1 00	1001	iuiio		0	.41	41			1
		N.	Man	le St	treet				Rou	ite 6	6			M	lanle	Str	eet				Rou	te 66	3					astbo			
				Nor						n Ea	-					Sou						Wes					App	roac	า		
		Г	10111	INOI	uı				FIOII	п⊏а	51			Г	10111	300	ILII			ı	1011	vves	sι			Fro	m N	orth	vest		
	Hard					App.		Bear				App.			Bear			Арр.				Hard		Арр.	Hard	Bear	Bear	Hard		App.	Int.
Start Time	Right	Right	Thru	Left	Peds	Total	Right	Right	Thru	Left	Peds	Total	Right	Thru	Left	Left	Peds	Total	Right	Thru	Left	Left	Peds	Total	Right	Right	Left	Left	Peds	Total	Total
04:00 PM	0	6	3	7	0	16	4	0	109	4	2	119	2	2	0	2	0	6	1	109	11	0	0	121	0	0	0	0	0	0	262
04:15 PM	0	11	4	9	0	24	3	2	91	9	0	105	0	1	0	2	0	3	0	112	10	0	0	122	0	0	2	0	0	2	256
04:30 PM	0	5	6	7	0	18	1	0	119	2	0	122	2	3	0	2	0	7	1	105	7	0	0	113	0	0	1	0	0	1	261
04:45 PM	0	8	10	11	0	29	6	1	106	1	1	115	2	6	0	2	0	10	1	140	11	0	0	152	0	0	0	0	0	0	306
Total	0	30	23	34	0	87	14	3	425	16	3	461	6	12	0	8	0	26	3	466	39	0	0	508	0	0	3	0	0	3	1085
. 0	, ,	-		٠.	·	٠.		·	423		·				ŭ	·	•		, ,	400	-	•	ŭ	000	, ,	•	·	·	•	Ū	1000
05:00 PM	0	15	6	15	0	36	4	0	116	3	0	123	4	3	0	1	0	8	0	132	12	0	0	144	0	0	0	0	0	0	311
05:15 PM	0	5	1	4	0	10	6	0	118	4	0	128	3	1	0	5	0	9	0	126	14	0	0	140	0	0	0	0	0	0	287
05:30 PM	0	4	2	9	0	15	3	Ō	105	2	Ō	110	3	4	0	1	0	8	1	111	9	0	0	121	0	0	1	Ō	0	1	255
05:45 PM	0	4	8	6	Ö	18	3	1	102	4	Õ	110	6	2	1	2	Ö	11	Ö	97	2	Ö	Õ	99	ő	Ö	0	Ö	Ö	0	238
Total	0	28	17	34	0	79	16	1	441	13	0	471	16	10	1	9	0	36	1	466	37	0	0	504	0	0	1	0	0	1	1091
rotai			••	0.	O	10			441		U		, .0		•	J	U	00		400	0,	U	U	001	, 0	U		O	U	•	1031
	_	58	40	68	0	166	30	1	866	29	3	932	22	22	1	17	Λ	62	4	000	76	Λ	0	1012	۱ ۵	Λ	1	Λ	Λ	4	2176
Grand Total	0				0	100		~ -			-	332			1 0	.,	0	02		932		0	0	1012	0	0	-	0	0	7	2176
Apprch %	0	34.9	24.1	41	-	7.6	3.2	0.4	92.9	3.1	0.3	40.0	35.5	35.5	1.6	27.4	-	2.8	0.4	92.1	7.5	-	0	40.5	-	-	100	-	-	0.2	
Total %	_	2.7	1.8	3.1	_0_		1.4	0.2	39.8	1.3	0.1	42.8	00		0	0.8	0	<u></u> 61	0.2	42.8	3.5	0	0	46.5	0	<u>0</u>	0.2	_0_	0_		
Lights	0	54	40	67	0	161	29	4	847	29	0	909	22	21	ı	17	-	-	4	912	74	0	•	990	0	-	4	0	0	4	2125
% Lights	0	93.1	100	98.5	0	97	96.7	100	97.8	100	0	97.5	100	95.5	100	100	0	98.4	100	97.9	97.4	0	0	97.8	0	0_	100	0	0	100	97.7
Buses	0	2	0	1	0	3	1	0	4	0	0	5	0	0	0	0	0	0	0	6	1	0	0	7	0	0	0	0	0	0	15
% Buses	0	3.4	0	1.5	0_	1.8	3.3	0	0.5	0	0	0.5	0	0	0_	0	0	0	0	0.6	1.3	0	0	0.7	0	0	0_	0	0	0	0.7
Trucks	0	2	0	0	0	2	0	0	15	0	0	15	0	1	0	0	0	1	0	14	1	0	0	15	0	0	0	0	0	0	33
% Trucks	0	3.4	0	0_	0	1.2	0	0	1.7	0	0	1.6	0	4.5	0	0	0	1.6	0	1.5	1.3	0	0	1.5	0	0	0	0	0	0	1.5
Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Crosswalk		Ŭ	·	·	•	·		Ŭ	·	·	•	·		•	ŭ	ŭ	•	·	•	·	·	·	ŭ	ŭ	•	ŭ	ŭ	·	·	·	
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Crosswalk	_	_	0				0	-	0	_	2			-		_	_			_	0	_	_			_		_	_		
Pedestrians	0	0	0	0	0	0	0	0	0	U	3	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3
% Pedestrians	0	0	U	0	0	0	0	0	0	0	100	0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17254 Site Code : 17254 Start Date : 4/26/2018

	N. Maple Street Route 66 From North From East											•	Stre Sou				F		ite 60 1 We	-				ithea Appr m No	oacl	h					
Start Time	Hard Right	Right	Thru	Left	Peds	App.	Right	Bear Right	Thru	Left	Peds	App. Total	Right	Thru	Bear Left	Left	Peds	App.	Right	Thru	Left	Hard Left	Peds	App. Total	Hard Right	Bear Right	Bear Left	Hard Left	Peds	App.	Int. Total
Peak Ho	ur A	naly	sis F	rom	04:0	0 PM	to 0	5:45	5 PM	- Pe	ak 1	of 1																			
Peak Ho	ur fo	r En	itire I	nter	secti	on Be	gins	at C	04:30	PM																					
04:30 PM	0	5	6	7	0	18	1	0	119	2	0	122	2	3	0	2	0	7	1	105	7	0	0	113	0	0	1	0	0	1	261
04:45 PM	0	8	10	11	0	29	6	1	106	1	1	115	2	6	0	2	0	10	1	140	11	0	0	152	0	0	0	0	0	0	306
05:00 PM	0	15	6	15	0	36	4	0	116	3	0	123	4	3	0	1	0	8	0	132	12	0	0	144	0	0	0	0	0	0	311
05:15 PM	0	5	_ 1	4	0	10	6	0	118	4	0	128	3	_ 1	0	5	0	9	0	126	14	0	0	140	0	0	0	0	0	0	287
Total Volume	0	33	23	37	0	93	17	1	459	10	1	488	11	13	0	10	0	34	2	503	44	0	0	549	0	0	1	0	0	1	1165
% App. Total	0	35.5	24.7	39.8	0		3.5	0.2	94.1	2	0.2		32.4	38.2	0	29.4	0		0.4	91.6	8	0	0		0	0	100	0	0		
PHF	.000	550	575	617	000	.646	.708	250	964	625	250	.953	688	542	.000	.500	.000	.850	.500	898	.786	.000	.000	.903	.000	.000	250	.000	.000	.250	.936

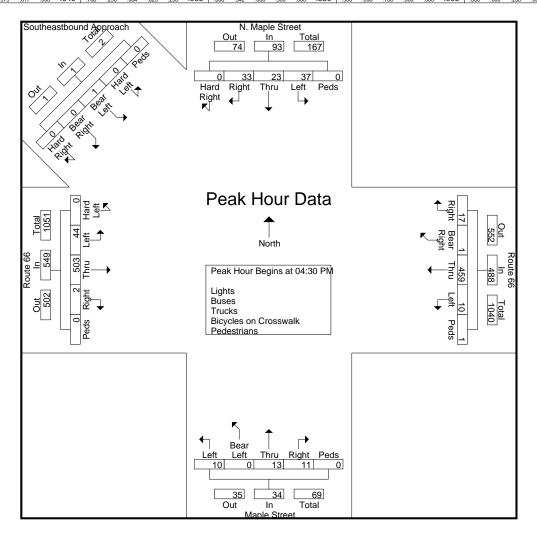

Kensington, Connecticut 06037 (860) 828-1693


File Name : 17254 Site Code : 17254 Start Date : 4/26/2018

Page No : 3

	N. Maple Street Route 66 From North From East										Str Sou				F	Rou	ite 6 1 We	-				App	roac	ound h west							
Start Time	Hard	Right	Thru	Left	Peds	Арр.	Right	Bear	Thru	Left	Peds	App.	Right	Thru	Bear	Left	Peds	App.	Right	Thru	Left	Hard	Peds	App.	Hard	Bear	Bear	Hard	Peds	App.	Int.
	Right	_				Total	_	Right	1	l		Total	1 -		Left			Total				Left		Total	Right	Right	Left	Left		Total	Total

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1

Peak Ho	ur ic	ıı ⊏a	CH A	ppro	acn	begii	is ai																							
	04:15 F	PM .					04:30 F	M					05:00 P	M					04:45 P	M					04:00 PI	м				
+0 mins.	0	11	4	9	0	24	1	0	119	2	0	122	4	3	0	1	0	8	1	140	11	0	0	152	0	0	0	0	0	0
+15 mins.	0	5	6	7	0	18	6	1	106	1	1	115	3	1	0	5	0	9	0	132	12	0	0	144	0	0	2	0	0	2
+30 mins.	0	8	10	11	0	29	4	0	116	3	0	123	3	4	0	1	0	8	0	126	14	0	0	140	0	0	1	0	0	1
+45 mins.	0	15	6	15	0	36	6	0	118	4	0	128	6	2	1	2	0	11	1	111	9	0	0	121	0	0	0	0	0	0
Total Volume	0	39	26	42	0	107	17	1	459	10	1	488	16	10	1	9	0	36	2	509	46	0	0	557	0	0	3	0	0	3
% App. Total	0	36.4	24.3	39.3	0		3.5	0.2	94.1	2	0.2		44.4	27.8	2.8	25	0		0.4	91.4	8.3	0	0		0	0	100	0	0	
PHF	.000	.650	.650	.700	.000	.743	.708	.250	.964	.625	.250	.953	.667	.625	.250	.450	.000	.818	.500	.909	.821	.000	.000	.916	.000	.000	.375	.000	.000	.375

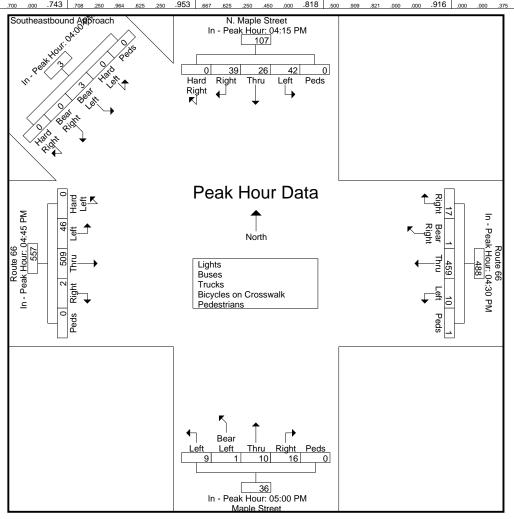

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at N. Main Street East Hampton, Connecticut

File Name: 17255 Site Code: 17255

Start Date : 4/26/2018


Page No : 1

		N I	Main S	Street			F	Route	66			LΛ	ain Stı	reet			F	Route	66		
			rom No					rom E					om So					rom W			
Start Time	Right	Thru	Left	Peds		Right	Thru	Left	Peds		Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
07:00 AM		13	17		App. Total	37	69	11		App. Total					App. 1 otal			7			308
	20	-		0	50	-			0	117	28	14	2	0		3	87	1	0	97	
07:15 AM	18	11	24	0	53	36	103	9	1	149	18	23	8	2	51		90	12	0	109	362
07:30 AM	22	10	25	0	57	13	92	11	0	116	26	7	13	0	46	5	78	5	0	88	307
07:45 AM	22	11	19_	0_	52	12	91_	22	0_	125	27	7	6	0_	40	2	114	15_	0_	131	348
Total	82	45	85	0	212	98	355	53	1	507	99	51	29	2	181	17	369	39	0	425	1325
08:00 AM	23	16	24	0	63	13	73	12	0	98	22	7	7	0	36	5	76	5	0	86	283
08:15 AM	21	17	20	0	58	9	74	22	0	105	25	13	3	1	42	9	75	16	1	101	306
08:30 AM	20	16	16	0	52	28	78	15	0	121	19	36	7	0	62	4	70	13	0	87	322
08:45 AM	18	21	22	0	61	16	65	14	2	97	12	20	6	1	39	3	63	10	0	76	273
Total	82	70	82	0	234	66	290	63	2	421	78	76	23	2	179	21	284	44	1	350	1184
Grand Total	164	115	167	0	446	164	645	116	3	928	177	127	52	4	360	38	653	83	1	775	2509
Apprch %	36.8	25.8	37.4	0		17.7	69.5	12.5	0.3		49.2	35.3	14.4	1.1		4.9	84.3	10.7	0.1	_	
Total %	6.5	4.6	6.7	0	17.8	6.5	25.7	4.6	0.1	37	7.1	5.1	2.1	0.2	14.3	1.5	26	3.3	0	30.9	
Lights	154	109	163	0	426	149	626	109	0	884	171	110	46	0	327	31	622	76	0	729	2366
% Lights	93.9	94.8	97.6	0	95.5	90.9	97.1	94	0	95.3	96.6	86.6	88.5	Ö	90.8	81.6	95.3	91.6	0	94.1	94.3
Buses	6	4	1	0	11	12	2	2	0	16	1	15	1	0	17	5	3	5	0	13	57
% Buses	3.7	3.5	0.6	0	2.5	7.3	0.3	1.7	0	1.7	0.6	11.8	1.9	0	4.7	13.2	0.5	6	0	1.7	2.3
Trucks	4	2	3	0	9	3	17	5	0	25	5	2	5	0	12	2	28	2	0	32	78
% Trucks	2.4	1.7	1.8	0	2	1.8	2.6	4.3	0	2.7	2.8	1.6	9.6	0	3.3	5.3	4.3	2.4	0	4.1	3.1
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Crosswalk						U					U										
Pedestrians	0	0	0	0	0	0	0	0	3	3	0	0	0	4	4	0	0	0	1	1	8
% Pedestrians	0	0	0	0	0	0	Ω	Ω	100	0.3	0	0	0	100	1.1	0	0	Ω	100	0.1	0.3

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17255 Site Code : 17255 Start Date : 4/26/2018

		N. I	Main S	Street			F	Route	66			М	ain St	reet			F	Route	66]
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	า 07:00	0 AM to	o 08:45	AM -	Peak 1	of 1													
Peak Hour f	or Énti	re Inte	rsection	n Beg	ins at 0	7:00 A	M														
07:00 AM	20	13	17	0	50	37	69	11	0	117	28	14	2	0	44	3	87	7	0	97	308
07:15 AM	18	11	24	0	53	36	103	9	1	149	18	23	8	2	51	7	90	12	0	109	362
07:30 AM	22	10	25	0	57	13	92	11	0	116	26	7	13	0	46	5	78	5	0	88	307
07:45 AM	22	11	19	0	52	12	91	22	0	125	27	7	6	0	40	2	114	15	0	131	348
Total Volume	82	45	85	0	212	98	355	53	1	507	99	51	29	2	181	17	369	39	0	425	1325
% App. Total	38.7	21.2	40.1	0		19.3	70	10.5	0.2		54.7	28.2	16	1.1		4	86.8	9.2	0		
PHF	.932	.865	.850	.000	.930	.662	.862	.602	.250	.851	.884	.554	.558	.250	.887	.607	.809	.650	.000	.811	.915

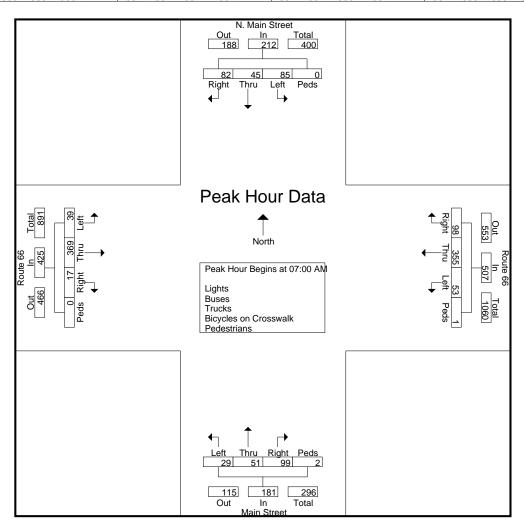

Kensington, Connecticut 06037 (860) 828-1693

> File Name: 17255 Site Code: 17255 Start Date : 4/26/2018


Page No : 3

ſ		N.	Main St	reet			F	Route	66			M	ain St	reet			F	Route	66		
		l l			F	rom E	ast			Fr	om So	outh			F	rom W	/est				
	Start Time						Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total

Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1

Peak Hour to	or ⊵ach	Appro	oach B	<u>egins a</u>	at:		
	08:00 AM	• •		•		07:00 AM	
+0 mins.	23	16	24	0	63	37	6

	08:00 AM					07:00 AM					07:00 AN	1				07:00 AN	1			
+0 mins.	23	16	24	0	63	37	69	11	0	117	28	14	2	0	44	3	87	7	0	97
+15 mins.	21	17	20	0	58	36	103	9	1	149	18	23	8	2	51	7	90	12	0	109
+30 mins.	20	16	16	0	52	13	92	11	0	116	26	7	13	0	46	5	78	5	0	88
+45 mins.	18	21	22	0	61	12	91	22	0	125	27	7	6	0	40	2	114	15	0	131
Total Volume	82	70	82	0	234	98	355	53	1	507	99	51	29	2	181	17	369	39	0	425
% App. Total	35	29.9	35	0		19.3	70	10.5	0.2		54.7	28.2	16	1.1		4	86.8	9.2	0	
PHF	.891	.833	.854	.000	.929	.662	.862	.602	.250	.851	.884	.554	.558	.250	.887	.607	.809	.650	.000	.811

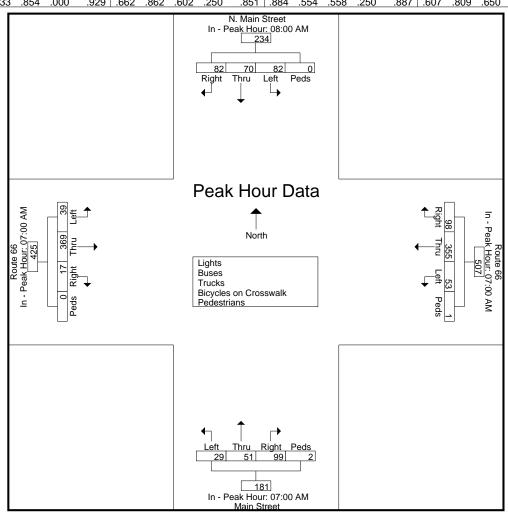

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at N. Main Street East Hampton, Connecticut

File Name: 17256 Site Code: 17256

Start Date : 4/26/2018


Page No : 1

			Main S		'			Route					ain St					Route			
		Fr	om N	orth			_ F	rom E	ast			Fr	om So	outh			FI	om W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	16	18	18	0	52	24	96	25	3	148	22	22	11	0	55	6	89	31	0	126	381
04:15 PM	20	17	13	0	50	25	92	24	1	142	17	24	5	0	46	11	96	30	0	137	375
04:30 PM	13	19	20	0	52	34	97	30	6	167	27	27	6	1	61	13	78	27	0	118	398
04:45 PM	20	20	21	0	61	31	103	37	2	173	20	29	8	0	57	13	115	38	0	166	457
Total	69	74	72	0	215	114	388	116	12	630	86	102	30	1	219	43	378	126	0	547	1611
	۱			_							۱		_						_		
05:00 PM	23	22	26	0	71	33	84	26	1	144	19	29	6	1	55	14	104	32	0	150	420
05:15 PM	20	24	23	0	67	33	102	43	0	178	13	22	10	0	45	7	104	35	0	146	436
05:30 PM	30	30	32	0	92	20	82	34	2	138	19	28	6	0	53	8	88	31	0	127	410
_05:45 PM	15	26	17	0	58	22	78	36	2	138	12	19	10	2	43	12	72	30	0	114	353
Total	88	102	98	0	288	108	346	139	5	598	63	98	32	3	196	41	368	128	0	537	1619
		470	470	•	500		704	055		4000		000					7.40	054		4004	
Grand Total	157	176	170	0	503	222	734	255	17	1228	149	200	62	4	415	84	746	254	0	1084	3230
Apprch %	31.2	35	33.8	0		18.1	59.8	20.8	1.4		35.9	48.2	14.9	1		7.7	68.8	23.4	0		
Total %	4.9	5.4	5.3	0	15.6	6.9	22.7	7.9	0.5	38	4.6	6.2	1.9	0.1	12.8	2.6	23.1	7.9	0	33.6	
Lights	155	175	164	0	494	219	718	252	0	1189	148	194	58	0	400	82	733	248	0	1063	3146
% Lights	98.7	99.4	96.5	0	98.2	98.6	97.8	98.8	0_	96.8	99.3	97	93.5	0	96.4	97.6	98.3	97.6	0	98.1	97.4
Buses	0	0	2	0	2	2	3	1	0	6	0	5	2	0	7	1	3	3	0	7	22
<u>% Buses</u>	2	0	1.2	0	<u>0.4</u> 7	0.9	0.4	0.4	0	0.5 16	0	2.5	3.2	0	1.7	1.2	0.4 10	1.2	<u>0</u>	0.6 14	0.7
Trucks	_	0.0	4	-	•	0.5	13	2	-			0.5	_	-	4	1		-	-		41
% Trucks	1.3	0.6	2.4	0_	1.4	0.5	1.8	0.8	0_	1.3	0.7	0.5	3.2	0_	<u> </u>	1.2	1.3	1.2	0_	1.3	1.3
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	70.6	1	0	0	0	0	0	0	0	0	0	0	0.4
Pedestrians																					
% Pedestrians	0	0	0	0	0	0	0	0	29.4	0.4	0	0	0	100	1	0	0	0	0	0	0.3

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17256 Site Code : 17256 Start Date : 4/26/2018

			Main S					Route rom E					ain St					Route rom W			
Start	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Time		- F	- 04-0	0.004.4	- 05.45	DM I	Daal. 4	-4.4													
Peak Hour A	,							Of 1													
Peak Hour fo	or Enti	re Inte	rsection	on Beg	ins at 0	4:45 P	M														
04:45 PM	20	20	21	0	61	31	103	37	2	173	20	29	8	0	57	13	115	38	0	166	457
05:00 PM	23	22	26	0	71	33	84	26	1	144	19	29	6	1	55	14	104	32	0	150	420
05:15 PM	20	24	23	0	67	33	102	43	0	178	13	22	10	0	45	7	104	35	0	146	436
05:30 PM	30	30	32	0	92	20	82	34	2	138	19	28	6	0	53	8	88	31	0	127	410
Total Volume	93	96	102	0	291	117	371	140	5	633	71	108	30	1	210	42	411	136	0	589	1723
% App. Total	32	33	35.1	0		18.5	58.6	22.1	0.8		33.8	51.4	14.3	0.5		7.1	69.8	23.1	0		
PHF	.775	.800	.797	.000	.791	.886	.900	.814	.625	.889	.888	.931	.750	.250	.921	.750	.893	.895	.000	.887	.943

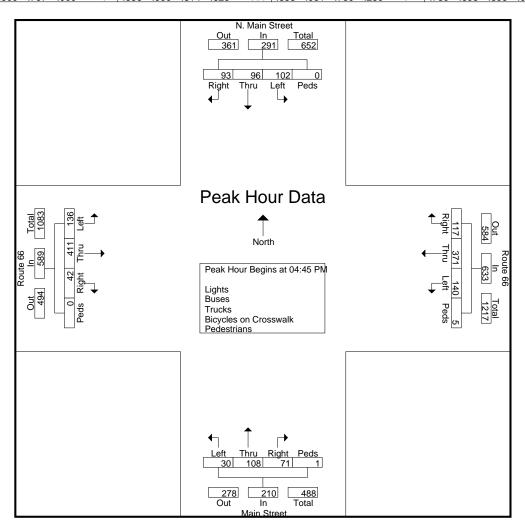


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17256 Site Code : 17256 Start Date : 4/26/2018

Page No : 3

			N. I	Main S	Street			F	Route	66			M	ain St	reet			F	Route	66		
			Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	est		
	Start	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	Ann Total	Int. Total
Į	Time	rtigitt	111114	2010	1 000	Арр. Тотат	rtigitt	11114		1 000	Арр. Тотаг	rugin	11114		1 000	Арр. готаг	rugiit	11110		1 000	Арр. Тотаг	IIII. TOTAI
	Peak Hour A	nalysi	s Fron	n 04:00	0 PM t	o 05:45	PM - I	Peak 1	of 1													
	Peak Hour fo	k Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1 k Hour for Each Approach Begins at:																				

04:45 PM 04:00 PM 04:45 PM 04:30 PM +0 mins. **115** +15 mins. +30 mins. +45 mins. Total Volume % App. Total 35.1 19.8 58.3 20.5 1.4 39.3 46.6 13.7 0.5 7.1 69.8 23.1 .887 PHF .775 .000 .800 .797 .000 .791 .963 .937 .375 .930 .879 .682 .250 .898 .750 .893 .895 .791 .796

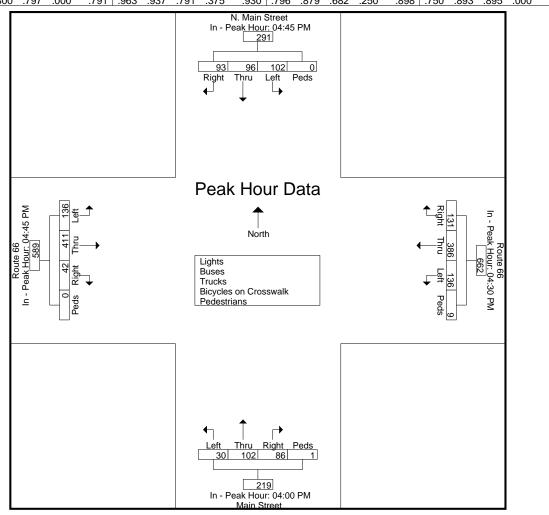

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at East Hampton Mall Ctr Dr East Hampton, Connecticut

File Name: 17257 Site Code: 17257

Start Date : 4/26/2018


Page No : 1

					i oupo i	THITCC	Ligit	10 D	4000	TTUONO	_ Dioy	DICO O	1 0100	ovvant	ı cuc	Juliano	<u>' </u>				
	Eas	st Har	npton	Mall C	tr Dr		F	Route	66			F	rivate	Dr			F	Route	66		
		F	rom No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
07:00 AM	3	0	7	0	10	11	107	4	0	122	1	0	1	0	2	5	121	2	0	128	262
07:15 AM	1	0	8	1	10	17	140	10	0	167	2	0	2	0	4	3	123	7	1	134	315
07:30 AM	7	0	10	0	17	5	120	0	0	125	1	0	5	0	6	2	131	2	0	135	283
07:45 AM	3	0	9	0	12	11	124	1	0	136	1	0	1	0	2	0	140	9	0	149	299
Total	14	0	34	1	49	44	491	15	0	550	5	0	9	0	14	10	515	20	1	546	1159
08:00 AM	7	0	11	0	18	10	87	0	0	97	3	0	2	0	5	1	131	1	0	133	253
08:15 AM	4	0	6	0	10	11	96	0	0	107	8	1	1	1	11	1	112	6	0	119	247
08:30 AM	6	0	8	0	14	16	111	0	0	127	3	1	3	1	8	0	110	6	0	116	265
08:45 AM	10	0	4	0	14	12	82	5	0	99	0	0	2	0	2	0	99	6	0	105	220
Total	27	0	29	0	56	49	376	5	0	430	14	2	8	2	26	2	452	19	0	473	985
Grand Total	41	0	63	1	105	93	867	20	0	980	19	2	17	2	40	12	967	39	1	1019	2144
Apprch %	39	0	60	1		9.5	88.5	2	0		47.5	5	42.5	5		1.2	94.9	3.8	0.1		
Total %	1.9	0	2.9	0	4.9	4.3	40.4	0.9	0	45.7	0.9	0.1	8.0	0.1	1.9	0.6	45.1	1.8	0	47.5	
Lights	41	0	61	0	102	88	830	19	0	937	10	2	12	0	24	11	931	39	0	981	2044
% Lights	100	0	96.8	0	97.1	94.6	95.7	95	0	95.6	52.6	100	70.6	0	60	91.7	96.3	100	0	96.3	95.3
Buses	0	0	1	0	1	1	16	0	0	17	0	0	0	0	0	0	4	0	0	4	22
% Buses	0	0	1.6	0	1	1.1	1.8	0	0_	1.7	0	0	0	0	0	0	0.4	0	0	0.4	1
Trucks	0	0	1	0	1	4	21	1	0	26	9	0	5	0	14	1	32	0	0	33	74
<u>% Trucks</u>	0	0	1.6	0	1	4.3	2.4	5_	0_	2.7	47.4	0	29.4	0	35	8.3	3.3	0	0_	3.2	3.5
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	1	1	0	0	0	0	0	0	0	0	2	2	0	0	0	1	1	4
	0	0	0	100	1	0	0	0	0	0	0	0	0	100	5	0	0	0	100	0.1	0.2
% Pedestrians	0	U	U	100	- 1	U	U	U	U	U	0	U	U	100	Э	U	U	U	100	U. I	0.2

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17257 Site Code : 17257 Start Date : 4/26/2018

	Eas	st Han	npton	Mall C	tr Dr		F	Route	66			Р	rivate	Dr			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fr	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	nalysi	s Fron	า 07:00	O AM to	08:45	AM - I	Peak 1	of 1													
Peak Hour fo	or Entii	re Inte	rsectio	n Beg	ins at 0	7:00 A	M														
07:00 AM	3	0	7	0	10	11	107	4	0	122	1	0	1	0	2	5	121	2	0	128	262
07:15 AM	1	0	8	1	10	17	140	10	0	167	2	0	2	0	4	3	123	7	1	134	315
07:30 AM	7	0	10	0	17	5	120	0	0	125	1	0	5	0	6	2	131	2	0	135	283
07:45 AM	3	0	9	0	12	11	124	1	0	136	1	0	1	0	2	0	140	9	0	149	299
Total Volume	14	0	34	1	49	44	491	15	0	550	5	0	9	0	14	10	515	20	1	546	1159
% App. Total	28.6	0	69.4	2		8	89.3	2.7	0		35.7	0	64.3	0		1.8	94.3	3.7	0.2		
PHF	.500	.000	.850	.250	.721	.647	.877	.375	.000	.823	.625	.000	.450	.000	.583	.500	.920	.556	.250	.916	.920

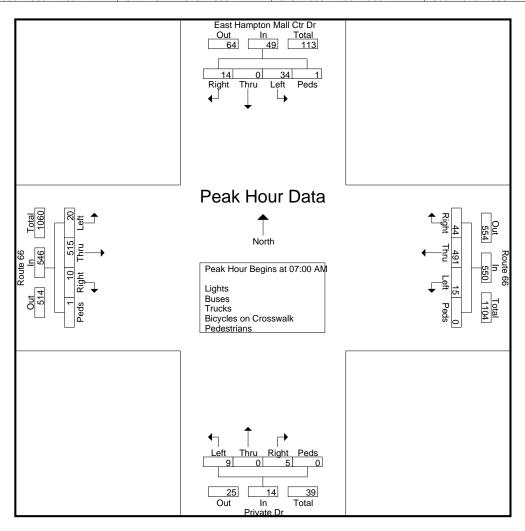

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17257 Site Code : 17257 Start Date : 4/26/2018

> > 551


.924

Page No : 3

	Eas	st Han	npton	Mall C	tr Dr		F	Route	66			Р	rivate	Dr			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om Sc	outh			F	rom W	/est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	Analysi	s Fron	า 07:00	O AM t	o 08:45	AM - I	Peak 1	of 1													
Peak Hour f	or Eacl	h Appi	oach l	Begins	at:																_
	07:15 AM	1				07:00 AM	1				07:45 AM					07:15 AM	1				
+0 mins.	1	0	8	1	10	11	107	4	0	122	1	0	1	0	2	3	123	7	1	134	
+15 mins.	7	0	10	0	17	17	140	10	0	167	3	0	2	0	5	2	131	2	0	135	
+30 mins.	3	0	9	0	12	5	120	0	0	125	8	1	1	1	11	0	140	9	0	149	
_+45 mins.	7	0	11	0	18	11	124	1	0	136	3	1	3	1	8	1	131	1	0	133	

Total Volume

% App. Total

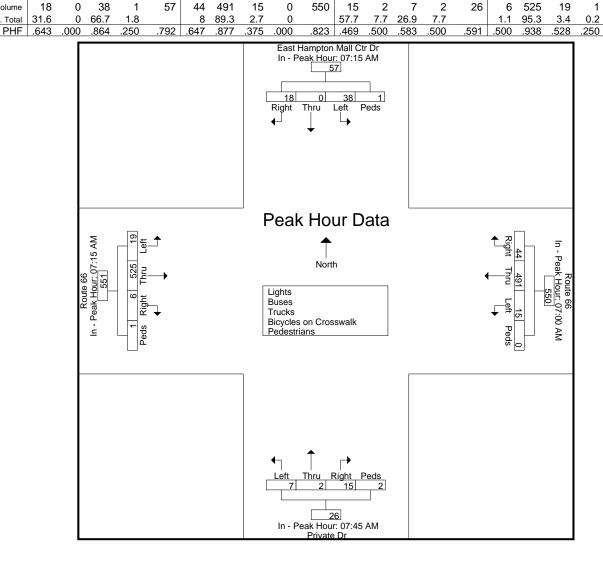

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at East Hampton Mall Ctr Dr East Hampton, Connecticut

File Name : 17258 Site Code : 17258

Start Date : 4/26/2018


Page No : 1

	Eas	st Han	npton	Mall C	tr Dr		Ī	Route	66			P	rivate	Dr			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	17	0	21	0	38	28	123	0	0	151	2	2	4	0	8	0	125	7	1	133	330
04:15 PM	15	0	23	2	40	32	116	1	1	150	2	0	1	0	3	0	125	7	0	132	325
04:30 PM	18	0	32	1	51	25	143	0	0	168	2	0	3	1	6	0	113	14	1	128	353
04:45 PM	18	0	28	1_	47	31	152	1_	0	184	0	0	1	0	1_	0	142	9	1_	152	384
Total	68	0	104	4	176	116	534	2	1	653	6	2	9	1	18	0	505	37	3	545	1392
05:00 PM	17	0	21	0	38	27	140	0	0	167	0	0	0	0	0	0	142	13	1	156	361
05:15 PM	23	0	20	0	43	30	142	3	0	175	0	0	1	2	3	1	132	12	1	146	367
05:30 PM	18	0	25	0	43	26	112	1	1	140	1	0	2	1	4	0	121	12	0	133	320
05:45 PM	9	0	17	0	26	24	133	1_	0	158	1	0	0	3	4	0	103	11	1_	115	303
Total	67	0	83	0	150	107	527	5	1	640	2	0	3	6	11	1	498	48	3	550	1351
																					ı
Grand Total	135	0	187	4	326	223	1061	7	2	1293	8	2	12	7	29	1	1003	85	6	1095	2743
Apprch %	41.4	0	57.4	1.2		17.2	82.1	0.5	0.2		27.6	6.9	41.4	24.1		0.1	91.6	7.8	0.5		
Total %	4.9	0	6.8	0.1	11.9	8.1	38.7	0.3	0.1	47.1	0.3	0.1	0.4	0.3	1.1	0	36.6	3.1	0.2	39.9	
Lights	135	0	187	0	322	223	1044		_					_					_		
<u>% Lights</u>	100	0_	100	0	98.8	100	98.4	71.4	0	98.4	100	100	83.3	0	69	100	98.3	100	0	97.9	97.9
Buses	0	0	0	0	0	0	6	0	0	6	0	0	0	0	0	0	4	0	0	4	10
% Buses	0	0	0	0	0	0	0.6	0	0	0.5	0	0	0	0	0	0	0.4	0	0	0.4	0.4
Trucks	0	0	0	0	0	0	11	2	0	13	0	0	2	0	2 6.9	0	13 1.3	0	0	13 1.2	28
% Trucks	0			0	0	0	I	28.6	0	1	0	0	16.7		6.9	0	1.3	0	0_	1.2	
Bicycles on Crosswalk																					
% Bicycles on Crosswalk	0	0	0	0	0	0	0	0	50	0.1	0	0	0	14.3	3.4	0	0	0	0	0	0.1
Pedestrians																					
% Pedestrians	0	0	0	100	1.2	0	0	0	50	0.1	0	0	0	85.7	20.7	0	0	0	100	0.5	0.6

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17258 Site Code : 17258 Start Date : 4/26/2018

	Eas		npton	Mall C	tr Dr			Route rom E					rivate om So					Route			
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	Analysi	s Fron	n 04:0	0 PM t	o 05:45	PM -	Peak 1	of 1	I										l		
Peak Hour f	or Enti	re Inte	rsection	on Beg	ins at 0	4:30 P	M														
04:30 PM	18	0	32	1	51	25	143	0	0	168	2	0	3	1	6	0	113	14	1	128	353
04:45 PM	18	0	28	1	47	31	152	1	0	184	0	0	1	0	1	0	142	9	1	152	384
05:00 PM	17	0	21	0	38	27	140	0	0	167	0	0	0	0	0	0	142	13	1	156	361
05:15 PM	23	0	20	0	43	30	142	3	0	175	0	0	1	2	3	1	132	12	1	146	367
Total Volume	76	0	101	2	179	113	577	4	0	694	2	0	5	3	10	1	529	48	4	582	1465
% App. Total	42.5	0	56.4	1.1		16.3	83.1	0.6	0		20	0	50	30		0.2	90.9	8.2	0.7		
PHF	.826	.000	.789	.500	.877	.911	.949	.333	.000	.943	.250	.000	.417	.375	.417	.250	.931	.857	1.00	.933	.954

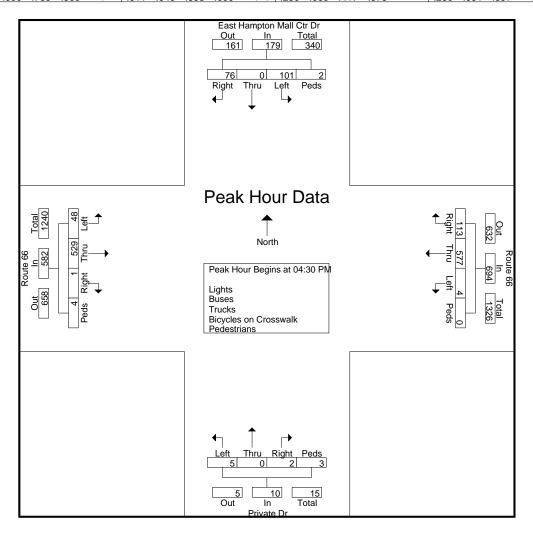


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17258 Site Code : 17258 Start Date : 4/26/2018

Page No : 3

	Eas		npton	Mall C	tr Dr			Route rom E					rivate om So					Route rom W			
Start Time	Right	Thru	Left		App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. T
	nalysi	s Fron	n 04:0	0 PM t	o 05:45	PM -	Peak 1	1 of 1					I								1
Peak Hour fe	or Eacl	alysis From 04:00 PM to 05:45 PM - Peak 1 of 1 Each Approach Begins at:																			
	04:30 PM					04:30 PM	1				04:00 PM	1				04:45 PN	1				
+0 mins.	18	0	32	1	51	25	143	0	0	168	2	2	4	0	8	0	142	9	1	152	
+15 mins.	18	0	28	1	47	31	152	1	0	184	2	0	1	0	3	0	142	13	1	156	
+30 mins.	17	0	21	0	38	27	140	0	0	167	2	0	3	1	6	1	132	12	1	146	
+45 mins.	23	0	20	0	43	30	142	3	0	175	0	0	1	0	1	0	121	12	0	133	
Total Valuma	76	Λ	101	2	170	112	577	1	Λ	604	6	2	<u> a</u>	1	18	1	537	16	3	587	1

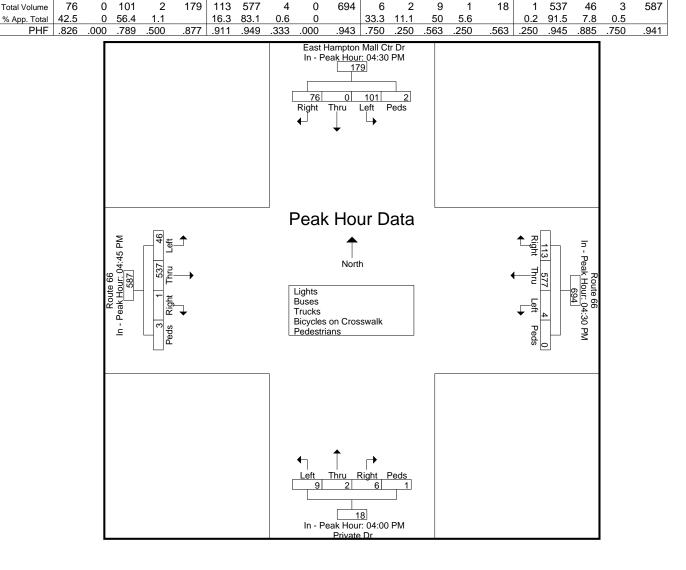

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Lakeview Street East Hampton, Connecticut

File Name: 17259 Site Code: 17259

Start Date : 4/26/2018

Page No : 1

Groups Printed- Lights - Buses - Trucks - Bicycles on Crosswalk - Pedestrians


					noupo i	THITC	<u> </u>	110 0	4000	TTUONO	, Dicy	OICO OI	1 Oloc	OVVAIIN	ı cuc	Juliania	<u>' </u>				
		Pri	vate D	rive	-		F	Route	66			Lake	eview	Street			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fr	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
07:00 AM	0	0	0	0	0	0	103	16	0	119	72	0	13	0	85	6	90	0	0	96	300
07:15 AM	0	0	0	0	0	0	116	18	0	134	70	0	21	0	91	9	108	0	2	119	344
07:30 AM	0	0	0	0	0	0	101	25	0	126	73	0	23	0	96	10	111	0	0	121	343
07:45 AM	0	0	0	0	0	0	111	34	0	145	50	0	17	0	67	9	117	0	0	126	338
Total	0	0	0	0	0	0	431	93	0	524	265	0	74	0	339	34	426	0	2	462	1325
08:00 AM	0	0	2	0	2	1	85	28	0	114	45	0	12	0	57	7	116	0	0	123	296
08:15 AM	0	0	0	1	1	0	95	30	0	125	42	0	13	0	55	18	95	0	1	114	295
08:30 AM	0	0	0	2	2	0	96	19	0	115	59	0	38	0	97	18	96	0	0	114	328
08:45 AM	0	0	0	0	0	0	82	18	0	100	27	0	14	0	41	10	74	0	0	84	225
Total	0	0	2	3	5	1	358	95	0	454	173	0	77	0	250	53	381	0	1	435	1144
Grand Total	0	0	2	3	5	1	789	188	0	978	438	0	151	0	589	87	807	0	3	897	2469
Apprch %	0	0	40	60		0.1	80.7	19.2	0		74.4	0	25.6	0		9.7	90	0	0.3		
Total %	0	0	0.1	0.1	0.2	0	32	7.6	0	39.6	17.7	0	6.1	0	23.9	3.5	32.7	0	0.1	36.3	
Lights	0	0	2	0	2	1	763	172	0	936	416	0	140	0	556	80	778	0	0	858	2352
% Lights	0	0	100	0	40	100	96.7	91.5	0	95.7	95	0	92.7	0	94.4	92	96.4	0	0	95.7	95.3
Buses	0	0	0	0	0	0	7	3	0	10	2	0	10	0	12	0	6	0	0	6	28
% Buses	0	0	0	0	0	0	0.9	1.6	0	1	0.5	0	6.6	0	2	0	0.7	0	0	0.7	1.1
Trucks	0	0	0	0	0	0	19	13	0	32	20	0	1	0	21	7	23	0	0	30	83
<u>% Trucks</u>	0	0_	0	0	0	0	2.4	6.9	0_	3.3	4.6	0	0.7	0	3.6	8	2.9	0	0_	3.3	3.4
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	3	3	0	0	0	0	0	0	0	0	0	0	0	0	0	3	3	6
	0	0	0	100	60	0	0	0	0	0	0	0	0	0	0	0	0	0	100	0.3	0.2
% Pedestrians	0	U	U	100	00	U	U	U	U	U	0	U	U	U	U	1 0	U	U	100	0.5	0.2

Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17259 Site Code : 17259 Start Date : 4/26/2018

Page No : 2

		Pri	vate D	rive			F	Route	66			Lake	eview	Street			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fı	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	ak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1 ak Hour for Entire Intersection Begins at 07:00 AM 17:00 AM 0 0 0 0 0 0 103 16 0 119 72 0 13 0 85 6 90 0 0 96 300																				
Peak Hour fo	or Éntii	re Inte	rsectio	n Beg	ins at 0	7:00 A	M														
07:00 AM	0	0	0	0	0	0	103	16	0	119	72	0	13	0	85	6	90	0	0	96	300
07:15 AM	0	0	0	0	0	0	116	18	0	134	70	0	21	0	91	9	108	0	2	119	344
07:30 AM	0	0	0	0	0	0	101	25	0	126	73	0	23	0	96	10	111	0	0	121	343
07:45 AM	0	0	0	0	0	0	111	34	0	145	50	0	17	0	67	9	117	0	0	126	338
Total Volume	0	0	0	0	0	0	431	93	0	524	265	0	74	0	339	34	426	0	2	462	1325
% App. Total	0	0	0	0		0	82.3	17.7	0		78.2	0	21.8	0		7.4	92.2	0	0.4		
PHF	.000	.000	.000	.000	.000	.000	.929	.684	.000	.903	.908	.000	.804	.000	.883	.850	.910	.000	.250	.917	.963

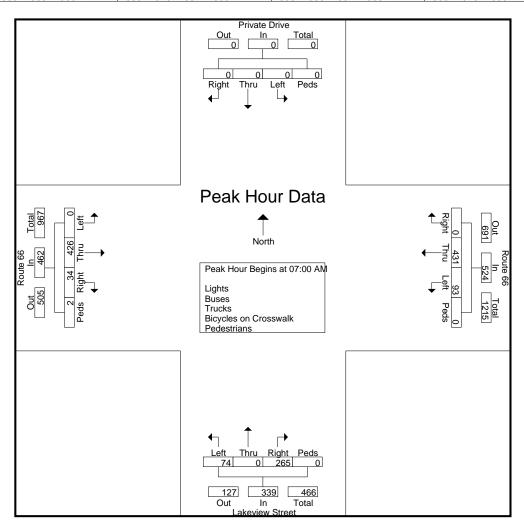


Kensington, Connecticut 06037 (860) 828-1693

> File Name : 17259 Site Code : 17259 Start Date : 4/26/2018

Page No : 3

	Pi	rivate L	Orive			ŀ	₹oute	66			Lake	eview	Street			ŀ	₹oute	66		
	F	rom N	orth			F	rom E	ast			Fr	om Sc	outh			Fı	rom W	'est		
Start Time	Right Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	me Right Thru Left Peds App. Total Right Thru Left Peds App. Total Right Thru Left Peds App. Total Right Thru Left Peds App. Total Intuity Company Com																			
Peak Hour fo	for Each Approach Begins at:														1					

+0 mins. +15 mins. +30 mins. +45 mins. Total Volume 21.8 82.3 17.7 7.2 92.4 0.4 78.2 % App. Total PHF .000 .000 .250 .375 .625 .000 .929 .684 .903 .908 .000 .804 .000 .883 .875 .966 .000 .250 .970

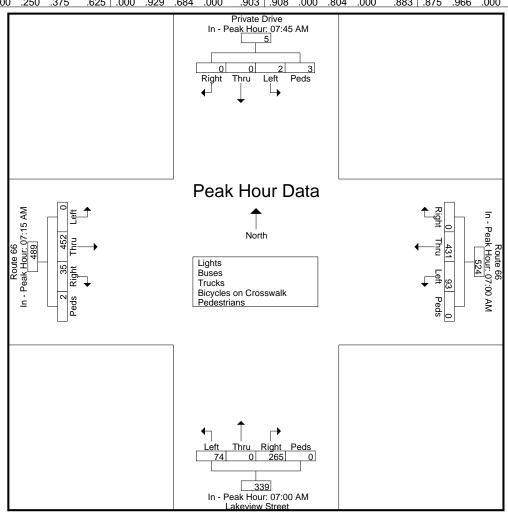

Kensington, Connecticut 06037 (860) 828-1693

Route 66 at Lakeview Street East Hampton, Connecticut

File Name: 17260 Site Code: 17260

Start Date : 4/26/2018

Page No : 1

Groups Printed- Lights - Buses - Trucks - Bicycles on Crosswalk - Pedestrians


					noupo i	THITC	z Ligii	10 0	4000	TTUONO	_ Dioy	OICO OI	1 Oloc	OVVAIIN	ı cuc	Juliania	<u>' </u>				
		Pri	vate D	Prive	-		F	Route	66			Lake	eview	Street			F	Route	66		
		Fr	om No	orth			F	rom E	ast			Fr	om So	outh			Fr	rom W	est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
04:00 PM	0	0	0	0	0	0	132	38	0	170	29	0	22	0	51	37	119	0	0	156	377
04:15 PM	0	0	0	3	3	0	124	47	0	171	37	0	12	0	49	29	120	0	0	149	372
04:30 PM	0	0	0	0	0	0	134	49	0	183	32	0	27	0	59	21	107	0	0	128	370
04:45 PM	0	0	0	0	0	0	140	68	0	208	31	0	18	0	49	23	133	0	0	156	413
Total	0	0	0	3	3	0	530	202	0	732	129	0	79	0	208	110	479	0	0	589	1532
05:00 PM	1	0	0	0	1	0	133	62	0	195	35	0	13	0	48	22	121	0	0	143	387
05:15 PM	0	0	0	0	0	0	141	72	0	213	34	0	27	0	61	25	123	0	0	148	422
05:30 PM	0	0	0	0	0	0	119	60	0	179	49	0	18	0	67	28	99	1	2	130	376
_05:45 PM	0	0	0	0	0	0	114	77	0	191	37	0	25	0	62	28	87	0	0	115	368
Total	1	0	0	0	1	0	507	271	0	778	155	0	83	0	238	103	430	1	2	536	1553
Grand Total	1	0	0	3	4	0	1037	473	0	1510	284	0	162	0	446	213	909	1	2	1125	3085
Apprch %	25	0	0	75		0	68.7	31.3	0		63.7	0	36.3	0		18.9	80.8	0.1	0.2		
Total %	0	0	0	0.1	0.1	0	33.6	15.3	0	48.9	9.2	0	5.3	0	14.5	6.9	29.5	0	0.1	36.5	
Lights	1	0	0	0	1	0	1016														
% Lights	100	0	0	0	25	0	98	98.1	0	98	98.6	0	100	0	99.1	99.1	97.6	100	0	97.7	98
Buses	0	0	0	0	0	0	8	1	0	9	4	0	0	0	4	1	7	0	0	8	21
% Buses	0	0	0	0	0	0	0.8	0.2	0_	0.6	1.4	0	0	0	0.9	0.5	0.8	0	0	0.7	0.7
Trucks	0	0	0	0	0	0	13	8	0	21	0	0	0	0	0	1	15	0	0	16	37
<u>% Trucks</u>	0	0_	0	0_	0	0	1.3	1.7	0_	1.4	0	0	0	0_	0	0.5	1.7	0	0_	1.4	1.2
Bicycles on Crosswalk																					
% Bicycles on	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrians	0	0	0	3	3	0	0	0	0	0	0	0	0	0	0	0	0	0	2	2	5
% Pedestrians	0	0	0	100	75	0	0	0	0	0	0	0	0	0	0	0	0	0	100	0.2	0.2
/₀ reuesinans	ı	U	U	100	10	U	U	U	U	U	ı	U	U	U	U	ı	U	U	100	0.2	0.2

Kensington, Connecticut 06037 (860) 828-1693

File Name : 17260 Site Code : 17260 Start Date : 4/26/2018

Page No : 2

																					1
		Pri	vate D)rive			F	Route	66			Lake	eview	Street			F	Route	66		
		Fr	rom No	orth			F	rom E	ast			Fr	om So	outh			Fi	rom W	'est		
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Tota
Peak Hour A	nalysi	s Fron	n 04:0	0 PM to	o 05:45	PM - I	Peak 1	of 1													
Peak Hour fo	or Enti	re Inte	rsection	n Beg	ins at 0	4:45 P	M														
04:45 PM	0	0	0	0	0	0	140	68	0	208	31	0	18	0	49	23	133	0	0	156	413
05:00 PM	1	0	0	0	1	0	133	62	0	195	35	0	13	0	48	22	121	0	0	143	387
05:15 PM	0	0	0	0	0	0	141	72	0	213	34	0	27	0	61	25	123	0	0	148	422
05:30 PM	0	0	0	0	0	0	119	60	0	179	49	0	18	0	67	28	99	1	2	130	376
Total Volume	1	0	0	0	1	0	533	262	0	795	149	0	76	0	225	98	476	1	2	577	1598
% App. Total	100	0	0	0		0	67	33	0		66.2	0	33.8	0		17	82.5	0.2	0.3		
PHF	.250	.000	.000	.000	.250	.000	.945	.910	.000	.933	.760	.000	.704	.000	.840	.875	.895	.250	.250	.925	.947

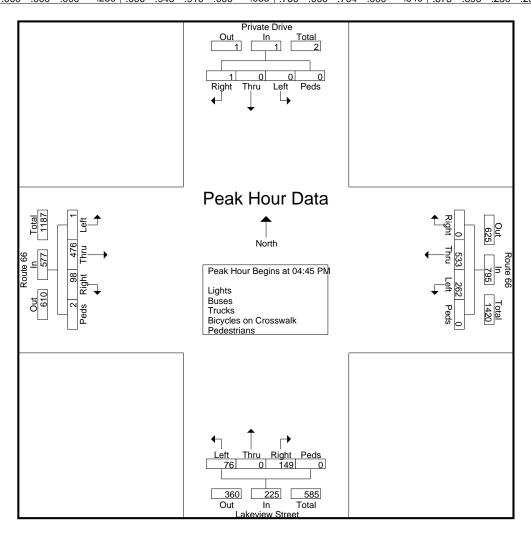


Kensington, Connecticut 06037 (860) 828-1693

File Name : 17260 Site Code : 17260 Start Date : 4/26/2018

Page No : 3

		Pri	vate D)rive			F	Route	66			Lake	eview	Street			F	Route (66		İ
	From North From East											Fr	om So	outh			Fı	rom W	est		i .
Start Time	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Int. Total
Peak Hour A	Right Thru Left Peds App. Total Right Thru Left Peds App. Total Right Thru Left Peds App. Total Right Thru Left Peds App. Total Ir Indianalysis From 04:00 PM to 05:45 PM - Peak 1 of 1																				
Peak Hour fo	or Each Approach Begins at:																				

reak noul i	<u>Ji ⊑aci</u>	I Appi	<u>uacii i</u>	<u>Jegins</u>	aı.															
	04:15 PM					04:30 PM	1				05:00 PM					04:00 PM	1			
+0 mins.	0	0	0	3	3	0	134	49	0	183	35	0	13	0	48	37	119	0	0	156
+15 mins.	0	0	0	0	0	0	140	68	0	208	34	0	27	0	61	29	120	0	0	149
+30 mins.	0	0	0	0	0	0	133	62	0	195	49	0	18	0	67	21	107	0	0	128
+45 mins.	1	0	0	0	1	0	141	72	0	213	37	0	25	0	62	23	133	0	0	156
Total Volume	1	0	0	3	4	0	548	251	0	799	155	0	83	0	238	110	479	0	0	589
% App. Total	25	0	0	75		0	68.6	31.4	0		65.1	0	34.9	0		18.7	81.3	0	0	
PHF	.250	.000	.000	.250	.333	.000	.972	.872	.000	.938	.791	.000	.769	.000	.888	.743	.900	.000	.000	.944

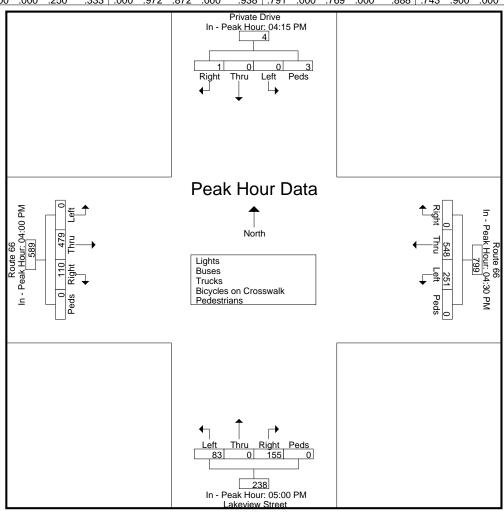

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/11/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	8	22	56	115	222	316	233	96	19	6	0	0	0	0	1093	36-45	549
16:00	12	41	96	174	365	509	295	95	13	2	0	0	0	0	1602	31-40	874
17:00	5	39	136	207	369	504	284	92	16	5	0	0	0	0	1657	31-40	873
18:00	2	25	99	151	391	555	327	96	22	0	0	0	0	0	1668	31-40	946
19:00	5	15	62	109	122	337	305	107	39	3	0	0	0	0	1104	36-45	642
20:00	1	7	29	39	83	288	267	110	25	11	2	0	0	0	862	36-45	555
21:00	2	10	22	42	131	261	205	75	13	3	0	0	0	0	764	36-45	466
22:00	0	1	18	14	44	188	172	55	12	2	0	2	0	0	508	36-45	360
23:00	1	2	14	13	23	97	81	37	12	2	0	1	1	0	284	36-45	178
Total	36	162	532	864	1750	3055	2169	763	171	34	2	3	1	0	9542		
Percent	0.4%	1.7%	5.6%	9.1%	18.3%	32.0%	22.7%	8.0%	1.8%	0.4%	0.0%	0.0%	0.0%	0.0%			
AM Peak Vol.																	
PM Peak	16:00	16:00	17:00	17:00	18:00	18:00	18:00	20:00	19:00	20:00	20:00	22:00	23:00		18:00		
Vol.	12	41	136	207	391	555	327	110	39	11	2	2	1		1668		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Eastbound															Lantauc.	0 0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/12/18	0	0	2	1	13	77	98	36	4	1	0	0	0	0	232	36-45	175
01:00	0	1	1	1	7	34	45	13	8	0	0	0	0	0	110	36-45	79
02:00	0	0	1	1	3	9	23	11	2	0	0	0	0	0	50	40-49	34
03:00	0	2	2	3	5	9	11	4	1	0	0	1	0	0	38	36-45	20
04:00	0	1	3	1	6	9	7	5	1	0	1	0	0	0	34	34-43	16
05:00	1	5	3	3	4	12	15	7	2	2	1	1	0	0	56	36-45	27
06:00	1	4	8	7	5	33	50	47	11	1	0	0	0	0	167	41-50	97
07:00	3	11	30	19	21	107	151	71	27	5	0	1	0	0	446	36-45	258
08:00	8	12	40	41	66	226	242	90	25	7	0	0	0	0	757	36-45	468
09:00	4	13	39	49	141	288	210	84	22	3	0	0	0	0	853	36-45	498
10:00	5	29	56	83	152	220	164	70	9	2	2	0	0	0	792	36-45	384
11:00	6	13	53	72	177	266	186	89	13	1	1	0	0	0	877	36-45	452
12 PM	5	16	54	87	204	321	198	76	10	2	0	0	0	0	973	31-40	525
13:00	9	20	58	99	203	332	218	84	9	4	0	0	0	0	1036	36-45	550
14:00	7	18	56	71	133	363	286	87	16	4	1	1	0	0	1043	36-45	649
15:00	4	17	82	127	270	377	249	102	31	5	0	0	0	0	1264	31-40	647
16:00	3	22	66	158	366	532	289	100	23	2	1	0	0	0	1562	31-40	898
17:00	8	42	110	261	484	413	278	86	14	2	0	0	0	0	1698	31-40	897
18:00	5	33	120	190	307	446	420	110	28	6	0	0	0	0	1665	36-45	866
19:00	2	13	25	48	147	384	379	124	49	6	1	0	0	0	1178	36-45	763
20:00	2	19	26	38	92	280	270	108	24	3	0	1	0	0	863	36-45	550
21:00	2	5	42	36	142	254	219	75	29	3	1	0	0	0	808	36-45	473
22:00	3	7	20	26	92	223	157	44	9	1	0	0	0	0	582	36-45	380
23:00	0	5	10	13	41	110	126	39	13	2	0	0	0	0	359	36-45	236
Total	78	308	907	1435	3081	5325	4291	1562	380	62	9	5	0	0	17443		
Percent	0.4%	1.8%	5.2%	8.2%	17.7%	30.5%	24.6%	9.0%	2.2%	0.4%	0.1%	0.0%	0.0%	0.0%			
AM Peak	08:00	10:00	10:00	10:00	11:00	09:00	08:00	08:00	07:00	08:00	10:00	03:00			11:00		
Vol.	8	29	56	83	177	288	242	90	27	7	2	1			877		
PM Peak	13:00	17:00	18:00	17:00	17:00	16:00	18:00	19:00	19:00	18:00	14:00	14:00			17:00		
Vol.	9	42	120	261	484	532	420	124	49	6	1	1			1698		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/13/18	1	0	3	7	12	87	83	37	11	2	0	0	0	0	243	36-45	170
01:00	0	2	4	3	15	29	37	29	5	1	0	0	0	0	125	38-47	66
02:00	0	0	0	0	3	19	14	6	4	0	0	0	0	0	46	36-45	33
03:00	0	1	0	0	3	4	9	8	2	0	0	0	0	0	27	41-50	17
04:00	0	1	0	1	2	11	6	2	2	1	1	0	0	0	27	36-45	17
05:00	1	2	5	0	3	14	14	4	5	1	0	0	0	0	49	36-45	28
06:00	3	8	10	6	9	25	48	41	12	2	1	0	0	0	165	41-50	89
07:00	1	8	21	23	39	75	141	91	29	5	3	1	0	0	437	41-50	232
08:00	8	12	42	48	75	202	204	106	30	9	0	0	0	0	736	36-45	406
09:00	7	11	50	48	109	263	252	96	26	2	0	0	0	0	864	36-45	515
10:00	6	24	42	48	135	262	196	88	13	3	0	0	0	0	817	36-45	458
11:00	6	17	50	91	209	348	166	72	12	0	0	0	0	0	971	31-40	557
12 PM	7	31	67	118	273	397	176	57	7	0	0	0	0	0	1133	31-40	670
13:00	9	16	95	133	305	413	203	55	8	5	0	0	0	0	1242	31-40	718
14:00	5	19	72	88	247	376	263	73	16	2	0	0	0	0	1161	36-45	639
15:00	4	23	74	135	311	428	237	63	9	2	2	0	0	0	1288	31-40	739
16:00	7	46	147	320	397	444	237	82	7	2	0	0	0	0	1689	31-40	841
17:00	1	66	228	342	486	437	206	58	15	1	1	0	0	0	1841	31-40	923
18:00	15	46	130	234	391	476	299	81	23	3	1	0	0	0	1699	31-40	867
19:00	5	9	53	63	134	397	334	123	32	5	1	1	0	0	1157	36-45	731
20:00	3	10	45	30	105	254	239	111	37	4	1	0	0	0	839	36-45	493
21:00	3	8	30	29	95	252	180	56	13	3	2	0	0	0	671	36-45	432
22:00	2	9	28	47	91	212	140	43	15	0	2	0	0	0	589	36-45	352
23:00	1_	1_	20	19	56	145	115	50	8	4	1_	0	0	0	420	36-45	260
Total	95	370	1216	1833	3505	5570	3799	1432	341	57	16	2	0	0	18236		
Percent	0.5%	2.0%	6.7%	10.1%	19.2%	30.5%	20.8%	7.9%	1.9%	0.3%	0.1%	0.0%	0.0%	0.0%			
AM Peak	08:00	10:00	09:00	11:00	11:00	11:00	09:00	08:00	08:00	08:00	07:00	07:00			11:00		
Vol.	8	24	50	91	209	348	252	106	30	9	3	1			971		
PM Peak	18:00	17:00	17:00	17:00	17:00	18:00	19:00	19:00	20:00	13:00	15:00	19:00			17:00		
Vol.	15	66	228	342	486	476	334	123	37	5	2	1			1841		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Eastbound															Latitude.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/14/18	2	2	7	3	29	94	101	39	8	3	0	0	0	0	288	36-45	195
01:00	0	4	1	2	17	36	53	30	11	1	1	0	0	0	156	36-45	89
02:00	0	0	1	0	12	22	34	17	9	3	0	0	0	0	98	36-45	56
03:00	0	0	0	0	8	16	29	8	4	2	0	0	0	0	67	36-45	45
04:00	0	0	1	0	3	11	15	5	0	0	0	0	0	0	35	36-45	26
05:00	1	4	1	2	1	15	18	15	3	0	0	0	0	0	60	41-50	33
06:00	0	4	4	3	6	25	29	40	8	2	0	0	0	0	121	41-50	69
07:00	1	6	11	11	13	54	81	52	24	8	0	1	0	0	262	36-45	135
08:00	5	11	19	25	36	122	150	67	27	4	0	0	0	0	466	36-45	272
09:00	13	8	37	39	46	177	210	94	25	6	0	0	0	0	655	36-45	387
10:00	4	30	64	79	158	319	232	84	19	5	0	0	0	0	994	36-45	551
11:00	3	14	63	54	159	367	309	66	19	2	0	0	0	0	1056	36-45	676
12 PM	8	23	92	123	217	414	236	64	13	1	0	0	0	0	1191	36-45	650
13:00	13	24	66	104	225	405	279	87	10	4	0	0	0	0	1217	36-45	684
14:00	0	14	55	101	286	429	286	94	20	3	0	0	0	0	1288	36-45	715
15:00	3	20	59	108	222	435	247	88	23	5	1	0	0	0	1211	36-45	682
16:00	2	14	44	64	180	393	297	118	37	4	2	0	1	0	1156	36-45	690
17:00	4	11	44	71	142	346	313	95	29	3	0	0	0	0	1058	36-45	659
18:00	1	10	56	53	156	312	268	91	19	3	0	0	0	0	969	36-45	580
19:00	0	13	37	55	95	294	240	82	34	1	1	0	0	0	852	36-45	534
20:00	2	8	31	38	83	193	235	96	18	6	2	0	0	0	712	36-45	428
21:00	1	6	19	28	136	243	133	45	11	4	0	0	0	0	626	31-40	379
22:00	0	6	23	18	100	186	115	36	6	1	0	0	0	0	491	36-45	301
23:00	0	3	12	21	55	129	116	47	7	4	0	0	0	0	394	36-45	245
Total	63	235	747	1002	2385	5037	4026	1460	384	75	7	1	1	0	15423		
Percent	0.4%	1.5%	4.8%	6.5%	15.5%	32.7%	26.1%	9.5%	2.5%	0.5%	0.0%	0.0%	0.0%	0.0%			
AM Peak	09:00	10:00	10:00	10:00	11:00	11:00	11:00	09:00	08:00	07:00	01:00	07:00			11:00		
Vol.	13	30	64	79	159	367	309	94	27	8	1	1_			1056		
PM Peak	13:00	13:00	12:00	12:00	14:00	15:00	17:00	16:00	16:00	20:00	16:00		16:00		14:00		
Vol.	13	24	92	123	286	435	313	118	37	6	2		1		1288		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Eastbound															Lantauc.	0 0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/15/18	3	2	5	4	48	103	96	34	7	0	0	0	0	0	302	36-45	199
01:00	0	0	2	1	18	49	54	30	2	0	0	0	0	0	156	36-45	103
02:00	0	2	0	2	9	25	31	18	6	2	0	0	0	0	95	36-45	56
03:00	1	0	1	1	6	17	12	3	3	0	0	0	0	0	44	36-45	29
04:00	1	1	1	3	3	7	8	3	1	1	0	0	0	0	29	36-45	15
05:00	0	2	0	1	3	10	9	6	2	1	0	0	0	0	34	36-45	19
06:00	0	2	1	1	3	12	24	19	4	2	0	0	0	0	68	41-50	43
07:00	0	7	9	2	5	45	69	45	16	3	0	0	0	0	201	36-45	114
08:00	0	6	5	2	25	59	100	49	23	4	1	0	0	0	274	36-45	159
09:00	5	14	18	13	26	95	159	87	24	3	1	0	0	0	445	36-45	254
10:00	2	16	22	21	74	178	205	75	19	3	0	0	0	0	615	36-45	383
11:00	7	19	43	36	110	261	203	84	14	5	0	0	0	0	782	36-45	464
12 PM	7	15	54	72	163	344	246	83	14	4	0	0	0	0	1002	36-45	590
13:00	4	22	49	56	125	292	270	104	27	4	3	1	0	0	957	36-45	562
14:00	5	17	51	56	128	276	302	88	23	3	0	0	0	0	949	36-45	578
15:00	8	17	42	76	187	294	207	58	10	1	1	0	0	0	901	36-45	501
16:00	0	16	41	85	215	375	218	66	11	0	1	0	0	0	1028	36-45	593
17:00	2	4	50	47	108	251	258	99	38	7	0	0	0	0	864	36-45	509
18:00	0	13	29	36	50	216	290	122	30	6	1	0	0	0	793	36-45	506
19:00	1	7	28	39	65	167	242	119	42	8	0	0	0	0	718	36-45	409
20:00	1	4	28	14	40	191	199	77	17	3	1	1	0	0	576	36-45	390
21:00	0	3	24	22	66	173	144	63	15	1	0	0	0	0	511	36-45	317
22:00	2	3	14	11	43	130	112	45	9	2	1	0	0	0	372	36-45	242
23:00	0	1	8	3	23	68	83	31	9	11	0	0	0	0	227	36-45	151
Total	49	193	525	604	1543	3638	3541	1408	366	64	10	2	0	0	11943		
Percent	0.4%	1.6%	4.4%	5.1%	12.9%	30.5%	29.6%	11.8%	3.1%	0.5%	0.1%	0.0%	0.0%	0.0%			
AM Peak	11:00	11:00	11:00	11:00	11:00	11:00	10:00	09:00	09:00	11:00	08:00				11:00		
Vol.	7	19	43	36	110	261	205	87	24	5	1				782		
PM Peak	15:00	13:00	12:00	16:00	16:00	16:00	14:00	18:00	19:00	19:00	13:00	13:00			16:00		
Vol.	8	22	54	85	215	375	302	122	42	8	3	1			1028		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Latitude: 0' 0.0000 Undefined

Eastbound																	
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/16/18	0	0	1	2	12	40	75	21	10	2	1	0	0	0	164	36-45	115
01:00	0	0	0	2	9	22	21	8	0	1	1	0	0	0	64	36-45	43
02:00	0	1	0	0	2	7	14	7	1	0	0	0	0	0	32	36-45	21
03:00	0	0	0	2	3	6	5	6	1	1	0	0	0	0	24	35-44	11
04:00	0	2	1	0	3	14	7	7	2	2	0	0	0	0	38	36-45	21
05:00	0	3	0	1	1	12	16	8	1	1	0	0	0	0	43	36-45	28
06:00	3	5	5	2	10	33	41	38	14	2	2	0	0	0	155	41-50	79
07:00	5	7	25	21	41	84	117	70	38	7	3	0	0	0	418	36-45	201
08:00	7	13	35	45	97	202	199	107	31	7	1	1	0	0	745	36-45	401
09:00	7	16	45	59	123	229	213	114	28	7	0	0	0	0	841	36-45	442
10:00	2	25	49	65	136	279	182	75	15	5	1	0	0	0	834	36-45	461
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	24	72	161	199	437	928	890	461	141	35	9	1	0	0	3358		
Percent	0.7%	2.1%	4.8%	5.9%	13.0%	27.6%	26.5%	13.7%	4.2%	1.0%	0.3%	0.0%	0.0%	0.0%			
AM Peak	08:00	10:00	10:00	10:00	10:00	10:00	09:00	09:00	07:00	07:00	07:00	08:00			09:00		
Vol.	7	25	49	65	136	279	213	114	38	7	3	1			841		
PM Peak Vol.																	
Total	345	1340	4088	5937	12701	23553	18716	7086	1783	327	53	14	2	0	75945		
Percent	0.5%	1.8%	5.4%	7.8%	16.7%	31.0%	24.6%	9.3%	2.3%	0.4%	0.1%	0.0%	0.0%	0.0%			

15th Percentile: 29 MPH 50th Percentile: 37 MPH 85th Percentile: 44 MPH 95th Percentile: 48 MPH

Stats 10 MPH Pace Speed: 36-45 MPH Number in Pace: 42269

Percent in Pace: 55.7%

Number of Vehicles > 40 MPH: 27981

Percent of Vehicles > 40 MPH: 36.8%

Mean Speed(Average): 38 MPH

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Westbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/11/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	24	7	18	43	111	324	260	81	10	8	1	0	0	0	887	36-45	584
16:00	18	10	19	51	147	327	263	63	15	5	0	0	0	0	918	36-45	590
17:00	19	2	14	30	117	333	295	115	18	7	0	1	0	0	951	36-45	628
18:00	16	8	19	29	65	220	254	94	26	4	0	0	0	0	735	36-45	474
19:00	6	6	16	25	54	186	214	82	17	3	1	0	0	1	611	36-45	400
20:00	2	2	8	10	60	155	188	68	6	1	2	0	0	0	502	36-45	343
21:00	2	0	5	12	48	109	113	25	3	3	0	0	0	0	320	36-45	222
22:00	1	5	5	8	25	64	81	24	9	1	0	0	0	0	223	36-45	145
23:00	0	0	2	2	14	45	41	23	3	11	0	0	0	0	131	36-45	86
Total	88	40	106	210	641	1763	1709	575	107	33	4	11	0	1	5278		
Percent	1.7%	0.8%	2.0%	4.0%	12.1%	33.4%	32.4%	10.9%	2.0%	0.6%	0.1%	0.0%	0.0%	0.0%			
AM Peak																	
Vol.																	
PM Peak	15:00	16:00	16:00	16:00	16:00	17:00	17:00	17:00	18:00	15:00	20:00	17:00		19:00	17:00		
Vol.	24	10	19	51	147	333	295	115	26	8	2	1		1	951		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/12/18	0	0	1	0	7	20	28	4	1	0	0	0	0	0	61	36-45	48
01:00	0	0	2	0	3	18	14	5	1	0	0	0	0	0	43	36-45	32
02:00	0	0	1	2	0	3	10	4	0	1	0	0	0	0	21	41-50	14
03:00	2	0	1	0	7	14	15	6	2	2	0	0	0	0	49	36-45	29
04:00	11	2	1	0	8	33	52	28	10	4	1	0	0	0	150	36-45	85
05:00	30	2	5	8	33	81	162	100	28	4	2	1	0	0	456	41-50	262
06:00	62	10	17	22	97	227	319	181	28	6	0	1	0	0	970	36-45	546
07:00	53	10	28	58	192	364	387	150	10	4	1	0	0	0	1257	36-45	751
08:00	60	12	27	53	146	332	334	128	10	1	0	0	0	0	1103	36-45	666
09:00	59	14	21	46	141	308	262	76	14	2	0	1	0	0	944	36-45	570
10:00	33	10	20	35	111	295	220	71	12	1	1	0	0	0	809	36-45	515
11:00	29	13	24	53	132	248	253	63	14	1	0	0	0	0	830	36-45	501
12 PM	34	15	35	47	146	264	225	81	8	4	1	0	0	0	860	36-45	489
13:00	30	14	30	54	139	285	227	66	8	0	1	0	0	0	854	36-45	512
14:00	30	7	14	29	100	258	301	106	19	1	0	0	0	0	865	36-45	559
15:00	19	12	12	33	107	259	281	103	24	4	0	0	1	0	855	36-45	540
16:00	16	10	21	25	149	294	320	97	18	4	0	0	1	0	955	36-45	614
17:00	20	6	35	23	99	279	294	109	24	3	0	0	0	0	892	36-45	573
18:00	14	2	19	29	76	202	271	96	15	5	3	0	0	0	732	36-45	473
19:00	5	6	12	31	63	196	216	87	16	5	1	0	0	0	638	36-45	412
20:00	12	6	17	23	75	218	218	37	11	1	0	0	0	0	618	36-45	436
21:00	4	1	7	13	56	122	123	29	4	3	0	0	0	0	362	36-45	245
22:00	0	7	6	13	51	97	95	32	6	0	0	0	0	0	307	36-45	192
23:00	0	3	1	7	24	57	40	9	6	2	0	0	0	0	149	36-45	97
Total	523	162	357	604	1962	4474	4667	1668	289	58	11	3	2	0	14780		
Percent	3.5%	1.1%	2.4%	4.1%	13.3%	30.3%	31.6%	11.3%	2.0%	0.4%	0.1%	0.0%	0.0%	0.0%			
AM Peak	06:00	09:00	07:00	07:00	07:00	07:00	07:00	06:00	05:00	06:00	05:00	05:00			07:00		
Vol.	62	14	28	58	192	364	387	181	28	6	2	1			1257		
PM Peak	12:00	12:00	12:00	13:00	16:00	16:00	16:00	17:00	15:00	18:00	18:00		15:00		16:00		
Vol.	34	15	35	54	149	294	320	109	24	5	3		1		955		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/13/18	1	3	3	3	9	27	11	4	1	0	0	0	0	0	62	35-44	38
01:00	1	0	1	0	5	15	8	4	0	0	0	1	0	0	35	36-45	23
02:00	1	0	0	1	4	9	10	2	2	0	0	0	0	0	29	36-45	19
03:00	0	0	1	1	3	12	13	7	2	3	1	0	0	0	43	36-45	25
04:00	12	1	1	2	9	25	46	20	5	3	2	0	0	0	126	36-45	71
05:00	25	3	5	6	33	82	148	104	30	11	1	0	0	0	448	41-50	252
06:00	49	9	17	37	79	227	273	174	24	4	3	0	0	0	896	36-45	500
07:00	84	12	19	47	162	305	363	129	12	2	0	0	0	0	1135	36-45	668
08:00	84	14	23	37	159	346	349	118	14	0	0	0	0	0	1144	36-45	695
09:00	61	14	23	47	162	316	258	72	15	0	0	0	0	0	968	36-45	574
10:00	41	10	29	56	140	295	253	55	10	1	0	0	0	0	890	36-45	548
11:00	35	12	30	51	151	286	234	58	3	1	0	0	0	0	861	36-45	520
12 PM	23	13	27	63	150	298	227	74	8	5	0	0	0	0	888	36-45	525
13:00	28	15	41	54	150	279	220	78	9	1	0	0	0	0	875	36-45	499
14:00	26	8	24	46	170	349	216	76	14	2	0	1	0	0	932	36-45	565
15:00	18	6	24	46	171	327	279	78	7	3	1	0	0	0	960	36-45	606
16:00	25	8	32	51	172	358	274	79	12	2	1	0	0	0	1014	36-45	632
17:00	20	13	25	52	150	250	284	107	17	2	0	0	0	0	920	36-45	534
18:00	8	11	18	21	78	226	271	110	19	5	2	1	0	0	770	36-45	497
19:00	6	5	18	21	76	209	210	71	12	6	1	0	0	0	635	36-45	419
20:00	6	1	19	27	67	205	170	64	11	5	0	0	0	0	575	36-45	375
21:00	1	3	12	16	68	180	109	31	0	3	1	1	0	1	426	36-45	289
22:00	1	4	10	9	32	157	114	22	2	0	0	0	0	0	351	36-45	271
23:00	0	2	2	8	27	87	87	21	6	0	11	0	0	0	241	36-45	174
Total	556	167	404	702	2227	4870	4427	1558	235	59	14	4	0	1	15224		
Percent	3.7%	1.1%	2.7%	4.6%	14.6%	32.0%	29.1%	10.2%	1.5%	0.4%	0.1%	0.0%	0.0%	0.0%			
AM Peak	07:00	08:00	11:00	10:00	07:00	08:00	07:00	06:00	05:00	05:00	06:00	01:00			08:00		
Vol	84	14	30	56	162	346	363	174	30	11	3	1			1144		
PM Peak	13:00	13:00	13:00	12:00	16:00	16:00	17:00	18:00	18:00	19:00	18:00	14:00		21:00	16:00		
Vol.	28	15	41	63	172	358	284	110	19	6	2	1		1	1014		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Westbound															Latitude.	0 0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/14/18	0	3	1	6	22	57	31	11	3	2	0	0	0	0	136	36-45	88
01:00	0	1	4	1	11	23	16	2	4	1	0	0	0	0	63	36-45	39
02:00	1	0	0	1	0	18	18	8	2	0	0	0	0	0	48	36-45	36
03:00	0	0	0	0	3	12	15	10	1	1	0	0	0	0	42	36-45	27
04:00	7	0	2	2	5	20	26	7	2	1	0	0	0	0	72	36-45	46
05:00	8	1	1	6	9	42	53	36	15	3	1	0	1	0	176	36-45	95
06:00	36	10	8	9	33	69	99	70	16	6	1	0	0	0	357	39-48	169
07:00	42	8	6	12	52	107	131	80	23	5	0	0	0	0	466	36-45	238
08:00	47	11	15	34	62	165	208	76	7	7	1	0	0	0	633	36-45	373
09:00	50	24	43	37	95	240	232	86	8	2	1	0	0	0	818	36-45	472
10:00	51	25	39	33	119	247	257	72	13	0	0	0	0	0	856	36-45	504
11:00	46	22	40	37	105	266	292	92	19	3	1	0	0	0	923	36-45	558
12 PM	34	20	24	50	175	305	237	66	8	0	1	0	1	0	921	36-45	542
13:00	23	11	25	52	149	308	260	75	21	3	2	0	1	0	930	36-45	568
14:00	29	6	25	21	104	283	318	102	9	5	0	0	0	0	902	36-45	601
15:00	25	7	24	33	103	268	298	99	12	2	1	0	0	0	872	36-45	566
16:00	18	6	21	29	100	249	315	79	13	7	0	1	0	0	838	36-45	564
17:00	19	5	17	35	120	276	297	102	13	7	1	0	0	0	892	36-45	573
18:00	13	10	12	31	99	278	232	65	17	3	2	0	0	0	762	36-45	510
19:00	9	10	13	13	90	228	198	71	9	0	2	0	0	0	643	36-45	426
20:00	10	3	16	24	71	181	160	45	8	1	0	0	0	0	519	36-45	341
21:00	4	2	17	20	76	206	173	43	6	3	1	0	0	0	551	36-45	379
22:00	3	3	5	12	71	188	133	41	12	8	4	0	1	10	491	36-45	321
23:00	11	1	3	5	9	56	102	73	25	7	4	3	11	0	290	41-50	175
Total	476	189	361	503	1683	4092	4101	1411	266	77	23	4	5	10	13201		
Percent	3.6%	1.4%	2.7%	3.8%	12.7%	31.0%	31.1%	10.7%	2.0%	0.6%	0.2%	0.0%	0.0%	0.1%			
AM Peak	10:00	10:00	09:00	09:00	10:00	11:00	11:00	11:00	07:00	08:00	05:00		05:00		11:00		
Vol.	51	25	43	37	119	266	292	92	23	7	1_		1_		923		
PM Peak	12:00	12:00	13:00	13:00	12:00	13:00	14:00	14:00	23:00	22:00	22:00	23:00	12:00	22:00	13:00		
Vol.	34	20	25	52	175	308	318	102	25	8	4	3	1	10	930		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Westbound															Latitude.	0 0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/15/18	0	2	0	1	6	31	99	49	12	3	3	0	0	0	206	41-50	148
01:00	0	2	0	2	2	26	35	35	5	1	1	0	0	0	109	41-50	70
02:00	1	0	0	1	1	11	26	14	1	1	0	0	0	0	56	41-50	40
03:00	0	0	2	1	2	10	10	6	1	0	1	0	0	0	33	36-45	20
04:00	2	0	1	0	4	2	11	9	3	2	0	0	0	0	34	41-50	20
05:00	5	1	2	1	3	7	36	30	11	5	3	0	0	0	104	41-50	66
06:00	17	2	2	3	0	16	64	71	20	10	3	0	0	0	208	41-50	135
07:00	21	2	8	5	5	31	114	76	36	9	3	0	0	0	310	41-50	190
08:00	42	4	9	5	19	94	156	112	20	4	1	0	0	0	466	41-50	268
09:00	46	5	14	18	31	152	233	142	34	4	1	0	0	0	680	36-45	385
10:00	60	17	20	29	76	227	251	124	20	2	2	0	0	0	828	36-45	478
11:00	42	9	17	26	78	231	323	131	23	4	2	0	0	0	886	36-45	554
12 PM	35	7	17	20	85	249	294	120	22	6	0	0	0	0	855	36-45	543
13:00	21	10	15	24	69	259	308	124	27	6	4	0	0	0	867	36-45	567
14:00	26	5	24	26	107	284	305	84	21	4	0	0	0	0	886	36-45	589
15:00	19	8	10	31	107	308	286	58	5	2	1	0	0	0	835	36-45	594
16:00	12	6	18	26	58	214	306	116	16	8	1	0	0	0	781	36-45	520
17:00	15	4	12	16	68	189	277	125	21	4	4	0	0	1	736	36-45	466
18:00	8	5	16	22	68	208	242	85	25	7	2	0	0	0	688	36-45	450
19:00	6	6	9	14	78	169	218	76	7	2	2	0	0	0	587	36-45	387
20:00	7	3	8	12	34	141	163	72	10	5	2	0	0	0	457	36-45	304
21:00	5	3	8	10	29	97	92	34	4	1	0	0	0	0	283	36-45	189
22:00	0	1	2	5	23	65	77	23	9	2	1	0	0	0	208	36-45	142
23:00	2	0	0	2	8	23	43	19	3	3	1	0	0	0	104	36-45	66
Total	392	102	214	300	961	3044	3969	1735	356	95	38	0	0	1	11207		
Percent	3.5%	0.9%	1.9%	2.7%	8.6%	27.2%	35.4%	15.5%	3.2%	0.8%	0.3%	0.0%	0.0%	0.0%			
AM Peak	10:00	10:00	10:00	10:00	11:00	11:00	11:00	09:00	07:00	06:00	00:00				11:00		
Vol.	60	17	20	29	78	231	323	142	36	10	3				886		
PM Peak	12:00	13:00	14:00	15:00	14:00	15:00	13:00	17:00	13:00	16:00	13:00			17:00	14:00		
Vol.	35	10	24	31	107	308	308	125	27	8	4			1	886		

Route 66 West of Silver Street Portland, Connecticut

Site Code: Station ID: 4717

Latitude: 0' 0.0000 Undefined

Westbound																	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
07/16/18	0	0	1	2	6	16	15	11	1	0	0	1	0	0	53	36-45	31
01:00	0	0	0	2	5	10	13	4	1	0	0	0	0	0	35	36-45	23
02:00	0	0	0	0	5	4	9	4	2	1	0	0	0	0	25	41-50	13
03:00	2	0	0	1	6	8	13	9	1	1	0	0	0	0	41	39-48	22
04:00	9	2	0	2	8	31	43	43	13	3	2	0	0	0	156	41-50	86
05:00	31	2	7	4	35	71	152	119	32	7	4	0	0	0	464	41-50	271
06:00	76	12	18	36	78	208	303	181	34	6	1	0	2	0	955	36-45	511
07:00	100	17	23	59	162	295	338	161	22	5	0	0	0	0	1182	36-45	633
08:00	62	6	13	33	128	351	402	170	34	3	0	0	0	0	1202	36-45	753
09:00	67	10	18	33	140	264	253	105	16	4	0	0	0	0	910	36-45	517
10:00	5	2	7	3	39	59	61	30	7	2	1	0	0	0	216	36-45	120
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	352	51	87	175	612	1317	1602	837	163	32	8	1	2	0	5239		
Percent	6.7%	1.0%	1.7%	3.3%	11.7%	25.1%	30.6%	16.0%	3.1%	0.6%	0.2%	0.0%	0.0%	0.0%			
AM Peak	07:00	07:00	07:00	07:00	07:00	08:00	08:00	06:00	06:00	05:00	05:00	00:00	06:00		08:00		
Vol.	100	17	23	59	162	351	402	181	34	7	4	1	2		1202		
PM Peak Vol.																	
Total	2387	711	1529	2494	8086	19560	20475	7784	1416	354	98	13	9	13	64929		
Percent	3.7%	1.1%	2.4%	3.8%	12.5%	30.1%	31.5%	12.0%	2.2%	0.5%	0.2%	0.0%	0.0%	0.0%			
					04 14011												

15th Percentile: 31 MPH 50th Percentile: 39 MPH 85th Percentile: 44 MPH 95th Percentile: 49 MPH

Stats 10 MPH Pace Speed: 36-45 MPH Number in Pace: 40035

Percent in Pace : 61.7%

Number of Vehicles > 40 MPH : 30162

Percent of Vehicles > 40 MPH : 46.5%

Mean Speed(Average) : 39 MPH

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
12 PM	0	1	0	3	16	89	185	226	84	28	3	1	0	0	636	41-50	411
13:00	1	1	0	5	15	109	193	195	103	48	7	1	0	0	678	41-50	388
14:00	0	2	2	3	19	85	197	238	166	51	13	0	0	0	776	41-50	435
15:00	2	2	3	6	16	81	248	363	243	87	5	1	1	0	1058	41-50	611
16:00	1	1	1	0	6	63	239	447	294	112	4	0	1	0	1169	46-55	741
17:00	0	0	1	0	3	57	217	422	308	127	22	2	0	0	1159	46-55	730
18:00	0	1	2	0	6	57	184	309	218	83	17	2	2	0	881	46-55	527
19:00	5	6	6	5	8	45	158	300	182	24	8	0	1	0	748	46-55	482
20:00	0	1	1	4	9	55	139	233	133	23	8	1	0	0	607	41-50	372
21:00	0	1	1	3	15	57	111	164	32	10	10	1	0	0	405	41-50	275
22:00	0	0	0	3	2	30	51	89	32	7	4	0	0	0	218	41-50	140
23:00	0	0	0	1	2	10	39	65	37	8	8	1	0	0	171	41-50	104
Total	9	16	17	33	117	738	1961	3051	1832	608	109	10	5	0	8506		
Percent	0.1%	0.2%	0.2%	0.4%	1.4%	8.7%	23.1%	35.9%	21.5%	7.1%	1.3%	0.1%	0.1%	0.0%			
AM Peak																	
Vol.																	
PM Peak	19:00	19:00	19:00	15:00	14:00	13:00	15:00	16:00	17:00	17:00	17:00	17:00	18:00		16:00		
Vol.	5	6	6	6	19	109	248	447	308	127	22	2	2		1169		

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Eastbound															Lalliude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	0	1	14	34	41	3	5	5	2	0	0	105	41-50	75
01:00	0	0	0	1	1	14	11	20	4	4	1	2	0	0	58	41-50	31
02:00	0	0	0	0	0	9	14	13	5	3	1	0	0	0	45	41-50	27
03:00	0	0	0	0	1	8	8	6	4	2	3	3	0	0	35	36-45	16
04:00	0	0	0	0	1	3	12	6	15	1	3	1	0	0	42	46-55	21
05:00	0	0	0	1	1	8	23	25	16	10	1	1	0	0	86	41-50	48
06:00	0	0	0	1	1	6	32	81	58	19	4	1	0	0	203	46-55	139
07:00	1	0	0	8	11	34	86	208	165	37	5	2	0	0	557	46-55	373
08:00	0	0	0	7	9	52	119	227	115	37	1	1	0	0	568	41-50	346
09:00	1	3	3	5	21	59	149	218	101	21	3	3	0	0	587	41-50	367
10:00	0	2	2	7	17	77	177	183	111	17	5	0	0	0	598	41-50	360
11:00	1	3	3	7	25	117	224	200	74	15	1	0	0	0	670	41-50	424
12 PM	2	4	4	3	18	107	236	238	73	23	3	1	0	0	712	41-50	474
13:00	0	2	2	14	15	91	230	246	97	26	3	4	0	0	730	41-50	476
14:00	0	3	3	6	27	87	227	269	136	40	6	0	0	0	804	41-50	496
15:00	0	5	5	14	23	107	303	411	185	51	5	1	0	0	1110	41-50	714
16:00	1	3	3	9	28	100	335	517	271	28	2	1	0	0	1298	41-50	852
17:00	2	1	1	3	22	98	339	502	237	24	3	3	0	0	1235	41-50	841
18:00	4	3	3	9	14	81	237	353	172	23	1	1	0	0	901	41-50	590
19:00	2	4	4	3	8	54	168	270	105	24	2	0	0	0	644	41-50	438
20:00	2	3	3	2	12	97	162	230	73	20	1	1	0	0	606	41-50	392
21:00	0	1	1	3	9	72	130	174	71	19	1	0	0	0	481	41-50	304
22:00	0	0	0	1	5	26	75	102	45	19	1	0	0	0	274	41-50	177
23:00	0	0	0	0	7	15	60	80	18	21	5	3	0	0	209	41-50	140
Total	16	37	37	104	277	1336	3391	4620	2154	489	66	31	0	0	12558		
Percent	0.1%	0.3%	0.3%	0.8%	2.2%	10.6%	27.0%	36.8%	17.2%	3.9%	0.5%	0.2%	0.0%	0.0%			
AM Peak	07:00	09:00	09:00	07:00	11:00	11:00	11:00	08:00	07:00	07:00	00:00	03:00			11:00		
Vol.	1	3	3	8	25	117	224	227	165	37	5	3			670		
PM Peak	18:00	15:00	15:00	13:00	16:00	12:00	17:00	16:00	16:00	15:00	14:00	13:00			16:00		
Vol.	4	5	5	14	28	107	339	517	271	51	6	4			1298		

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	1	0	16	30	32	6	8	2	1	0	0	96	41-50	62
01:00	0	0	0	0	0	13	24	16	2	6	6	0	0	0	67	41-50	40
02:00	0	0	0	0	1	8	8	14	3	3	3	2	0	0	42	41-50	22
03:00	0	0	0	0	2	6	14	12	6	2	1	0	0	0	43	41-50	26
04:00	0	0	0	1	0	10	19	5	10	0	5	4	0	0	54	36-45	29
05:00	0	0	0	1	2	11	42	21	26	5	2	2	1	0	113	41-50	63
06:00	0	0	0	1	6	20	91	102	75	10	5	1	0	0	311	41-50	193
07:00	0	0	0	7	10	43	130	225	120	26	4	2	0	0	567	41-50	355
08:00	0	0	0	2	15	42	118	227	105	22	0	3	0	0	534	41-50	345
09:00	0	2	2	6	14	31	122	217	74	18	2	1	0	0	489	41-50	339
10:00	0	0	0	8	17	74	141	217	71	22	2	2	0	0	554	41-50	358
11:00	2	5	5	11	42	127	209	159	57	9	6	1	0	0	633	41-50	368
12 PM	1	3	3	11	16	104	249	213	75	9	13	2	0	0	699	41-50	462
13:00	0	2	2	6	14	99	222	270	102	27	4	0	0	0	748	41-50	492
14:00	0	3	3	8	21	85	292	316	136	22	3	3	0	0	892	41-50	608
15:00	0	2	2	5	23	114	313	434	192	25	5	3	0	0	1118	41-50	747
16:00	1	2	2	6	20	101	291	569	243	26	8	1	0	0	1270	41-50	860
17:00	0	2	2	4	15	141	409	521	216	27	8	2	0	0	1347	41-50	930
18:00	0	4	4	3	12	48	294	407	180	28	6	1	0	0	987	41-50	701
19:00	0	5	5	1	13	37	172	236	131	50	3	1	1	0	655	41-50	408
20:00	0	4	4	2	2	64	204	213	120	33	3	2	0	0	651	41-50	417
21:00	0	1	1	2	11	64	191	124	41	17	5	0	0	0	457	41-50	315
22:00	1	2	2	7	4	53	143	97	52	26	1	3	0	0	391	41-50	240
23:00	0	3	3	3	7	34	77	83	28	20	2	0	0	0	260	41-50	160
Total	5	40	40	96	267	1345	3805	4730	2071	441	99	37	2	0	12978		
Percent	0.0%	0.3%	0.3%	0.7%	2.1%	10.4%	29.3%	36.4%	16.0%	3.4%	0.8%	0.3%	0.0%	0.0%			
AM Peak	11:00	11:00	11:00	11:00	11:00	11:00	11:00	08:00	07:00	07:00	01:00	04:00	05:00		11:00		
Vol.	2	5_	5_	11	42	127	209	227	120	26	6	4	1		633		
PM Peak	12:00	19:00	19:00	12:00	15:00	17:00	17:00	16:00	16:00	19:00	12:00	14:00	19:00		17:00		
Vol.	1	5	5	11	23	141	409	569	243	50	13	3	1		1347		

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	1	1	2	4	17	71	78	27	8	3	1	0	0	213	41-50	149
01:00	0	0	0	2	3	20	28	27	15	5	8	1	0	0	109	41-50	55
02:00	0	0	0	0	2	8	18	19	11	0	0	1	1	0	60	41-50	37
03:00	0	0	0	0	2	6	18	13	14	4	3	0	1	0	61	41-50	31
04:00	0	0	0	0	0	6	20	10	16	1	3	1	0	0	57	41-50	30
05:00	0	0	0	0	3	9	24	11	15	7	5	3	0	0	77	41-50	35
06:00	0	1	1	0	3	11	25	30	36	7	5	2	0	0	121	46-55	66
07:00	0	0	0	0	3	4	87	104	68	11	5	3	0	0	285	41-50	191
08:00	1	2	2	2	8	14	134	198	89	30	3	3	0	0	486	41-50	332
09:00	0	2	2	8	7	28	199	229	95	29	3	0	0	0	602	41-50	428
10:00	0	3	3	8	12	43	209	271	122	38	4	0	1	0	714	41-50	480
11:00	0	0	0	14	17	68	253	308	139	34	0	1	0	0	834	41-50	561
12 PM	0	2	2	6	18	97	268	306	187	27	10	2	0	0	925	41-50	574
13:00	1	1	1	13	15	92	268	291	165	33	5	0	0	0	885	41-50	559
14:00	0	2	2	8	13	56	259	308	126	28	5	1	0	0	808	41-50	567
15:00	1	1	1	5	22	55	246	299	145	36	0	0	0	0	811	41-50	545
16:00	0	0	0	6	8	29	233	323	171	50	4	3	0	0	827	41-50	556
17:00	2	6	6	6	9	41	207	271	140	40	0	1	1	0	730	41-50	478
18:00	2	4	4	5	13	49	177	269	135	23	1	0	0	0	682	41-50	446
19:00	2	1	1	3	6	22	153	210	108	29	0	1	1	0	537	41-50	363
20:00	1	1	1	6	9	41	216	177	49	30	2	1	0	0	534	41-50	393
21:00	0	1	1	5	9	58	161	148	43	23	1	0	0	0	450	41-50	309
22:00	0	0	0	1	6	32	121	101	56	21	0	2	0	0	340	41-50	222
23:00	0	0	0	2	2	38	110	89	34	5	5	1	0	0	286	41-50	199
Total	10	28	28	102	194	844	3505	4090	2006	519	75	28	5	0	11434		
Percent	0.1%	0.2%	0.2%	0.9%	1.7%	7.4%	30.7%	35.8%	17.5%	4.5%	0.7%	0.2%	0.0%	0.0%	44.00		
AM Peak	08:00	10:00	10:00	11:00	11:00	11:00	11:00	11:00	11:00	10:00	01:00	05:00	02:00		11:00		
Vol.	1 1 2 2 2 2	33	33	14_	17	68	253	308	139	38	88	3	1 1 2 2 2		834		
PM Peak	17:00	17:00	17:00	13:00	15:00	12:00	12:00	16:00	12:00	16:00	12:00	16:00	17:00		12:00		
Vol.	2	6	6	13	22	97	268	323	187	50	10	3	1		925		

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Latitude: 0' 0.0000 Undefined

Eastbound																	
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	0	0	1	16	54	65	12	13	3	1	0	0	165	41-50	119
01:00	0	0	0	3	2	18	25	37	16	4	3	0	0	0	108	41-50	62
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	0	0	3	3	34	79	102	28	17	6	1	0	0	273		
Percent	0.0%	0.0%	0.0%	1.1%	1.1%	12.5%	28.9%	37.4%	10.3%	6.2%	2.2%	0.4%	0.0%	0.0%			
AM Peak				01:00	01:00	01:00	00:00	00:00	01:00	00:00	00:00	00:00			00:00		
Vol.				3	2	18	54	65	16	13	3	1			165		
PM Peak																	
Vol.																	
Total	40	121	122	338	858	4297	12741	16593	8091	2074	355	107	12	0	45749		
Percent	0.1%	0.3%	0.3%	0.7%	1.9%	9.4%	27.8%	36.3%	17.7%	4.5%	0.8%	0.2%	0.0%	0.0%			
			- · · ·		40 14011												

15th Percentile: 40 MPH 50th Percentile: 46 MPH 52 MPH 85th Percentile: 95th Percentile: 55 MPH

Stats 10 MPH Pace Speed: 41-50 MPH Number in Pace : 29334

Percent in Pace : 64.1% Number of Vehicles > 40 MPH: 39973 Percent of Vehicles > 40 MPH: 87.4% 47 MPH

Mean Speed(Average):

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Westbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	0	1	0	22	94	226	199	63	19	3	0	0	0	0	627	36-45	425
13:00	1	2	1	8	109	230	191	78	7	4	0	0	0	0	631	36-45	421
14:00	1	2	1	16	96	208	235	75	22	4	0	0	0	0	660	36-45	443
15:00	1	2	1	19	113	216	185	80	16	4	2	0	0	0	639	36-45	401
16:00	0	2	1	13	111	205	206	106	21	6	1	1	0	0	673	36-45	411
17:00	0	0	0	18	107	229	203	91	19	6	1	0	0	0	674	36-45	432
18:00	1	1	2	10	69	190	176	102	24	1	1	0	0	0	577	36-45	366
19:00	0	2	4	11	57	153	170	49	11	4	0	0	0	0	461	36-45	323
20:00	0	3	2	17	59	134	102	35	9	3	0	1	1	0	366	36-45	236
21:00	1	1	2	6	41	108	46	19	8	2	0	0	0	0	234	36-45	154
22:00	1	0	1	3	20	62	63	22	9	3	0	0	0	0	184	36-45	125
23:00	1	0	0	1	12	38	25	15	5	0	0	1	0	0	98	36-45	63
Total	7	16	15	144	888	1999	1801	735	170	40	5	3	1	0	5824		
Percent	0.1%	0.3%	0.3%	2.5%	15.2%	34.3%	30.9%	12.6%	2.9%	0.7%	0.1%	0.1%	0.0%	0.0%			
AM Peak																	
Vol.																	
PM Peak	13:00	20:00	19:00	12:00	15:00	13:00	14:00	16:00	18:00	16:00	15:00	16:00	20:00		17:00		
Vol.	1	3	4	22	113	230	235	106	24	6	2	1	1		674		

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Westbound															Lalliude.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	2	4	7	13	8	2	1	0	0	0	0	37	39-48	21
01:00	0	0	0	0	3	11	7	3	2	0	0	0	0	0	26	36-45	18
02:00	0	0	0	1	2	9	6	4	3	0	1	0	0	0	26	36-45	15
03:00	0	0	0	1	6	10	2	3	2	1	0	0	0	0	25	31-40	16
04:00	0	0	0	1	10	25	31	13	12	1	1	1	0	0	95	36-45	56
05:00	0	0	0	1	18	60	114	91	36	10	1	0	0	0	331	41-50	205
06:00	1	2	8	10	45	199	294	178	50	6	2	0	0	0	795	36-45	493
07:00	6	14	23	86	234	409	302	96	14	1	0	0	0	0	1185	36-45	711
08:00	10	16	40	78	182	336	267	83	17	3	1	0	0	0	1033	36-45	603
09:00	0	0	1	19	120	283	230	87	15	2	0	0	1	0	758	36-45	513
10:00	1	1	4	17	95	242	189	61	13	3	0	0	0	0	626	36-45	431
11:00	1	2	1	17	111	236	174	45	16	0	0	0	0	0	603	36-45	410
12 PM	2	1	3	34	127	213	177	59	8	0	0	0	0	0	624	36-45	390
13:00	0	0	1	18	116	192	196	60	19	3	1	0	0	0	606	36-45	388
14:00	3	1	7	38	145	230	206	69	12	1	1	0	0	0	713	36-45	436
15:00	0	2	3	49	163	249	189	64	16	3	1	0	0	0	739	36-45	438
16:00	2	4	6	30	152	249	225	75	9	1	0	1	0	0	754	36-45	474
17:00	1	5	11	42	155	242	173	61	14	5	1	0	0	0	710	36-45	415
18:00	2	1	4	13	121	193	202	57	13	1	0	2	0	0	609	36-45	395
19:00	0	1	2	17	63	148	158	67	24	2	0	0	0	0	482	36-45	306
20:00	1	1	0	15	58	124	92	35	6	1	0	0	0	0	333	36-45	216
21:00	0	4	0	10	32	116	60	28	12	0	0	0	0	0	262	36-45	176
22:00	0	0	0	2	15	79	51	17	4	0	2	0	0	0	170	36-45	130
23:00	1	0	3	6	19	33	25	14	7	11	0	0	0	0	109	36-45	58
Total	31	55	117	507	1996	3895	3383	1278	326	46	12	4	1	0	11651		
Percent	0.3%	0.5%	1.0%	4.4%	17.1%	33.4%	29.0%	11.0%	2.8%	0.4%	0.1%	0.0%	0.0%	0.0%			
AM Peak	08:00	08:00	08:00	07:00	07:00	07:00	07:00	06:00	06:00	05:00	06:00	04:00	09:00		07:00		
Vol.	10	16	40	86	234	409	302	178	50	10	2	1	1_		1185		
PM Peak	14:00	17:00	17:00	15:00	15:00	15:00	16:00	16:00	19:00	17:00	22:00	18:00			16:00		
Vol.	3	5	11	49	163	249	225	75	24	5	2	2			754		

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	1	8	21	9	10	4	0	0	0	0	0	53	34-43	30
01:00	0	0	0	1	4	13	7	3	1	0	0	0	0	0	29	36-45	20
02:00	0	0	0	1	0	5	6	7	2	1	0	0	0	0	22	40-49	13
03:00	0	0	0	2	5	6	4	6	3	0	1	0	0	0	27	31-40	11
04:00	0	0	0	2	8	15	28	22	12	5	0	0	0	0	92	41-50	50
05:00	0	1	0	1	25	79	121	83	27	5	3	0	0	0	345	41-50	204
06:00	0	7	19	36	84	210	276	125	37	5	2	0	0	0	801	36-45	486
07:00	9	25	44	101	224	379	286	87	20	0	1	0	0	0	1176	36-45	665
08:00	2	1	9	49	190	342	272	85	19	3	1	0	0	0	973	36-45	614
09:00	2	0	1	17	144	254	258	79	16	3	0	0	0	0	774	36-45	512
10:00	2	2	4	36	162	239	153	52	7	2	0	0	0	0	659	31-40	401
11:00	1	2	10	37	183	235	94	30	5	0	0	0	0	0	597	31-40	418
12 PM	0	5	4	20	118	250	182	71	17	1	0	1	0	0	669	36-45	432
13:00	2	1	7	27	135	249	205	53	8	2	0	0	0	0	689	36-45	454
14:00	1	0	2	34	127	258	206	57	8	2	0	0	0	0	695	36-45	464
15:00	2	7	10	52	154	278	193	55	15	2	1	0	0	0	769	36-45	471
16:00	0	2	2	13	149	265	173	72	13	1	1	0	0	0	691	36-45	438
17:00	0	3	2	25	108	271	205	68	11	8	0	0	0	0	701	36-45	476
18:00	0	2	1	15	82	233	190	65	21	4	0	1	0	0	614	36-45	423
19:00	0	1	1	19	76	217	154	44	14	2	0	0	0	0	528	36-45	371
20:00	1	0	0	8	80	174	120	35	11	2	1	0	0	0	432	36-45	294
21:00	0	1	1	11	84	165	81	31	4	3	0	0	0	0	381	31-40	249
22:00	0	1	1	4	48	83	76	23	7	2	1	0	0	0	246	36-45	159
23:00	0	0	1	9	27	78	66	27	13	2	0	1	0	0	224	36-45	144
Total	22	61	119	521	2225	4319	3365	1190	295	55	12	3	0	0	12187		
Percent	0.2%	0.5%	1.0%	4.3%	18.3%	35.4%	27.6%	9.8%	2.4%	0.5%	0.1%	0.0%	0.0%	0.0%			
AM Peak	07:00	07:00	07:00	07:00	07:00	07:00	07:00	06:00	06:00	04:00	05:00				07:00		
Vol.	9	25	44	101	224	379	286	125	37	5	3				1176		
PM Peak	13:00	15:00	15:00	15:00	15:00	15:00	14:00	16:00	18:00	17:00	15:00	12:00			15:00		
Vol.	2	7	10	52	154	278	206	72	21	8	1	1			769		

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Westbound															Latitudo.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	0	0	1	19	52	26	14	6	2	0	0	0	0	120	36-45	78
01:00	0	1	0	2	14	25	28	5	3	2	0	0	0	0	80	36-45	53
02:00	0	0	0	0	4	14	20	6	2	1	0	0	0	0	47	36-45	34
03:00	0	0	1	0	2	11	7	6	1	0	0	0	0	0	28	36-45	18
04:00	0	0	0	1	5	8	16	13	3	0	0	0	0	0	46	41-50	29
05:00	0	0	0	1	8	27	55	38	14	4	3	0	0	0	150	41-50	93
06:00	1	1	0	2	16	60	91	60	36	4	0	0	0	0	271	41-50	151
07:00	0	0	1	2	22	101	169	95	41	3	0	0	0	0	434	36-45	270
08:00	0	3	0	8	45	152	212	92	24	5	0	0	0	0	541	36-45	364
09:00	0	3	0	14	89	233	268	86	28	4	0	0	0	0	725	36-45	501
10:00	1	1	10	24	138	272	261	82	15	5	0	0	0	0	809	36-45	533
11:00	2	4	10	34	151	308	214	75	21	2	0	0	0	0	821	36-45	522
12 PM	0	2	2	17	105	289	236	85	15	8	1	0	0	0	760	36-45	525
13:00	0	0	0	19	116	306	230	65	10	2	0	0	0	0	748	36-45	536
14:00	2	1	5	13	92	287	239	69	23	2	1	0	0	0	734	36-45	526
15:00	2	6	0	18	113	294	253	64	19	0	1	0	0	0	770	36-45	547
16:00	0	2	4	17	131	269	199	76	8	2	0	0	0	0	708	36-45	468
17:00	0	3	0	8	80	277	233	62	15	4	0	0	0	0	682	36-45	510
18:00	0	1	1	14	98	204	188	50	12	3	0	0	0	0	571	36-45	392
19:00	0	1	4	8	68	155	133	52	16	4	1	0	0	0	442	36-45	288
20:00	2	2	1	17	67	142	106	41	8	1	0	0	0	0	387	36-45	248
21:00	0	2	0	7	65	122	78	20	3	2	0	0	0	0	299	36-45	200
22:00	0	0	0	13	73	137	94	21	8	0	0	0	0	0	346	36-45	231
23:00	0	0	0	6	27	83	54	16	6	1	1_	0	0	0	194	36-45	137
Total	10	33	39	246	1548	3828	3410	1193	337	61	8	0	0	0	10713		
Percent	0.1%	0.3%	0.4%	2.3%	14.4%	35.7%	31.8%	11.1%	3.1%	0.6%	0.1%	0.0%	0.0%	0.0%			
AM Peak	11:00	11:00	10:00	11:00	11:00	11:00	09:00	07:00	07:00	08:00	05:00				11:00		
Vol.	2	44	10	34	151	308	268	95	41	5	3				821		
PM Peak	14:00	15:00	14:00	13:00	16:00	13:00	15:00	12:00	14:00	12:00	12:00				15:00		
Vol.	2	6	5	19	131	306	253	85	23	8	1				770		

Route 66 East of Main Street Portland, Connecticut

Site Code: Station ID: 4683

Latitude: 0' 0.0000 Undefined

Westbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	0	8	27	46	36	13	2	1	0	0	0	0	133	36-45	82
01:00	0	0	2	4	15	19	21	3	0	0	0	0	0	0	64	36-45	40
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	0	2	12	42	65	57	16	2	1	0	0	0	0	197		
Percent	0.0%	0.0%	1.0%	6.1%	21.3%	33.0%	28.9%	8.1%	1.0%	0.5%	0.0%	0.0%	0.0%	0.0%			
AM Peak			01:00	00:00	00:00	00:00	00:00	00:00	00:00	00:00					00:00		
Vol.			2	8	27	46	36	13	2	1					133		
PM Peak			-					=-									
Vol.																	
Total	70	165	292	1430	6699	14106	12016	4412	1130	203	37	10	2	0	40572		
Percent	0.2%	0.4%	0.7%	3.5%	16.5%	34.8%	29.6%	10.9%	2.8%	0.5%	0.1%	0.0%	0.0%	0.0%			
. 0.00.70	J,J		Eth Darsont		22 MDII		_0.0,0	, .	,	0.075	3,5	0.075	0.070	0.075			

15th Percentile: 33 MPH 50th Percentile: 39 MPH 85th Percentile: 44 MPH 95th Percentile: 49 MPH

Stats 10 MPH Pace Speed: 36-45 MPH

 Number in Pace :
 26122

 Percent in Pace :
 64.4%

 Number of Vehicles > 40 MPH :
 17810

 Percent of Vehicles > 40 MPH :
 43.9%

Mean Speed(Average): 43.9%

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	0	2	6	12	97	209	227	89	20	2	0	0	0	0	664	36-45	436
13:00	0	3	4	23	87	206	172	112	28	5	0	0	0	0	640	36-45	378
14:00	0	3	8	28	76	203	213	141	36	8	3	0	0	0	719	36-45	416
15:00	1	1	4	29	99	296	392	208	67	5	2	1	0	0	1105	36-45	688
16:00	1	0	10	35	118	315	473	231	57	9	2	1	0	0	1252	36-45	788
17:00	1	0	7	17	94	295	488	246	70	7	1	0	0	0	1226	36-45	783
18:00	1	3	3	7	41	246	364	201	62	5	4	0	0	0	937	36-45	610
19:00	5	6	5	8	42	164	245	155	41	4	0	1	0	0	676	36-45	409
20:00	0	1	4	9	49	165	188	101	26	1	0	0	0	0	544	36-45	353
21:00	0	1	3	15	55	135	127	40	11	4	0	0	0	0	391	36-45	262
22:00	0	0	3	2	30	69	76	36	5	5	1	0	0	0	227	36-45	145
23:00	0	0	1	2	7	61	65	37	6	2	11	0	1	0	183	36-45	126
Total	9	20	58	187	795	2364	3030	1597	429	57	14	3	1	0	8564		
Percent	0.1%	0.2%	0.7%	2.2%	9.3%	27.6%	35.4%	18.6%	5.0%	0.7%	0.2%	0.0%	0.0%	0.0%			
AM Peak Vol.																	
PM Peak	19:00	19:00	16:00	16:00	16:00	16:00	17:00	17:00	17:00	16:00	18:00	15:00	23:00		16:00		
Vol.	5	6	10	35	118	315	488	246	70	9	4	1	1		1252		

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Eastbound															Lalliude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76	-	Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	1	9	39	31	11	3	0	0	0	0	0	94	36-45	70
01:00	0	0	1	1	7	18	17	7	3	1	0	0	0	0	55	36-45	35
02:00	0	0	0	0	4	11	1	1	0	0	1	0	1	0	19	31-40	15
03:00	0	0	0	1	4	6	7	6	0	0	0	0	0	0	24	36-45	13
04:00	0	0	0	1	4	10	12	4	0	0	0	0	0	0	31	36-45	22
05:00	0	0	1	1	5	18	28	14	9	3	0	0	0	0	79	36-45	46
06:00	0	0	1	1	10	42	100	70	28	6	1	0	1	0	260	41-50	170
07:00	1	0	8	11	52	112	176	140	48	6	4	0	0	0	558	41-50	316
08:00	0	0	7	9	42	137	173	83	23	6	0	0	0	0	480	36-45	310
09:00	1	3	5	21	54	161	166	90	22	3	0	0	0	0	526	36-45	327
10:00	0	2	7	17	65	191	140	89	14	1	0	0	0	1	527	36-45	331
11:00	1	3	7	25	115	237	176	56	15	1	0	0	1	0	637	36-45	413
12 PM	2	4	3	18	107	258	207	65	16	0	0	0	0	0	680	36-45	465
13:00	0	2	14	15	86	227	209	77	19	4	2	0	0	0	655	36-45	436
14:00	0	3	6	27	78	244	247	116	36	4	0	0	0	0	761	36-45	491
15:00	0	5	14	23	92	315	372	160	55	6	1	0	0	0	1043	36-45	687
16:00	1	3	9	28	91	355	464	224	41	7	0	0	0	0	1223	36-45	819
17:00	2	1	3	22	92	388	469	225	32	4	0	0	0	0	1238	36-45	857
18:00	4	3	9	14	77	259	329	155	32	5	1	0	0	0	888	36-45	588
19:00	2	4	3	8	54	196	241	104	31	5	1	0	0	0	649	36-45	437
20:00	2	3	2	12	78	172	190	76	19	2	0	0	0	0	556	36-45	362
21:00	0	1	3	9	42	147	137	47	15	2	1	0	0	1	405	36-45	284
22:00	0	0	1	5	31	79	80	36	14	3	0	0	0	0	249	36-45	159
23:00	0	0	0	7	17	60	73	22	7	1	0	0	0	0	187	36-45	133
Total	16	37	104	277	1216	3682	4045	1878	482	70	12	0	3	2	11824		
Percent	0.1%	0.3%	0.9%	2.3%	10.3%	31.1%	34.2%	15.9%	4.1%	0.6%	0.1%	0.0%	0.0%	0.0%	44.00		
AM Peak	07:00	09:00	07:00	11:00	11:00	11:00	07:00	07:00	07:00	06:00	07:00		02:00	10:00	11:00		
Vol.	1 10.00	3	8	25	115	237	176	140	48	6	4		1	1 24.00	637		
PM Peak	18:00	15:00	13:00	16:00	12:00	17:00	17:00	17:00	15:00	16:00	13:00			21:00	17:00		
Vol.	4	5	14	28	107	388	469	225	55	7	2			1	1238		

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	1	0	13	45	32	15	4	2	1	0	0	0	113	36-45	77
01:00	0	0	0	0	7	24	12	7	1	4	0	0	0	0	55	36-45	36
02:00	0	0	0	1	0	9	7	3	1	0	0	0	0	0	21	36-45	16
03:00	0	0	0	2	2	6	4	2	0	1	0	0	0	0	17	35-44	10
04:00	0	0	1	0	2	13	12	4	2	0	0	0	0	0	34	36-45	25
05:00	0	0	1	2	6	25	26	16	13	1	0	1	0	0	91	36-45	51
06:00	0	0	1	6	21	71	83	63	20	3	2	0	0	0	270	36-45	154
07:00	0	0	7	10	44	134	200	102	34	3	3	0	0	0	537	36-45	334
08:00	0	0	2	15	40	119	197	90	19	3	2	0	0	0	487	36-45	316
09:00	0	2	6	14	38	134	190	81	21	2	2	0	0	0	490	36-45	324
10:00	0	0	8	17	85	170	183	63	13	2	0	0	1	0	542	36-45	353
11:00	2	5	11	42	117	238	154	40	12	1	0	0	0	0	622	36-45	392
12 PM	1	3	11	16	93	226	206	74	18	0	0	0	0	0	648	36-45	432
13:00	0	2	6	14	81	232	265	103	19	1	0	0	0	0	723	36-45	497
14:00	0	3	8	21	88	287	289	115	25	6	1	0	0	0	843	36-45	576
15:00	0	2	5	23	112	333	412	174	41	3	0	0	0	0	1105	36-45	745
16:00	1	2	6	20	91	315	527	225	58	7	3	0	0	0	1255	36-45	842
17:00	0	2	4	15	142	419	486	187	40	2	1	0	0	0	1298	36-45	905
18:00	0	4	3	12	44	299	386	192	50	7	1	0	0	0	998	36-45	685
19:00	0	5	1	13	40	161	216	124	45	9	1	1	0	0	616	36-45	377
20:00	0	4	2	2	52	173	189	106	14	5	2	0	0	0	549	36-45	362
21:00	0	1	2	11	70	164	141	47	6	0	0	0	0	0	442	36-45	305
22:00	1	2	7	4	45	120	105	24	12	1	0	0	0	0	321	36-45	225
23:00	0	3	3	7	37	64	83	33	9	11	1	0	0	0	241	36-45	147
Total	5	40	96	267	1270	3781	4405	1890	477	64	20	2	1	0	12318		
Percent	0.0%	0.3%	0.8%	2.2%	10.3%	30.7%	35.8%	15.3%	3.9%	0.5%	0.2%	0.0%	0.0%	0.0%			
AM Peak	11:00	11:00	11:00	11:00	11:00	11:00	07:00	07:00	07:00	01:00	07:00	05:00	10:00		11:00		
Vol.	2	5	11	42	117	238	200	102	34	4	3	1	11		622		
PM Peak	12:00	19:00	12:00	15:00	17:00	17:00	16:00	16:00	16:00	19:00	16:00	19:00			17:00		
Vol.	1	5	11	23	142	419	527	225	58	9	3	1			1298		

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	1	2	4	22	59	56	23	6	1	0	0	0	0	174	36-45	115
01:00	0	0	2	3	8	26	29	15	3	2	0	0	0	0	88	36-45	55
02:00	0	0	0	2	7	12	20	5	4	3	3	1	0	0	57	36-45	32
03:00	0	0	0	2	3	10	8	5	3	1	0	1	0	1	34	36-45	18
04:00	0	0	0	0	7	8	8	3	1	0	0	0	0	0	27	34-43	16
05:00	0	0	0	3	4	11	26	8	4	1	0	0	0	0	57	36-45	37
06:00	0	1	0	3	7	22	39	30	12	3	1	0	0	0	118	41-50	69
07:00	0	0	0	3	11	71	111	64	23	7	3	0	0	0	293	36-45	182
08:00	1	2	2	8	22	107	172	76	19	6	0	0	0	0	415	36-45	279
09:00	0	2	8	7	35	162	199	114	35	4	2	0	0	0	568	36-45	361
10:00	0	3	8	12	55	187	247	126	35	6	1	1	0	0	681	36-45	434
11:00	0	0	14	17	65	240	288	128	31	4	1	0	0	0	788	36-45	528
12 PM	0	2	6	18	95	253	292	163	46	5	0	0	1	0	881	36-45	545
13:00	1	1	13	15	107	259	309	135	32	5	0	0	0	0	877	36-45	568
14:00	0	2	8	13	82	257	269	129	37	6	2	0	0	0	805	36-45	526
15:00	1	1	5	22	51	230	273	158	41	4	1	0	0	0	787	36-45	503
16:00	0	0	6	8	42	204	304	147	49	7	1	0	0	0	768	36-45	508
17:00	2	6	6	9	46	195	238	131	32	5	2	1	0	0	673	36-45	433
18:00	2	4	5	13	42	164	242	114	28	9	1	0	0	0	624	36-45	406
19:00	2	1	3	6	39	160	168	92	19	4	0	1	0	0	495	36-45	328
20:00	1	1	6	9	54	169	141	53	23	2	0	0	0	0	459	36-45	310
21:00	0	1	5	9	62	145	128	43	8	3	0	0	0	0	404	36-45	273
22:00	0	0	1	6	47	110	104	26	12	0	0	0	0	0	306	36-45	214
23:00	0	0	2	2	29	100	90	32	7	1	1	0	0	0	264	36-45	190
Total	10	28	102	194	942	3161	3761	1820	510	89	19	5	1	1	10643		
Percent	0.1%	0.3%	1.0%	1.8%	8.9%	29.7%	35.3%	17.1%	4.8%	0.8%	0.2%	0.0%	0.0%	0.0%			
AM Peak	08:00	10:00	11:00	11:00	11:00	11:00	11:00	11:00	09:00	07:00	02:00	02:00		03:00	11:00		
Vol.	1 1	33	14	17	65	240	288	128	35	7	3	1 1	10.00	1_	788		
PM Peak	17:00	17:00	13:00	15:00	13:00	13:00	13:00	12:00	16:00	18:00	14:00	17:00	12:00		12:00		
Vol.	2	6	13	22	107	259	309	163	49	9	2	1	1		881		

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	0	1	13	48	43	15	5	4	1	0	0	0	130	36-45	91
01:00	0	0	3	2	5	27	29	9	0	2	0	0	0	0	77	36-45	56
02:00	0	0	0	1	8	19	18	6	1	3	0	0	0	0	56	36-45	37
03:00	0	0	0	0	2	11	8	2	2	0	1	0	0	0	26	36-45	19
04:00	0	0	0	3	2	4	9	4	0	1	0	0	0	0	23	41-50	13
05:00	0	0	1	1	1	7	15	14	5	2	0	0	1	0	47	41-50	29
06:00	0	0	0	2	1	25	36	35	11	0	0	0	0	0	110	41-50	71
07:00	1	0	0	3	15	56	70	36	16	5	0	1	0	0	203	36-45	126
08:00	1	0	2	2	26	76	105	57	15	3	0	0	0	0	287	36-45	181
09:00	0	4	5	9	45	134	154	64	15	4	0	0	0	0	434	36-45	288
10:00	1	1	3	7	67	142	206	94	22	3	1	0	0	0	547	36-45	348
11:00	1	1	1	21	81	253	248	105	23	4	0	0	0	0	738	36-45	501
12 PM	0	1	5	10	58	257	279	127	27	7	1	0	0	0	772	36-45	536
13:00	2	3	5	21	90	276	269	126	20	4	1	0	0	0	817	36-45	545
14:00	0	4	2	14	83	232	252	131	38	9	0	0	0	0	765	36-45	484
15:00	0	0	4	13	55	197	261	170	46	8	0	0	1	0	755	36-45	458
16:00	2	1	3	4	42	173	257	149	41	10	0	2	0	0	684	36-45	430
17:00	2	0	4	10	32	147	216	146	48	7	2	0	0	0	614	36-45	363
18:00	1	1	3	7	27	150	234	140	40	7	2	0	0	0	612	36-45	384
19:00	3	3	7	6	30	97	162	93	25	4	1	2	0	0	433	36-45	259
20:00	0	0	0	7	32	109	131	59	19	4	0	0	0	0	361	36-45	240
21:00	2	1	1	4	30	97	80	37	9	4	0	0	0	0	265	36-45	177
22:00	0	1	1	3	19	48	61	25	8	3	3	0	0	0	172	36-45	109
23:00	0	0	0	3	15	41	54	9	11	2	0	0	0	0	135	36-45	95
Total	16	21	50	154	779	2626	3197	1653	447	100	13	5	2	0	9063		
Percent	0.2%	0.2%	0.6%	1.7%	8.6%	29.0%	35.3%	18.2%	4.9%	1.1%	0.1%	0.1%	0.0%	0.0%			
AM Peak	07:00	09:00	09:00	11:00	11:00	11:00	11:00	11:00	11:00	07:00	00:00	07:00	05:00		11:00		
Vol	1_	4	5	21	81	253	248	105	23	5	11	1	1_		738		
PM Peak	19:00	14:00	19:00	13:00	13:00	13:00	12:00	15:00	17:00	16:00	22:00	16:00	15:00		13:00		
Vol.	3	4	7	21	90	276	279	170	48	10	3	2	1		817		

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Latitude: 0' 0.0000 Undefined

Eastbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/04/18	0	0	0	1	8	23	28	5	3	2	1	0	0	0	71	36-45	51
01:00	0	0	0	1	3	13	7	3	1	0	0	0	0	0	28	36-45	20
02:00	0	0	0	1	1	7	6	6	1	0	0	0	0	0	22	36-45	13
03:00	0	0	2	2	5	9	3	1	0	0	0	0	0	0	22	31-40	14
04:00	0	1	2	3	2	2	7	4	0	0	0	0	0	0	21	41-50	11
05:00	0	0	1	1	5	10	26	12	8	2	1	0	0	0	66	41-50	38
06:00	0	0	0	1	11	47	72	42	23	1	1	1	0	0	199	36-45	119
07:00	0	1	4	18	51	148	161	65	22	5	3	0	0	0	478	36-45	309
08:00	0	1	4	16	44	139	141	44	22	2	2	0	0	0	415	36-45	280
09:00	0	3	2	6	47	120	157	77	23	6	1	1	0	0	443	36-45	277
10:00	0	1	3	6	30	67	60	24	4	0	0	0	0	0	195	36-45	127
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	7	18	56	207	585	668	283	107	18	9	2	0	0	1960		
Percent	0.0%	0.4%	0.9%	2.9%	10.6%	29.8%	34.1%	14.4%	5.5%	0.9%	0.5%	0.1%	0.0%	0.0%			
AM Peak		09:00	07:00	07:00	07:00	07:00	07:00	09:00	06:00	09:00	07:00	06:00			07:00		
Vol.		3	4	18	51	148	161	77	23	6	3	1			478		
PM Peak																	
Vol.																	
Total	56	153	428	1135	5209	16199	19106	9121	2452	398	87	17	8	3	54372		
Percent	0.1%	0.3%	0.8%	2.1%	9.6%	29.8%	35.1%	16.8%	4.5%	0.7%	0.2%	0.0%	0.0%	0.0%			
			Cth Danasa	era .	OF MOLL												

15th Percentile: 35 MPH 50th Percentile: 41 MPH 85th Percentile: 47 MPH 95th Percentile: 50 MPH

Stats 10 MPH Pace Speed: 36-45 MPH Number in Pace: 35305

Percent in Pace : 64.9%

Number of Vehicles > 40 MPH : 31192

Percent of Vehicles > 40 MPH : 57.4%

Mean Speed(Average) : 41 MPH

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
12 PM	0	0	10	14	45	127	183	133	80	37	3	3	0	1	636	41-50	316
13:00	0	1	9	9	47	116	194	136	90	33	6	1	0	0	642	41-50	330
14:00	0	0	14	16	34	110	170	165	93	45	7	8	1	0	663	41-50	335
15:00	0	2	4	25	52	145	177	152	88	28	7	1	1	1	683	41-50	329
16:00	0	1	10	10	40	121	205	161	59	25	5	4	1	3	645	41-50	366
17:00	0	0	3	11	42	94	210	181	109	40	14	2	1	1	708	41-50	391
18:00	0	0	1	11	17	77	181	154	88	42	14	3	0	0	588	41-50	335
19:00	0	1	3	4	21	83	135	118	68	35	7	3	1	0	479	41-50	253
20:00	0	0	5	8	25	72	94	85	42	14	7	1	1	0	354	41-50	179
21:00	0	1	4	9	13	42	67	50	30	10	3	2	0	0	231	41-50	117
22:00	0	0	4	1	4	33	51	42	32	4	5	3	2	0	181	41-50	93
23:00	0	0	0	0	8	13	38	23	11	8	4	0	0	1	106	41-50	61
Total	0	6	67	118	348	1033	1705	1400	790	321	82	31	8	7	5916		
Percent	0.0%	0.1%	1.1%	2.0%	5.9%	17.5%	28.8%	23.7%	13.4%	5.4%	1.4%	0.5%	0.1%	0.1%			
M Peak Vol.																	
M Peak		15:00	14:00	15:00	15:00	15:00	17:00	17:00	17:00	14:00	17:00	14:00	22:00	16:00	17:00		
Vol.		2	14	25	52	145	210	181	109	45	14	8	2	3	708		

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Westbound															Lalliude.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	1	0	5	6	9	6	6	4	0	0	0	0	37	37-46	15
01:00	0	0	0	1	6	5	5	7	3	2	0	0	0	0	29	40-49	12
02:00	0	0	0	0	2	4	7	3	4	3	1	1	0	0	25	36-45	11
03:00	0	0	1	0	5	7	8	1	2	2	3	0	0	0	29	36-45	15
04:00	0	0	0	1	6	10	17	22	17	7	2	4	0	2	88	41-50	39
05:00	0	0	1	2	9	18	70	58	83	50	22	8	0	0	321	46-55	141
06:00	0	0	3	6	22	62	153	214	201	85	36	13	4	0	799	46-55	415
07:00	0	1	4	13	50	178	366	331	208	83	17	2	1	0	1254	41-50	697
08:00	0	0	1	10	56	160	296	318	162	51	15	3	1	0	1073	41-50	614
09:00	0	0	9	19	77	140	205	182	99	48	7	3	0	0	789	41-50	387
10:00	0	1	3	13	35	111	200	153	74	35	15	4	0	0	644	41-50	353
11:00	0	3	6	11	43	98	185	152	79	19	6	0	0	1	603	41-50	337
12 PM	0	0	12	22	53	119	171	160	62	32	6	1	0	0	638	41-50	331
13:00	0	0	4	20	40	122	168	141	81	32	7	1	0	1	617	41-50	309
14:00	0	2	6	7	50	133	236	168	85	28	3	1	0	1	720	41-50	404
15:00	1	0	11	18	56	153	185	162	101	23	4	3	1	0	718	41-50	347
16:00	0	1	9	14	46	128	237	181	86	26	4	1	0	0	733	41-50	418
17:00	0	0	5	10	41	143	222	141	87	28	7	2	0	0	686	36-45	365
18:00	0	0	10	9	49	119	187	153	73	20	7	2	0	1	630	41-50	340
19:00	0	1	2	13	29	64	102	138	73	40	15	3	0	0	480	41-50	240
20:00	0	0	3	5	18	65	104	57	49	18	2	1	0	1	323	36-45	169
21:00	0	0	4	5	16	46	83	47	37	9	6	1	0	1	255	41-50	130
22:00	1	0	3	3	11	25	56	38	20	12	4	0	1	1	175	41-50	94
23:00	0	0	1	3	4	22	29	17	20	4	7	0	0	0	107	36-45	51
Total	2	9	99	205	729	1938	3301	2850	1712	661	196	54	8	9	11773		
Percent	0.0%	0.1%	0.8%	1.7%	6.2%	16.5%	28.0%	24.2%	14.5%	5.6%	1.7%	0.5%	0.1%	0.1%			
AM Peak		11:00	09:00	09:00	09:00	07:00	07:00	07:00	07:00	06:00	06:00	06:00	06:00	04:00	07:00		
Vol.		3	9	19	77	178	366	331	208	85	36	13	4	2	1254		
PM Peak	15:00	14:00	12:00	12:00	15:00	15:00	16:00	16:00	15:00	19:00	19:00	15:00	15:00	13:00	16:00		
Vol.	1	2	12	22	56	153	237	181	101	40	15	3	1	1	733		

Site Code:

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 East of Pickering Street Portland, Connecticut

Station ID: 4682

Westbound															Lalliude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	1	7	14	10	4	8	6	2	0	0	0	52	36-45	24
01:00	0	0	0	3	4	9	4	8	3	1	1	0	0	0	33	31-40	13
02:00	0	0	0	0	3	3	2	7	5	1	1	0	0	1	23	46-55	12
03:00	0	0	0	4	2	1	4	6	3	3	3	0	1	0	27	41-50	10
04:00	0	0	0	1	7	9	17	16	15	12	7	2	2	0	88	41-50	33
05:00	1	0	0	1	11	34	56	57	76	59	27	9	0	1	332	51-60	135
06:00	1	0	2	9	19	75	181	223	167	86	32	8	2	2	807	41-50	404
07:00	0	3	7	9	59	185	343	311	169	69	15	5	0	0	1175	41-50	654
08:00	1	0	6	7	59	162	263	246	146	75	13	5	1	0	984	41-50	509
09:00	0	1	5	17	47	124	200	199	114	45	9	5	0	0	766	41-50	399
10:00	0	2	5	13	55	154	199	141	63	25	4	1	0	1	663	36-45	353
11:00	1	5	6	13	88	172	181	89	29	7	7	1	0	0	599	36-45	353
12 PM	1	2	9	22	58	145	177	139	58	29	8	1	1	1	651	36-45	322
13:00	0	2	6	26	51	141	209	143	67	20	3	0	0	0	668	41-50	352
14:00	0	1	8	19	56	120	196	151	90	30	4	0	0	0	675	41-50	347
15:00	0	0	11	12	42	165	236	162	95	24	6	0	1	2	756	36-45	401
16:00	0	0	8	8	55	117	221	164	72	20	5	2	1	0	673	41-50	385
17:00	0	1	4	12	31	106	199	181	87	32	7	2	0	0	662	41-50	380
18:00	1	1	4	7	20	85	197	151	80	36	10	2	0	0	594	41-50	348
19:00	0	1	5	1	27	84	154	132	66	27	9	2	0	1	509	41-50	286
20:00	0	0	1	7	21	92	123	106	58	18	5	4	0	0	435	41-50	229
21:00	0	1	4	8	24	94	109	87	36	10	2	0	2	0	377	36-45	203
22:00	0	2	4	6	15	44	58	55	31	10	5	0	0	1	231	41-50	113
23:00	0	1	2	5	16	37	55	62	34	11	2	3	0	1	229	41-50	117
Total	6	23	97	211	777	2172	3394	2840	1572	656	187	52	11	11	12009		
Percent	0.0%	0.2%	0.8%	1.8%	6.5%	18.1%	28.3%	23.6%	13.1%	5.5%	1.6%	0.4%	0.1%	0.1%			
AM Peak	05:00	11:00	07:00	09:00	11:00	07:00	07:00	07:00	07:00	06:00	06:00	05:00	04:00	06:00	07:00		
Vol.	1	5_	7	17	88	185	343	311	169	86	32	9	2	2	1175		
PM Peak	12:00	12:00	15:00	13:00	12:00	15:00	15:00	17:00	15:00	18:00	18:00	20:00	21:00	15:00	15:00		
Vol.	1	2	11	26	58	165	236	181	95	36	10	4	2	2	756		

Site Code:

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 East of Pickering Street Portland, Connecticut

Station ID: 4682

Westbound															Latitude.	0 0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	0	1	2	11	18	46	16	20	8	1	0	3	0	126	36-45	64
01:00	0	0	1	1	7	15	25	22	8	1	2	0	0	0	82	41-50	47
02:00	0	0	0	1	3	7	7	16	6	4	1	1	0	0	46	41-50	23
03:00	0	0	1	0	2	3	6	9	4	2	1	0	0	0	28	41-50	15
04:00	0	0	0	2	4	4	10	10	10	6	1	0	0	0	47	41-50	20
05:00	0	0	0	2	4	13	16	36	37	21	7	5	0	2	143	46-55	73
06:00	0	1	2	0	3	26	45	60	54	46	17	7	0	0	261	46-55	114
07:00	0	1	1	1	14	34	87	107	84	72	30	4	1	0	436	41-50	194
08:00	0	0	4	3	14	58	129	115	112	60	21	4	1	0	521	41-50	244
09:00	0	0	5	11	17	123	180	177	129	46	12	2	0	1	703	41-50	357
10:00	0	0	3	16	36	108	221	216	133	42	10	4	0	0	789	41-50	437
11:00	0	1	11	21	36	143	212	196	129	44	11	0	0	0	804	41-50	408
12 PM	0	1	8	17	40	106	193	213	116	37	10	6	0	0	747	41-50	406
13:00	0	2	8	11	49	137	213	179	100	27	3	1	0	1	731	41-50	392
14:00	0	2	4	13	32	75	215	200	111	46	11	3	1	0	713	41-50	415
15:00	0	0	8	12	28	97	235	198	119	32	16	0	1	0	746	41-50	433
16:00	0	2	7	6	30	106	196	188	111	34	10	3	0	0	693	41-50	384
17:00	0	1	6	12	37	94	213	170	98	30	12	2	0	1	676	41-50	383
18:00	0	1	1	11	21	76	169	134	106	30	10	0	0	0	559	41-50	303
19:00	0	1	4	7	15	50	106	100	84	31	14	6	1	1	420	41-50	206
20:00	1	1	4	4	22	50	103	94	64	19	5	3	0	0	370	41-50	197
21:00	0	1	4	2	27	55	104	66	30	5	3	0	1	0	298	41-50	170
22:00	0	1	4	8	19	86	109	67	41	9	3	1	2	0	350	36-45	195
23:00	0	0	1	4	14	49	64	38	26	12	1	1	0	0	210	36-45	113
Total	1	16	88	167	485	1533	2904	2627	1732	664	212	53	11	6	10499		
Percent	0.0%	0.2%	0.8%	1.6%	4.6%	14.6%	27.7%	25.0%	16.5%	6.3%	2.0%	0.5%	0.1%	0.1%			
AM Peak		06:00	11:00	11:00	10:00	11:00	10:00	10:00	10:00	07:00	07:00	06:00	00:00	05:00	11:00		
Vol.		11	11	21	36	143	221	216	133	72	30	7	3	2	804		
PM Peak	20:00	13:00	12:00	12:00	13:00	13:00	15:00	12:00	15:00	14:00	15:00	12:00	22:00	13:00	12:00		
Vol.	1	2	8	17	49	137	235	213	119	46	16	6	2	1	747		

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Westbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	1	6	20	28	31	27	11	5	3	1	0	0	133	36-45	59
01:00	0	0	2	2	7	6	17	16	10	1	0	0	0	0	61	41-50	33
02:00	0	0	0	0	8	7	7	11	5	3	3	2	0	1	47	41-50	18
03:00	0	1	0	0	3	2	11	7	6	5	1	0	0	0	36	41-50	18
04:00	0	0	0	0	5	6	10	9	9	0	3	1	0	1	44	41-50	19
05:00	0	1	0	1	4	5	15	13	14	12	4	0	2	0	71	41-50	28
06:00	0	0	4	1	8	13	27	38	39	22	9	5	2	1	169	46-55	77
07:00	0	0	3	2	4	16	60	61	49	32	23	6	2	0	258	41-50	121
08:00	0	1	2	8	15	36	96	98	72	51	12	3	0	1	395	41-50	194
09:00	0	0	8	13	23	65	149	154	114	48	13	4	1	0	592	41-50	303
10:00	0	1	5	4	24	82	156	167	102	51	15	3	0	1	611	41-50	323
11:00	0	1	13	20	39	109	187	167	118	37	8	1	2	0	702	41-50	354
12 PM	0	0	4	11	28	116	215	213	114	42	8	1	0	1	753	41-50	428
13:00	1	2	2	19	35	122	192	198	88	34	15	0	0	2	710	41-50	390
14:00	0	0	3	11	27	110	212	213	106	35	10	4	1	0	732	41-50	425
15:00	0	1	5	6	21	121	228	211	118	41	12	1	0	0	765	41-50	439
16:00	0	1	4	16	20	85	189	161	115	48	10	4	1	0	654	41-50	350
17:00	0	0	6	13	16	86	168	188	104	56	15	4	3	1	660	41-50	356
18:00	0	0	4	9	21	67	165	156	104	51	17	4	2	2	602	41-50	321
19:00	0	0	7	10	18	54	115	111	89	35	16	0	1	0	456	41-50	226
20:00	0	1	3	7	11	38	90	92	65	23	8	1	2	2	343	41-50	182
21:00	0	0	3	4	18	42	74	59	33	16	5	0	0	0	254	41-50	133
22:00	0	0	2	4	2	25	38	39	28	12	3	2	0	0	155	41-50	77
23:00	0	0	2	1	5	21	18	27	16	9	4	1	0	1	105	41-50	45
Total	1	10	83	168	382	1262	2470	2436	1529	669	217	48	19	14	9308		
Percent	0.0%	0.1%	0.9%	1.8%	4.1%	13.6%	26.5%	26.2%	16.4%	7.2%	2.3%	0.5%	0.2%	0.2%			
AM Peak		03:00	11:00	11:00	11:00	11:00	11:00	10:00	11:00	08:00	07:00	07:00	05:00	02:00	11:00		
Vol.		1	13	20	39	109	187	167	118	51	23	6	2	1	702		
PM Peak	13:00	13:00	19:00	13:00	13:00	13:00	15:00	12:00	15:00	17:00	18:00	14:00	17:00	13:00	15:00		
Vol.	1	2	7	19	35	122	228	213	118	56	17	4	3	2	765		

Route 66 East of Pickering Street Portland, Connecticut

Site Code: Station ID: 4682

Latitude: 0' 0.0000 Undefined

Westbound																	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/04/18	0	0	1	0	5	5	11	6	10	3	1	1	1	0	44	39-48	17
01:00	0	0	0	1	3	5	12	8	2	0	2	0	0	0	33	41-50	20
02:00	0	0	0	0	5	2	5	9	3	1	1	0	0	0	26	41-50	14
03:00	0	0	0	3	3	8	4	3	5	0	0	2	0	0	28	36-45	12
04:00	0	0	1	3	10	9	17	19	12	9	5	1	0	0	86	41-50	36
05:00	0	0	1	7	19	42	48	68	79	32	20	6	1	0	323	46-55	147
06:00	0	0	4	18	63	141	223	162	74	28	13	3	0	0	729	41-50	385
07:00	2	2	10	44	143	324	308	169	45	15	0	0	0	1	1063	36-45	632
08:00	0	8	26	70	140	258	235	92	37	13	4	1	2	4	890	36-45	493
09:00	0	1	8	19	63	147	183	146	72	20	5	0	2	1	667	36-45	330
10:00	0	1	2	9	27	70	60	52	26	7	0	1	0	0	255	36-45	130
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	2	12	53	174	481	1011	1106	734	365	128	51	15	6	6	4144		
Percent	0.0%	0.3%	1.3%	4.2%	11.6%	24.4%	26.7%	17.7%	8.8%	3.1%	1.2%	0.4%	0.1%	0.1%			
AM Peak	07:00	08:00	08:00	08:00	07:00	07:00	07:00	07:00	05:00	05:00	05:00	05:00	08:00	08:00	07:00		
Vol.	2	8	26	70	143	324	308	169	79	32	20	6	2	4	1063		
PM Peak Vol.																	
Total	12	76	487	1043	3202	8949	14880	12887	7700	3099	945	253	63	53	53649		
Percent	0.0%	0.1%	0.9%	1.9%	6.0%	16.7%	27.7%	24.0%	14.4%	5.8%	1.8%	0.5%	0.1%	0.1%			
. 0.00.11	0.070		C+h Danaan		0.070	10.170	,0	/ 0	/ 3	0.070	1.070	0.070	0.170	0.170			

15th Percentile: 36 MPH 50th Percentile: 44 MPH 85th Percentile: 52 MPH 95th Percentile: 57 MPH

Stats 10 MPH Pace Speed: 41-50 MPH Number in Pace: 27767

Percent in Pace : 51.8%

Number of Vehicles > 40 MPH : 39880

Percent of Vehicles > 40 MPH : 74.3%

Mean Speed(Average) : 45 MPH

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	0	0	1	0	1	4	12	77	194	177	84	23	5	1	579	51-60	371
13:00	0	0	1	1	5	3	13	63	156	186	99	37	7	1	572	51-60	342
14:00	0	0	0	0	1	8	19	69	179	203	131	37	4	5	656	51-60	382
15:00	0	0	0	0	4	8	13	90	281	317	186	59	14	4	976	51-60	598
16:00	0	0	0	1	1	14	16	90	302	416	254	67	6	9	1176	51-60	718
17:00	0	0	0	0	5	5	13	64	287	438	244	88	20	2	1166	51-60	725
18:00	0	0	0	0	1	1	5	42	185	288	229	87	21	2	861	56-65	517
19:00	0	0	0	0	0	1	5	30	157	223	145	61	15	6	643	51-60	380
20:00	0	0	0	1	1	0	3	20	116	194	139	47	12	2	535	56-65	333
21:00	0	0	0	0	0	3	1	32	90	129	103	21	8	5	392	56-65	232
22:00	0	0	0	0	0	0	4	22	58	70	50	12	2	5	223	51-60	128
23:00	0	0	0	0	0	0	1	10	34	61	27	15	3	5	156	51-60	95
Total	0	0	2	3	19	47	105	609	2039	2702	1691	554	117	47	7935		
Percent	0.0%	0.0%	0.0%	0.0%	0.2%	0.6%	1.3%	7.7%	25.7%	34.1%	21.3%	7.0%	1.5%	0.6%			
AM Peak																	
Vol.																	
PM Peak			12:00	13:00	13:00	16:00	14:00	15:00	16:00	17:00	16:00	17:00	18:00	16:00	16:00		
Vol.			1	1	5	14	19	90	302	438	254	88	21	9	1176		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Eastbound															Latitado.	0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	0	0	0	2	10	28	27	18	9	1	1	96	51-60	55
01:00	0	0	0	0	0	1	0	6	11	12	9	6	1	1	47	51-60	23
02:00	0	0	0	0	0	2	0	2	8	5	4	2	0	0	23	51-60	13
03:00	0	0	0	0	0	0	1	2	9	0	4	1	0	0	17	46-55	11
04:00	0	0	0	0	0	0	1	2	8	7	4	3	0	0	25	51-60	15
05:00	0	0	0	0	0	0	4	4	26	30	11	3	6	2	86	51-60	56
06:00	0	0	0	0	0	3	4	11	39	70	58	18	10	5	218	56-65	128
07:00	0	0	0	0	1	1	12	36	83	130	118	49	11	4	445	56-65	248
08:00	0	0	0	0	0	4	18	56	139	146	75	27	7	3	475	51-60	285
09:00	0	0	0	1	1	2	15	59	161	150	63	20	4	0	476	51-60	311
10:00	0	0	0	2	3	9	15	75	171	119	59	9	2	0	464	51-60	290
11:00	0	0	0	2	1	6	13	90	191	158	66	20	4	1	552	51-60	349
12 PM	0	0	0	2	2	6	15	77	215	169	86	14	7	1	594	51-60	384
13:00	0	0	0	1	0	3	14	67	210	201	98	27	6	2	629	51-60	411
14:00	0	0	0	1	0	2	19	61	190	205	127	44	8	1	658	51-60	395
15:00	0	0	0	3	4	6	8	68	255	356	209	53	19	1	982	51-60	611
16:00	0	0	0	0	1	2	15	107	286	385	244	71	10	4	1125	51-60	671
17:00	0	0	0	0	1	4	5	68	283	464	270	86	17	4	1202	51-60	747
18:00	0	0	0	0	1	3	7	61	238	282	184	56	13	3	848	51-60	520
19:00	0	0	0	0	0	0	4	36	144	212	150	56	9	8	619	56-65	362
20:00	0	0	0	0	0	2	9	37	142	197	105	36	12	2	542	51-60	339
21:00	0	0	0	0	0	0	3	33	105	115	85	37	4	2	384	51-60	220
22:00	0	0	0	0	0	0	1	6	50	81	56	18	1	4	217	56-65	137
23:00	0	0	0	0	0	0	2	11	47	52	30	12	5	2	161	51-60	99
Total	0	0	0	12	15	56	187	985	3039	3573	2133	677	157	51	10885		
Percent	0.0%	0.0%	0.0%	0.1%	0.1%	0.5%	1.7%	9.0%	27.9%	32.8%	19.6%	6.2%	1.4%	0.5%	44.00		
AM Peak				10:00	10:00	10:00	08:00	11:00	11:00	11:00	07:00	07:00	07:00	06:00	11:00		
Vol.				2	3	9	18	90	191	158	118	49	11	5	552		
PM Peak				15:00	15:00	12:00	14:00	16:00	16:00	17:00	17:00	17:00	15:00	19:00	17:00		
Vol.				3	4	6	19	107	286	464	270	86	19	8	1202		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Eastbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	0	0	1	1	7	28	36	16	7	0	3	99	51-60	64
01:00	0	0	0	0	0	0	2	5	16	10	9	3	0	1	46	51-60	26
02:00	0	0	0	0	1	0	0	1	7	8	6	2	0	0	25	51-60	15
03:00	0	0	0	0	0	0	1	3	6	2	1	0	0	2	15	46-55	9
04:00	0	0	0	0	0	0	2	1	10	6	4	2	1	2	28	51-60	16
05:00	0	0	0	0	0	0	3	5	22	29	16	5	1	2	83	51-60	51
06:00	0	0	0	0	0	0	1	15	52	76	63	18	7	3	235	56-65	139
07:00	0	0	0	0	0	3	3	36	98	143	97	36	12	4	432	51-60	241
08:00	0	0	0	0	2	3	7	27	126	149	102	26	9	5	456	51-60	275
09:00	0	0	0	0	2	1	9	36	103	140	88	32	7	1	419	51-60	243
10:00	0	0	0	0	3	2	17	65	153	138	95	28	3	2	506	51-60	291
11:00	0	0	1	2	1	5	16	72	175	172	80	20	3	2	549	51-60	347
12 PM	0	0	0	0	4	2	17	67	198	177	95	34	5	2	601	51-60	375
13:00	0	0	0	0	3	7	12	52	188	189	140	47	9	4	651	51-60	377
14:00	0	0	0	0	1	3	10	44	213	275	148	51	12	3	760	51-60	488
15:00	0	0	0	0	1	3	11	59	287	346	185	66	13	6	977	51-60	633
16:00	0	0	0	0	1	6	25	94	297	420	253	79	20	7	1202	51-60	717
17:00	0	0	0	0	0	3	13	105	372	440	201	70	9	6	1219	51-60	812
18:00	0	0	0	0	0	1	11	83	307	356	197	50	6	6	1017	51-60	663
19:00	0	0	0	0	1	1	6	29	170	190	131	46	17	7	598	51-60	360
20:00	0	0	0	0	1	1	11	45	158	172	113	30	6	5	542	51-60	330
21:00	0	0	0	0	0	0	9	31	106	136	85	14	5	2	388	51-60	242
22:00	0	0	0	0	0	0	0	19	80	114	61	16	7	1	298	51-60	194
23:00	0	0	0	0	0	1	5	9	62	67	40	11	6	0	201	51-60	129
Total	0	0	1	2	21	43	192	910	3234	3791	2226	693	158	76	11347		
Percent	0.0%	0.0%	0.0%	0.0%	0.2%	0.4%	1.7%	8.0%	28.5%	33.4%	19.6%	6.1%	1.4%	0.7%			
AM Peak			11:00	11:00	10:00	11:00	10:00	11:00	11:00	11:00	08:00	07:00	07:00	08:00	11:00		
Vol.			1	2	3	5	17	72	175	172	102	36	12	5	549		
PM Peak					12:00	13:00	16:00	17:00	17:00	17:00	16:00	16:00	16:00	16:00	17:00		
Vol.					4	7	25	105	372	440	253	79	20	7	1219		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Eastbound															Lalliude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	0	0	0	0	1	5	18	27	52	32	15	2	2	154	56-65	84
01:00	0	0	0	0	0	0	1	11	20	22	12	6	0	3	75	51-60	42
02:00	0	0	0	0	0	0	1	1	13	13	8	7	1	3	47	51-60	26
03:00	0	0	0	0	0	0	0	9	5	6	6	1	1	3	31	46-55	14
04:00	0	0	0	0	0	0	0	4	7	8	2	2	0	0	23	51-60	15
05:00	0	0	0	0	0	0	0	4	15	15	9	6	1	1	51	51-60	30
06:00	0	0	0	0	0	1	0	10	20	26	26	20	2	0	105	56-65	52
07:00	0	0	0	0	0	2	2	20	61	90	52	24	6	5	262	51-60	151
08:00	0	0	0	0	0	4	4	36	120	123	65	27	5	1	385	51-60	243
09:00	0	0	0	1	1	3	5	34	156	202	93	16	7	1	519	51-60	358
10:00	0	0	0	1	1	4	10	65	174	226	118	50	8	2	659	51-60	400
11:00	0	0	0	0	2	2	9	70	219	223	107	30	10	2	674	51-60	442
12 PM	0	0	0	0	0	1	11	70	249	325	149	38	10	3	856	51-60	574
13:00	0	0	0	1	4	4	11	66	239	291	123	45	11	1	796	51-60	530
14:00	0	0	0	0	2	0	18	74	246	285	134	33	10	3	805	51-60	531
15:00	0	0	0	0	0	4	0	54	207	303	126	49	7	4	754	51-60	510
16:00	0	0	0	0	0	0	7	50	189	280	160	58	9	4	757	51-60	469
17:00	0	0	0	2	0	2	5	50	192	193	153	45	12	2	656	51-60	385
18:00	0	0	0	0	0	1	6	35	143	204	137	42	24	5	597	51-60	347
19:00	0	0	0	0	0	0	4	33	122	173	109	32	9	3	485	51-60	295
20:00	0	0	0	0	0	0	4	47	137	148	75	32	7	6	456	51-60	285
21:00	0	0	0	0	1	11	30	55	126	105	46	8	3	1	386	51-60	231
22:00	0	0	0	0	0	0	3	29	84	83	56	16	2	1	274	51-60	167
23:00	0	0	0	0	0	0	3	24	79	80	44	13	3	0	246	51-60	159
Total	0	0	0	5	11	40	139	869	2850	3476	1842	615	150	56	10053		
Percent	0.0%	0.0%	0.0%	0.0%	0.1%	0.4%	1.4%	8.6%	28.3%	34.6%	18.3%	6.1%	1.5%	0.6%			
AM Peak				09:00	11:00	08:00	10:00	11:00	11:00	10:00	10:00	10:00	11:00	07:00	11:00		
Vol.				1	2	4	10	70	219	226	118	50	10	5	674		
PM Peak				17:00	13:00	21:00	21:00	14:00	12:00	12:00	16:00	16:00	18:00	20:00	12:00		
Vol.				2	4	11	30	74	249	325	160	58	24	6	856		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Eastbound															Latitado.	0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	0	0	0	0	2	8	36	32	17	6	6	2	109	51-60	68
01:00	0	0	0	0	0	0	1	6	24	14	7	1	3	1	57	51-60	38
02:00	0	0	0	1	0	0	2	9	20	7	8	6	1	0	54	46-55	29
03:00	0	0	0	0	0	0	1	3	6	8	4	1	1	0	24	51-60	14
04:00	0	0	0	0	0	0	1	5	5	1	0	2	2	1	17	46-55	10
05:00	0	0	0	0	1	1	1	2	10	17	7	1	1	2	43	51-60	27
06:00	0	0	0	0	0	0	0	7	23	34	21	10	1	2	98	51-60	57
07:00	0	0	0	0	1	1	3	16	35	52	38	22	5	3	176	56-65	90
08:00	0	0	0	0	0	0	2	16	64	74	66	13	3	1	239	55-64	140
09:00	0	0	0	0	0	0	4	28	110	145	60	23	6	1	377	51-60	255
10:00	0	0	2	0	0	1	10	54	152	177	61	26	4	4	491	51-60	329
11:00	0	0	0	0	0	0	12	67	218	220	109	29	6	0	661	51-60	438
12 PM	0	0	0	0	0	0	17	81	238	233	113	33	5	6	726	51-60	471
13:00	0	0	0	0	0	2	11	93	268	244	90	28	4	5	745	51-60	512
14:00	0	0	0	1	1	2	8	63	235	252	120	34	6	5	727	51-60	487
15:00	0	0	0	0	0	3	10	56	227	217	142	39	4	3	701	51-60	444
16:00	0	0	0	0	1	2	4	38	166	215	145	52	10	9	642	51-60	381
17:00	0	0	0	0	1	1	3	19	133	198	155	51	9	9	579	56-65	353
18:00	0	0	0	0	0	1	7	33	141	198	141	52	11	6	590	51-60	339
19:00	0	0	0	0	0	2	7	18	94	157	97	36	14	2	427	56-65	254
20:00	0	0	0	1	0	2	3	25	85	122	73	24	5	3	343	51-60	207
21:00	0	0	0	0	0	2	3	18	61	76	52	17	6	2	237	51-60	137
22:00	0	0	0	0	0	1	0	11	40	46	23	12	5	3	141	51-60	86
23:00	0	0	0	0	0	0	1	12	21	33	30	13	1	1	112	56-65	63
Total	0	0	2	3	5	21	113	688	2412	2772	1579	531	119	71	8316		
Percent	0.0%	0.0%	0.0%	0.0%	0.1%	0.3%	1.4%	8.3%	29.0%	33.3%	19.0%	6.4%	1.4%	0.9%	44.00		
AM Peak Vol.			10:00	02:00	05:00	05:00	11:00 12	11:00	11:00	11:00	11:00	11:00	00:00	10:00	11:00 661		
			2	14.00	14.00	15.00		67	218	220	109	29	10:00	4			
PM Peak				14:00	14:00	15:00	12:00	13:00 93	13:00	14:00	17:00	16:00	19:00	16:00	13:00 745		
Vol.				1	1	3	17	93	268	252	155	52	14	9	745		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Latitude: 0' 0.0000 Undefined

Eastbound																	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/04/18	0	0	0	0	0	0	1	7	16	15	5	5	1	3	53	51-60	31
01:00	0	0	0	0	0	0	1	3	10	4	5	3	0	0	26	51-60	14
02:00	0	0	0	0	0	0	0	1	4	9	0	2	2	0	18	51-60	13
03:00	0	0	0	0	0	0	1	4	5	4	3	1	0	0	18	46-55	9
04:00	0	0	0	0	0	1	1	2	3	2	6	1	0	0	16	56-65	8
05:00	0	0	0	0	0	0	2	7	22	19	12	3	0	1	66	51-60	41
06:00	0	0	0	0	0	2	3	33	70	49	35	10	0	1	203	51-60	119
07:00	0	0	1	0	0	1	19	63	163	124	58	14	2	2	447	51-60	287
08:00	0	0	0	1	0	4	14	60	179	161	64	11	5	1	500	51-60	340
09:00	0	0	0	0	1	4	16	39	142	160	66	24	4	2	458	51-60	302
10:00	0	0	0	0	0	0	4	37	60	111	55	14	4	4	289	51-60	171
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	0	1	1	1	12	62	256	674	658	309	88	18	14	2094		
Percent	0.0%	0.0%	0.0%	0.0%	0.0%	0.6%	3.0%	12.2%	32.2%	31.4%	14.8%	4.2%	0.9%	0.7%			
AM Peak			07:00	08:00	09:00	08:00	07:00	07:00	08:00	08:00	09:00	09:00	08:00	10:00	08:00		
Vol.			1	1	1	4	19	63	179	161	66	24	5	4	500		
PM Peak																	
Vol.																	
Total	0	0	6	26	72	219	798	4317	14248	16972	9780	3158	719	315	50630		
Percent	0.0%	0.0%	0.0%	0.1%	0.1%	0.4%	1.6%	8.5%	28.1%	33.5%	19.3%	6.2%	1.4%	0.6%			
			File Democrati	9.	EO MIDIL												

15th Percentile: 50 MPH 50th Percentile: 56 MPH 85th Percentile: 63 MPH 95th Percentile: 67 MPH

Stats 10 MPH Pace Speed: 51-60 MPH Number in Pace: 31220

Percent in Pace: 61.7%

Number of Vehicles > 40 MPH: 50307

Percent of Vehicles > 40 MPH: 99.4%

Mean Speed(Average): 57 MPH

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	0	0	0	1	1	11	31	123	205	112	43	9	0	1	537	46-55	328
13:00	0	0	0	1	1	11	48	125	202	140	62	13	2	2	607	51-60	342
14:00	0	0	0	1	1	6	40	126	190	137	62	12	4	2	581	51-60	327
15:00	1	0	0	0	0	10	37	106	197	160	73	12	3	1	600	51-60	357
16:00	0	0	0	1	0	3	26	133	214	179	54	10	4	0	624	51-60	393
17:00	0	0	0	0	0	11	33	97	240	228	74	16	1	2	702	51-60	468
18:00	0	0	0	0	0	0	19	101	183	175	63	17	4	2	564	51-60	358
19:00	0	0	0	0	1	1	20	93	150	102	40	17	1	1	426	51-60	252
20:00	0	0	0	0	0	2	24	66	105	91	15	6	1	1	311	51-60	196
21:00	0	0	0	0	0	6	16	37	81	36	16	2	0	0	194	46-55	118
22:00	0	0	0	0	1	1	15	46	46	29	20	6	1	0	165	46-55	92
23:00	0	0	0	0	0	1	10	21	36	11	6	0	11	11	87	46-55	57
Total	1	0	0	4	5	63	319	1074	1849	1400	528	120	22	13	5398		
Percent	0.0%	0.0%	0.0%	0.1%	0.1%	1.2%	5.9%	19.9%	34.3%	25.9%	9.8%	2.2%	0.4%	0.2%			
AM Peak																	
Vol.																	
PM Peak	15:00			12:00	12:00	12:00	13:00	16:00	17:00	17:00	17:00	18:00	14:00	13:00	17:00		
Vol.	1			1	1	11	48	133	240	228	74	17	4	2	702		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Westbound															Latitude.	. 0 0.0000	Onacimica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	0	1	1	4	10	5	8	0	0	0	0	29	44-53	15
01:00	0	0	0	0	0	0	3	4	12	4	2	0	0	0	25	51-60	16
02:00	0	0	0	0	0	0	0	6	9	6	1	0	0	0	22	46-55	15
03:00	0	0	0	0	0	1	0	4	6	2	2	0	0	0	15	46-55	10
04:00	0	0	0	0	0	0	6	19	26	15	6	4	2	2	80	46-55	45
05:00	0	0	0	0	0	1	8	34	63	106	47	16	3	2	280	51-60	169
06:00	0	0	0	0	0	1	11	80	191	243	129	37	9	0	701	51-60	434
07:00	0	0	0	0	5	14	69	186	314	382	182	35	4	1	1192	51-60	696
08:00	0	0	1	0	5	19	50	224	302	319	109	17	9	0	1055	51-60	621
09:00	0	0	0	0	3	12	58	171	247	198	60	15	2	1	767	51-60	445
10:00	0	0	0	1	9	27	91	172	191	97	31	10	0	0	629	46-55	363
11:00	0	0	0	0	2	20	101	155	165	97	26	3	1	0	570	46-55	320
12 PM	0	0	0	0	6	16	71	184	152	96	29	5	1	0	560	46-55	336
13:00	0	1	0	0	1	5	45	133	162	120	43	13	3	0	526	46-55	295
14:00	0	0	0	0	0	0	40	165	201	150	62	10	2	0	630	46-55	366
15:00	0	0	1	0	1	7	45	149	224	167	72	13	1	1	681	51-60	391
16:00	0	0	0	2	1	9	41	133	208	182	71	16	2	3	668	51-60	390
17:00	0	0	0	0	0	6	44	168	202	167	62	19	2	0	670	46-55	370
18:00	0	0	0	0	1	4	19	120	181	172	51	10	1	1	560	51-60	353
19:00	0	0	0	0	2	1	23	70	143	126	37	12	1	1	416	51-60	269
20:00	0	0	0	0	2	5	31	81	110	69	19	5	0	1	323	46-55	191
21:00	0	0	0	0	0	1	22	57	74	34	15	2	0	0	205	46-55	131
22:00	0	0	0	0	0	2	17	50	44	27	8	3	0	0	151	46-55	94
23:00	0	0	0	0	0	7	10	30	22	18	7	2	11	0	97	46-55	52
Total	0	1	2	3	39	159	809	2405	3254	2805	1071	247	44	13	10852		
Percent	0.0%	0.0%	0.0%	0.0%	0.4%	1.5%	7.5%	22.2%	30.0%	25.8%	9.9%	2.3%	0.4%	0.1%			
AM Peak			08:00	10:00	10:00	10:00	11:00	08:00	07:00	07:00	07:00	06:00	06:00	04:00	07:00		
Vol.			1_	1	9	27	101	224	314	382	182	37	9	2	1192		
PM Peak		13:00	15:00	16:00	12:00	12:00	12:00	12:00	15:00	16:00	15:00	17:00	13:00	16:00	15:00		
Vol.		1	1	2	6	16	71	184	224	182	72	19	3	3	681		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Westbound															Latitude.	. 0 0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	0	1	0	10	9	13	6	2	2	0	0	43	46-55	22
01:00	0	0	0	0	0	2	6	13	5	1	1	0	0	0	28	41-50	19
02:00	0	0	0	1	0	0	2	5	9	3	1	0	0	0	21	46-55	14
03:00	0	0	0	0	0	1	1	2	13	3	0	1	1	0	22	49-58	16
04:00	0	0	0	0	0	0	7	18	17	21	8	4	0	0	75	51-60	38
05:00	0	0	0	0	0	1	8	33	74	97	52	17	2	1	285	51-60	171
06:00	0	0	0	0	0	0	21	90	204	237	119	32	2	1	706	51-60	441
07:00	0	0	0	0	0	4	49	202	367	347	133	13	5	0	1120	51-60	714
08:00	0	0	0	0	2	16	53	176	321	263	108	21	6	1	967	51-60	584
09:00	0	0	0	1	0	12	55	147	255	192	69	13	2	0	746	51-60	447
10:00	0	0	0	0	2	19	62	144	191	140	33	3	2	1	597	46-55	335
11:00	0	0	0	0	5	22	75	151	192	97	23	4	1	0	570	46-55	343
12 PM	0	0	0	0	1	5	44	127	200	121	52	9	2	0	561	46-55	327
13:00	0	0	0	0	1	8	54	137	231	126	50	7	0	0	614	46-55	368
14:00	0	0	0	0	0	5	45	121	194	139	46	15	2	1	568	51-60	333
15:00	0	1	0	0	0	7	36	125	234	180	64	8	1	0	656	51-60	414
16:00	0	0	0	0	4	12	48	110	196	186	77	9	5	1	648	51-60	382
17:00	0	0	0	0	0	4	31	97	214	174	87	18	1	2	628	51-60	388
18:00	0	0	0	0	1	5	25	114	192	180	65	15	6	0	603	51-60	372
19:00	0	0	0	0	1	4	42	100	162	125	29	4	3	0	470	51-60	287
20:00	0	0	0	0	1	3	24	93	122	95	22	3	1	1	365	50-59	217
21:00	0	0	0	0	1	7	44	116	105	42	15	3	0	1	334	46-55	221
22:00	0	0	0	0	1	5	25	68	63	32	10	3	2	0	209	46-55	131
23:00	0	0	0	1	1	4	20	57	59	33	11	4	0	1	191	46-55	116
Total	0	1	0	3	22	146	787	2255	3633	2840	1077	208	44	11	11027		
Percent	0.0%	0.0%	0.0%	0.0%	0.2%	1.3%	7.1%	20.4%	32.9%	25.8%	9.8%	1.9%	0.4%	0.1%			
AM Peak				02:00	11:00	11:00	11:00	07:00	07:00	07:00	07:00	06:00	08:00	05:00	07:00		
Vol.				1	5	22	75	202	367	347	133	32	6	1_	1120		
PM Peak		15:00		23:00	16:00	16:00	13:00	13:00	15:00	16:00	17:00	17:00	18:00	17:00	15:00		
Vol.		1		1	4	12	54	137	234	186	87	18	6	2	656		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Westbound															Lantado.	0.0000	Ondomica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	0	0	0	0	4	21	32	35	17	4	0	0	3	116	46-55	67
01:00	0	0	0	0	0	3	11	25	17	5	5	1	0	0	67	46-55	42
02:00	0	0	0	0	1	2	4	12	12	2	7	0	1	0	41	46-55	24
03:00	0	0	0	0	0	1	2	5	10	3	1	1	0	0	23	46-55	15
04:00	0	0	0	0	0	0	5	6	12	14	3	0	0	0	40	51-60	26
05:00	0	0	0	0	0	1	1	15	45	35	22	6	3	1	129	51-60	80
06:00	0	0	0	0	0	0	6	28	69	71	39	16	1	0	230	51-60	140
07:00	0	0	0	0	0	1	14	61	94	137	64	31	2	2	406	51-60	231
08:00	0	0	0	0	1	2	17	83	162	148	64	8	3	0	488	51-60	310
09:00	0	0	0	0	1	4	49	154	237	183	55	8	1	0	692	51-60	420
10:00	0	0	0	1	1	10	51	167	252	195	66	12	5	0	760	51-60	447
11:00	0	0	0	0	1	12	54	184	236	216	68	12	1	0	784	51-60	452
12 PM	0	0	0	0	3	10	24	152	293	190	65	15	3	0	755	51-60	483
13:00	0	0	0	0	1	4	29	156	243	172	45	14	3	1	668	51-60	415
14:00	0	0	0	0	1	3	35	129	239	179	85	24	2	1	698	51-60	418
15:00	0	0	0	0	2	5	32	152	262	165	63	8	3	4	696	51-60	427
16:00	0	0	0	0	1	10	23	133	253	173	46	14	4	2	659	51-60	426
17:00	0	0	0	1	3	4	41	139	241	156	50	9	4	3	651	51-60	397
18:00	0	0	0	0	1	3	19	108	202	142	41	6	3	0	525	51-60	344
19:00	0	0	0	0	1	3	18	86	134	106	46	14	2	0	410	51-60	240
20:00	0	0	0	0	0	3	35	76	113	91	29	3	1	0	351	51-60	204
21:00	0	0	0	0	2	8	43	94	75	30	3	1	0	0	256	46-55	169
22:00	0	0	0	0	1	10	60	74	116	54	9	1	0	0	325	46-55	190
23:00	0	0	0	0	11	7	36	60	51	21	7	11	0	0	184	46-55	111
Total	0	0	0	2	22	110	630	2131	3403	2505	887	205	42	17	9954		
Percent	0.0%	0.0%	0.0%	0.0%	0.2%	1.1%	6.3%	21.4%	34.2%	25.2%	8.9%	2.1%	0.4%	0.2%			
AM Peak				10:00	02:00	11:00	11:00	11:00	10:00	11:00	11:00	07:00	10:00	00:00	11:00		
Vol.				1	1	12	54	184	252	216	68	31	5_	3	784		
PM Peak				17:00	12:00	12:00	22:00	13:00	12:00	12:00	14:00	14:00	16:00	15:00	12:00		
Vol.				1	3	10	60	156	293	190	85	24	4	4	755		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Westbound															Latitude.	0 0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	0	0	1	10	29	33	26	18	3	1	1	0	122	41-50	62
01:00	0	0	0	0	1	1	13	20	18	4	1	0	0	0	58	46-55	38
02:00	0	0	0	0	0	1	6	10	15	3	2	2	1	1	41	46-55	25
03:00	0	0	0	0	0	1	5	7	15	3	1	0	0	0	32	46-55	22
04:00	0	0	0	0	0	1	4	9	14	7	5	0	0	1	41	46-55	23
05:00	0	0	0	0	0	1	0	16	26	18	10	2	1	0	74	50-59	44
06:00	0	0	0	0	0	0	0	16	49	40	18	7	0	2	132	51-60	89
07:00	0	0	0	0	1	1	5	28	67	70	41	17	6	0	236	51-60	137
08:00	0	0	0	0	0	2	14	70	116	109	33	9	3	0	356	51-60	225
09:00	0	0	0	0	0	1	31	121	170	140	47	13	1	0	524	51-60	310
10:00	0	0	0	0	1	2	34	108	199	151	53	9	1	0	558	51-60	350
11:00	0	0	0	0	0	5	47	151	233	156	46	11	2	1	652	51-60	389
12 PM	0	0	0	0	1	8	55	178	240	177	47	9	3	1	719	46-55	418
13:00	0	0	0	0	0	8	54	179	254	150	49	12	4	1	711	46-55	433
14:00	0	0	0	0	0	12	55	141	232	178	59	8	2	0	687	51-60	410
15:00	0	0	0	0	1	6	50	140	242	186	55	9	2	0	691	51-60	428
16:00	0	0	0	0	0	2	20	122	230	161	66	13	0	0	614	51-60	391
17:00	0	0	0	0	1	0	26	127	217	188	67	10	7	0	643	51-60	405
18:00	0	0	0	0	1	3	22	134	193	142	59	13	1	2	570	51-60	335
19:00	0	0	0	0	0	3	22	88	145	114	39	16	1	1	429	51-60	259
20:00	0	0	0	0	3	3	14	62	112	79	27	6	2	1	309	51-60	191
21:00	0	0	0	0	0	3	17	71	69	43	7	8	0	0	218	46-55	140
22:00	0	0	0	0	0	4	8	36	58	26	7	2	1	0	142	46-55	94
23:00	0	0	0	0	0	1	7	29	23	18	7	1_	0	0	86	46-55	52
Total	0	0	0	0	11	79	538	1896	2963	2181	749	178	39	11	8645		
Percent	0.0%	0.0%	0.0%	0.0%	0.1%	0.9%	6.2%	21.9%	34.3%	25.2%	8.7%	2.1%	0.5%	0.1%			
AM Peak					00:00	00:00	11:00	11:00	11:00	11:00	10:00	07:00	07:00	06:00	11:00		
Vol.					1	10	47	151	233	156	53	17	6	2	652		
PM Peak					20:00	14:00	12:00	13:00	13:00	17:00	17:00	19:00	17:00	18:00	12:00		
Vol.					3	12	55	179	254	188	67	16	7	2	719		

Route 66 East of Grandview Terrace Portland, Connecticut

Site Code: Station ID: 4679

Latitude: 0' 0.0000 Undefined

Westbound																	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/04/18	0	0	0	0	0	1	3	7	15	3	1	2	1	1	34	46-55	22
01:00	0	0	0	0	1	1	5	9	8	3	1	0	0	0	28	46-55	17
02:00	0	0	0	0	0	0	1	6	7	2	0	0	0	0	16	46-55	13
03:00	0	0	0	0	0	1	2	4	9	4	0	1	0	0	21	46-55	13
04:00	0	0	0	0	0	1	7	18	18	12	8	3	0	0	67	46-55	36
05:00	0	0	0	0	0	1	9	35	96	78	44	15	1	0	279	51-60	174
06:00	0	0	0	0	0	1	28	117	246	229	78	19	2	2	722	51-60	475
07:00	0	0	0	6	1	15	50	179	422	278	72	14	2	1	1040	51-60	700
08:00	0	0	0	0	0	3	31	170	417	296	83	20	3	1	1024	51-60	713
09:00	0	0	0	0	2	5	12	91	252	230	77	17	4	1	691	51-60	482
10:00	0	0	Ō	0	0	2	16	73	149	103	35	7	1	1	387	51-60	252
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	0	0	6	4	31	164	709	1639	1238	399	98	14	7	4309		
Percent	0.0%	0.0%	0.0%	0.1%	0.1%	0.7%	3.8%	16.5%	38.0%	28.7%	9.3%	2.3%	0.3%	0.2%			
AM Peak				07:00	09:00	07:00	07:00	07:00	07:00	08:00	08:00	08:00	09:00	06:00	07:00		
Vol.				6	2	15	50	179	422	296	83	20	4	2	1040		
PM Peak Vol.															·	·	
Total	1	2	2	18	103	588	3247	10470	16741	12969	4711	1056	205	72	50185		
Percent	0.0%	0.0%	0.0%	0.0%	0.2%	1.2%	6.5%	20.9%	33.4%	25.8%	9.4%	2.1%	0.4%	0.1%	30103		
FEICEIIL	0.0%		0.0%		0.270	1.270	0.5%	20.970	33.4%	25.0%	9.470	2.170	0.476	0.176			

15th Percentile: 46 MPH 50th Percentile: 53 MPH 85th Percentile: 59 MPH 95th Percentile: 63 MPH

Stats 10 MPH Pace Speed: 51-60 MPH Number in Pace: 29710

Percent in Pace: 59.2%

Number of Vehicles > 40 MPH: 49471

Percent of Vehicles > 40 MPH: 98.6%

Mean Speed(Average): 54 MPH

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Eastbound															Latitude.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	0	0	2	1	4	5	16	48	32	21	10	1	1	0	141	46-55	80
11:00	0	0	3	0	0	10	35	120	166	94	34	8	1	0	471	46-55	286
12 PM	0	0	1	0	4	10	54	114	159	102	44	10	3	2	503	46-55	273
13:00	0	0	0	2	3	9	52	105	185	104	28	15	0	0	503	46-55	290
14:00	0	0	3	5	2	10	35	120	177	172	71	22	0	0	617	51-60	349
15:00	0	0	0	1	5	7	52	149	292	224	100	20	8	0	858	51-60	516
16:00	0	0	1	4	2	5	29	159	338	326	155	35	3	1	1058	51-60	664
17:00	0	0	0	1	3	1	26	144	342	309	172	44	5	2	1049	51-60	651
18:00	0	0	0	0	2	1	24	109	208	237	93	28	7	1	710	51-60	445
19:00	0	0	0	1	0	2	22	121	142	138	76	18	7	0	527	51-60	280
20:00	0	0	0	0	0	6	32	82	136	87	28	5	0	0	376	51-60	223
21:00	0	0	0	1	0	2	30	80	84	51	16	5	3	0	272	46-55	164
22:00	0	0	0	0	0	0	6	36	51	25	22	3	2	0	145	46-55	87
23:00	0	0	0	0	0	6	10	28	30	27	12	11	0	1	115	46-55	58_
Total	0	0	10	16	25	74	423	1415	2342	1917	861	215	40	7	7345		
Percent	0.0%	0.0%	0.1%	0.2%	0.3%	1.0%	5.8%	19.3%	31.9%	26.1%	11.7%	2.9%	0.5%	0.1%			
AM Peak			11:00	10:00	10:00	11:00	11:00	11:00	11:00	11:00	11:00	11:00	10:00		11:00		
Vol.			3	1	4	10	35	120	166	94	34	8	1		471		
PM Peak			14:00	14:00	15:00	12:00	12:00	16:00	17:00	16:00	17:00	17:00	15:00	12:00	16:00		
Vol.			3	5	5	10	54	159	342	326	172	44	8	2	1058		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	2	6	15	18	17	3	2	0	1	64	50-59	35
01:00	0	0	0	0	0	1	4	9	11	7	3	2	2	0	39	46-55	20
02:00	0	0	0	0	0	0	2	5	1	2	0	0	0	0	10	41-50	7
03:00	0	0	1	0	0	4	1	4	5	1	2	0	0	0	18	46-55	9
04:00	0	0	0	0	0	1	2	8	3	2	3	0	0	0	19	44-53	11
05:00	0	0	0	1	0	0	3	15	17	19	7	4	0	1	67	51-60	36
06:00	0	0	0	0	0	2	6	25	64	64	37	15	2	1	216	51-60	128
07:00	0	0	0	2	1	3	16	55	115	112	67	24	3	5	403	51-60	227
08:00	0	0	0	2	3	7	21	74	139	124	61	19	5	0	455	51-60	263
09:00	0	0	1	2	2	6	24	67	131	104	52	14	4	1	408	51-60	235
10:00	0	0	0	0	3	4	34	73	122	111	55	21	2	2	427	51-60	233
11:00	0	0	0	3	0	6	23	63	142	140	77	22	1	2	479	51-60	282
12 PM	0	0	1	5	1	7	24	78	157	132	91	28	4	1	529	51-60	289
13:00	0	0	0	1	10	17	32	94	174	167	78	26	7	3	609	51-60	341
14:00	0	0	0	2	2	7	28	85	218	185	92	34	12	2	667	51-60	403
15:00	0	0	2	5	6	6	40	119	226	296	192	56	12	5	965	51-60	522
16:00	0	0	0	0	3	16	15	120	329	336	203	71	18	7	1118	51-60	665
17:00	0	0	0	4	4	0	24	102	353	393	193	60	11	6	1150	51-60	746
18:00	0	0	2	0	3	6	20	90	296	283	143	43	11	2	899	51-60	579
19:00	0	0	0	0	0	4	13	74	148	203	118	18	6	7	591	51-60	351
20:00	0	0	2	1	2	4	28	79	176	123	50	12	3	1	481	51-60	299
21:00	0	0	0	0	0	2	17	59	103	95	43	12	4	0	335	51-60	198
22:00	0	0	0	1	0	2	14	34	62	58	27	8	2	1	209	51-60	120
23:00	0	0	0	0	0	4	3	18	45	46	19	5	0	1_	141	51-60	91
Total	0	0	9	29	40	111	400	1365	3055	3020	1616	496	109	49	10299		
Percent	0.0%	0.0%	0.1%	0.3%	0.4%	1.1%	3.9%	13.3%	29.7%	29.3%	15.7%	4.8%	1.1%	0.5%			
AM Peak			03:00	11:00	08:00	08:00	10:00	08:00	11:00	11:00	11:00	07:00	08:00	07:00	11:00		
Vol.			1	3	3	7	34	74	142	140	77	24	5	5_	479		
PM Peak			15:00	12:00	13:00	13:00	15:00	16:00	17:00	17:00	16:00	16:00	16:00	16:00	17:00		
Vol.			2	5	10	17	40	120	353	393	203	71	18	7	1150		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Eastbound															Lalliude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	0	9	16	25	23	9	3	0	0	85	51-60	48
01:00	0	0	1	2	0	0	4	7	10	8	7	1	0	1	41	49-58	18
02:00	0	0	0	0	0	2	2	1	7	7	4	1	1	0	25	51-60	14
03:00	0	0	0	0	0	3	4	2	5	3	2	1	0	0	20	49-58	8
04:00	0	0	0	1	2	0	4	8	10	6	0	1	0	0	32	46-55	18
05:00	0	0	1	1	0	1	3	12	26	12	10	1	3	1	71	51-60	38
06:00	0	0	0	1	2	2	9	29	57	73	38	14	5	4	234	51-60	130
07:00	0	0	0	1	0	1	19	51	116	117	84	33	13	6	441	51-60	233
08:00	0	2	0	2	2	1	16	65	110	131	56	26	3	1	415	51-60	241
09:00	0	0	4	1	2	7	25	71	140	97	67	16	2	1	433	51-60	237
10:00	0	0	1	4	4	4	24	89	140	100	57	17	2	0	442	51-60	240
11:00	0	0	0	2	2	9	36	118	180	140	47	14	1	0	549	51-60	320
12 PM	0	0	0	1	4	14	59	153	240	148	53	13	3	1	689	46-55	393
13:00	0	0	1	2	0	12	39	246	531	198	50	12	1	0	1092	46-55	777
14:00	0	0	0	3	5	17	62	246	532	234	64	11	5	1	1180	46-55	778
15:00	0	0	1	3	0	7	52	233	513	429	137	34	8	4	1421	51-60	942
16:00	0	0	0	6	1	4	42	273	550	531	171	31	5	0	1614	51-60	1081
17:00	0	0	0	1	3	5	42	175	666	557	154	30	2	0	1635	51-60	1223
18:00	0	0	0	2	2	6	40	231	551	330	114	31	6	4	1317	51-60	881
19:00	0	0	0	0	1	5	12	78	358	225	82	22	5	0	788	51-60	583
20:00	0	0	0	1	0	8	36	166	323	114	47	7	1	0	703	46-55	489
21:00	0	1	0	2	1	1	31	108	240	80	28	2	1	1	496	46-55	348
22:00	0	0	0	0	1	1	22	72	164	90	37	3	0	3	393	51-60	254
23:00	0	0	0	0	1	3	10	38	138	46	18	7	2	2	265	51-60	184
Total	0	3	9	36	33	113	602	2488	5632	3699	1336	331	69	30	14381		
Percent	0.0%	0.0%	0.1%	0.3%	0.2%	0.8%	4.2%	17.3%	39.2%	25.7%	9.3%	2.3%	0.5%	0.2%			
AM Peak		08:00	09:00	10:00	10:00	11:00	11:00	11:00	11:00	11:00	07:00	07:00	07:00	07:00	11:00		
Vol.		2	4	44	4	9	36	118	180	140	84	33	13	6	549		
PM Peak		21:00	13:00	16:00	14:00	14:00	14:00	16:00	17:00	17:00	16:00	15:00	15:00	15:00	17:00		
Vol.		1	1	6	5	17	62	273	666	557	171	34	8	4	1635		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Eastbound															Lantado.	0.0000	Oridoninod
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	2	1	6	19	78	34	10	5	2	0	157	51-60	112
01:00	0	0	0	1	0	0	1	17	33	15	6	2	2	0	77	46-55	50
02:00	0	0	0	0	0	0	2	6	12	7	5	1	0	0	33	49-58	19
03:00	0	0	0	0	1	1	4	9	17	2	4	1	0	0	39	46-55	26
04:00	0	0	0	0	0	1	6	4	10	5	2	0	0	0	28	51-60	15
05:00	0	0	3	0	1	1	7	12	18	10	7	2	1	0	62	46-55	30
06:00	0	0	0	0	1	2	5	19	47	44	26	5	1	3	153	51-60	91
07:00	0	0	0	0	3	0	13	36	100	82	63	22	9	1	329	51-60	182
08:00	0	0	1	3	1	8	18	41	134	132	69	21	3	1	432	51-60	266
09:00	0	1	0	2	4	10	35	113	207	139	61	20	2	0	594	51-60	346
10:00	0	1	0	1	4	11	35	115	236	164	65	16	1	2	651	51-60	400
11:00	0	0	1	2	1	9	50	140	210	169	70	15	3	2	672	51-60	379
12 PM	0	0	1	4	5	15	54	161	254	211	94	16	1	6	822	51-60	465
13:00	0	0	1	4	3	20	77	145	229	224	71	17	6	5	802	51-60	453
14:00	0	0	2	3	9	20	74	185	315	213	60	17	6	3	907	51-60	528
15:00	0	0	1	5	13	25	64	198	284	162	72	18	3	0	845	46-55	482
16:00	0	0	2	2	14	28	90	150	236	142	88	20	7	1	780	46-55	386
17:00	0	0	3	8	15	39	85	164	232	165	62	28	7	2	810	49-58	397
18:00	0	0	4	7	15	42	97	147	152	75	48	14	7	4	612	46-55	299
19:00	0	1	2	13	31	53	125	128	92	44	28	7	6	5	535	41-50	253
20:00	0	0	1	5	2	12	50	79	145	90	33	8	5	3	433	51-60	235
21:00	0	0	0	2	4	10	30	90	135	86	28	8	0	0	393	46-55	225
22:00	0	1	1	2	0	7	27	68	89	49	22	7	2	0	275	46-55	157
23:00	0	0	0	0	0	0	12	38	72	47	18	10	2	3	202	51-60	119
Total	0	4	23	64	129	315	967	2084	3337	2311	1012	280	76	41	10643		
Percent	0.0%	0.0%	0.2%	0.6%	1.2%	3.0%	9.1%	19.6%	31.4%	21.7%	9.5%	2.6%	0.7%	0.4%			
AM Peak		09:00	05:00	08:00	09:00	10:00	11:00	11:00	10:00	11:00	11:00	07:00	07:00	06:00	11:00		
Vol.		1_	3	3	4	11	50	140	236	169	70	22	9	3	672		
PM Peak		19:00	18:00	19:00	19:00	19:00	19:00	15:00	14:00	13:00	12:00	17:00	16:00	12:00	14:00		
Vol.		1	4	13	31	53	125	198	315	224	94	28	7	6	907		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Eastbound															Lamado.	0 0.0000	Onacimica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	1	1	0	3	11	33	27	20	7	2	0	1	106	46-55	60
01:00	0	0	1	0	1	1	9	10	21	10	6	3	0	0	62	46-55	31
02:00	0	0	0	0	0	1	4	12	13	9	4	3	0	1	47	46-55	25
03:00	0	0	0	0	1	1	3	6	6	4	1	0	0	0	22	46-55	12
04:00	0	0	0	0	0	0	2	1	4	3	0	1	0	0	11	50-59	7
05:00	0	0	0	0	1	1	9	11	9	7	1	1	0	0	40	41-50	20
06:00	0	0	1	0	2	3	8	27	37	18	8	1	1	0	106	46-55	64
07:00	0	0	0	2	1	0	18	43	50	21	12	6	1	0	154	46-55	93
08:00	0	0	0	2	0	3	16	56	85	60	26	9	1	0	258	51-60	145
09:00	0	0	0	1	0	2	22	81	179	106	36	8	2	0	437	51-60	285
10:00	0	0	1	3	1	8	43	109	229	142	54	12	3	0	605	51-60	371
11:00	0	0	1	1	1	10	51	179	284	152	31	6	4	1	721	46-55	463
12 PM	0	0	1	1	4	5	44	117	263	162	69	18	2	3	689	51-60	425
13:00	0	0	1	2	2	4	30	108	241	205	69	21	1	1	685	51-60	446
14:00	0	0	0	1	2	8	40	127	214	159	98	22	3	0	674	51-60	373
15:00	0	0	0	0	2	6	26	124	188	156	73	19	4	2	600	51-60	344
16:00	0	0	0	3	2	3	10	83	184	163	94	27	4	4	577	51-60	347
17:00	0	0	0	0	1	2	13	72	137	136	103	20	10	3	497	51-60	273
18:00	0	0	0	3	1	2	14	58	139	143	79	24	6	3	472	51-60	282
19:00	0	0	0	0	0	0	15	59	106	103	66	14	3	0	366	51-60	209
20:00	0	0	0	0	0	2	26	56	83	76	36	7	2	0	288	51-60	159
21:00	0	0	0	1	1	4	14	42	52	36	19	5	2	2	178	46-55	94
22:00	0	0	0	0	0	0	4	27	49	31	12	2	2	0	127	51-60	80
23:00	0	0	0	0	0	2	6	18	27	16	13	6	1	2	91	46-55	45
Total	0	0	7	21	23	71	438	1459	2627	1938	917	237	52	23	7813		
Percent	0.0%	0.0%	0.1%	0.3%	0.3%	0.9%	5.6%	18.7%	33.6%	24.8%	11.7%	3.0%	0.7%	0.3%			
AM Peak			00:00	10:00	06:00	11:00	11:00	11:00	11:00	11:00	10:00	10:00	11:00	00:00	11:00		
Vol.			1	3	2	10	51	179	284	152	54	12	4	1	721		
PM Peak			12:00	16:00	12:00	14:00	12:00	14:00	12:00	13:00	17:00	16:00	17:00	16:00	12:00		
Vol.			1	3	4	8	44	127	263	205	103	27	10	4	689		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Latitude: 0' 0.0000 Undefined

Eastbound															Latitude.	0.0000	Onacinica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	2	0	0	4	11	11	16	6	3	0	0	53	51-60	27
01:00	0	0	0	0	0	0	2	5	6	4	3	1	0	0	21	46-55	11
02:00	0	0	0	0	0	0	0	3	3	1	3	0	1	0	11	46-55	6
03:00	0	0	0	0	0	2	2	2	3	5	0	0	0	0	14	51-60	8
04:00	0	0	0	0	2	1	2	9	4	5	2	0	0	0	25	46-55	13
05:00	0	0	1	0	0	4	2	11	32	15	12	2	2	0	81	51-60	47
06:00	0	0	1	0	0	2	4	25	55	64	43	19	3	2	218	51-60	119
07:00	0	0	1	0	0	2	10	41	84	120	91	38	11	3	401	56-65	211
08:00	0	0	1	2	0	1	18	59	99	116	79	29	9	2	415	51-60	215
09:00	0	0	2	1	0	4	10	50	117	102	70	18	4	2	380	51-60	219
10:00	0	3	2	0	2	2	32	64	127	96	46	7	2	0	383	51-60	223
11:00	0	0	1	3	0	3	25	93	144	111	57	14	4	1	456	51-60	255
12 PM	0	0	0	1	1	5	22	75	137	142	75	25	3	1	487	51-60	279
13:00	0	0	0	2	3	10	51	99	157	107	50	11	1	1	492	51-60	264
14:00	0	0	0	1	0	8	35	87	183	186	92	23	2	5	622	51-60	369
15:00	0	0	0	4	1	11	44	118	250	290	155	41	12	2	928	51-60	540
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	3	9	16	9	55	263	752	1412	1380	784	231	54	19	4987		
Percent	0.0%	0.1%	0.2%	0.3%	0.2%	1.1%	5.3%	15.1%	28.3%	27.7%	15.7%	4.6%	1.1%	0.4%			
AM Peak		10:00	09:00	11:00	04:00	05:00	10:00	11:00	11:00	07:00	07:00	07:00	07:00	07:00	11:00		
Vol.		3	2	3	2	4	32	93	144	120	91	38	11	3	456		
PM Peak				15:00	13:00	15:00	13:00	15:00	15:00	15:00	15:00	15:00	15:00	14:00	15:00		
Vol.				4	3	11	51	118	250	290	155	41	12	5	928		
Total	0	10	67	182	259	739	3093	9563	18405	14265	6526	1790	400	169	55468		
Percent	0.0%	0.0%	0.1%	0.3%	0.5%	1.3%	5.6%	17.2%	33.2%	25.7%	11.8%	3.2%	0.7%	0.3%			

15th Percentile: 47 MPH 50th Percentile: 53 MPH 85th Percentile: 60 MPH 95th Percentile: 64 MPH

Stats 10 MPH Pace Speed: 51-60 MPH Number in Pace: 32670

Percent in Pace: 58.9%

Number of Vehicles > 45 MPH: 51118

Percent of Vehicles > 45 MPH: 92.2%

Mean Speed(Average): 54 MPH

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	2
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
10:00	0	0	1	0	0	4	18	47	56	42	6	2	1	0	177	46-55	103
11:00	1	0	0	0	2	9	42	137	206	76	22	4	0	0	499	46-55	343
12 PM	0	0	0	0	1	7	22	115	171	86	29	3	1	0	435	46-55	286
13:00	0	0	0	2	3	14	42	145	167	67	11	6	0	0	457	46-55	312
14:00	0	0	4	4	6	16	31	136	163	98	21	2	0	0	481	46-55	299
15:00	0	0	1	1	3	8	36	112	194	113	44	5	0	0	517	51-60	307
16:00	0	0	0	2	4	4	38	114	203	150	51	12	1	0	579	51-60	353
17:00	0	0	0	1	2	1	12	80	217	169	53	10	1	0	546	51-60	386
18:00	0	0	0	1	1	0	13	70	143	114	37	7	0	0	386	51-60	257
19:00	0	0	0	0	2	1	13	60	95	47	23	1	0	0	242	46-55	155
20:00	0	0	0	1	0	5	30	64	64	24	11	5	1	0	205	46-55	128
21:00	0	0	0	0	0	2	11	44	48	21	6	1	0	0	133	46-55	92
22:00	0	0	0	0	1	0	5	16	22	22	9	2	0	0	77	51-60	44
23:00	0	0	0	0	0	0	7	8	20	21	8	2	0	0	66	51-60	41
Total	1	0	6	12	25	71	320	1148	1769	1050	331	62	5	0	4800		
Percent	0.0%	0.0%	0.1%	0.3%	0.5%	1.5%	6.7%	23.9%	36.9%	21.9%	6.9%	1.3%	0.1%	0.0%			
AM Peak	11:00		10:00		11:00	11:00	11:00	11:00	11:00	11:00	11:00	11:00	10:00		11:00		
Vol.	1		1		2	9	42	137	206	76	22	4	1		499		
PM Peak			14:00	14:00	14:00	14:00	13:00	13:00	17:00	17:00	17:00	16:00	12:00		16:00		
Vol.			4	4	6	16	42	145	217	169	53	12	1		579		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Westbound															Lalliude.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	1	1	0	3	9	9	2	0	0	0	25	51-60	18
01:00	0	0	0	0	0	1	0	3	3	4	1	1	0	0	13	51-60	7
02:00	0	0	0	0	0	0	2	2	6	3	2	1	0	0	16	51-60	9
03:00	0	0	0	0	0	0	1	1	5	5	3	2	1	0	18	51-60	10
04:00	0	0	0	0	0	0	3	5	29	27	13	10	2	1	90	51-60	56
05:00	0	0	0	0	0	0	7	24	89	73	52	23	3	1	272	51-60	162
06:00	0	0	0	0	0	0	12	67	230	304	156	33	2	1	805	51-60	534
07:00	0	0	0	2	1	2	18	152	427	410	136	18	2	0	1168	51-60	837
08:00	0	0	0	3	6	9	27	145	328	322	130	15	1	0	986	51-60	650
09:00	0	0	1	2	2	6	32	121	239	208	96	13	0	0	720	51-60	447
10:00	0	0	0	0	3	8	34	81	224	175	78	17	5	0	625	51-60	399
11:00	0	0	0	0	3	5	21	109	194	130	51	7	3	0	523	51-60	324
12 PM	0	1	2	0	2	9	32	117	184	130	44	9	1	0	531	51-60	314
13:00	0	0	0	1	2	6	27	118	197	122	41	9	2	1	526	51-60	319
14:00	0	0	0	3	6	9	41	109	211	128	55	11	1	1	575	51-60	339
15:00	0	0	2	2	2	7	29	111	223	129	58	12	1	0	576	51-60	352
16:00	0	0	1	0	1	7	22	131	235	182	53	9	4	0	645	51-60	417
17:00	0	0	2	3	6	1	24	115	254	166	63	6	5	1	646	51-60	420
18:00	0	0	0	1	3	2	16	92	196	175	68	12	4	1	570	51-60	371
19:00	0	0	0	0	0	1	14	47	155	125	48	5	2	3	400	51-60	280
20:00	0	0	0	1	1	4	10	64	109	99	23	4	1	0	316	51-60	208
21:00	0	0	0	0	0	0	11	35	74	49	10	4	3	0	186	51-60	123
22:00	0	0	0	0	0	0	5	25	46	32	20	5	1	0	134	51-60	78
23:00	0	0	0	0	11	0	5	15	22	18	12	2	0	0	75	51-60	40
Total	0	1	8	18	40	78	393	1692	3689	3025	1215	228	44	10	10441		
Percent	0.0%	0.0%	0.1%	0.2%	0.4%	0.7%	3.8%	16.2%	35.3%	29.0%	11.6%	2.2%	0.4%	0.1%			
AM Peak			09:00	08:00	08:00	08:00	10:00	07:00	07:00	07:00	06:00	06:00	10:00	04:00	07:00		
Vol.			1_	3	6_	9	34	152	427	410	156	33	5_	1_	1168		
PM Peak		12:00	12:00	14:00	14:00	12:00	14:00	16:00	17:00	16:00	18:00	15:00	17:00	19:00	17:00		
Vol.		1	2	3	6	9	41	131	254	182	68	12	5	3	646		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	0	2	5	11	7	3	1	0	0	29	50-59	18
01:00	0	0	0	0	0	0	6	9	9	2	2	0	1	0	29	46-55	18
02:00	0	0	0	0	0	0	2	4	6	4	2	0	0	0	18	51-60	10
03:00	0	0	0	0	0	0	2	7	7	5	6	2	0	0	29	46-55	14
04:00	0	0	0	0	0	0	2	9	26	26	17	6	1	0	87	51-60	52
05:00	0	0	0	0	0	0	3	14	82	101	64	23	4	2	293	51-60	183
06:00	0	0	1	2	3	3	17	54	210	307	171	34	3	1	806	51-60	517
07:00	0	0	1	0	0	6	36	92	401	407	167	14	0	2	1126	51-60	808
08:00	0	0	0	1	0	7	27	126	302	320	112	23	0	0	918	51-60	622
09:00	0	1	0	1	5	12	28	109	262	196	66	5	1	1	687	51-60	458
10:00	0	0	0	3	7	21	45	149	197	143	38	7	1	1	612	46-55	346
11:00	0	1	0	4	0	9	57	126	242	117	29	7	0	0	592	46-55	368
12 PM	0	0	0	7	1	3	35	116	143	72	10	8	1	4	400	46-55	259
13:00	0	0	0	0	0	1	0	0	9	3	0	1	0	0	14	51-60	12
14:00	0	0	0	0	0	0	2	3	8	0	0	0	0	0	13	46-55	11
15:00	0	0	0	0	1	0	0	3	14	12	5	0	0	2	37	51-60	26
16:00	0	0	0	1	0	0	0	8	15	13	0	0	0	1	38	51-60	28
17:00	0	0	0	0	1	0	0	1	25	13	0	0	0	3	43	51-60	38
18:00	0	0	0	1	3	0	0	15	21	16	0	2	1	3	62	49-58	37
19:00	0	0	0	1	1	0	0	0	23	12	1	0	0	3	41	51-60	35
20:00	0	0	0	2	0	0	0	4	19	2	0	0	0	0	27	46-55	23
21:00	0	0	0	2	0	0	0	5	4	1	0	0	0	0	12	46-55	9
22:00	0	0	0	2	0	0	0	1	11	4	0	0	1	1	20	51-60	15
23:00	0	0	0	0	0	0	0	11	18	2	1_	0	0	2	24	49-58	20
Total	0	2	2	27	22	62	264	861	2065	1785	694	133	14	26	5957		
Percent	0.0%	0.0%	0.0%	0.5%	0.4%	1.0%	4.4%	14.5%	34.7%	30.0%	11.7%	2.2%	0.2%	0.4%			
AM Peak		09:00	06:00	11:00	10:00	10:00	11:00	10:00	07:00	07:00	06:00	06:00	05:00	05:00	07:00		
Vol.		1_	1	4	7	21	57	149	401	407	171	34	4	2	1126		
PM Peak				12:00	18:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00		
Vol.				7	3	3	35	116	143	72	10	8	1	4	400		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Westbound															Latitado.	0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	0	0	0	0	8	2	1	0	2	1	14	51-60	10
01:00	0	0	0	0	0	0	0	0	3	1	0	0	0	0	4	49-58	4
02:00	0	0	0	0	0	0	0	0	3	1	0	0	0	0	4	49-58	4
03:00	0	0	0	0	0	0	0	0	2	0	0	0	0	0	2	45-54	2
04:00	0	0	0	0	0	0	0	0	7	0	0	0	0	0	7	46-55	7
05:00	0	0	0	0	0	0	1	3	11	0	0	0	0	0	15	46-55	14
06:00	0	0	0	0	0	0	0	0	20	10	1	2	0	2	35	51-60	30
07:00	0	0	0	0	0	0	0	0	19	47	7	1	0	1	75	51-60	66
08:00	0	0	0	0	0	0	0	5	55	66	3	0	0	0	129	51-60	121
09:00	0	0	0	0	0	0	0	17	93	36	0	0	0	0	146	51-60	129
10:00	0	0	0	0	0	0	1	25	104	51	4	0	0	1	186	51-60	155
11:00	0	0	0	0	0	0	0	16	60	8	2	0	0	0	86	46-55	76
12 PM	0	0	0	0	0	0	4	21	86	20	1	0	0	0	132	46-55	107
13:00	0	0	0	0	0	0	3	26	72	22	2	0	0	0	125	46-55	98
14:00	0	0	0	0	0	1	1	19	48	12	0	0	0	2	83	46-55	67
15:00	0	0	0	0	0	0	6	24	57	32	0	1	0	2	122	51-60	89
16:00	0	0	0	0	0	0	5	24	39	16	0	0	0	0	84	46-55	63
17:00	0	0	0	0	1	0	4	16	26	13	0	0	0	1	61	46-55	42
18:00	0	0	0	0	0	1	4	9	16	6	0	0	0	0	36	46-55	25
19:00	0	0	0	0	0	1	1	4	1	1	0	0	0	0	8	44-53	5
20:00	0	0	0	0	0	1	0	1	1	1	0	0	0	0	4	44-53	2
21:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
22:00	0	0	0	0	0	0	0	0	0	1	0	0	0	0	1	49-58	1
23:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
Total	0	0	0	0	1 1	4	30	210	731	346	21	4	2	10	1359		
Percent	0.0%	0.0%	0.0%	0.0%	0.1%	0.3%	2.2%	15.5%	53.8%	25.5%	1.5%	0.3%	0.1%	0.7%	40.00		
AM Peak Vol.							05:00	10:00 25	10:00	08:00 66	07:00 7	06:00	00:00 2	06:00	10:00 186		
					17.00	14.00	15.00		104			15:00		14:00			
PM Peak Vol.					17:00	14:00	15:00 6	13:00 26	12:00 86	15:00 32	13:00 2	15:00		14:00 2	12:00 132		
VOI.					ı	ı	Ö	20	00	32	2	1		2	132		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Westbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
01:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
02:00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	44-53	1
03:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
04:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
05:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
06:00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	44-53	1
07:00	0	0	0	0	0	0	0	1	1	0	0	0	0	0	2	44-53	2
08:00	0	0	0	0	0	0	0	0	2	0	0	0	0	0	2	45-54	2
09:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
10:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
11:00	0	0	0	0	0	0	0	1	1	0	0	0	0	0	2	44-53	2
12 PM	0	0	0	0	0	0	0	0	2	1	0	0	0	0	3	49-58	3
13:00	0	0	0	0	0	0	0	0	11	1	0	0	0	0	12	51-60	12
14:00	0	0	0	1	0	0	0	3	17	9	1	0	0	0	31	51-60	26
15:00	0	0	0	1	1	1	0	1	11	10	0	0	0	0	25	51-60	21
16:00	0	0	0	0	0	0	0	0	2	3	0	0	0	0	5	51-60	5
17:00	0	0	0	0	0	0	0	0	1	1	0	0	0	0	2	49-58	2
18:00	0	0	0	0	0	0	0	0	2	2	1	0	0	0	5	51-60	4
19:00	0	0	0	0	0	0	0	0	2	6	0	0	0	0	8	51-60	8
20:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
21:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
22:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
23:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
Total	0	0	0	2	1	1	0	6	54	33	2	0	0	0	99		
Percent	0.0%	0.0%	0.0%	2.0%	1.0%	1.0%	0.0%	6.1%	54.5%	33.3%	2.0%	0.0%	0.0%	0.0%			
AM Peak								07:00	08:00						07:00		
Vol.								1	2						2		
PM Peak				14:00	15:00	15:00		14:00	14:00	15:00	14:00				14:00		
Vol.				1	1	1		3	17	10	1				31		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4638

Latitude: 0' 0.0000 Undefined

Westbound															Latitude.	0.0000	Onacinica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
01:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
02:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
03:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	*	*
04:00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	44-53	1
05:00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	44-53	1
06:00	0	0	0	0	0	0	0	0	1	1	0	0	0	0	2	49-58	2
07:00	0	0	0	0	0	0	0	0	0	3	0	0	0	0	3	51-60	3
08:00	0	0	0	0	0	0	0	0	2	5	1	0	0	0	8	51-60	7
09:00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	44-53	1
10:00	0	0	0	0	0	0	0	0	0	3	0	0	0	0	3	51-60	3
11:00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	44-53	1
12 PM	0	0	0	0	0	0	0	1	1	1	0	0	0	0	3	44-53	2
13:00	0	0	0	1	3	0	2	6	6	3	0	0	0	0	21	46-55	12
14:00	0	0	0	0	0	0	1	0	1	0	1	0	0	0	3	34-43	1
15:00	0	0	0	0	0	0	0	0	0	2	0	0	0	0	2	50-59	2
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	0	0	1	3	0	3	7	15	18	2	0	0	0	49		
Percent	0.0%	0.0%	0.0%	2.0%	6.1%	0.0%	6.1%	14.3%	30.6%	36.7%	4.1%	0.0%	0.0%	0.0%			
AM Peak									08:00	08:00	08:00				08:00		
Vol.									2	5	1				8		
PM Peak				13:00	13:00		13:00	13:00	13:00	13:00	14:00				13:00		
Vol.				1	3		2	6	6	3	1				21		
Total	1	3	16	60	92	216	1010	3924	8323	6257	2265	427	65	46	22705		
Percent	0.0%	0.0%	0.1%	0.3%	0.4%	1.0%	4.4%	17.3%	36.7%	27.6%	10.0%	1.9%	0.3%	0.2%			

15th Percentile: 47 MPH 50th Percentile: 53 MPH 85th Percentile: 59 MPH 95th Percentile: 63 MPH

Stats 10 MPH Pace Speed: 51-60 MPH Number in Pace: 14580

Percent in Pace : 64.2%

Number of Vehicles > 45 MPH : 21307

Percent of Vehicles > 45 MPH : 93.8%

Mean Speed(Average) : 54 MPH

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	0	0	0	0	1	9	35	116	153	133	90	35	9	4	585	51-60	286
14:00	0	0	3	1	1	7	36	74	172	183	102	50	13	4	646	51-60	355
15:00	0	2	2	1	0	12	42	132	288	258	173	67	20	2	999	51-60	546
16:00	0	0	3	4	6	6	41	141	352	303	206	86	17	7	1172	51-60	655
17:00	0	0	1	1	2	6	30	137	254	305	272	88	14	7	1117	56-65	577
18:00	0	0	1	1	0	3	29	85	201	232	191	71	12	4	830	51-60	433
19:00	0	0	1	0	1	1	18	66	137	183	146	62	9	4	628	56-65	329
20:00	0	0	0	0	2	1	8	62	136	152	107	38	10	4	520	51-60	288
21:00	0	0	0	1	3	3	14	67	105	105	55	13	4	3	373	51-60	210
22:00	0	0	0	0	1	2	22	36	56	52	29	8	3	1	210	51-60	108
23:00	0	0	0	0	0	1	8	27	50	41	17	7	4	4	159	51-60	91
Total	0	2	11	9	17	51	283	943	1904	1947	1388	525	115	44	7239		
Percent	0.0%	0.0%	0.2%	0.1%	0.2%	0.7%	3.9%	13.0%	26.3%	26.9%	19.2%	7.3%	1.6%	0.6%			
AM Peak Vol.																	
PM Peak		15:00	14:00	16:00	16:00	15:00	15:00	16:00	16:00	17:00	17:00	17:00	15:00	16:00	16:00		
Vol.		2	3	4	6	12	42	141	352	305	272	88	20	7	1172		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Eastbound															Latitude:	0.0000	Undefined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	0	0	1	4	16	23	21	11	6	0	1	83	51-60	44
01:00	0	0	0	0	0	0	4	7	17	10	7	5	1	0	51	51-60	27
02:00	0	0	0	0	0	0	3	3	4	2	3	2	0	0	17	46-55	7
03:00	0	0	0	0	0	1	3	1	6	4	4	0	0	0	19	51-60	10
04:00	0	0	0	0	0	1	3	5	7	2	7	1	0	0	26	46-55	12
05:00	0	0	0	0	0	3	5	14	20	17	14	6	2	4	85	51-60	37
06:00	0	0	1	1	0	0	8	22	51	56	49	27	12	6	233	51-60	107
07:00	0	1	0	3	0	4	20	38	75	121	103	68	19	6	458	56-65	224
08:00	0	1	2	1	1	11	22	84	117	102	82	22	7	2	454	51-60	219
09:00	0	1	1	0	5	8	41	108	124	109	58	23	2	1	481	51-60	233
10:00	0	0	1	0	1	9	33	97	141	90	42	14	5	0	433	46-55	238
11:00	0	1	2	1	1	12	33	103	168	129	79	28	3	2	562	51-60	297
12 PM	0	1	1	4	1	6	29	77	166	170	91	25	4	3	578	51-60	336
13:00	0	1	4	5	3	8	45	93	174	143	113	27	7	1	624	51-60	317
14:00	0	0	2	3	1	7	34	84	161	180	145	32	18	2	669	51-60	341
15:00	0	1	1	0	2	10	32	110	247	251	224	73	19	8	978	51-60	498
16:00	0	0	1	1	0	7	58	169	261	336	221	86	16	8	1164	51-60	597
17:00	0	0	2	3	1	6	37	165	329	298	226	89	17	4	1177	51-60	627
18:00	0	0	1	0	1	4	23	92	190	212	177	86	22	6	814	51-60	402
19:00	0	1	2	1	0	0	15	69	139	162	138	66	12	5	610	51-60	301
20:00	0	0	0	0	0	5	17	75	148	126	95	43	7	5	521	51-60	274
21:00	0	0	0	0	0	5	21	64	107	83	51	18	4	3	356	51-60	190
22:00	0	0	0	0	0	0	7	26	64	52	36	15	3	2	205	51-60	116
23:00	0	0	0	0	0	2	15	21	41	42	14	10	4	5	154	51-60	83
Total	0	8	21	23	17	110	512	1543	2780	2718	1990	772	184	74	10752		
Percent	0.0%	0.1%	0.2%	0.2%	0.2%	1.0%	4.8%	14.4%	25.9%	25.3%	18.5%	7.2%	1.7%	0.7%			
AM Peak		07:00	08:00	07:00	09:00	11:00	09:00	09:00	11:00	11:00	07:00	07:00	07:00	06:00	11:00		
Vol.		1	2	3	5	12	41	108	168	129	103	68	19	6	562		
PM Peak		12:00	13:00	13:00	13:00	15:00	16:00	16:00	17:00	16:00	17:00	17:00	18:00	15:00	17:00		
Vol.		1	4	5	3	10	58	169	329	336	226	89	22	8	1177		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	0	0	0	3	15	33	20	12	7	3	0	93	51-60	53
01:00	0	0	0	0	0	1	0	13	12	11	4	2	1	0	44	46-55	25
02:00	0	0	0	1	0	0	2	1	10	5	4	0	0	0	23	51-60	15
03:00	0	0	0	0	0	0	2	3	5	2	1	0	2	1	16	46-55	8
04:00	0	0	0	0	0	0	5	7	9	5	3	1	1	0	31	46-55	16
05:00	0	0	1	0	0	1	6	8	25	24	14	3	0	2	84	51-60	49
06:00	0	1	1	0	0	1	11	24	64	55	57	20	8	5	247	51-60	119
07:00	0	1	0	2	2	2	17	48	91	106	86	56	17	10	438	51-60	197
08:00	0	0	1	0	2	5	28	65	107	113	66	43	15	3	448	51-60	220
09:00	0	2	2	1	0	2	25	57	105	107	79	38	6	4	428	51-60	212
10:00	0	1	2	0	5	17	62	104	119	92	50	19	3	1	475	46-55	223
11:00	0	0	4	0	1	18	58	100	151	102	58	23	1	3	519	50-59	253
12 PM	0	0	4	0	0	4	39	108	155	126	91	35	10	1	573	51-60	281
13:00	0	3	3	1	1	11	31	94	174	156	103	46	12	6	641	51-60	330
14:00	0	0	0	1	1	11	35	124	165	191	140	46	20	2	736	51-60	356
15:00	0	1	2	1	1	14	43	127	258	280	177	81	13	8	1006	51-60	538
16:00	0	0	1	4	2	9	41	167	276	291	268	91	15	4	1169	51-60	567
17:00	0	0	4	3	0	8	60	178	342	319	227	72	14	6	1233	51-60	661
18:00	0	0	2	1	1	2	25	143	269	260	168	58	15	2	946	51-60	529
19:00	0	0	1	1	0	3	17	94	158	149	112	41	6	6	588	51-60	307
20:00	0	0	1	1	0	1	20	86	135	142	75	35	7	4	507	51-60	277
21:00	0	0	0	0	0	8	21	67	125	96	52	10	2	1	382	51-60	221
22:00	0	0	0	0	0	2	8	44	96	75	37	8	1	2	273	51-60	171
23:00	0	0	0	0	1	2	9	31	66	48	37	6	3	0	203	51-60	114
Total	0	9	29	17	17	122	568	1708	2950	2775	1921	741	175	71	11103		
Percent	0.0%	0.1%	0.3%	0.2%	0.2%	1.1%	5.1%	15.4%	26.6%	25.0%	17.3%	6.7%	1.6%	0.6%			
AM Peak		09:00	11:00	07:00	10:00	11:00	10:00	10:00	11:00	08:00	07:00	07:00	07:00	07:00	11:00		
Vol.		2	4	2	5	18	62	104	151	113	86	56	17	10	519		
PM Peak		13:00	12:00	16:00	16:00	15:00	17:00	17:00	17:00	17:00	16:00	16:00	14:00	15:00	17:00		
Vol.		3	4	4	2	14	60	178	342	319	268	91	20	8	1233		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	0	0	0	0	1	6	28	51	23	24	10	4	0	147	46-55	79
01:00	0	0	0	0	0	1	9	14	15	16	7	3	2	3	70	50-59	31
02:00	0	0	0	0	1	1	1	9	12	6	2	4	2	4	42	46-55	21
03:00	0	0	0	0	1	1	2	8	8	3	3	2	0	2	30	46-55	16
04:00	0	0	0	0	0	0	2	4	5	9	2	0	0	0	22	51-60	14
05:00	0	0	0	0	0	1	1	11	20	8	7	2	1	0	51	46-55	31
06:00	0	0	1	0	0	0	5	18	26	30	24	6	1	0	111	51-60	56
07:00	0	1	1	0	0	3	5	32	74	77	51	13	3	4	264	51-60	151
08:00	0	0	1	0	4	7	16	66	119	92	69	16	4	2	396	51-60	211
09:00	0	0	2	2	1	8	31	91	140	119	88	16	3	2	503	51-60	259
10:00	0	0	1	2	1	7	48	131	186	135	100	20	7	2	640	51-60	321
11:00	0	0	2	3	2	11	56	121	200	159	90	17	4	1	666	51-60	359
12 PM	0	0	3	4	2	12	58	137	260	213	116	26	6	0	837	51-60	473
13:00	0	1	3	2	3	8	61	140	224	202	123	35	9	0	811	51-60	426
14:00	0	0	4	0	3	11	35	137	237	193	109	24	7	1	761	51-60	430
15:00	0	0	5	5	3	15	30	123	198	189	136	37	12	2	755	51-60	387
16:00	0	0	3	1	1	3	19	109	214	228	115	35	7	4	739	51-60	442
17:00	0	0	0	2	0	3	32	80	185	122	129	61	17	4	635	51-60	307
18:00	0	0	1	0	0	1	16	89	155	151	114	41	7	3	578	51-60	306
19:00	0	0	0	0	0	1	15	68	137	118	86	33	5	3	466	51-60	255
20:00	0	0	0	1	1	0	16	68	139	99	67	29	11	2	433	51-60	238
21:00	0	0	1	1	0	8	28	99	128	73	33	5	4	1	381	46-55	227
22:00	0	0	0	0	0	4	18	69	88	53	31	5	0	1	269	46-55	157
23:00	0	0	0	2	1	2	14	53	62	57	26	13	2	1	233	51-60	119
Total	0	2	28	25	24	109	524	1705	2883	2375	1552	453	118	42	9840		
Percent	0.0%	0.0%	0.3%	0.3%	0.2%	1.1%	5.3%	17.3%	29.3%	24.1%	15.8%	4.6%	1.2%	0.4%			
AM Peak		07:00	09:00	11:00	08:00	11:00	11:00	10:00	11:00	11:00	10:00	10:00	10:00	02:00	11:00		
Vol.		1_	2	3	4	11	56	131	200	159	100	20	7	4	666		
PM Peak		13:00	15:00	15:00	13:00	15:00	13:00	13:00	12:00	16:00	15:00	17:00	17:00	16:00	12:00		
Vol.		1	5	5	3	15	61	140	260	228	136	61	17	4	837		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	0	0	0	0	9	17	26	27	13	9	2	4	107	51-60	53
01:00	0	0	0	0	0	1	5	11	19	8	8	0	3	1	56	46-55	30
02:00	0	0	0	0	0	1	5	12	9	10	3	3	2	0	45	46-55	21
03:00	0	0	0	0	0	1	4	3	4	7	4	1	1	1	26	51-60	11
04:00	0	0	0	0	0	3	2	4	3	3	2	0	0	0	17	44-53	7
05:00	0	0	0	1	0	2	1	2	16	11	6	2	3	1	45	51-60	27
06:00	0	0	1	0	0	1	2	10	28	24	19	10	3	0	98	51-60	52
07:00	0	0	0	0	0	2	4	24	38	60	33	11	7	3	182	51-60	98
08:00	0	0	0	0	0	2	9	26	66	64	44	19	4	1	235	51-60	130
09:00	0	0	0	0	2	5	18	66	121	83	66	15	4	0	380	51-60	204
10:00	0	0	0	1	0	3	20	80	155	145	60	20	5	2	491	51-60	300
11:00	0	1	0	1	0	5	29	98	204	172	102	29	5	1	647	51-60	376
12 PM	0	0	0	1	1	6	50	95	220	187	112	30	4	2	708	51-60	407
13:00	0	1	2	1	0	7	38	144	230	169	113	35	6	3	749	51-60	399
14:00	0	0	1	1	1	3	19	127	234	173	130	41	5	5	740	51-60	407
15:00	0	0	0	1	1	6	21	93	196	182	136	36	14	0	686	51-60	378
16:00	0	0	0	0	0	4	19	86	156	159	147	44	15	6	636	51-60	315
17:00	0	0	0	0	1	1	7	63	163	137	110	58	17	9	566	51-60	300
18:00	0	0	1	0	0	2	9	61	124	185	128	59	13	1	583	56-65	313
19:00	0	0	0	0	0	3	8	48	86	94	81	40	24	7	391	51-60	180
20:00	0	0	0	1	0	1	12	35	75	87	71	30	14	3	329	51-60	162
21:00	0	0	1	0	0	3	9	21	75	61	45	13	7	3	238	51-60	136
22:00	0	0	0	0	0	1	5	31	30	37	17	9	3	0	133	51-60	67
23:00	0	0	0	1	0	1	7	18	15	30	18	6	4	1	101	56-65	48
Total	0	2	6	9	6	64	312	1175	2293	2115	1468	520	165	54	8189		
Percent	0.0%	0.0%	0.1%	0.1%	0.1%	0.8%	3.8%	14.3%	28.0%	25.8%	17.9%	6.3%	2.0%	0.7%			
AM Peak		11:00	06:00	05:00	09:00	09:00	11:00	11:00	11:00	11:00	11:00	11:00	07:00	00:00	11:00		
Vol.		1_	1_	1	2	5	29	98	204	172	102	29	7	4	647		
PM Peak		13:00	13:00	12:00	12:00	13:00	12:00	13:00	14:00	12:00	16:00	18:00	19:00	17:00	13:00		
Vol.		1	2	1	1	7	50	144	234	187	147	59	24	9	749		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Latitude: 0' 0.0000 Undefined

Eastbound															Lantado.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/04/18	0	0	0	0	0	0	5	5	15	12	9	5	1	2	54	51-60	27
01:00	0	0	0	0	0	1	2	4	9	3	4	1	0	0	24	46-55	13
02:00	0	0	0	0	1	1	1	5	6	1	2	1	1	0	19	46-55	11
03:00	0	0	0	1	0	1	3	5	3	2	2	1	0	0	18	41-50	8
04:00	0	0	0	0	0	0	2	2	4	6	2	1	0	0	17	51-60	10
05:00	1	0	1	0	0	1	6	6	21	11	9	5	4	2	67	51-60	32
06:00	0	0	0	0	0	5	13	35	51	37	24	20	4	1	190	50-59	88
07:00	0	0	3	0	1	4	21	72	109	111	66	20	9	2	418	51-60	220
08:00	0	0	1	0	1	9	34	70	130	109	53	18	3	1	429	51-60	239
09:00	0	1	0	0	3	3	30	86	120	101	55	22	7	1	429	51-60	221
10:00	0	0	0	1	1	6	18	68	102	73	53	18	5	3	348	51-60	175
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	1	1	5	2	7	31	135	358	570	466	279	112	34	12	2013		
Percent	0.0%	0.0%	0.2%	0.1%	0.3%	1.5%	6.7%	17.8%	28.3%	23.1%	13.9%	5.6%	1.7%	0.6%			
AM Peak	05:00	09:00	07:00	03:00	09:00	08:00	08:00	09:00	08:00	07:00	07:00	09:00	07:00	10:00	08:00		
Vol.	1	1	3	1	3	9	34	86	130	111	66	22	9	3	429		
PM Peak Vol.																	
Total	1	24	100	85	88	487	2334	7432	13380	12396	8598	3123	791	297	49136		
Percent	0.0%	0.0%	0.2%	0.2%	0.2%	1.0%	4.8%	15.1%	27.2%	25.2%	17.5%	6.4%	1.6%	0.6%			

15th Percentile: 47 MPH 50th Percentile: 55 MPH 85th Percentile: 63 MPH 95th Percentile: 67 MPH

Stats 10 MPH Pace Speed : 51-60 MPH Number in Pace : 25776

Percent in Pace : 52.5%

Number of Vehicles > 40 MPH : 48351

Percent of Vehicles > 40 MPH : 98.4%

Mean Speed(Average) : 56 MPH

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Westbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	0	0	2	2	9	12	57	152	220	84	28	5	0	1	572	46-55	372
14:00	0	1	3	1	8	7	36	141	215	120	30	5	0	1	568	46-55	356
15:00	0	3	1	1	4	9	36	130	226	141	31	8	1	0	591	51-60	367
16:00	0	1	0	3	8	8	32	139	274	125	18	6	2	0	616	46-55	413
17:00	0	0	0	1	1	5	36	153	253	170	41	3	2	0	665	51-60	423
18:00	0	1	2	0	2	2	32	117	200	126	41	9	2	0	534	51-60	326
19:00	0	0	0	1	1	2	19	59	160	101	28	5	3	2	381	51-60	261
20:00	0	0	0	0	0	0	23	74	110	68	12	2	1	1	291	46-55	184
21:00	0	0	1	0	1	1	12	32	71	52	18	1	0	2	191	51-60	123
22:00	0	0	0	0	0	1	15	26	45	44	14	10	1	0	156	51-60	89
23:00	0	0	0	0	0	0	3	16	22	26	10	2	0	0	79	51-60	48
Total	0	6	9	9	34	47	301	1039	1796	1057	271	56	12	7	4644		
Percent	0.0%	0.1%	0.2%	0.2%	0.7%	1.0%	6.5%	22.4%	38.7%	22.8%	5.8%	1.2%	0.3%	0.2%			
AM Peak																	
Vol.																	
PM Peak		15:00	14:00	16:00	13:00	13:00	13:00	17:00	16:00	17:00	17:00	22:00	19:00	19:00	17:00		
Vol.		3	3	3	9	12	57	153	274	170	41	10	3	2	665		

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 West of Route 17 Portland, Connecticut

Station ID: 4680

Westbound															Lantado.	0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	0	1	0	2	8	11	4	5	0	0	0	31	46-55	19
01:00	0	0	0	0	0	0	1	5	8	2	2	0	0	0	18	46-55	13
02:00	0	0	0	0	0	0	0	5	10	5	0	0	0	0	20	46-55	15
03:00	0	0	0	0	0	0	3	2	8	1	5	1	1	0	21	46-55	10
04:00	0	0	0	0	0	0	0	5	35	22	11	8	1	1	83	51-60	57
05:00	0	0	0	0	0	1	1	23	63	123	70	13	1	1	296	56-65	193
06:00	0	0	0	0	0	3	9	54	218	315	138	29	2	2	770	51-60	533
07:00	0	0	2	1	1	3	16	148	432	389	124	11	6	0	1133	51-60	821
08:00	0	1	3	1	3	12	32	157	366	325	95	17	3	1	1016	51-60	691
09:00	0	0	1	2	6	22	42	140	278	176	40	6	1	0	714	51-60	454
10:00	0	2	1	3	6	9	47	140	227	101	25	2	0	1	564	46-55	367
11:00	0	0	0	0	8	8	49	134	203	94	25	6	4	0	531	46-55	337
12 PM	0	2	3	1	4	6	45	150	196	104	24	4	2	0	541	46-55	346
13:00	1	2	3	1	3	11	41	135	199	101	30	4	2	0	533	46-55	334
14:00	0	0	2	1	6	14	34	163	225	141	26	4	1	0	617	46-55	388
15:00	0	1	0	2	3	10	42	179	249	131	24	4	1	0	646	46-55	428
16:00	0	1	2	0	1	6	41	148	272	152	33	5	0	0	661	51-60	424
17:00	0	0	3	2	2	5	26	139	281	112	46	7	2	0	625	46-55	420
18:00	0	0	2	0	1	4	16	115	193	160	44	8	0	0	543	51-60	353
19:00	0	1	0	2	1	0	8	84	170	90	38	4	1	1	400	51-60	260
20:00	0	0	1	0	0	2	15	77	121	65	8	3	0	2	294	46-55	198
21:00	0	0	0	0	0	1	13	55	77	46	9	4	1	1	207	46-55	132
22:00	0	0	0	0	0	1	5	30	67	33	8	3	0	1	148	51-60	100
23:00	0	0	1_	0	2	4	2	20	26	22	6	3	0	0	86	51-60	48
Total	1	10	24	16	48	122	490	2116	3935	2714	836	146	29	11	10498		
Percent	0.0%	0.1%	0.2%	0.2%	0.5%	1.2%	4.7%	20.2%	37.5%	25.9%	8.0%	1.4%	0.3%	0.1%			
AM Peak		10:00	08:00	10:00	11:00	09:00	11:00	08:00	07:00	07:00	06:00	06:00	07:00	06:00	07:00		
Vol.	40.00	2	3	3	8	22	49	157	432	389	138	29	6	2	1133		
PM Peak	13:00	12:00	12:00	15:00	14:00	14:00	12:00	15:00	17:00	18:00	17:00	18:00	12:00	20:00	16:00		
Vol.	1	2	3	2	6	14	45	179	281	160	46	8	2	2	661		

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 West of Route 17 Portland, Connecticut

Station ID: 4680

Westbound															Lantado.	0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	0	0	0	7	12	15	6	3	1	0	0	44	46-55	27
01:00	0	0	0	0	0	0	3	8	9	4	0	1	0	0	25	46-55	17
02:00	0	0	0	0	1	1	0	5	9	4	1	0	0	0	21	46-55	14
03:00	0	0	0	0	0	0	1	2	8	6	3	0	2	0	22	51-60	14
04:00	0	0	0	0	0	1	2	14	25	26	9	6	2	0	85	51-60	51
05:00	0	0	0	0	1	1	3	19	66	111	77	15	2	0	295	56-65	188
06:00	0	0	0	0	0	0	11	51	235	295	127	19	5	1	744	51-60	530
07:00	1	0	0	2	3	9	28	188	438	343	88	14	3	1	1118	51-60	781
08:00	0	4	0	1	4	14	36	149	345	275	78	8	3	1	918	51-60	620
09:00	1	1	2	3	2	8	31	129	285	169	43	6	2	0	682	51-60	454
10:00	0	2	2	2	5	16	62	154	201	100	17	6	3	0	570	46-55	355
11:00	1	0	2	2	5	17	55	146	212	78	18	5	0	0	541	46-55	358
12 PM	0	2	1	2	0	9	40	129	207	112	27	6	0	1	536	46-55	336
13:00	0	0	0	3	4	15	45	155	224	107	25	4	0	0	582	46-55	379
14:00	0	2	2	2	6	3	25	137	190	151	36	2	0	1	557	51-60	341
15:00	0	0	0	0	0	12	31	107	263	156	45	5	2	2	623	51-60	419
16:00	0	0	3	1	1	5	37	121	226	140	47	5	1	1	588	51-60	366
17:00	0	0	1	5	0	4	30	126	266	152	38	9	2	1	634	51-60	418
18:00	0	0	0	1	1	1	11	113	200	169	43	6	1	0	546	51-60	369
19:00	0	0	1	0	0	2	23	87	211	101	32	4	0	1	462	51-60	312
20:00	0	0	2	1	1	1	20	89	142	84	16	7	1	1	365	46-55	231
21:00	0	0	1	1	0	2	34	84	127	46	7	1	0	4	307	46-55	211
22:00	0	0	2	0	1	2	10	50	88	39	18	3	2	0	215	46-55	138
23:00	0	0	0	0	0	0	7	38	64	55	18	3	1	0	186	51-60	119
Total	3	11	19	26	35	123	552	2113	4056	2729	816	136	32	15	10666		
Percent	0.0%	0.1%	0.2%	0.2%	0.3%	1.2%	5.2%	19.8%	38.0%	25.6%	7.7%	1.3%	0.3%	0.1%			
AM Peak	07:00	08:00	09:00	09:00	10:00	11:00	10:00	07:00	07:00	07:00	06:00	06:00	06:00	06:00	07:00		
Vol.	1	4	16:00	17:00	14.00	17	62	188	438	343	127	19	15:00	24.00	1118		
PM Peak		12:00	16:00	17:00	14:00	13:00	13:00	13:00	17:00	18:00	16:00	17:00	15:00	21:00	17:00		
Vol.		2	3	5	6	15	45	155	266	169	47	9	2	4	634		

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 West of Route 17 Portland, Connecticut

Station ID: 4680

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	0	0	0	0	5	10	33	29	15	5	5	2	1	105	46-55	62
01:00	0	0	0	0	0	1	4	17	24	10	5	4	0	0	65	46-55	41
02:00	0	0	0	0	0	2	2	9	12	7	4	4	0	0	40	46-55	21
03:00	0	1	1	0	0	0	1	8	5	5	3	2	0	0	26	46-55	13
04:00	0	0	0	0	0	0	2	4	16	12	6	2	0	0	42	51-60	28
05:00	0	0	0	0	0	0	2	7	36	45	27	13	0	2	132	51-60	81
06:00	0	0	0	0	0	0	7	33	79	93	33	6	0	0	251	51-60	172
07:00	0	0	2	1	0	2	7	42	149	121	54	17	1	2	398	51-60	270
08:00	0	0	3	0	4	7	24	69	169	156	52	14	2	1	501	51-60	325
09:00	0	1	1	2	4	9	37	139	248	177	44	11	2	0	675	51-60	425
10:00	0	1	2	2	6	16	49	171	312	150	35	10	2	0	756	46-55	483
11:00	0	1	2	1	6	18	60	215	275	127	26	10	1	0	742	46-55	490
12 PM	0	2	1	3	3	11	56	163	271	147	37	5	0	0	699	46-55	434
13:00	0	0	5	0	8	8	42	163	266	102	36	8	1	1	640	46-55	429
14:00	0	2	0	0	5	10	39	157	264	141	36	8	1	0	663	46-55	421
15:00	0	0	3	2	7	5	54	174	257	130	30	5	1	0	668	46-55	431
16:00	0	0	1	0	0	5	38	134	302	129	24	8	4	0	645	46-55	436
17:00	0	1	1	0	1	4	39	174	234	123	29	4	2	0	612	46-55	408
18:00	0	0	1	0	0	1	14	102	234	115	29	2	1	0	499	51-60	349
19:00	0	0	2	0	0	2	17	63	167	101	42	9	1	1	405	51-60	268
20:00	0	0	1	0	1	5	14	76	138	68	25	2	1	1	332	46-55	214
21:00	0	1	0	0	1	3	14	98	98	36	9	1	1	0	262	46-55	196
22:00	0	0	0	0	0	4	31	96	125	41	14	6	0	0	317	46-55	221
23:00	0	0	0	0	1	4	18	39	69	29	6	1	0	0	167	46-55	108
Total	0	10	26	11	47	122	581	2186	3779	2080	611	157	23	9	9642		
Percent	0.0%	0.1%	0.3%	0.1%	0.5%	1.3%	6.0%	22.7%	39.2%	21.6%	6.3%	1.6%	0.2%	0.1%			
AM Peak		03:00	08:00	09:00	10:00	11:00	11:00	11:00	10:00	09:00	07:00	07:00	00:00	05:00	10:00		
Vol.		1	3	2	6	18	60	215	312	177	54	17	2	2	756		
PM Peak		12:00	13:00	12:00	13:00	12:00	12:00	15:00	16:00	12:00	19:00	19:00	16:00	13:00	12:00		
Vol.		2	5	3	8	11	56	174	302	147	42	9	4	1	699		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Westbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	0	0	0	1	14	31	48	14	4	0	2	0	114	46-55	79
01:00	0	0	0	0	0	0	6	21	18	13	3	0	0	0	61	46-55	39
02:00	0	0	0	0	0	2	2	10	13	3	8	0	0	0	38	46-55	23
03:00	0	0	0	0	0	0	0	10	15	11	1	0	0	0	37	49-58	26
04:00	0	0	0	0	0	1	1	6	9	15	7	1	1	1	42	51-60	24
05:00	0	0	0	0	0	1	0	9	22	25	10	3	0	0	70	51-60	47
06:00	0	0	0	0	0	0	4	12	43	55	30	4	3	1	152	51-60	98
07:00	0	1	0	0	0	0	1	18	72	96	40	15	1	0	244	51-60	168
08:00	0	0	0	0	0	1	9	59	134	119	38	5	0	1	366	51-60	253
09:00	0	0	3	0	0	11	23	72	212	140	47	9	3	0	520	51-60	352
10:00	1	0	4	0	0	6	23	97	217	158	45	5	1	0	557	51-60	375
11:00	0	1	4	0	2	7	54	137	255	132	28	2	2	2	626	46-55	392
12 PM	0	0	1	0	3	6	33	167	289	160	24	4	0	0	687	46-55	456
13:00	0	0	2	1	1	8	48	222	267	125	21	7	1	0	703	46-55	489
14:00	0	0	1	1	0	8	35	158	313	143	29	7	1	0	696	46-55	471
15:00	0	0	0	0	0	6	43	180	246	153	21	4	1	1	655	46-55	426
16:00	0	1	1	0	2	2	16	145	265	132	31	3	1	0	599	46-55	410
17:00	0	1	1	0	0	2	30	177	251	136	25	5	1	0	629	46-55	428
18:00	0	0	1	2	1	4	23	126	205	147	30	7	2	0	548	51-60	352
19:00	0	1	1	0	0	4	17	109	143	107	23	7	0	0	412	46-55	252
20:00	0	0	1	0	1	1	13	50	122	72	20	1	0	2	283	51-60	194
21:00	0	1	1	0	0	0	6	43	95	44	13	1	0	0	204	49-58	139
22:00	0	0	0	0	0	0	3	24	66	29	9	2	1	0	134	51-60	95
23:00	0	0	0	0	0	0	4	20	26	23	3	4	0	0	80	51-60	49
Total	1	6	21	4	10	71	408	1903	3346	2052	510	96	21	8	8457		
Percent	0.0%	0.1%	0.2%	0.0%	0.1%	0.8%	4.8%	22.5%	39.6%	24.3%	6.0%	1.1%	0.2%	0.1%			
AM Peak	10:00	07:00	10:00		11:00	09:00	11:00	11:00	11:00	10:00	09:00	07:00	06:00	11:00	11:00		
Vol.	1	1_	4		2	11	54	137	255	158	47	15	3	2	626		
PM Peak		16:00	13:00	18:00	12:00	13:00	13:00	13:00	14:00	12:00	16:00	13:00	18:00	20:00	13:00		
Vol.		1	2	2	3	8	48	222	313	160	31	7	2	2	703		

Route 66 West of Route 17 Portland, Connecticut

Site Code: Station ID: 4680

Latitude: 0' 0.0000 Undefined

Westbound															Lantado.	0 0.0000	Onacimea
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/04/18	0	0	0	0	0	1	1	1	17	6	3	0	2	2	33	51-60	23
01:00	0	0	0	0	0	2	2	6	13	4	1	0	0	0	28	46-55	19
02:00	0	0	0	0	0	0	4	2	3	4	2	0	0	0	15	51-60	7
03:00	0	0	0	0	0	0	2	4	10	4	3	0	0	0	23	51-60	14
04:00	0	0	0	0	0	0	1	6	37	21	15	5	0	0	85	51-60	58
05:00	1	0	0	0	0	1	3	23	90	116	44	9	0	0	287	51-60	206
06:00	0	1	0	0	3	2	67	239	297	104	38	2	1	0	754	46-55	536
07:00	0	0	3	2	1	17	145	435	395	112	14	1	0	0	1125	46-55	830
08:00	0	1	2	0	2	11	117	445	328	95	20	3	1	0	1025	46-55	773
09:00	0	0	2	0	2	16	40	169	274	122	16	3	2	0	646	46-55	443
10:00	0	1	2	0	13	11	36	113	187	78	13	1	0	0	455	46-55	300
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	1	3	9	2	21	61	418	1443	1651	666	169	24	6_	2	4476		
Percent	0.0%	0.1%	0.2%	0.0%	0.5%	1.4%	9.3%	32.2%	36.9%	14.9%	3.8%	0.5%	0.1%	0.0%			
AM Peak	05:00	06:00	07:00	07:00	10:00	07:00	07:00	08:00	07:00	09:00	05:00	05:00	00:00	00:00	07:00		
Vol.	1	1	3	2	13	17	145	445	395	122	44	9	2	2	1125		
PM Peak																	
Vol.		46	400		105	F.16	0756	10000	10500	44000	0016	045	400		10000		
Total	6	46	108	68	195	546	2750	10800	18563	11298	3213	615	123	52	48383		
Percent	0.0%	0.1%	0.2%	0.1%	0.4%	1.1%	5.7%	22.3%	38.4%	23.4%	6.6%	1.3%	0.3%	0.1%			

15th Percentile: 46 MPH 50th Percentile: 52 MPH 85th Percentile: 58 MPH 95th Percentile: 62 MPH

Stats 10 MPH Pace Speed : 51-60 MPH Number in Pace : 29861

Percent in Pace: 61.7%

Number of Vehicles > 40 MPH: 47414

Percent of Vehicles > 40 MPH: 98.0%

Mean Speed(Average): 53 MPH

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Numbe
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
15:00	0	6	4	5	15	22	84	195	88	19	4	0	0	0	442	46-55	28
16:00	0	10	4	10	6	15	74	201	118	15	2	0	0	0	455	46-55	319
17:00	1	10	11	15	12	18	107	187	109	12	1	0	0	0	483	46-55	296
18:00	0	0	0	1	5	8	72	213	82	21	2	0	0	0	404	46-55	29
19:00	0	0	0	0	0	7	57	108	66	10	3	0	0	0	251	46-55	174
20:00	0	0	0	0	1	6	41	83	53	6	2	0	0	0	192	46-55	136
21:00	0	0	0	0	0	5	24	31	26	13	0	0	0	0	99	46-55	5
22:00	0	0	0	0	0	3	21	39	19	2	4	0	1	0	89	41-50	6
23:00	0	0	0	11	0	5	7	22	12	6	4	0	0	0	57	46-55	34
Total	1	26	19	32	39	89	487	1079	573	104	22	0	11	0	2472		
Percent	0.0%	1.1%	0.8%	1.3%	1.6%	3.6%	19.7%	43.6%	23.2%	4.2%	0.9%	0.0%	0.0%	0.0%			
AM Peak Vol.																	
PM Peak	17:00	16:00	17:00	17:00	15:00	15:00	17:00	18:00	16:00	18:00	15:00		22:00		17:00		
Vol.	1	10	11	15	15	22	107	213	118	21	4		1		483		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	0	6	2	3	1	0	0	0	0	12	40-49	8
01:00	0	0	0	0	0	1	3	9	3	2	0	0	0	0	18	46-55	12
02:00	0	0	0	0	0	0	1	7	5	1	1	0	0	1	16	46-55	12
03:00	0	0	0	0	0	0	4	12	10	1	4	1	0	0	32	46-55	22
04:00	0	0	0	0	0	1	8	25	56	17	6	1	1	0	115	46-55	81
05:00	0	0	0	0	2	3	29	126	144	43	4	2	0	0	353	46-55	270
06:00	0	0	0	1	3	19	161	409	225	42	2	0	0	0	862	46-55	634
07:00	0	0	0	0	5	39	301	613	144	14	0	0	0	0	1116	41-50	914
08:00	0	1	2	0	11	49	212	385	118	24	0	0	0	0	802	41-50	597
09:00	0	0	0	1	14	39	143	243	102	19	0	0	0	0	561	41-50	386
10:00	0	1	4	4	11	38	131	196	77	17	0	0	0	0	479	41-50	327
11:00	0	0	2	0	10	21	85	174	83	18	3	0	0	0	396	41-50	259
12 PM	0	0	0	0	3	18	87	188	66	15	1	0	0	0	378	41-50	275
13:00	0	0	0	1	2	27	111	182	81	15	1	0	0	1	421	41-50	293
14:00	0	0	0	0	3	24	106	176	80	5	1	2	0	0	397	41-50	282
15:00	0	0	4	1	4	27	106	192	88	15	2	0	0	0	439	41-50	298
16:00	0	7	29	15	5	28	79	172	95	15	2	0	0	0	447	46-55	267
17:00	0	3	4	5	8	36	78	186	98	13	1	0	0	0	432	46-55	284
18:00	0	0	0	0	1	10	79	144	92	15	1	0	0	0	342	46-55	236
19:00	0	0	0	1	1	7	43	85	37	11	0	0	0	0	185	41-50	128
20:00	0	0	0	0	4	27	58	56	19	3	1	0	0	0	168	41-50	114
21:00	0	0	0	0	0	8	30	47	15	5	0	0	0	0	105	41-50	77
22:00	0	0	0	0	0	3	15	27	24	10	1	0	1	0	81	46-55	51
23:00	0	0	0	1	0	4	11	17	16	9	2	1	0	0	61	46-55	33
Total	0	12	45	30	87	429	1887	3673	1681	330	33	7	2	2	8218		
Percent	0.0%	0.1%	0.5%	0.4%	1.1%	5.2%	23.0%	44.7%	20.5%	4.0%	0.4%	0.1%	0.0%	0.0%	07.00		
AM Peak		08:00	10:00	10:00	09:00	08:00	07:00	07:00	06:00	05:00	04:00	05:00	04:00	02:00	07:00		
Vol.		10.00	40.00	4 0.00	14	49	301	613	225	43	45.00	2	11	1 1	1116		
PM Peak		16:00	16:00	16:00	17:00	17:00	13:00	15:00	17:00	12:00	15:00	14:00	22:00	13:00	16:00		
Vol.		/	29	15	8	36	111	192	98	15	2	2	1	1	447		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Westbound															Lamado.	0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	1	7	8	6	1	0	0	0	0	23	41-50	15
01:00	0	0	0	0	0	0	2	4	3	1	0	0	0	0	10	44-53	7
02:00	0	0	0	0	0	1	1	8	3	0	2	0	0	0	15	46-55	11
03:00	0	0	0	0	0	1	2	7	8	5	1	0	0	0	24	46-55	15
04:00	0	0	0	0	0	0	12	30	36	21	4	1	1	0	105	46-55	66
05:00	0	0	0	0	2	5	52	139	126	35	11	2	0	0	372	46-55	265
06:00	0	0	0	0	14	40	175	405	196	27	0	2	0	0	859	46-55	601
07:00	0	0	0	0	9	54	319	556	153	19	0	0	0	0	1110	41-50	875
08:00	0	0	0	0	19	29	221	426	131	15	2	0	0	0	843	41-50	647
09:00	0	0	0	0	6	28	130	281	140	15	4	0	0	0	604	46-55	421
10:00	0	1	0	0	7	22	140	198	107	13	1	0	0	0	489	41-50	338
11:00	0	0	0	0	5	47	139	175	59	18	1	0	0	0	444	41-50	314
12 PM	0	0	0	3	5	32	118	206	71	14	3	1	0	1	454	41-50	324
13:00	0	0	0	0	3	23	124	208	79	12	1	0	0	0	450	41-50	332
14:00	0	0	0	2	6	22	124	199	112	28	0	1	0	0	494	41-50	323
15:00	0	4	16	9	6	21	92	194	122	26	3	1	0	0	494	46-55	316
16:00	0	0	2	5	6	32	108	255	120	27	4	0	0	0	559	46-55	375
17:00	0	4	4	15	8	34	149	212	73	13	1	0	1	1	515	41-50	361
18:00	0	1	0	0	4	41	112	185	91	14	2	1	0	0	451	41-50	297
19:00	0	0	0	0	4	11	70	160	70	18	3	1	0	0	337	41-50	230
20:00	0	0	0	0	2	11	67	105	42	9	1	2	0	0	239	41-50	172
21:00	0	0	0	0	1	7	44	57	31	7	2	0	1	0	150	41-50	101
22:00	0	0	0	0	0	6	24	44	30	8	2	1	0	0	115	46-55	74
23:00	0	0	0	1	0	2	21	20	10	8	0	1	0	0	63	41-50	41
Total	0	10	22	35	107	470	2253	4082	1819	354	48	14	3	2	9219		
Percent	0.0%	0.1%	0.2%	0.4%	1.2%	5.1%	24.4%	44.3%	19.7%	3.8%	0.5%	0.2%	0.0%	0.0%			
AM Peak		10:00			08:00	07:00	07:00	07:00	06:00	05:00	05:00	05:00	04:00		07:00		
Vol.		1			19	54	319	556	196	35	11	2	1		1110		
PM Peak		15:00	15:00	17:00	17:00	18:00	17:00	16:00	15:00	14:00	16:00	20:00	17:00	12:00	16:00		
Vol.		4	16	15	8	41	149	255	122	28	4	2	1	1	559		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Westbound															Lantado.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	2	6	9	3	1	1	0	0	0	22	41-50	15
01:00	0	0	0	0	0	2	9	8	4	1	0	0	0	0	24	41-50	17
02:00	0	0	0	0	0	3	3	4	4	2	1	2	1	0	20	44-53	8
03:00	0	0	0	0	0	1	5	3	11	8	2	1	0	0	31	51-60	19
04:00	0	0	0	0	0	0	7	28	37	17	3	1	0	0	93	46-55	65
05:00	0	0	0	0	1	4	33	152	135	48	9	3	0	0	385	46-55	287
06:00	0	0	0	0	11	21	121	456	241	33	2	0	0	0	885	46-55	697
07:00	0	0	6	8	7	49	240	541	171	28	1	1	0	0	1052	41-50	781
08:00	0	0	0	0	14	46	172	337	173	29	3	0	0	0	774	46-55	510
09:00	0	0	0	0	4	47	162	298	95	11	0	0	0	0	617	41-50	460
10:00	0	0	0	1	5	29	145	215	78	10	1	0	0	0	484	41-50	360
11:00	0	0	0	0	8	51	158	211	59	8	2	0	0	0	497	41-50	369
12 PM	0	0	0	2	3	26	149	182	64	15	0	0	0	0	441	41-50	331
13:00	0	0	0	0	0	37	156	207	77	7	0	0	0	0	484	41-50	363
14:00	0	0	0	0	2	34	137	205	90	13	1	0	0	0	482	41-50	342
15:00	0	3	11	6	19	36	131	202	73	13	0	1	0	0	495	41-50	333
16:00	1	9	8	11	13	26	95	209	115	13	2	1	0	0	503	46-55	324
17:00	1	20	4	9	17	31	125	186	95	14	3	0	0	0	505	41-50	311
18:00	0	0	0	0	6	28	81	172	117	13	2	0	0	0	419	46-55	289
19:00	0	0	0	1	11	12	59	114	72	15	3	1	0	0	288	46-55	186
20:00	0	0	0	0	0	18	68	88	47	6	2	0	0	0	229	41-50	156
21:00	0	0	0	0	0	9	40	59	36	7	1	0	0	0	152	41-50	99
22:00	0	0	0	0	0	12	28	66	32	4	1	1	0	0	144	46-55	98
23:00	0	0	0	0	1	6	22	49	21	7	1	1	0	0	108	41-50	71
Total	2	32	29	38	122	530	2152	4001	1850	323	41	13	1	0	9134		
Percent	0.0%	0.4%	0.3%	0.4%	1.3%	5.8%	23.6%	43.8%	20.3%	3.5%	0.4%	0.1%	0.0%	0.0%			
AM Peak			07:00	07:00	08:00	11:00	07:00	07:00	06:00	05:00	05:00	05:00	02:00		07:00		
Vol.			6	8	14	51	240	541	241	48	9	3	1		1052		
PM Peak	16:00	17:00	15:00	16:00	15:00	13:00	13:00	16:00	18:00	12:00	17:00	15:00			17:00		
Vol.	1	20	11	11	19	37	156	209	117	15	3	1			505		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Westbound															Lalliuue.	0.0000	Ondennec
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	0	5	7	18	13	2	1	0	1	0	47	46-55	31
01:00	0	0	0	0	0	4	5	13	7	2	1	0	1	0	33	45-54	20
02:00	0	0	0	0	1	0	4	8	7	2	0	0	0	0	22	46-55	15
03:00	0	0	0	0	0	0	3	16	6	3	1	0	0	0	29	46-55	22
04:00	0	0	0	0	0	1	5	10	16	8	2	0	1	0	43	46-55	26
05:00	0	0	0	0	0	0	4	28	53	26	8	1	0	0	120	46-55	81
06:00	0	0	0	0	1	6	18	80	117	37	9	2	0	1	271	46-55	197
07:00	0	0	0	0	0	4	50	159	132	27	4	0	0	0	376	46-55	291
08:00	0	0	0	0	0	4	61	203	155	48	7	0	0	0	478	46-55	358
09:00	0	0	0	0	3	15	124	283	139	32	1	0	0	0	597	46-55	422
10:00	0	0	0	1	1	23	190	309	86	19	0	0	0	0	629	41-50	499
11:00	0	0	0	0	0	25	161	286	95	14	1	0	0	0	582	41-50	447
12 PM	0	0	0	5	1	25	201	281	99	10	1	0	0	0	623	41-50	482
13:00	0	0	0	1	3	19	144	265	102	12	0	0	0	0	546	41-50	409
14:00	0	0	1	2	2	25	200	325	80	12	1	0	0	0	648	41-50	525
15:00	0	0	0	0	5	23	185	320	116	11	0	0	0	0	660	41-50	505
16:00	0	0	0	2	7	9	138	288	142	12	1	0	0	0	599	46-55	430
17:00	0	0	1	0	0	36	200	262	113	13	2	0	0	0	627	41-50	462
18:00	0	1	0	1	4	29	177	201	70	13	1	0	0	1	498	41-50	378
19:00	1	0	0	0	0	22	115	164	54	9	2	1	0	0	368	41-50	279
20:00	0	0	1	0	2	15	95	86	28	3	2	1	0	0	233	41-50	181
21:00	0	0	0	0	0	11	64	80	26	4	3	1	0	0	189	41-50	144
22:00	0	0	0	0	1	9	59	76	27	8	2	1	0	0	183	41-50	135
23:00	0	0	0	0	0	2	31	46	26	5	2	0	0	0	112	41-50	77
Total	1	1	3	12	31	312	2241	3807	1709	332	52	7	3	2	8513		
Percent	0.0%	0.0%	0.0%	0.1%	0.4%	3.7%	26.3%	44.7%	20.1%	3.9%	0.6%	0.1%	0.0%	0.0%			
AM Peak				10:00	09:00	11:00	10:00	10:00	08:00	08:00	06:00	06:00	00:00	06:00	10:00		
Vol				11	3	25	190	309	155	48	9	2	1_	1_	629		
PM Peak	19:00	18:00	14:00	12:00	16:00	17:00	12:00	14:00	16:00	17:00	21:00	19:00		18:00	15:00		
Vol.	1	1	1	5	7	36	201	325	142	13	3	1		1	660		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Westbound															Latitado.	0.0000	Oridefilied
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	2	13	27	19	9	2	2	0	0	74	46-55	46
01:00	0	0	0	0	1	3	13	20	5	2	0	0	0	0	44	41-50	33
02:00	0	0	0	0	0	3	2	12	5	3	0	0	0	0	25	46-55	17
03:00	0	0	0	0	0	2	3	10	9	1	0	0	0	0	25	46-55	19
04:00	0	0	0	0	0	0	2	9	8	7	1	0	0	0	27	46-55	17
05:00	0	0	0	0	0	1	8	25	19	10	4	2	0	0	69	46-55	44
06:00	0	0	0	0	1	4	18	58	61	17	3	2	0	0	164	46-55	119
07:00	0	0	0	0	6	1	28	74	61	25	2	1	0	0	198	46-55	135
08:00	0	0	0	0	2	15	71	130	91	23	1	1	0	0	334	46-55	221
09:00	0	0	0	1	1	16	97	205	92	9	0	1	0	0	422	41-50	302
10:00	0	0	0	0	7	18	173	259	110	11	1	0	0	0	579	41-50	432
11:00	0	0	0	0	3	52	195	273	95	13	0	1	0	0	632	41-50	468
12 PM	0	0	0	0	2	34	152	290	106	6	0	0	0	0	590	41-50	442
13:00	0	0	0	0	0	19	162	265	101	9	0	0	1	0	557	41-50	427
14:00	1	0	2	2	0	10	85	255	106	22	1	0	0	0	484	46-55	361
15:00	0	0	0	6	8	17	143	216	89	12	1	0	0	0	492	41-50	359
16:00	0	0	1	0	4	14	101	231	113	13	0	0	0	0	477	46-55	344
17:00	0	0	0	0	2	9	95	194	97	10	1	2	0	0	410	45-54	291
18:00	0	0	0	1	1	15	70	133	85	15	4	1	0	1	326	46-55	218
19:00	0	0	0	0	1	9	47	114	65	17	2	0	0	0	255	46-55	179
20:00	0	0	0	0	1	14	54	73	39	1	0	0	0	0	182	41-50	127
21:00	0	0	0	0	1	9	36	33	30	4	1	0	0	0	114	41-50	69
22:00	0	0	0	0	0	3	13	44	19	5	1	2	1	0	88	46-55	63
23:00	0	0	0	0	0	1	10	13	13	6	0	1	11	0	45	46-55	26
Total	1	0	3	10	41	271	1591	2963	1438	250	25	16	3	1	6613		
Percent	0.0%	0.0%	0.0%	0.2%	0.6%	4.1%	24.1%	44.8%	21.7%	3.8%	0.4%	0.2%	0.0%	0.0%			
AM Peak				09:00	10:00	11:00	11:00	11:00	10:00	07:00	05:00	00:00			11:00		
Vol.				1	7	52	195	273	110	25	4	2			632		
PM Peak	14:00		14:00	15:00	15:00	12:00	13:00	12:00	16:00	14:00	18:00	17:00	13:00	18:00	12:00		
Vol.	1		2	6	8	34	162	290	113	22	4	2	1	1	590		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Latitude: 0' 0.0000 Undefined

Westbound																	2
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	1	3	6	9	2	0	0	0	0	0	21	41-50	15
01:00	0	0	0	0	0	2	3	5	6	3	0	0	0	0	19	46-55	11
02:00	0	0	0	0	0	1	0	1	3	1	0	0	0	0	6	51-60	4
03:00	0	0	0	0	0	1	2	6	15	4	1	1	0	0	30	46-55	21
04:00	0	0	0	0	0	1	4	33	45	20	6	1	0	0	110	46-55	78
05:00	0	0	0	0	2	4	42	151	121	36	11	0	0	0	367	46-55	272
06:00	0	0	0	0	2	10	166	453	237	24	4	0	0	0	896	46-55	690
07:00	0	0	0	0	3	42	312	605	158	15	1	1	0	0	1137	41-50	917
08:00	0	2	1	0	11	28	168	419	156	15	1	0	0	0	801	41-50	587
09:00	0	0	0	0	1	15	80	219	163	23	3	0	0	0	504	46-55	382
10:00	0	0	0	0	4	24	96	232	100	17	3	0	0	0	476	46-55	332
11:00	0	0	0	0	3	12	95	160	88	14	4	1	0	0	377	41-50	255
12 PM	0	0	0	0	4	32	85	224	85	14	0	1	0	0	445	41-50	309
13:00	0	0	0	2	0	15	118	183	92	18	0	0	0	0	428	41-50	301
14:00	0	0	0	0	4	5	125	182	96	12	3	0	0	0	427	41-50	307
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*			*		*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	2	1	2	35	195	1302	2882	1367	216	37	5	0	0	6044		
Percent	0.0%	0.0%	0.0%	0.0%	0.6%	3.2%	21.5%	47.7%	22.6%	3.6%	0.6%	0.1%	0.0%	0.0%			
AM Peak		08:00	08:00		08:00	07:00	07:00	07:00	06:00	05:00	05:00	03:00			07:00		
Vol.		2	1	40.00	11_	42	312	605	237	36	11	10.00			1137		
PM Peak				13:00	12:00 4	12:00	14:00	12:00	14:00	13:00	14:00	12:00			12:00		
Vol.	-	00	100	150		32	125	224	96	18	3	1	12	7	445		
Total	5 0.0%	83 0.2%	122	159	462	2296	11913	22487	10437	1909	258	62	13	-	50213		
Percent	0.0%	0.2%	0.2%	0.3%	0.9%	4.6%	23.7%	44.8%	20.8%	3.8%	0.5%	0.1%	0.0%	0.0%			

15th Percentile: 41 MPH 50th Percentile: 47 MPH 85th Percentile: 52 MPH 95th Percentile: 54 MPH

Stats 10 MPH Pace Speed : 41-50 MPH Number in Pace : 34400

Percent in Pace: 68.5%
Number of Vehicles > 40 MPH: 47086
Percent of Vehicles > 40 MPH: 93.8%
Mean Speed(Average): 48 MPH

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	14	20	30	50	69	89	225	260	90	10	1	0	0	0	858	41-50	485
16:00	37	38	46	70	114	148	214	260	86	15	1	0	0	0	1029	41-50	474
17:00	31	66	80	98	93	105	187	205	99	18	0	0	0	0	982	41-50	392
18:00	0	0	0	0	5	25	97	299	209	41	5	0	0	0	681	46-55	508
19:00	0	0	0	0	1	8	50	194	140	40	5	1	0	0	439	46-55	334
20:00	0	0	0	0	1	6	44	139	95	26	4	2	0	0	317	46-55	234
21:00	0	0	0	0	1	11	33	111	65	19	3	0	0	0	243	46-55	176
22:00	0	0	0	0	0	0	24	54	44	24	8	3	0	0	157	46-55	98
23:00	0	0	0	0	0	2	7	29	39	12	8	2	0	0	99	46-55	68
Total	82	124	156	218	284	394	881	1551	867	205	35	8	0	0	4805		
Percent	1.7%	2.6%	3.2%	4.5%	5.9%	8.2%	18.3%	32.3%	18.0%	4.3%	0.7%	0.2%	0.0%	0.0%			
AM Peak Vol.																	
PM Peak	16:00	17:00	17:00	17:00	16:00	16:00	15:00	18:00	18:00	18:00	22:00	22:00			16:00		
Vol.	37	66	80	98	114	148	225	299	209	41	8	3			1029		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Eastbound															Latitude.	0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	0	11	24	21	8	4	0	0	0	68	46-55	45
01:00	0	0	0	0	0	0	3	9	9	6	1	0	0	0	28	46-55	18
02:00	0	0	0	0	1	1	1	3	4	2	2	0	1	0	15	46-55	7
03:00	0	0	0	0	0	0	2	9	0	4	1	1	0	0	17	41-50	11
04:00	0	0	0	0	1	2	3	6	11	5	1	0	1	0	30	46-55	17
05:00	0	0	0	0	2	0	5	16	23	14	6	2	0	0	68	46-55	39
06:00	0	0	0	0	0	3	31	83	54	22	8	0	0	0	201	46-55	137
07:00	0	0	0	0	1	34	91	155	58	22	3	0	0	0	364	41-50	246
08:00	0	1	3	7	7	22	98	172	68	20	5	0	0	0	403	41-50	270
09:00	0	0	3	4	2	12	69	113	74	18	3	0	0	0	298	46-55	187
10:00	0	0	0	1	5	33	69	125	63	27	1	1	0	0	325	41-50	194
11:00	0	0	0	0	1	20	96	179	91	21	4	0	0	0	412	41-50	275
12 PM	0	0	2	7	10	30	97	168	82	23	1	0	0	0	420	41-50	265
13:00	0	0	0	1	13	43	127	168	75	22	1	1	1	1	453	41-50	295
14:00	0	0	0	1	19	53	158	214	83	22	3	1	0	0	554	41-50	372
15:00	3	3	17	21	54	114	203	268	86	19	0	0	0	0	788	41-50	471
16:00	17	54	131	102	73	135	177	185	66	4	0	0	0	0	944	41-50	362
17:00	1	14	50	48	91	164	246	248	74	9	0	0	0	0	945	41-50	494
18:00	0	0	0	3	5	39	160	272	98	36	2	0	0	0	615	41-50	432
19:00	0	0	0	1	4	12	110	205	92	27	4	0	0	1	456	41-50	315
20:00	0	0	0	0	3	54	96	101	53	8	2	2	0	0	319	41-50	197
21:00	0	0	0	0	0	17	60	97	59	17	1	0	0	0	251	41-50	157
22:00	0	0	0	0	3	5	7	44	33	16	6	3	0	0	117	46-55	77
23:00	0	0	0	0	0	0	11	37	32	14	8	1	0	0	103	46-55	69
Total	21	72	206	196	295	793	1931	2901	1309	386	67	12	3	2	8194		
Percent	0.3%	0.9%	2.5%	2.4%	3.6%	9.7%	23.6%	35.4%	16.0%	4.7%	0.8%	0.1%	0.0%	0.0%			
AM Peak		08:00	08:00	08:00	08:00	07:00	08:00	11:00	11:00	10:00	06:00	05:00	02:00		11:00		
Vol.		1	3	7	7	34	98	179	91	27	8	2	1_		412		
PM Peak	16:00	16:00	16:00	16:00	17:00	17:00	17:00	18:00	18:00	18:00	23:00	22:00	13:00	13:00	17:00		
Vol.	17	54	131	102	91	164	246	272	98	36	8	3	1	1	945		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	1	1	7	18	16	11	2	0	0	0	56	46-55	34
01:00	0	0	0	0	0	0	1	11	13	3	2	0	0	0	30	46-55	24
02:00	0	0	0	0	1	1	0	2	3	2	0	0	0	0	9	51-60	5
03:00	0	0	0	0	0	0	4	6	5	3	0	0	0	0	18	44-53	11
04:00	0	0	0	0	0	0	1	3	7	2	1	0	1	0	15	46-55	10
05:00	0	0	0	0	1	0	13	10	20	21	6	1	0	0	72	51-60	41
06:00	0	0	0	0	1	6	19	83	69	25	7	2	0	0	212	46-55	152
07:00	0	0	2	3	13	19	102	141	72	24	7	1	0	0	384	41-50	243
08:00	0	0	0	0	6	23	88	153	99	21	5	1	0	0	396	46-55	252
09:00	0	0	1	5	4	21	58	123	109	22	4	0	0	0	347	46-55	232
10:00	0	0	0	0	3	12	69	159	95	27	5	0	0	0	370	46-55	254
11:00	0	1	0	1	4	36	85	178	106	28	7	0	0	0	446	46-55	284
12 PM	0	0	0	3	7	33	102	213	105	17	1	0	0	0	481	46-55	318
13:00	0	0	1	14	44	33	90	159	140	34	1	1	0	0	517	46-55	299
14:00	1	2	4	3	9	45	129	230	142	36	7	0	0	0	608	46-55	372
15:00	10	28	42	49	62	107	189	259	149	18	2	1	0	0	916	41-50	448
16:00	7	11	21	29	73	144	229	365	110	21	3	1	0	0	1014	41-50	594
17:00	18	46	76	91	87	149	225	241	74	15	1	0	0	0	1023	41-50	466
18:00	8	9	22	19	30	73	174	262	166	24	3	1	0	0	791	41-50	436
19:00	0	0	0	2	10	31	122	218	115	37	6	1	1	0	543	41-50	340
20:00	0	0	1	4	5	25	103	155	96	23	3	1	0	0	416	41-50	258
21:00	0	0	0	0	0	11	70	133	74	21	7	1	1	0	318	46-55	207
22:00	0	0	0	0	0	5	24	60	53	27	6	2	0	1	178	46-55	113
23:00	0	0	0	1_	0	2	9	42	42	20	5	1	0	0	122	46-55	84
Total	44	97	170	224	361	777	1913	3224	1880	482	91	15	3	1	9282		
Percent	0.5%	1.0%	1.8%	2.4%	3.9%	8.4%	20.6%	34.7%	20.3%	5.2%	1.0%	0.2%	0.0%	0.0%			
AM Peak		11:00	07:00	09:00	07:00	11:00	07:00	11:00	09:00	11:00	06:00	06:00	04:00		11:00		
Vol.		1_	2	5	13	36	102	178	109	28	7	2	1_		446		
PM Peak	17:00	17:00	17:00	17:00	17:00	17:00	16:00	16:00	18:00	19:00	14:00	22:00	19:00	22:00	17:00		
Vol.	18	46	76	91	87	149	229	365	166	37	7	2	1	1	1023		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	3	8	34	21	7	3	1	0	0	77	46-55	55
01:00	0	0	0	0	0	2	5	12	6	4	3	2	0	0	34	44-53	18
02:00	0	0	0	0	0	1	2	6	0	6	3	4	0	0	22	56-65	9
03:00	0	0	0	0	0	0	1	10	7	3	1	1	1	0	24	46-55	17
04:00	0	0	0	0	0	4	0	8	5	5	3	3	0	0	28	46-55	13
05:00	0	0	0	1	0	3	8	13	29	17	7	1	0	0	79	51-60	46
06:00	0	0	0	0	1	4	30	82	100	22	3	1	0	0	243	46-55	182
07:00	0	0	1	7	3	33	67	145	93	39	3	1	0	0	392	46-55	238
08:00	0	0	0	1	0	1	86	156	116	24	4	0	0	0	388	46-55	272
09:00	0	0	0	1	5	27	89	140	83	26	3	0	0	0	374	41-50	229
10:00	0	0	0	2	18	17	92	140	95	19	3	0	0	0	386	46-55	235
11:00	0	0	0	0	9	48	146	189	73	13	2	0	0	0	480	41-50	335
12 PM	0	0	0	11	25	53	138	194	87	7	1	0	0	0	516	41-50	332
13:00	0	0	0	3	17	55	152	208	92	15	1	0	0	0	543	41-50	360
14:00	0	0	0	6	21	54	184	282	96	18	0	0	0	0	661	41-50	466
15:00	27	46	62	63	76	122	187	209	73	7	1	0	0	0	873	41-50	396
16:00	25	42	77	70	151	190	248	193	55	4	0	0	0	0	1055	41-50	441
17:00	29	53	83	71	119	195	211	144	51	3	0	0	0	0	959	36-45	406
18:00	0	0	2	31	74	145	251	159	63	19	3	0	0	0	747	41-50	410
19:00	0	0	0	2	8	45	100	150	108	18	12	4	0	0	447	46-55	258
20:00	0	0	0	0	7	39	95	157	87	25	1	3	0	0	414	41-50	252
21:00	0	0	0	2	7	16	67	103	75	27	2	0	0	0	299	46-55	178
22:00	0	0	0	2	2	4	31	89	67	21	9	2	0	0	227	46-55	156
23:00	0	0	0	0	1	11	35	42	50	20	5	2	11	0	167	46-55	92
Total	81	141	225	273	544	1072	2233	2865	1532	369	73	25	2	0	9435		
Percent	0.9%	1.5%	2.4%	2.9%	5.8%	11.4%	23.7%	30.4%	16.2%	3.9%	0.8%	0.3%	0.0%	0.0%			
AM Peak			07:00	07:00	10:00	11:00	11:00	11:00	08:00	07:00	05:00	02:00	03:00		11:00		
Vol.			1_	7	18	48	146	189	116	39	7	4	1_		480		
PM Peak	17:00	17:00	17:00	17:00	16:00	17:00	18:00	14:00	19:00	21:00	19:00	19:00	23:00		16:00		
Vol.	29	53	83	71	151	195	251	282	108	27	12	4	1		1055		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	2	4	9	22	33	36	7	0	0	1	0	114	46-55	69
01:00	0	0	0	1	3	4	9	13	18	11	2	0	0	0	61	46-55	31
02:00	0	0	0	0	1	1	1	5	11	6	2	0	1	0	28	49-58	17
03:00	0	0	0	0	0	1	5	8	7	4	1	0	1	0	27	45-54	15
04:00	0	0	0	0	0	0	2	3	7	6	2	1	1	0	22	51-60	13
05:00	0	0	0	0	2	2	9	19	10	9	3	2	1	0	57	44-53	29
06:00	0	0	0	0	1	4	10	28	34	23	8	0	0	0	108	46-55	62
07:00	0	0	0	0	3	15	39	118	68	21	9	2	0	0	275	46-55	186
08:00	0	0	0	2	9	34	97	124	93	18	4	0	0	0	381	41-50	221
09:00	0	0	0	2	9	32	130	183	79	15	1	0	0	0	451	41-50	313
10:00	0	0	0	0	5	26	108	231	123	30	1	0	0	0	524	46-55	354
11:00	0	0	0	0	22	60	146	275	77	16	1	0	0	0	597	41-50	421
12 PM	2	5	1	0	24	109	209	248	103	19	0	0	0	0	720	41-50	457
13:00	0	4	0	7	9	45	154	289	137	32	4	1	0	0	682	41-50	443
14:00	0	0	0	0	10	76	173	259	137	28	2	1	1	0	687	41-50	432
15:00	0	0	0	0	5	32	147	311	147	34	0	0	1	0	677	41-50	458
16:00	0	0	1	3	21	26	145	238	168	25	6	1	0	0	634	46-55	406
17:00	0	0	0	2	10	47	141	265	98	28	4	1	0	0	596	41-50	406
18:00	4	3	3	7	19	33	113	221	100	32	5	0	0	0	540	41-50	334
19:00	0	0	0	0	0	6	61	170	110	39	6	1	0	0	393	46-55	280
20:00	0	0	0	1	8	30	90	142	92	12	1	0	0	0	376	45-54	234
21:00	0	0	0	1	1	10	65	138	70	24	5	1	0	0	315	46-55	208
22:00	0	0	0	0	1	34	74	98	63	10	3	1	0	0	284	41-50	172
23:00	0	0	0	0	1	2	25	76	58	17	4	2	0	0	185	46-55	134
Total	6	12	5	28	168	638	1975	3495	1846	466	74	14	7	0	8734		
Percent	0.1%	0.1%	0.1%	0.3%	1.9%	7.3%	22.6%	40.0%	21.1%	5.3%	0.8%	0.2%	0.1%	0.0%			
AM Peak				00:00	11:00	11:00	11:00	11:00	10:00	10:00	07:00	05:00	00:00		11:00		
Vol.				2	22	60	146	275	123	30	9	2	1		597		
PM Peak	18:00	12:00	18:00	13:00	12:00	12:00	12:00	15:00	16:00	19:00	16:00	23:00	14:00		12:00		
Vol.	4	5	3	7	24	109	209	311	168	39	6	2	1		720		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Eastbound															Lantado.	0.0000	Onacinica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	2	12	36	27	21	2	0	0	1	101	46-55	63
01:00	0	0	0	0	0	1	7	18	13	11	3	0	0	0	53	46-55	31
02:00	0	0	0	0	0	3	3	8	16	4	2	0	0	0	36	46-55	24
03:00	0	0	0	0	0	1	3	8	2	2	0	0	0	0	16	41-50	11
04:00	0	0	0	0	0	2	2	1	2	2	3	0	0	0	12	54-63	5
05:00	0	0	0	0	0	3	7	10	10	6	3	3	0	0	42	46-55	20
06:00	0	0	0	0	0	1	11	31	27	16	2	1	0	0	89	46-55	58
07:00	0	0	0	0	1	5	18	58	49	13	7	1	1	0	153	46-55	107
08:00	0	0	0	0	0	8	38	99	70	20	1	0	0	0	236	46-55	169
09:00	0	0	0	0	1	12	57	128	92	23	0	0	0	0	313	46-55	220
10:00	0	0	1	2	5	16	97	150	78	20	1	0	0	0	370	41-50	247
11:00	0	0	0	0	4	28	136	187	81	20	2	0	0	0	458	41-50	323
12 PM	0	0	0	0	5	26	118	247	137	22	1	0	0	0	556	46-55	384
13:00	0	0	0	0	3	13	116	270	154	24	4	0	0	0	584	46-55	424
14:00	1	3	3	7	25	33	135	224	130	24	5	0	0	0	590	41-50	359
15:00	0	0	0	0	4	25	94	225	138	32	5	0	0	0	523	46-55	363
16:00	0	0	4	6	17	32	79	201	144	40	2	0	0	0	525	46-55	345
17:00	0	0	0	0	0	9	63	188	167	27	6	3	0	0	463	46-55	355
18:00	0	0	0	0	0	10	43	145	137	55	8	2	0	0	400	46-55	282
19:00	0	0	0	0	0	11	60	127	95	31	3	0	0	0	327	46-55	222
20:00	0	0	0	0	1	16	50	98	54	22	1	1	0	0	243	46-55	152
21:00	0	0	0	0	0	4	29	43	52	14	7	2	0	1	152	46-55	95
22:00	0	0	0	0	0	5	14	39	40	12	3	0	0	0	113	46-55	79
23:00	0	0	0	0	0	0	12	23	26	7	6	0	0	1	75	46-55	49
Total	1	3	8	15	66	266	1204	2564	1741	468	77	13	1	3	6430		
Percent	0.0%	0.0%	0.1%	0.2%	1.0%	4.1%	18.7%	39.9%	27.1%	7.3%	1.2%	0.2%	0.0%	0.0%			
AM Peak			10:00	10:00	10:00	11:00	11:00	11:00	09:00	09:00	07:00	05:00	07:00	00:00	11:00		
Vol.			11	2	5	28	136	187	92	23	7	3	1	1	458		
PM Peak	14:00	14:00	16:00	14:00	14:00	14:00	14:00	13:00	17:00	18:00	18:00	17:00		21:00	14:00		
Vol.	1	3	4	7	25	33	135	270	167	55	8	3		1	590		

Route 66 at Portland/E. Hampton Town Line Portland, Connecticut

Site Code: Station ID: 4629

Latitude: 0' 0.0000 Undefined

Eastbound																	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	2	9	14	10	4	4	0	0	0	43	46-55	24
01:00	0	0	0	0	0	0	1	10	1	5	0	1	0	0	18	41-50	11
02:00	0	0	0	0	0	1	1	1	3	2	1	1	0	0	10	51-60	5
03:00	0	0	0	0	0	1	0	2	3	4	0	0	0	0	10	50-59	7
04:00	0	0	0	0	0	1	2	5	6	8	1	2	0	0	25	51-60	14
05:00	0	0	0	1	0	0	3	17	26	20	4	0	0	0	71	51-60	46
06:00	0	0	0	0	2	10	35	86	62	20	8	0	0	0	223	46-55	148
07:00	0	0	0	0	0	16	85	139	96	21	5	1	1	0	364	46-55	235
08:00	5	1	2	2	1	16	64	141	104	33	3	1	0	0	373	46-55	245
09:00	0	0	0	0	0	9	45	136	114	32	9	0	0	0	345	46-55	250
10:00	0	0	0	0	4	2	54	172	77	24	2	0	0	0	335	46-55	249
11:00	0	0	0	0	6	22	101	150	106	26	2	1	0	0	414	46-55	256
12 PM	0	0	0	0	8	19	75	168	111	36	8	0	0	0	425	46-55	279
13:00	0	0	0	0	1	16	63	155	140	37	9	0	0	0	421	46-55	295
14:00	0	0	0	0	15	40	107	201	137	36	5	0	0	0	541	46-55	338
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	5	1	2	3	37	155	645	1397	996	308	61	7	1	0	3618		
Percent	0.1%	0.0%	0.1%	0.1%	1.0%	4.3%	17.8%	38.6%	27.5%	8.5%	1.7%	0.2%	0.0%	0.0%			
AM Peak	08:00	08:00	08:00	08:00	11:00	11:00	11:00	10:00	09:00	08:00	09:00	04:00	07:00		11:00		
Vol.	5	11	2	2	6	22	101	172	114	33	9	2	1		414		
PM Peak					14:00	14:00	14:00	14:00	13:00	13:00	13:00				14:00		
Vol.					15	40	107	201	140	37	9				541		
Total	240	450	772	957	1755	4095	10782	17997	10171	2684	478	94	17	6	50498		
Percent	0.5%	0.9%	1.5%	1.9%	3.5%	8.1%	21.4%	35.6%	20.1%	5.3%	0.9%	0.2%	0.0%	0.0%			

15th Percentile: 39 MPH 50th Percentile: 46 MPH 85th Percentile: 52 MPH 95th Percentile: 56 MPH

 Stats
 10 MPH Pace Speed : Number in Pace : 28779
 41-50 MPH Pace : 28779

 Percent in Pace : 57.0%
 57.0%

Number of Vehicles > 40 MPH: 42229
Percent of Vehicles > 40 MPH: 83.6%
Mean Speed(Average): 46 MPH

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Westbound															Latitude.	0.0000	Ondenne
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	7	22	33	54	56	97	79	64	22	2	0	0	0	0	436	36-45	176
16:00	7	5	26	41	60	61	100	102	26	3	0	0	0	0	431	41-50	202
17:00	13	12	16	29	72	66	108	110	23	0	0	0	0	0	449	41-50	218
18:00	4	12	16	37	71	52	110	71	22	2	0	0	0	0	397	41-50	181
19:00	2	5	5	9	32	58	71	62	12	3	0	0	0	0	259	41-50	133
20:00	1	2	4	6	17	23	60	53	14	1	0	0	0	0	181	41-50	113
21:00	1	0	0	3	5	14	28	31	19	2	0	0	0	0	103	41-50	59
22:00	0	0	0	0	5	9	28	21	15	1	1	0	0	0	80	41-50	49
23:00	0	0	0	0	1	5	19	16	12	4	1	0	0	0	58	41-50	35
Total	35	58	100	179	319	385	603	530	165	18	2	0	0	0	2394		
Percent	1.5%	2.4%	4.2%	7.5%	13.3%	16.1%	25.2%	22.1%	6.9%	0.8%	0.1%	0.0%	0.0%	0.0%			
AM Peak Vol.																	
PM Peak	17:00	15:00	15:00	15:00	17:00	15:00	18:00	17:00	16:00	23:00	22:00				17:00		
Vol.	13	22	33	54	72	97	110	110	26	4	1				449		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Westbound															Lantado.	0.0000	Ondonno
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	3	11	3	2	0	0	0	0	0	19	41-50	14
01:00	0	0	0	0	0	3	2	8	3	0	0	0	0	0	16	44-53	11
02:00	0	0	0	0	0	1	4	5	1	0	0	0	0	0	11	41-50	9
03:00	0	0	0	0	0	0	8	12	6	1	2	0	0	0	29	41-50	20
04:00	0	1	0	0	0	1	20	24	16	3	0	1	0	0	66	41-50	44
05:00	4	5	10	9	22	28	80	75	19	5	0	0	0	0	257	41-50	155
06:00	48	57	65	76	75	96	131	65	9	0	0	0	0	0	622	36-45	227
07:00	101	142	193	137	105	98	92	23	0	0	0	0	0	0	891	16-25	335
08:00	45	64	102	120	127	126	96	25	1	0	0	0	0	0	706	31-40	253
09:00	16	30	61	67	73	92	111	48	8	1	0	0	0	0	507	36-45	203
10:00	24	27	45	55	58	89	55	54	5	0	0	0	0	0	412	31-40	147
11:00	3	9	15	22	42	68	117	66	11	0	0	0	0	0	353	36-45	185
12 PM	6	13	12	44	55	69	89	35	8	1	0	0	0	0	332	36-45	158
13:00	3	13	19	32	49	88	82	45	6	0	0	0	0	0	337	36-45	170
14:00	6	5	17	44	67	69	94	55	5	0	0	0	0	0	362	36-45	163
15:00	5	6	20	49	52	74	116	54	9	1	0	0	0	0	386	36-45	190
16:00	5	11	26	30	71	99	122	56	16	1	0	0	0	0	437	36-45	221
17:00	5	12	19	42	57	82	108	71	9	1	0	0	0	0	406	36-45	190
18:00	1	5	6	23	45	61	87	59	14	1	0	0	0	0	302	36-45	148
19:00	0	2	5	11	26	36	44	49	15	0	0	0	0	0	188	41-50	93
20:00	1	1	5	13	16	31	64	27	4	1	0	0	0	0	163	36-45	95
21:00	0	2	0	4	14	34	49	12	2	0	0	0	0	0	117	36-45	83
22:00	0	0	0	1	1	11	22	19	10	2	1	0	0	0	67	41-50	41
23:00	0	0	0	0	1	9	11	25	12	2	11	1	0	0	62	44-53	37
Total	273	405	620	779	956	1268	1615	915	191	20	4	2	0	0	7048		
Percent	3.9%	5.7%	8.8%	11.1%	13.6%	18.0%	22.9%	13.0%	2.7%	0.3%	0.1%	0.0%	0.0%	0.0%			
AM Peak	07:00	07:00	07:00	07:00	08:00	08:00	06:00	05:00	05:00	05:00	03:00	04:00			07:00		
Vol.	101	142	193	137	127	126	131	75	19	5	2	1			891		
PM Peak	12:00	12:00	16:00	15:00	16:00	16:00	16:00	17:00	16:00	22:00	22:00	23:00			16:00		
Vol.	6	13	26	49	71	99	122	71	16	2	1	1			437		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	0	5	15	2	0	0	0	0	0	22	41-50	20
01:00	0	0	0	0	1	1	2	3	0	0	0	0	0	0	7	40-49	5
02:00	0	0	0	0	1	3	4	4	2	0	0	0	0	0	14	41-50	8
03:00	0	0	0	0	0	2	5	4	4	2	0	0	0	0	17	41-50	9
04:00	0	0	0	0	0	3	20	25	15	1	1	0	0	0	65	41-50	45
05:00	0	1	7	8	32	29	71	53	31	5	0	0	0	0	237	41-50	124
06:00	15	58	94	111	91	116	116	63	8	1	0	0	0	0	673	36-45	232
07:00	45	109	116	175	174	126	121	43	6	0	0	0	0	0	915	26-35	349
08:00	47	63	82	160	144	80	100	48	7	1	0	0	0	0	732	26-35	304
09:00	27	41	36	87	94	111	95	40	4	0	0	0	0	0	535	36-45	206
10:00	7	16	53	78	91	50	89	48	7	0	0	0	0	0	439	26-35	169
11:00	5	9	28	51	64	70	86	68	11	1	0	0	0	0	393	36-45	156
12 PM	10	17	28	33	76	66	106	55	18	3	0	0	0	0	412	36-45	172
13:00	5	9	29	43	73	80	88	65	9	1	0	0	0	0	402	36-45	168
14:00	2	9	23	42	74	84	108	68	13	1	0	0	0	0	424	36-45	192
15:00	4	10	22	35	66	84	105	86	20	3	0	0	0	0	435	40-49	191
16:00	10	16	29	50	75	86	101	101	25	1	0	0	0	0	494	41-50	202
17:00	9	20	23	36	60	56	122	125	30	3	0	0	0	0	484	41-50	247
18:00	16	17	41	47	42	54	109	88	14	0	0	0	0	0	428	41-50	197
19:00	0	6	9	34	39	64	92	59	16	1	0	0	0	0	320	36-45	156
20:00	0	0	4	12	34	55	75	55	11	1	0	0	0	0	247	41-50	130
21:00	2	1	2	5	14	25	50	41	15	0	0	0	0	0	155	41-50	91
22:00	0	0	0	0	6	17	33	42	13	3	1	0	0	0	115	41-50	75
23:00	0	0	0	0	1	3	20	26	8	0	0	0	0	0	58	41-50	46
Total	204	402	626	1007	1252	1265	1723	1225	289	28	2	0	0	0	8023		
Percent	2.5%	5.0%	7.8%	12.6%	15.6%	15.8%	21.5%	15.3%	3.6%	0.3%	0.0%	0.0%	0.0%	0.0%			
AM Peak	08:00	07:00	07:00	07:00	07:00	07:00	07:00	11:00	05:00	05:00	04:00				07:00		
Vol.	47	109	116	175	174	126	121	68	31	5	1				915		
PM Peak	18:00	17:00	18:00	16:00	12:00	16:00	17:00	17:00	17:00	12:00	22:00				16:00		
Vol.	16	20	41	50	76	86	122	125	30	3	1				494		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Westbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	2	12	5	6	1	0	0	0	0	26	41-50	17
01:00	0	0	0	0	1	6	6	3	2	1	0	0	0	0	19	36-45	12
02:00	0	0	0	0	1	2	2	9	2	2	0	0	0	0	18	43-52	11
03:00	0	0	0	1	0	0	7	8	6	1	0	1	0	0	24	41-50	15
04:00	1	1	0	0	1	2	20	23	14	3	0	0	0	0	65	41-50	43
05:00	1	7	10	19	24	28	74	69	10	4	1	1	0	0	248	41-50	143
06:00	48	62	66	73	85	81	150	80	11	1	0	0	0	0	657	36-45	231
07:00	54	59	128	156	128	116	161	55	4	0	0	0	0	0	861	21-30	284
08:00	34	38	76	105	125	137	112	53	5	1	0	0	0	0	686	31-40	262
09:00	24	26	53	92	85	108	98	41	9	0	0	0	0	0	536	36-45	206
10:00	10	23	32	47	61	90	103	55	8	0	1	0	0	0	430	36-45	193
11:00	22	25	54	72	62	101	72	32	1	0	0	0	0	0	441	36-45	173
12 PM	19	27	27	70	88	83	66	24	9	2	0	0	0	0	415	31-40	171
13:00	8	14	24	55	94	114	99	37	4	0	1	1	0	0	451	36-45	213
14:00	4	17	26	33	72	102	110	46	5	0	1	0	0	0	416	36-45	212
15:00	10	27	36	49	76	78	109	57	12	0	0	0	0	0	454	36-45	187
16:00	9	12	34	41	60	103	111	75	20	2	1	0	0	0	468	36-45	214
17:00	8	16	34	53	76	77	131	68	15	2	0	0	0	0	480	36-45	208
18:00	7	15	27	57	70	94	98	58	9	1	0	0	0	0	436	36-45	192
19:00	2	12	22	30	31	48	74	62	12	1	0	0	0	0	294	41-50	136
20:00	1	4	4	8	22	41	75	47	12	1	1	0	0	0	216	41-50	122
21:00	0	1	1	6	11	20	59	38	10	0	0	0	0	0	146	41-50	97
22:00	0	0	0	3	10	23	47	41	12	4	1	0	0	0	141	41-50	88
23:00	0	0	0	0_	6	12	51	30	8	4	1_	0	0	0	112	41-50	81
Total	262	386	654	970	1189	1468	1847	1016	206	31	8	3	0	0	8040		
Percent	3.3%	4.8%	8.1%	12.1%	14.8%	18.3%	23.0%	12.6%	2.6%	0.4%	0.1%	0.0%	0.0%	0.0%			
AM Peak	07:00	06:00	07:00	07:00	07:00	08:00	07:00	06:00	04:00	05:00	05:00	03:00			07:00		
Vol.	54	62	128	156	128	137	161	80	14	4	1_	1			861		
PM Peak	12:00	12:00	15:00	12:00	13:00	13:00	17:00	16:00	16:00	22:00	13:00	13:00			17:00		
Vol.	19	27	36	70	94	114	131	75	20	4	1	1			480		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Westbound															Lantauc.	0 0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	1	4	10	20	16	5	2	2	0	0	0	60	41-50	36
01:00	0	0	0	0	0	1	11	9	3	1	0	0	0	0	25	41-50	20
02:00	0	0	0	0	1	1	6	6	6	0	0	0	0	0	20	41-50	12
03:00	0	0	0	0	0	4	17	4	2	0	1	0	0	0	28	38-47	21
04:00	0	0	0	0	0	5	6	15	6	1	1	0	0	0	34	41-50	21
05:00	0	0	0	0	2	4	29	36	20	4	1	0	0	0	96	41-50	65
06:00	0	0	2	10	16	20	60	65	20	4	1	0	0	0	198	41-50	125
07:00	1	5	17	33	34	57	88	51	18	3	0	0	0	0	307	36-45	145
08:00	0	5	19	43	55	74	101	80	25	1	1	0	0	0	404	41-50	181
09:00	7	20	35	64	99	76	102	60	14	1	1	0	0	0	479	36-45	178
10:00	19	26	50	100	105	99	116	35	6	0	0	0	0	0	556	36-45	215
11:00	16	31	48	85	90	98	76	44	18	0	0	0	0	0	506	31-40	188
12 PM	19	30	52	65	79	99	114	53	10	2	0	0	0	0	523	36-45	213
13:00	3	16	46	72	85	85	101	58	14	2	0	0	0	0	482	36-45	186
14:00	22	31	37	82	77	73	97	68	12	2	1	0	0	0	502	36-45	170
15:00	23	38	46	96	101	83	120	48	10	0	0	0	0	0	565	36-45	203
16:00	7	20	39	56	92	96	105	110	22	0	1	0	0	0	548	41-50	215
17:00	17	22	38	58	81	101	107	79	18	0	0	0	0	0	521	36-45	208
18:00	4	19	27	42	86	91	99	62	14	2	1	0	0	0	447	36-45	190
19:00	5	6	23	39	48	56	92	62	17	1	0	0	0	0	349	41-50	154
20:00	0	4	5	26	32	50	48	41	6	2	0	0	0	0	214	36-45	98
21:00	0	0	1	10	24	30	67	36	6	1	0	0	0	0	175	41-50	103
22:00	0	0	1	6	14	42	54	44	14	1	2	0	0	0	178	41-50	98
23:00	0	0	11	3	4	17	42	26	8	1	11	0	0	0	103	41-50	68
Total	143	273	487	891	1129	1272	1678	1108	294	31	14	0	0	0	7320		
Percent	2.0%	3.7%	6.7%	12.2%	15.4%	17.4%	22.9%	15.1%	4.0%	0.4%	0.2%	0.0%	0.0%	0.0%			
AM Peak	10:00	11:00	10:00	10:00	10:00	10:00	10:00	08:00	08:00	05:00	00:00				10:00		
Vol.	19	31	50	100	105	99	116	80	25	4	2				556		
PM Peak	15:00	15:00	12:00	15:00	15:00	17:00	15:00	16:00	16:00	12:00	22:00				15:00		
Vol.	23	38	52	96	101	101	120	110	22	2	2				565		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Westbound															Lamuuc.	0 0.0000	Oridennica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	1	3	6	7	26	20	5	0	3	2	0	0	73	41-50	46
01:00	0	0	0	0	0	7	20	11	5	1	0	0	0	0	44	41-50	31
02:00	0	0	0	1	3	3	5	15	2	1	0	0	0	0	30	41-50	20
03:00	0	0	0	0	0	5	5	7	4	0	0	0	0	0	21	41-50	12
04:00	0	0	0	0	0	1	6	11	3	1	0	0	0	0	22	41-50	17
05:00	0	0	0	1	2	6	20	13	6	2	2	0	0	0	52	41-50	33
06:00	0	0	1	6	19	22	32	39	14	2	0	1	0	0	136	41-50	71
07:00	0	0	0	9	22	22	59	29	16	3	1	0	0	0	161	41-50	88
08:00	4	3	9	17	35	71	75	44	10	0	0	0	0	0	268	36-45	146
09:00	4	9	34	56	65	69	85	32	9	1	0	0	0	0	364	36-45	154
10:00	8	15	31	60	80	115	98	51	8	1	0	0	0	0	467	36-45	213
11:00	26	29	44	89	95	108	77	31	2	0	0	0	0	0	501	31-40	203
12 PM	13	25	47	79	66	88	89	69	12	0	0	0	0	0	488	36-45	177
13:00	6	8	41	58	89	116	90	56	5	3	0	0	0	0	472	34-43	206
14:00	16	15	43	65	74	80	96	57	16	2	0	0	0	0	464	36-45	176
15:00	5	20	33	74	71	85	100	50	5	0	0	0	0	0	443	36-45	185
16:00	4	11	19	47	60	78	112	70	10	2	0	0	0	0	413	36-45	190
17:00	6	10	15	27	59	61	101	65	17	1	0	0	0	0	362	41-50	166
18:00	1	4	10	26	41	58	89	66	14	0	1	0	1	0	311	41-50	155
19:00	1	0	3	15	35	57	63	52	23	2	0	0	0	0	251	36-45	120
20:00	0	0	1	17	13	24	70	34	10	0	0	0	0	0	169	41-50	104
21:00	0	0	1	3	13	18	39	23	12	1	0	0	0	0	110	41-50	62
22:00	0	0	0	1	3	10	29	23	9	2	1	0	0	0	78	41-50	52
23:00	0	0	0	0	1	4	15	17	11	3	0	0	1	0	52	41-50	32
Total	94	149	333	654	852	1115	1401	885	228	28	8	3	2	0	5752		
Percent	1.6%	2.6%	5.8%	11.4%	14.8%	19.4%	24.4%	15.4%	4.0%	0.5%	0.1%	0.1%	0.0%	0.0%			
AM Peak	11:00	11:00	11:00	11:00	11:00	10:00	10:00	10:00	07:00	07:00	00:00	00:00			11:00		
Vol.	26	29	44	89	95	115	98	51	16	3	3	2			501		
PM Peak	14:00	12:00	12:00	12:00	13:00	13:00	16:00	16:00	19:00	13:00	18:00		18:00		12:00		
Vol.	16	25	47	79	89	116	112	70	23	3	1		1		488		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Latitude: 0' 0.0000 Undefined

Westbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	3	10	8	3	0	0	0	0	0	24	41-50	18
01:00	0	0	0	0	0	2	4	4	3	1	0	0	0	0	14	40-49	8
02:00	0	0	0	0	1	3	2	1	1	0	0	0	0	0	8	36-45	5
03:00	0	0	0	0	0	0	7	4	4	0	0	0	0	0	15	41-50	11
04:00	0	0	0	1	2	7	21	23	10	5	0	0	0	0	69	41-50	44
05:00	1	3	6	8	21	43	77	56	17	5	2	0	0	0	239	41-50	133
06:00	34	61	87	100	85	96	125	75	5	0	0	0	0	0	668	36-45	221
07:00	43	56	134	186	141	159	139	44	7	0	0	0	0	0	909	26-35	327
08:00	44	69	76	123	154	115	127	44	3	2	0	0	0	0	757	26-35	277
09:00	13	21	27	35	59	64	118	91	19	0	0	0	0	0	447	41-50	209
10:00	10	9	23	65	78	98	96	45	6	4	0	0	0	0	434	36-45	194
11:00	4	8	21	47	70	53	81	43	8	1	1	0	0	0	337	36-45	134
12 PM	3	7	15	33	69	68	110	61	18	0	0	0	0	0	384	36-45	178
13:00	10	13	25	50	82	74	69	34	4	0	0	0	0	0	361	31-40	156
14:00	5	12	21	46	70	75	92	45	8	1	0	0	0	0	375	36-45	167
15:00	8	22	20	39	52	71	87	39	9	0	0	0	0	0	347	36-45	158
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	175	281	455	733	884	931	1165	617	125	19	3	0	0	0	5388		
Percent	3.2%	5.2%	8.4%	13.6%	16.4%	17.3%	21.6%	11.5%	2.3%	0.4%	0.1%	0.0%	0.0%	0.0%			
AM Peak	08:00	08:00	07:00	07:00	08:00	07:00	07:00	09:00	09:00	04:00	05:00				07:00		
Vol.	44	69	134	186	154	159	139	91	19	5	2				909		
PM Peak	13:00	15:00	13:00	13:00	13:00	14:00	12:00	12:00	12:00	14:00					12:00		
Vol.	10	22	25	50	82	75	110	61	18	11					384		
Total	1186	1954	3275	5213	6581	7704	10032	6296	1498	175	41	8	2	0	43965		
Percent	2.7%	4.4%	7.4%	11.9%	15.0%	17.5%	22.8%	14.3%	3.4%	0.4%	0.1%	0.0%	0.0%	0.0%			

15th Percentile: 25 MPH 50th Percentile: 37 MPH 85th Percentile: 46 MPH 95th Percentile: 49 MPH

Stats 10 MPH Pace Speed: 36-45 MPH
Number in Pace: 17736

Percent in Pace: 40.3%
Number of Vehicles > 40 MPH: 18052
Percent of Vehicles > 40 MPH: 41.1%
Mean Speed(Average): 36 MPH

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Numbe
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
15:00	4	5	4	16	51	170	283	186	45	3	0	0	0	0	767	41-50	46
16:00	0	0	2	8	29	183	403	270	36	5	0	0	0	1	937	41-50	67
17:00	1	12	21	26	56	165	318	269	58	5	0	0	0	0	931	41-50	58
18:00	0	3	3	4	18	119	236	184	90	18	2	0	0	0	677	41-50	42
19:00	2	5	6	4	13	69	123	126	73	12	1	0	0	0	434	41-50	24
20:00	0	1	0	4	6	35	72	109	58	7	0	0	0	0	292	41-50	18
21:00	0	1	0	0	3	34	57	88	65	8	0	0	0	0	256	46-55	15
22:00	0	0	0	0	0	8	28	54	34	10	2	1	0	0	137	46-55	8
23:00	0	0	0	0	1	6	8	28	33	9	3	0	0	0	88	46-55	6
Total	7	27	36	62	177	789	1528	1314	492	77	8	1	0	1	4519		
Percent	0.2%	0.6%	0.8%	1.4%	3.9%	17.5%	33.8%	29.1%	10.9%	1.7%	0.2%	0.0%	0.0%	0.0%			
M Peak																	
Vol.																	
PM Peak	15:00	17:00	17:00	17:00	17:00	16:00	16:00	16:00	18:00	18:00	23:00	22:00		16:00	16:00		
Vol.	4	12	21	26	56	183	403	270	90	18	3	1		1	937		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	5	11	24	27	11	1	0	0	0	79	46-55	51
01:00	0	0	0	0	0	1	5	11	4	4	0	0	0	0	25	41-50	16
02:00	0	0	0	0	0	0	3	11	2	2	0	1	0	0	19	41-50	14
03:00	0	0	0	0	0	0	5	2	2	1	0	0	0	0	10	41-50	7
04:00	0	1	0	1	0	4	4	8	4	2	1	0	0	0	25	46-55	12
05:00	0	0	1	1	2	10	11	18	10	2	0	0	0	0	55	41-50	29
06:00	0	5	9	8	9	16	37	39	16	6	1	0	0	0	146	41-50	76
07:00	2	14	36	23	26	34	44	44	24	1	1	0	0	0	249	41-50	88
08:00	0	3	17	30	23	89	107	43	36	6	0	0	0	0	354	36-45	196
09:00	0	0	4	11	31	78	94	62	34	2	0	0	0	0	316	36-45	172
10:00	2	2	8	16	17	59	92	58	26	5	0	0	0	0	285	36-45	151
11:00	0	0	3	17	23	87	96	86	41	12	0	0	0	0	365	36-45	183
12 PM	1	1	7	12	20	93	99	90	51	2	1	0	0	0	377	36-45	192
13:00	0	2	5	8	35	89	135	92	33	7	0	0	0	0	406	41-50	227
14:00	0	5	5	9	28	111	170	89	29	8	0	0	0	0	454	36-45	281
15:00	0	1	4	3	37	139	247	180	35	7	0	0	0	0	653	41-50	427
16:00	0	0	9	12	41	138	317	268	66	7	0	0	0	0	858	41-50	585
17:00	0	9	14	16	56	192	327	271	80	7	1	0	0	0	973	41-50	598
18:00	0	3	3	3	18	105	202	165	98	10	1	0	0	0	608	41-50	367
19:00	1	5	4	9	9	55	118	135	60	15	1	0	0	0	412	41-50	253
20:00	0	0	4	1	5	61	115	91	45	6	0	0	0	0	328	41-50	206
21:00	0	1	1	0	4	31	67	82	23	4	0	0	0	0	213	41-50	149
22:00	0	0	0	0	3	6	15	41	40	9	3	1	0	0	118	46-55	81
23:00	0	0	0	0	1	7	16	29	20	8	4	2	0	0	87	46-55	49
Total	6	52	134	180	388	1410	2337	1939	806	144	15	4	0	0	7415		
Percent	0.1%	0.7%	1.8%	2.4%	5.2%	19.0%	31.5%	26.1%	10.9%	1.9%	0.2%	0.1%	0.0%	0.0%			
AM Peak	07:00	07:00	07:00	08:00	09:00	08:00	08:00	11:00	11:00	11:00	00:00	02:00			11:00		
Vol.	2	14	36	30	31	89	107	86	41	12	1	11			365		
PM Peak	12:00	17:00	17:00	17:00	17:00	17:00	17:00	17:00	18:00	19:00	23:00	23:00			17:00		
Vol.	1	9	14	16	56	192	327	271	98	15	4	2			973		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	2	12	22	18	7	1	0	0	0	62	46-55	40
01:00	0	0	0	0	0	0	5	6	10	4	2	0	0	0	27	46-55	16
02:00	0	0	0	0	0	0	3	3	4	1	0	0	0	0	11	46-55	7
03:00	0	0	0	0	0	1	4	5	2	1	0	0	0	0	13	41-50	9
04:00	0	0	0	0	1	1	1	4	4	0	1	0	0	0	12	46-55	8
05:00	0	0	1	1	3	5	10	8	7	4	1	0	0	0	40	41-50	18
06:00	0	0	9	11	19	25	33	33	19	10	1	0	0	0	160	41-50	66
07:00	0	2	18	21	9	41	70	68	51	11	2	0	0	0	293	41-50	138
08:00	0	2	9	21	23	72	95	65	56	14	2	0	0	0	359	36-45	167
09:00	0	3	9	7	25	96	91	73	23	4	1	0	0	0	332	36-45	187
10:00	0	0	5	13	19	72	92	69	41	10	1	0	0	0	322	36-45	164
11:00	0	2	4	12	28	80	89	87	56	6	1	0	0	0	365	41-50	176
12 PM	1	4	6	8	28	94	118	105	58	7	0	0	0	0	429	41-50	223
13:00	0	5	0	10	36	66	159	114	39	10	1	0	0	1	441	41-50	273
14:00	0	1	6	13	33	92	183	122	44	7	2	0	0	0	503	41-50	305
15:00	0	2	2	13	37	160	281	221	57	12	1	0	0	0	786	41-50	502
16:00	0	2	3	8	25	152	351	257	85	12	0	0	0	0	895	41-50	608
17:00	1	4	8	7	42	130	300	358	121	25	2	0	0	0	998	41-50	658
18:00	1	6	11	16	40	110	240	236	91	5	0	0	0	0	756	41-50	476
19:00	0	1	3	5	18	78	148	160	86	20	3	0	0	0	522	41-50	308
20:00	0	1	3	5	13	56	139	110	61	4	1	0	0	0	393	41-50	249
21:00	0	0	0	5	6	30	100	116	51	7	4	0	0	0	319	41-50	216
22:00	0	0	0	0	1	11	53	74	30	10	3	1	0	0	183	41-50	127
23:00	0	0	0	1	3	7	16	37	34	11	4	0	0	0	113	46-55	71
Total	3	35	97	177	409	1381	2593	2353	1048	202	34	1	0	1	8334		
Percent	0.0%	0.4%	1.2%	2.1%	4.9%	16.6%	31.1%	28.2%	12.6%	2.4%	0.4%	0.0%	0.0%	0.0%			
AM Peak		09:00	07:00	07:00	11:00	09:00	08:00	11:00	08:00	08:00	01:00				11:00		
Vol.		3	18	21	28	96	95	87	56	14	2				365		
PM Peak	12:00	18:00	18:00	18:00	17:00	15:00	16:00	17:00	17:00	17:00	21:00	22:00		13:00	17:00		
Vol.	1	6	11	16	42	160	351	358	121	25	4	1		1	998		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	4	12	31	22	8	3	0	0	0	80	46-55	53
01:00	0	0	0	0	0	3	10	10	8	4	1	1	0	0	37	41-50	20
02:00	0	0	0	0	0	0	1	4	6	6	0	0	0	0	17	51-60	12
03:00	0	0	0	0	1	0	3	6	4	2	3	0	0	0	19	46-55	10
04:00	0	0	0	0	1	3	5	9	5	3	3	1	0	0	30	41-50	14
05:00	0	0	0	0	0	7	14	14	9	9	1	0	0	0	54	41-50	28
06:00	2	8	7	9	10	24	29	37	38	12	0	0	0	0	176	46-55	75
07:00	1	8	26	35	28	37	62	62	41	15	2	0	0	0	317	41-50	124
08:00	0	6	8	12	30	85	79	86	48	21	3	0	0	0	378	39-48	165
09:00	0	5	4	25	35	67	86	54	31	13	1	0	0	0	321	36-45	153
10:00	0	0	3	10	32	89	107	81	33	5	1	0	0	0	361	36-45	196
11:00	1	3	4	20	46	113	148	82	28	6	0	0	0	0	451	36-45	261
12 PM	1	5	11	21	69	115	138	80	36	11	0	0	0	0	487	36-45	253
13:00	1	2	1	7	34	100	162	107	55	14	2	0	0	0	485	41-50	269
14:00	0	2	5	12	30	107	207	130	53	6	1	0	0	0	553	41-50	337
15:00	0	1	9	15	51	153	266	195	66	5	0	0	0	0	761	41-50	461
16:00	0	4	2	12	29	156	349	273	93	11	0	0	0	0	929	41-50	622
17:00	1	5	18	24	56	188	329	233	83	5	1	0	0	0	943	41-50	562
18:00	1	7	5	10	24	172	255	209	61	8	0	0	0	0	752	41-50	464
19:00	1	1	4	2	14	67	135	165	71	12	4	0	0	0	476	41-50	300
20:00	1	2	4	3	16	54	114	92	63	18	1	0	0	0	368	41-50	206
21:00	0	1	0	0	4	21	70	105	67	12	6	0	0	0	286	41-50	175
22:00	0	0	0	0	1	12	24	64	70	24	4	1	0	0	200	46-55	134
23:00	0	0	0	0	1_	7	39	47	42	9	4	1_	0	0	150	46-55	89_
Total	10	60	111	217	512	1584	2644	2176	1033	239	41	4	0	0	8631		
Percent	0.1%	0.7%	1.3%	2.5%	5.9%	18.4%	30.6%	25.2%	12.0%	2.8%	0.5%	0.0%	0.0%	0.0%			
AM Peak	06:00	06:00	07:00	07:00	11:00	11:00	11:00	08:00	08:00	08:00	00:00	01:00			11:00		
Vol.	2	8	26	35	46	113	148	86	48	21	3	1			451		
PM Peak	12:00	18:00	17:00	17:00	12:00	17:00	16:00	16:00	16:00	22:00	21:00	22:00			17:00		
Vol.	1	7	18	24	69	188	349	273	93	24	6	1			943		

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 East of Route 151 East Hampton, Connecticut

Station ID: 4641

Eastbound															Lamuuc.	0.0000	Onacimica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	2	6	24	33	37	12	2	1	0	0	117	46-55	70
01:00	0	0	0	1	0	2	15	13	18	11	0	1	0	0	61	46-55	31
02:00	0	0	1	0	1	1	4	4	4	7	3	1	1	0	27	51-60	11
03:00	0	0	0	0	0	1	13	5	6	1	1	0	0	0	27	41-50	18
04:00	0	0	0	0	0	4	2	6	4	1	3	0	0	0	20	45-54	10
05:00	0	0	0	1	0	3	9	17	11	4	0	0	0	0	45	46-55	28
06:00	0	0	0	0	7	10	15	20	19	10	4	1	0	0	86	46-55	39
07:00	0	0	1	3	17	33	56	57	47	19	1	0	0	0	234	41-50	113
08:00	0	0	3	0	12	45	82	95	85	11	7	0	0	0	340	46-55	180
09:00	0	0	4	7	13	84	142	104	60	10	0	0	0	0	424	41-50	246
10:00	0	0	11	6	33	107	142	86	50	16	0	0	0	0	451	36-45	249
11:00	0	2	5	20	31	118	216	117	32	4	1	0	0	0	546	36-45	334
12 PM	1	1	10	18	33	152	183	134	38	3	0	0	0	0	573	36-45	335
13:00	0	1	3	21	45	151	220	146	45	3	1	0	0	0	636	36-45	371
14:00	0	2	7	19	58	174	216	92	50	6	0	0	0	0	624	36-45	390
15:00	2	5	14	17	50	143	179	113	42	7	0	0	0	0	572	36-45	322
16:00	1	0	4	11	28	117	168	164	55	13	0	0	0	0	561	41-50	332
17:00	3	2	5	13	48	141	202	117	64	18	1	0	0	0	614	36-45	343
18:00	1	8	8	14	23	114	188	101	57	8	2	0	0	0	524	36-45	302
19:00	0	4	1	2	7	56	118	103	56	21	4	0	0	0	372	41-50	221
20:00	0	2	1	1	15	59	108	103	47	10	2	1	0	0	349	41-50	211
21:00	0	1	0	1	6	30	90	104	45	9	0	0	0	0	286	41-50	194
22:00	0	0	1	0	1	24	56	85	37	16	4	0	0	0	224	41-50	141
23:00	0	0	0	0	5	16	44	86	57	10	2	1	0	0	221	46-55	143
Total	8	28	79	155	435	1591	2492	1905	966	230	38	6	11	0	7934		
Percent	0.1%	0.4%	1.0%	2.0%	5.5%	20.1%	31.4%	24.0%	12.2%	2.9%	0.5%	0.1%	0.0%	0.0%			
AM Peak		11:00	10:00	11:00	10:00	11:00	11:00	11:00	08:00	07:00	08:00	00:00	02:00		11:00		
Vol.		2	11	20	33	118	216	117	85	19	7	1	1		546		
PM Peak	17:00	18:00	15:00	13:00	14:00	14:00	13:00	16:00	17:00	19:00	19:00	20:00			13:00		
Vol.	3	8	14	21	58	174	220	164	64	21	4	1			636		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	2	3	4	15	35	28	11	2	2	0	0	102	46-55	63
01:00	0	0	0	1	0	2	11	14	15	3	3	0	0	0	49	46-55	29
02:00	0	0	0	0	1	0	6	14	12	4	1	0	0	0	38	46-55	26
03:00	0	0	0	0	0	3	3	6	1	1	1	0	0	0	15	41-50	9
04:00	0	0	0	0	0	0	1	2	2	1	1	0	0	0	7	46-55	4
05:00	0	0	0	1	0	2	2	2	5	3	0	0	0	0	15	49-58	8
06:00	0	0	0	0	1	6	9	13	14	6	0	1	0	0	50	46-55	27
07:00	0	0	0	0	1	12	21	33	35	15	3	1	0	0	121	46-55	68
08:00	0	0	0	3	8	33	45	46	40	10	0	0	0	0	185	41-50	91
09:00	0	1	1	1	23	51	70	67	49	10	0	0	0	0	273	41-50	137
10:00	0	1	2	10	22	87	108	63	33	18	0	0	0	0	344	36-45	195
11:00	0	1	7	18	34	108	138	73	31	8	1	0	0	0	419	36-45	246
12 PM	0	2	2	16	35	106	122	124	73	11	2	0	1	0	494	41-50	246
13:00	0	0	6	8	26	122	174	129	49	10	0	0	0	0	524	41-50	303
14:00	0	0	7	7	16	85	187	135	65	10	1	0	1	0	514	41-50	322
15:00	0	1	6	11	22	103	145	126	59	11	0	0	0	0	484	41-50	271
16:00	0	0	5	5	10	101	151	151	66	9	0	0	0	0	498	41-50	302
17:00	0	2	3	5	35	86	137	102	60	15	3	0	0	0	448	41-50	239
18:00	1	2	6	1	7	74	101	79	95	39	6	1	0	0	412	41-50	180
19:00	0	2	2	0	10	40	71	94	70	17	3	0	1	0	310	41-50	165
20:00	0	0	0	1	8	26	49	60	55	17	7	1	0	0	224	46-55	115
21:00	0	0	0	1	1	14	39	48	30	11	5	1	0	0	150	41-50	87
22:00	0	0	0	1	2	8	14	27	37	10	4	0	0	0	103	46-55	64
23:00	0	0	0	0	0	5	9	14	29	7	5	1	0	0	70	46-55	43
Total	1	12	47	92	265	1078	1628	1457	953	257	48	8	3	0	5849		
Percent	0.0%	0.2%	0.8%	1.6%	4.5%	18.4%	27.8%	24.9%	16.3%	4.4%	0.8%	0.1%	0.1%	0.0%			
AM Peak		09:00	11:00	11:00	11:00	11:00	11:00	11:00	09:00	10:00	01:00	00:00			11:00		
Vol.		1	7	18	34	108	138	73	49	18	3	2			419		
PM Peak	18:00	12:00	14:00	12:00	12:00	13:00	14:00	16:00	18:00	18:00	20:00	18:00	12:00		13:00		
Vol.	1	2	7	16	35	122	187	151	95	39	7	1	1		524		

Route 66 East of Route 151 East Hampton, Connecticut

Site Code: Station ID: 4641

Latitude: 0' 0.0000 Undefined

Eastbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	2	8	16	11	7	3	0	0	0	47	46-55	27
01:00	0	0	0	0	0	1	6	7	3	1	2	0	0	0	20	41-50	13
02:00	0	0	0	0	0	1	1	1	1	1	2	0	0	0	7	56-65	3
03:00	0	0	0	0	0	0	2	2	3	1	0	0	0	0	8	46-55	5
04:00	0	0	1	0	1	3	2	5	4	0	0	1	0	0	17	45-54	9
05:00	0	0	0	0	2	3	7	14	17	4	4	0	1	0	52	46-55	31
06:00	0	2	7	7	7	23	34	31	30	7	1	0	0	0	149	41-50	65
07:00	0	1	20	28	22	37	68	58	55	17	5	0	0	0	311	41-50	126
08:00	1	4	10	18	27	58	96	70	61	13	3	1	0	0	362	41-50	166
09:00	0	3	4	1	16	60	90	77	63	22	2	0	0	0	338	41-50	167
10:00	0	1	3	5	17	52	67	81	56	13	1	0	0	0	296	41-50	148
11:00	0	0	2	5	18	70	110	90	54	22	1	0	0	0	372	41-50	200
12 PM	0	2	8	6	18	54	103	100	62	21	3	0	1	0	378	41-50	203
13:00	0	1	1	9	31	81	104	90	58	16	1	0	0	0	392	41-50	194
14:00	0	2	9	8	18	79	149	95	66	17	3	0	0	0	446	41-50	244
15:00	1	0	2	12	23	92	185	174	51	8	2	0	0	0	550	41-50	359
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00					*	*	*									*	*
Total	2	16	67	99	200	616	1032	911	595	170	33	2	2	0	3745		
Percent	0.1%	0.4%	1.8%	2.6%	5.3%	16.4%	27.6%	24.3%	15.9%	4.5%	0.9%	0.1%	0.1%	0.0%	44.00		
AM Peak	08:00	08:00	07:00	07:00	08:00	11:00	11:00	11:00	09:00	09:00	07:00	04:00	05:00		11:00		
Vol.	15:00	4 4 4 4 4 4 4	20	28	27	70	110	90	63	22	12:00	1	12:00		372		
PM Peak Vol.	15:00	12:00 2	14:00 9	15:00 12	13:00 31	15:00 92	15:00 185	15:00 174	14:00 66	12:00 21	12:00 3		12:00		15:00 550		
	37		<u>9</u> 571	982	2386	<u>92</u> 8449	14254	12055	5893	1319	<u>3</u> 217	26	6	2			
Total Percent	0.1%	230 0.5%	1.2%	982 2.1%	2386 5.1%	18.2%	30.7%	26.0%	5893 12.7%	2.8%	0.5%	26 0.1%	0.0%	0.0%	46427		
reideill	U. 170	0.5%	1.270	Z.170	5.170	10.270	30.770	20.070	12.170	2.070	0.5%	U. I 70	0.070	0.076			

15th Percentile: 36 MPH 50th Percentile: 43 MPH 85th Percentile: 50 MPH 95th Percentile: 54 MPH

Stats 10 MPH Pace Speed: 41-50 MPH Number in Pace: 26309

Percent in Pace : 56.7%

Number of Vehicles > 40 MPH : 33772

Percent of Vehicles > 40 MPH : 72.7%

Mean Speed(Average) : 44 MPH

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Westbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	0	1	3	17	22	31	28	16	1	0	0	0	0	0	119	36-45	59
15:00	1	1	7	29	45	76	116	32	2	1	0	0	0	0	310	36-45	192
16:00	4	7	5	21	62	80	88	35	6	0	0	0	0	0	308	36-45	168
17:00	7	11	11	31	41	85	107	49	11	0	0	0	0	0	353	36-45	192
18:00	0	5	13	19	38	68	93	42	5	0	0	0	0	0	283	36-45	161
19:00	0	2	2	8	22	51	65	31	5	0	0	0	0	0	186	36-45	116
20:00	0	0	0	1	5	29	45	25	13	2	0	0	0	0	120	36-45	74
21:00	0	0	0	1	8	11	16	25	13	2	0	0	0	0	76	41-50	41
22:00	0	0	0	0	1	7	23	20	6	3	0	0	0	0	60	41-50	43
23:00	0	0	0	0	0	5	6	11	4	3	0	0	0	0	29	41-50	17
Total	12	27	41	127	244	443	587	286	66	11	0	0	0	0	1844		
Percent	0.7%	1.5%	2.2%	6.9%	13.2%	24.0%	31.8%	15.5%	3.6%	0.6%	0.0%	0.0%	0.0%	0.0%			
AM Peak Vol.																	
PM Peak	17:00	17:00	18:00	17:00	16:00	17:00	15:00	17:00	20:00	22:00					17:00		
Vol.	7	11	13	31	62	85	116	49	13	3					353		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Westbound															Lantado.	0 0.0000	Onacimica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	2	7	1	0	0	0	0	0	0	10	36-45	9
01:00	0	0	0	0	0	2	5	2	1	0	0	0	0	0	10	41-50	7
02:00	0	0	0	0	0	0	1	1	1	0	0	0	0	0	3	39-48	2
03:00	0	0	0	0	0	1	7	7	3	1	1	0	0	0	20	41-50	14
04:00	0	0	0	0	0	3	8	17	8	1	0	0	0	0	37	46-55	25
05:00	0	0	3	6	20	29	42	37	6	1	0	0	0	0	144	41-50	79
06:00	4	11	15	54	80	106	65	28	4	0	0	0	0	0	367	31-40	186
07:00	26	43	66	98	125	118	69	17	1	0	0	0	0	0	563	31-40	243
08:00	4	10	25	68	74	102	101	36	3	0	0	0	0	0	423	36-45	203
09:00	0	3	13	41	58	91	75	34	7	0	0	0	0	0	322	36-45	166
10:00	0	0	9	16	41	77	69	27	5	0	0	0	0	0	244	36-45	146
11:00	1	0	8	14	52	66	65	26	4	0	0	0	0	0	236	36-45	131
12 PM	1	7	11	15	28	88	75	23	6	0	0	0	0	0	254	36-45	163
13:00	0	1	4	8	31	62	87	33	9	0	0	0	0	0	235	36-45	149
14:00	0	3	5	22	33	74	84	32	3	0	0	0	0	0	256	36-45	158
15:00	1	3	10	18	52	83	83	26	4	0	0	0	0	0	280	36-45	166
16:00	3	3	11	18	45	70	110	38	9	0	0	0	0	0	307	36-45	180
17:00	1	4	3	23	61	77	90	36	6	0	1	0	0	0	302	36-45	167
18:00	0	2	7	3	31	50	73	28	10	0	0	0	0	0	204	36-45	123
19:00	0	1	0	2	8	34	53	21	3	0	0	0	0	0	122	36-45	87
20:00	0	3	1	4	9	37	54	11	4	0	0	0	0	0	123	36-45	91
21:00	0	0	0	0	4	18	42	13	2	0	0	1	0	0	80	36-45	60
22:00	0	0	0	0	0	8	10	20	5	1	0	0	0	0	44	41-50	30
23:00	0	0	0	0	0	5_	10	8	7	2	0	0	0	0	32	41-50	18_
Total	41	94	191	410	752	1203	1285	522	111	6	2	1	0	0	4618		
Percent	0.9%	2.0%	4.1%	8.9%	16.3%	26.1%	27.8%	11.3%	2.4%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak	07:00	07:00	07:00	07:00	07:00	07:00	08:00	05:00	04:00	03:00	03:00				07:00		
Vol.	26	43	66	98	125	118	101	37	8	1_	1_				563		
PM Peak	16:00	12:00	12:00	17:00	17:00	12:00	16:00	16:00	18:00	23:00	17:00	21:00			16:00		
Vol.	3	7	11	23	61	88	110	38	10	2	1	1			307		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Westbound															Latitado.	0.0000	Oridefilied
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	0	4	3	2	0	0	0	0	0	9	41-50	7
01:00	0	0	0	0	0	0	3	3	0	0	0	0	0	0	6	41-50	6
02:00	0	0	0	0	1	0	4	1	0	0	0	0	0	0	6	39-48	5
03:00	0	0	0	0	0	0	2	1	2	2	0	0	0	0	7	49-58	4
04:00	0	0	0	0	1	2	15	13	8	1	1	0	0	0	41	41-50	28
05:00	0	2	1	4	17	28	47	31	10	1	1	0	0	0	142	41-50	78
06:00	11	11	22	64	87	86	75	42	7	0	0	0	0	0	405	31-40	173
07:00	24	36	59	81	108	136	106	27	3	1	0	0	0	0	581	31-40	244
08:00	7	23	33	58	80	107	104	40	6	0	0	0	0	0	458	36-45	211
09:00	5	5	13	27	55	94	77	33	3	0	0	0	0	0	312	36-45	171
10:00	0	0	2	16	53	74	88	38	4	3	1	0	0	0	279	36-45	162
11:00	0	1	6	11	39	74	100	38	12	0	0	0	0	0	281	36-45	174
12 PM	3	7	19	26	54	71	72	37	4	1	0	0	0	0	294	36-45	143
13:00	0	1	4	17	36	80	103	40	9	0	0	0	0	0	290	36-45	183
14:00	0	4	7	21	53	85	93	32	4	0	0	0	0	0	299	36-45	178
15:00	2	6	7	20	50	104	79	43	4	1	0	0	0	0	316	36-45	183
16:00	0	7	7	29	54	87	107	46	4	0	0	0	0	0	341	36-45	194
17:00	5	5	10	26	45	103	102	63	8	0	0	0	0	0	367	36-45	205
18:00	0	5	9	13	51	71	79	35	7	0	0	0	0	0	270	36-45	150
19:00	1	4	5	9	24	63	56	32	8	0	0	0	0	0	202	36-45	119
20:00	0	0	0	1	12	36	55	29	5	1	0	0	0	0	139	36-45	91
21:00	0	0	0	3	5	9	35	24	10	1	0	0	0	0	87	41-50	59
22:00	0	0	1	0	3	11	22	25	5	4	0	0	0	0	71	41-50	47
23:00	0	0	0	0	1	6	12	11	5	1	0	0	0	0	36	41-50	23
Total	58	117	205	426	829	1327	1440	687	130	17	3	0	0	0	5239		
Percent	1.1%	2.2%	3.9%	8.1%	15.8%	25.3%	27.5%	13.1%	2.5%	0.3%	0.1%	0.0%	0.0%	0.0%	07.00		
AM Peak	07:00	07:00	07:00	07:00	07:00	07:00	07:00	06:00	11:00	10:00	04:00				07:00		
Vol.	24	36	59	81	108	136	106	42	12	3	1				581		
PM Peak	17:00	12:00 7	12:00	16:00	12:00	15:00	16:00	17:00	21:00	22:00					17:00		
Vol.	5	7	19	29	54	104	107	63	10	4					367		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Westbound															Lantado.	0.0000	Onacimoa
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	0	5	5	4	1	0	0	0	0	15	41-50	10
01:00	0	0	0	0	0	5	4	1	0	0	0	0	0	0	10	36-45	9
02:00	0	0	0	0	0	0	3	4	0	0	0	0	0	0	7	41-50	7
03:00	0	0	0	0	0	1	4	3	1	2	0	0	0	0	11	41-50	7
04:00	0	0	0	0	0	4	8	19	11	0	0	0	0	0	42	46-55	30
05:00	0	0	0	5	13	35	48	21	12	2	1	0	1	0	138	36-45	83
06:00	10	16	22	42	74	97	102	42	3	2	0	0	0	0	410	36-45	199
07:00	29	35	63	93	105	116	89	24	4	0	0	0	0	0	558	31-40	221
08:00	2	3	19	43	80	109	94	56	11	1	1	0	0	0	419	36-45	203
09:00	3	5	9	37	61	114	83	29	4	0	0	0	0	0	345	36-45	197
10:00	3	1	13	26	60	71	83	31	4	0	0	0	0	0	292	36-45	154
11:00	4	8	17	41	77	90	69	16	4	0	0	0	0	0	326	31-40	167
12 PM	2	16	11	33	51	92	66	17	4	0	0	0	0	0	292	36-45	158
13:00	0	3	21	36	52	87	92	14	2	0	0	0	0	0	307	36-45	179
14:00	0	2	7	19	48	86	84	35	6	0	0	0	0	0	287	36-45	170
15:00	0	3	12	19	63	84	73	35	3	1	0	0	0	0	293	36-45	157
16:00	0	8	14	24	53	96	83	48	8	1	0	0	0	0	335	36-45	179
17:00	7	3	26	30	75	81	94	43	9	0	0	0	0	0	368	36-45	175
18:00	2	7	4	10	55	70	89	54	8	0	0	0	0	0	299	36-45	159
19:00	2	1	0	6	12	61	75	33	9	0	0	0	0	0	199	36-45	136
20:00	0	0	0	4	16	45	64	25	2	0	1	0	0	0	157	36-45	109
21:00	0	0	0	2	11	31	37	15	11	3	0	0	0	0	110	36-45	68
22:00	0	0	0	0	1	13	36	28	6	3	0	0	0	0	87	41-50	64
23:00	0	0	0	0	0	8	26	20	8	2	1	0	0	0	65	41-50	46
Total	64	111	238	470	907	1396	1411	618	134	18	4	0	1	0	5372		
Percent	1.2%	2.1%	4.4%	8.7%	16.9%	26.0%	26.3%	11.5%	2.5%	0.3%	0.1%	0.0%	0.0%	0.0%			
AM Peak	07:00	07:00	07:00	07:00	07:00	07:00	06:00	08:00	05:00	03:00	05:00		05:00		07:00		
Vol.	29	35	63	93	105	116	102	56	12	2	1		11		558		
PM Peak	17:00	12:00	17:00	13:00	17:00	16:00	17:00	18:00	21:00	21:00	20:00				17:00		
Vol.	7	16	26	36	75	96	94	54	11	3	1				368		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Westbound															Lamade.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	1	1	4	10	10	5	2	0	0	0	0	33	41-50	20
01:00	0	0	0	0	0	2	2	6	2	0	0	0	0	0	12	46-55	8
02:00	0	0	0	0	3	1	2	4	2	1	0	0	0	0	13	46-55	6
03:00	0	0	0	0	0	0	2	3	3	0	0	0	0	0	8	46-55	6
04:00	0	0	0	2	1	0	7	3	4	1	0	0	0	0	18	41-50	10
05:00	0	0	0	0	0	6	16	22	12	3	1	0	0	0	60	41-50	38
06:00	0	0	0	6	11	29	38	19	10	1	1	0	0	0	115	36-45	67
07:00	0	0	5	7	37	49	48	46	14	0	0	0	0	0	206	36-45	97
08:00	0	0	3	4	34	66	86	39	16	1	0	0	0	0	249	36-45	152
09:00	2	2	8	26	65	95	87	33	7	0	0	0	1	0	326	36-45	182
10:00	0	4	9	35	78	132	105	22	2	0	0	0	0	0	387	36-45	237
11:00	1	1	10	20	60	90	117	39	2	0	0	0	0	1	341	36-45	207
12 PM	0	8	13	47	67	102	105	28	4	0	0	0	0	0	374	36-45	207
13:00	0	10	21	34	60	71	116	23	5	0	0	0	0	0	340	36-45	187
14:00	7	7	14	37	64	95	83	30	1	0	0	0	0	0	338	36-45	178
15:00	1	13	15	51	79	97	100	30	3	2	0	0	0	0	391	36-45	197
16:00	1	8	7	24	61	131	86	36	6	0	0	0	0	0	360	36-45	217
17:00	0	6	16	29	66	97	88	41	4	1	0	0	0	0	348	36-45	185
18:00	0	5	7	6	35	69	85	33	6	1	0	0	0	0	247	36-45	154
19:00	0	1	5	9	27	47	76	37	11	2	0	0	0	0	215	36-45	123
20:00	0	0	0	2	13	37	55	30	3	0	0	0	0	0	140	36-45	92
21:00	0	0	0	3	6	22	37	33	6	1	0	0	0	0	108	41-50	70
22:00	0	0	0	0	5	22	40	27	8	1	1	0	0	0	104	41-50	67
23:00	0	0	0	0	1	10	20	15	5	1	0	0	0	0	52	41-50	35
Total	12	65	133	343	774	1274	1411	609	141	18	3	0	1	1	4785		
Percent	0.3%	1.4%	2.8%	7.2%	16.2%	26.6%	29.5%	12.7%	2.9%	0.4%	0.1%	0.0%	0.0%	0.0%			
AM Peak	09:00	10:00	11:00	10:00	10:00	10:00	11:00	07:00	08:00	05:00	05:00		09:00	11:00	10:00		
Vol.	2	4	10	35	78	132	117	46	16	3	1_		1	1	387		
PM Peak	14:00	15:00	13:00	15:00	15:00	16:00	13:00	17:00	19:00	15:00	22:00				15:00		
Vol.	7	13	21	51	79	131	116	41	11	2	1				391		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Westbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	3	11	12	5	0	1	1	0	0	33	41-50	23
01:00	0	0	0	1	0	1	7	3	5	0	0	0	0	0	17	40-49	10
02:00	0	0	0	0	2	0	3	5	3	0	0	0	0	0	13	41-50	8
03:00	0	0	0	0	0	0	4	3	0	1	0	0	0	0	8	41-50	7
04:00	0	0	0	0	0	1	6	7	3	0	0	0	0	0	17	41-50	13
05:00	0	0	0	0	1	5	14	15	6	1	0	0	0	0	42	41-50	29
06:00	0	0	1	2	11	11	25	19	13	1	1	1	0	0	85	41-50	44
07:00	0	0	0	2	7	38	35	22	5	1	0	0	0	0	110	36-45	73
08:00	0	0	0	8	23	45	71	25	7	1	0	0	0	0	180	36-45	116
09:00	0	1	1	19	57	75	75	31	1	0	0	0	0	0	260	36-45	150
10:00	0	3	12	22	60	106	94	28	9	0	1	0	0	0	335	36-45	200
11:00	4	11	18	45	84	109	60	14	4	0	0	0	0	0	349	31-40	193
12 PM	4	14	14	34	51	106	90	30	4	0	0	0	0	0	347	36-45	196
13:00	0	3	6	29	63	99	93	49	4	0	0	0	0	0	346	36-45	192
14:00	1	5	6	20	58	79	112	46	8	0	0	0	0	0	335	36-45	191
15:00	4	10	11	19	47	85	80	48	3	0	0	0	0	0	307	36-45	165
16:00	3	2	5	9	51	64	92	41	8	0	0	0	0	0	275	36-45	156
17:00	0	4	5	15	43	65	72	34	9	1	0	0	0	0	248	36-45	137
18:00	1	2	1	2	23	63	61	52	6	0	0	0	0	0	211	36-45	124
19:00	0	0	2	2	19	29	61	39	7	1	0	0	0	0	160	41-50	100
20:00	0	0	0	0	4	21	44	26	9	0	0	0	0	0	104	41-50	70
21:00	0	0	0	0	4	17	26	13	4	2	0	0	0	0	66	36-45	43
22:00	0	0	0	0	0	7	18	17	9	1	1	0	0	0	53	41-50	35
23:00	0	0	0	0	0	1	7	10	3	11	0	1	0	0	23	41-50	17
Total	17	55	82	229	608	1030	1161	589	135	11	4	3	0	0	3924		
Percent	0.4%	1.4%	2.1%	5.8%	15.5%	26.2%	29.6%	15.0%	3.4%	0.3%	0.1%	0.1%	0.0%	0.0%			
AM Peak	11:00	11:00	11:00	11:00	11:00	11:00	10:00	09:00	06:00	03:00	00:00	00:00			11:00		
Vol.	4	11	18	45	84	109	94	31	13	1_	1_	1			349		
PM Peak	12:00	12:00	12:00	12:00	13:00	12:00	14:00	18:00	17:00	21:00	22:00	23:00			12:00		
Vol.	4	14	14	34	63	106	112	52	9	2	1	1			347		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Latitude: 0' 0.0000 Undefined

Westbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	0	5	1	0	0	0	0	0	0	6	39-48	6
01:00	0	0	0	0	1	5	6	0	0	0	0	0	0	0	12	36-45	11
02:00	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	44-53	1
03:00	0	0	0	0	0	0	2	6	2	0	0	0	0	0	10	46-55	8
04:00	0	0	0	0	0	1	12	16	9	1	0	0	0	0	39	41-50	28
05:00	0	0	0	5	13	32	43	27	6	1	0	1	0	0	128	36-45	75
06:00	2	12	24	42	112	120	72	18	4	0	0	0	0	0	406	31-40	232
07:00	38	37	67	72	118	146	71	19	3	0	0	0	0	0	571	31-40	264
08:00	10	16	40	57	77	109	88	44	7	1	0	0	0	0	449	36-45	197
09:00	0	0	9	16	37	80	87	32	6	1	0	0	0	0	268	36-45	167
10:00	2	9	9	24	62	85	86	36	3	2	0	0	0	0	318	36-45	171
11:00	0	2	6	17	34	64	75	34	9	0	0	0	0	0	241	36-45	139
12 PM	1	1	5	20	47	83	74	34	1	0	0	0	0	0	266	36-45	157
13:00	4	7	15	15	38	79	58	25	3	0	0	0	0	0	244	36-45	137
14:00	4	7	9	17	46	72	81	31	7	2	0	0	0	0	276	36-45	153
15:00	0	2	7	13	42	48	42	20	3	0	0	0	0	0	177	31-40	90
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	61	93	191	298	627	924	802	343	64	8	0	1	0	0	3412		
Percent	1.8%	2.7%	5.6%	8.7%	18.4%	27.1%	23.5%	10.1%	1.9%	0.2%	0.0%	0.0%	0.0%	0.0%			
AM Peak	07:00	07:00	07:00	07:00	07:00	07:00	08:00	08:00	04:00	10:00		05:00			07:00		
Vol.	38	37	67	72	118	146	88	44	9	2		1			571		
PM Peak	13:00	13:00	13:00	12:00	12:00	12:00	14:00	12:00	14:00	14:00					14:00		
Vol.	4	7	15	20	47	83	81	34	7	2					276		
Total	265	562	1081	2303	4741	7597	8097	3654	781	89	16	5	2	1	29194		
Percent	0.9%	1.9%	3.7%	7.9%	16.2%	26.0%	27.7%	12.5%	2.7%	0.3%	0.1%	0.0%	0.0%	0.0%			

15th Percentile: 30 MPH 50th Percentile: 38 MPH 85th Percentile: 45 MPH 95th Percentile: 49 MPH

 Stats
 10 MPH Pace Speed : Number in Pace : 15694
 36-45 MPH Number in Pace : 15694

 Percent in Pace : 53.8%
 53.8%

Number of Vehicles > 40 MPH: 12645
Percent of Vehicles > 40 MPH: 43.3%
Mean Speed(Average): 38 MPH

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Numbe
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
)4/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
14:00	0	0	0	1	14	43	40	22	4	1	0	0	0	0	125	36-45	8
15:00	1	3	2	33	84	145	116	102	23	2	0	0	0	0	511	36-45	26
16:00	3	5	5	19	76	178	159	103	18	5	0	0	0	0	571	36-45	33
17:00	0	5	6	21	72	146	151	117	42	5	0	1	0	0	566	36-45	297
18:00	1	5	1	3	50	115	97	99	26	1	1	0	0	0	399	36-45	212
19:00	1	3	4	11	25	41	77	78	22	5	0	0	0	0	267	41-50	15
20:00	1	0	0	1	7	42	61	49	14	0	0	0	0	0	175	41-50	110
21:00	0	0	0	2	15	22	51	45	10	1	1	0	0	0	147	41-50	96
22:00	0	0	0	0	1	4	22	30	10	1	0	0	0	0	68	41-50	5
23:00	0	0	0	0	4	8	19	15	8	2	1	0	0	0	57	41-50	3
Total	7	21	18	91	348	744	793	660	177	23	3	11	0	0	2886		
Percent	0.2%	0.7%	0.6%	3.2%	12.1%	25.8%	27.5%	22.9%	6.1%	0.8%	0.1%	0.0%	0.0%	0.0%			
M Peak Vol.																	
M Peak	16:00	16:00	17:00	15:00	15:00	16:00	16:00	17:00	17:00	16:00	18:00	17:00		,	16:00		
Vol.	3	5	6	33	84	178	159	117	42	5	1	1			571		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	4	15	19	5	1	0	0	0	0	44	41-50	34
01:00	0	0	0	0	1	0	3	1	2	0	2	0	0	0	9	41-50	4
02:00	0	0	0	1	1	0	2	1	1	0	0	0	0	0	6	41-50	3
03:00	0	0	0	0	1	3	3	0	0	3	0	0	0	0	10	35-44	6
04:00	0	0	0	1	0	0	5	7	0	0	0	0	0	0	13	41-50	12
05:00	0	0	1	2	3	3	10	5	3	1	0	0	0	0	28	40-49	15
06:00	0	0	3	3	11	42	24	14	10	2	0	0	0	0	109	36-45	66
07:00	2	1	7	18	48	57	68	26	1	0	0	0	0	0	228	36-45	125
08:00	0	5	3	9	34	65	79	28	13	0	1	0	0	0	237	36-45	144
09:00	1	1	1	3	34	59	57	30	8	2	0	0	0	0	196	36-45	116
10:00	1	1	11	18	29	52	54	18	6	2	0	0	0	0	192	36-45	106
11:00	1	1	10	4	46	64	65	38	5	1	0	0	0	0	235	36-45	129
12 PM	1	3	5	14	39	55	67	41	10	1	0	0	0	0	236	36-45	122
13:00	0	1	3	8	24	54	84	62	16	3	0	0	0	0	255	41-50	146
14:00	0	3	0	5	33	62	101	53	15	3	0	0	0	0	275	36-45	163
15:00	3	8	0	10	72	138	123	58	11	0	0	0	0	0	423	36-45	261
16:00	3	3	1	24	77	127	162	84	18	1	0	0	0	0	500	36-45	289
17:00	3	4	1	6	63	162	176	104	26	1	0	0	0	0	546	36-45	338
18:00	1	6	0	9	37	88	93	89	27	1	0	1	0	0	352	39-48	182
19:00	3	5	0	7	32	51	82	49	16	2	0	0	0	0	247	36-45	133
20:00	1	0	1	1	14	49	82	36	10	0	0	0	0	0	194	36-45	131
21:00	0	0	0	0	10	23	54	25	10	1	0	0	0	0	123	41-50	79
22:00	0	0	0	0	3	10	23	26	6	3	0	0	0	0	71	41-50	49
23:00	0	0	0	1_	1	7	17	22	3	3	1_	0	0	0	55	41-50	39
Total	20	42	47	144	613	1175	1449	836	222	31	4	1	0	0	4584		
Percent	0.4%	0.9%	1.0%	3.1%	13.4%	25.6%	31.6%	18.2%	4.8%	0.7%	0.1%	0.0%	0.0%	0.0%			
AM Peak	07:00	08:00	10:00	07:00	07:00	08:00	08:00	11:00	08:00	03:00	01:00				08:00		
Vol.	2	5_	11	18	48	65	79	38	13	3_	2				237		
PM Peak	15:00	15:00	12:00	16:00	16:00	17:00	17:00	17:00	18:00	13:00	23:00	18:00			17:00		
Vol.	3	8	5	24	77	162	176	104	27	3	1	1			546		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Eastbound															Latitude.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	1	0	1	0	15	5	8	1	0	0	0	0	31	41-50	20
01:00	0	0	0	0	0	3	6	5	4	0	0	0	0	0	18	41-50	11
02:00	0	0	0	1	0	0	0	1	0	0	0	0	0	0	2	19-28	1
03:00	0	0	0	0	0	4	2	1	0	0	0	0	0	0	7	36-45	6
04:00	0	0	0	0	0	0	6	2	0	0	0	0	0	0	8	40-49	8
05:00	0	1	1	2	3	5	6	1	1	1	0	0	0	0	21	36-45	11
06:00	0	2	0	7	18	31	29	21	5	2	0	0	0	0	115	36-45	60
07:00	1	3	5	26	43	61	61	39	10	0	0	0	0	0	249	36-45	122
08:00	0	1	7	14	35	69	53	39	18	4	0	0	0	0	240	36-45	122
09:00	0	2	3	13	40	54	60	36	14	1	1	0	0	0	224	36-45	114
10:00	0	5	5	19	33	65	53	45	15	4	0	0	0	0	244	36-45	118
11:00	1	1	1	5	35	75	88	42	5	1	0	0	0	0	254	36-45	163
12 PM	1	3	10	20	51	69	89	43	13	2	0	1	0	0	302	36-45	158
13:00	0	9	5	12	35	62	79	63	16	1	0	0	0	0	282	39-48	142
14:00	0	5	8	13	32	71	114	67	16	1	2	1	0	0	330	36-45	185
15:00	3	11	7	18	75	137	123	106	30	3	0	0	0	0	513	36-45	260
16:00	2	6	0	20	85	151	99	104	39	2	2	0	0	0	510	36-45	250
17:00	1	6	4	13	97	144	127	133	37	3	2	0	0	0	567	36-45	271
18:00	0	10	2	10	68	124	147	64	24	3	1	0	0	0	453	36-45	271
19:00	3	6	0	12	24	72	75	73	26	2	1	0	0	0	294	39-48	148
20:00	1	2	0	2	30	60	68	54	10	3	1	0	0	0	231	36-45	128
21:00	0	0	0	3	7	45	50	43	26	2	0	2	0	0	178	36-45	95
22:00	0	0	0	0	4	18	48	22	10	1	0	0	1	0	104	41-50	70
23:00	0	0	0	0	1	5	20	22	9	4	0	0	0	0	61	41-50	42
Total	13	73	59	210	717	1325	1418	1031	336	41	10	4	1	0	5238		
Percent	0.2%	1.4%	1.1%	4.0%	13.7%	25.3%	27.1%	19.7%	6.4%	0.8%	0.2%	0.1%	0.0%	0.0%			
AM Peak	07:00	10:00	08:00	07:00	07:00	11:00	11:00	10:00	08:00	08:00	09:00				11:00		
Vol.	1	5_	7	26	43	75	88	45	18	4	1 1 2 2	04.00			254		
PM Peak	15:00	15:00	12:00	12:00	17:00	16:00	18:00	17:00	16:00	23:00	14:00	21:00	22:00		17:00		
Vol.	3	11	10	20	97	151	147	133	39	4	2	2	1		567		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	1	1	8	27	12	6	1	0	0	0	0	56	41-50	39
01:00	0	0	0	0	0	4	4	4	4	0	0	0	0	0	16	36-45	8
02:00	0	0	0	0	4	0	3	2	1	0	0	0	0	0	10	41-50	5
03:00	0	0	0	0	0	1	5	0	0	3	0	0	0	0	9	36-45	6
04:00	0	0	1	0	0	3	6	5	1	0	0	0	0	0	16	41-50	11
05:00	0	0	0	0	7	7	7	2	6	1	0	0	0	0	30	31-40	14
06:00	0	7	0	0	19	30	39	20	8	1	0	0	0	0	124	36-45	69
07:00	0	0	8	41	55	74	51	28	8	2	0	0	0	0	267	31-40	129
08:00	1	11	4	13	19	67	82	45	23	2	1	0	0	0	268	36-45	149
09:00	0	3	6	14	27	46	62	38	9	0	0	0	0	0	205	36-45	108
10:00	2	2	1	2	61	75	52	37	6	0	0	0	0	0	238	31-40	136
11:00	1	3	6	25	54	110	66	24	10	0	0	0	0	0	299	36-45	176
12 PM	1	8	4	19	66	101	88	46	5	3	0	0	0	0	341	36-45	189
13:00	1	2	2	21	59	104	68	57	7	1	0	0	0	0	322	36-45	172
14:00	1	0	5	13	61	103	95	48	8	1	0	0	0	0	335	36-45	198
15:00	2	1	2	23	113	144	153	49	13	2	0	0	0	0	502	36-45	297
16:00	7	7	4	17	96	174	134	97	19	1	0	0	0	0	556	36-45	308
17:00	5	10	3	25	117	209	145	57	15	0	1	0	0	0	587	36-45	354
18:00	2	5	3	16	76	148	150	62	14	2	0	0	0	0	478	36-45	298
19:00	3	6	2	3	18	65	88	62	21	2	0	0	0	0	270	36-45	153
20:00	0	1	0	5	23	49	76	44	13	1	0	0	0	0	212	36-45	125
21:00	0	0	0	1	20	27	60	41	10	3	2	0	0	0	164	41-50	101
22:00	0	0	0	0	1	16	43	46	9	1	1	0	0	0	117	41-50	89
23:00	0	0	0	0	4	12	35	21	5	2	0	0	0	0	79	41-50	56
Total	26	66	51	239	901	1577	1539	847	221	29	5	0	0	0	5501		
Percent	0.5%	1.2%	0.9%	4.3%	16.4%	28.7%	28.0%	15.4%	4.0%	0.5%	0.1%	0.0%	0.0%	0.0%			
AM Peak	10:00	08:00	07:00	07:00	10:00	11:00	08:00	08:00	08:00	03:00	08:00				11:00		
Vol.	2	11	8	41	61	110	82	45	23	3	11				299		
PM Peak	16:00	17:00	14:00	17:00	17:00	17:00	15:00	16:00	19:00	12:00	21:00				17:00		
Vol.	7	10	5	25	117	209	153	97	21	3	2				587		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	1	9	35	15	6	1	0	0	0	0	67	41-50	50
01:00	0	0	0	0	1	5	8	14	0	1	1	0	0	0	30	41-50	22
02:00	0	0	0	0	1	3	1	3	4	0	0	0	0	0	12	46-55	7
03:00	0	0	0	0	0	1	7	2	1	0	0	0	0	0	11	41-50	9
04:00	0	0	1	0	0	2	2	2	2	2	0	0	0	0	11	51-60	4
05:00	0	0	4	0	0	5	6	11	1	0	1	0	0	0	28	41-50	17
06:00	0	0	0	0	3	10	15	7	7	0	0	0	0	0	42	36-45	25
07:00	1	0	0	5	21	35	25	43	12	4	1	0	0	0	147	41-50	68
08:00	0	0	2	12	27	56	56	48	16	4	0	0	0	0	221	36-45	112
09:00	3	2	1	5	35	98	78	38	17	3	0	0	0	0	280	36-45	176
10:00	0	5	3	14	45	98	81	61	12	2	0	0	0	0	321	36-45	179
11:00	1	5	0	3	42	90	75	81	25	2	0	0	0	0	324	36-45	165
12 PM	0	5	1	11	55	85	103	68	17	5	0	0	0	0	350	36-45	188
13:00	1	4	3	13	61	91	100	72	19	3	0	1	0	0	368	36-45	191
14:00	0	11	1	7	55	125	113	64	12	2	0	0	0	0	390	36-45	238
15:00	2	9	0	15	55	105	99	54	16	1	0	0	0	0	356	36-45	204
16:00	2	7	5	13	53	97	98	74	17	7	0	0	0	0	373	36-45	195
17:00	1	7	1	3	55	112	122	62	25	2	0	0	0	0	390	36-45	234
18:00	0	7	0	7	33	103	101	64	14	4	0	0	0	0	333	36-45	204
19:00	0	4	0	3	19	45	70	52	19	3	0	0	0	0	215	41-50	122
20:00	1	0	1	2	17	50	65	49	17	1	0	0	0	0	203	36-45	115
21:00	0	0	0	3	10	42	55	60	11	2	0	0	0	0	183	41-50	115
22:00	0	0	0	2	4	20	42	56	10	4	0	0	0	0	138	41-50	98
23:00	0	0	0	0	3	6	37	42	16	3	0	0	0	0	107	41-50	79
Total	12	66	23	118	596	1293	1394	1042	296	56	3	11	0	0	4900		
Percent	0.2%	1.3%	0.5%	2.4%	12.2%	26.4%	28.4%	21.3%	6.0%	1.1%	0.1%	0.0%	0.0%	0.0%			
AM Peak	09:00	10:00	05:00	10:00	10:00	09:00	10:00	11:00	11:00	07:00	01:00				11:00		
Vol.	3	5	4	14	45	98	81	81	25	4	1				324		
PM Peak	15:00	14:00	16:00	15:00	13:00	14:00	17:00	16:00	17:00	16:00		13:00			14:00		
Vol.	2	11	5	15	61	125	122	74	25	7		1			390		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	1	8	14	17	9	2	3	0	0	0	54	41-50	31
01:00	0	0	0	0	1	3	10	6	7	0	1	0	0	0	28	41-50	16
02:00	0	0	0	0	1	0	6	5	7	1	0	0	0	0	20	44-53	12
03:00	0	0	0	0	0	1	0	2	2	0	0	0	0	0	5	45-54	4
04:00	0	0	0	0	0	0	0	0	2	1	0	0	0	0	3	49-58	3
05:00	0	0	0	0	0	1	4	2	3	0	1	0	0	0	11	39-48	6
06:00	0	0	0	0	4	2	7	8	5	1	0	0	0	0	27	41-50	15
07:00	0	0	0	0	11	15	24	19	17	1	0	1	0	0	88	41-50	43
08:00	0	0	0	0	7	31	35	29	13	3	1	0	0	0	119	36-45	66
09:00	0	0	0	4	31	32	53	40	9	1	0	0	0	0	170	41-50	93
10:00	3	1	6	9	42	68	57	32	18	1	0	0	0	0	237	36-45	125
11:00	5	3	3	20	56	97	80	29	9	1	0	0	0	0	303	36-45	177
12 PM	1	4	2	12	47	111	97	56	3	5	0	0	0	0	338	36-45	208
13:00	1	5	0	8	26	105	121	74	16	2	0	0	0	0	358	36-45	226
14:00	2	4	6	4	37	93	95	81	29	3	0	0	0	0	354	36-45	188
15:00	1	2	2	6	48	103	81	69	11	2	0	0	0	0	325	36-45	184
16:00	1	9	0	5	54	81	88	57	20	4	0	0	0	0	319	36-45	169
17:00	0	2	0	1	30	81	86	69	20	4	1	0	0	0	294	36-45	167
18:00	0	1	0	7	27	54	70	73	24	6	2	1	0	0	265	41-50	143
19:00	0	0	0	0	17	31	68	42	18	8	1	0	0	0	185	41-50	110
20:00	0	0	0	0	11	18	51	33	10	4	1	0	0	0	128	41-50	84
21:00	0	0	0	0	3	21	40	21	8	0	1	0	0	0	94	41-50	61
22:00	0	0	0	0	2	4	17	25	8	1	0	0	0	0	57	41-50	42
23:00	0	0	0	0	1	6	14	12	6	4	0	0	0	0	43	41-50	26
Total	14	31	19	76	457	966	1118	801	274	55	12	2	0	0	3825		
Percent	0.4%	0.8%	0.5%	2.0%	11.9%	25.3%	29.2%	20.9%	7.2%	1.4%	0.3%	0.1%	0.0%	0.0%			
AM Peak	11:00	11:00	10:00	11:00	11:00	11:00	11:00	09:00	10:00	08:00	00:00	07:00			11:00		
Vol.	5	3	6	20	56	97	80	40	18	3	3	1			303		
PM Peak	14:00	16:00	14:00	12:00	16:00	12:00	13:00	14:00	14:00	19:00	18:00	18:00			13:00		
Vol.	2	9	6	12	54	111	121	81	29	8	2	1			358		

Route 66 East of Middletown Avenue Portland, Connecticut

Site Code: Station ID: 4631

Latitude: 0' 0.0000 Undefined

Eastbound															Latitude.	0.0000	Onacinica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	1	2	2	9	3	2	1	0	0	0	20	44-53	12
01:00	0	0	0	0	0	1	6	4	1	0	0	0	0	0	12	41-50	10
02:00	0	0	0	1	0	1	0	0	1	0	1	0	0	0	4	19-28	1
03:00	0	0	0	0	0	1	0	1	0	0	0	0	0	0	2	29-38	1
04:00	0	0	0	0	0	3	1	3	1	0	0	0	0	0	8	46-55	4
05:00	0	0	1	0	2	7	11	6	3	0	1	0	0	0	31	36-45	18
06:00	0	0	1	1	14	35	17	22	13	1	0	1	0	0	105	36-45	52
07:00	0	6	8	8	32	83	59	33	8	4	1	0	0	0	242	36-45	142
08:00	0	3	6	8	41	69	60	41	15	1	0	0	0	0	244	36-45	129
09:00	1	5	0	1	24	56	69	35	16	3	0	0	0	0	210	36-45	125
10:00	0	1	3	11	28	44	41	47	14	4	0	0	0	0	193	41-50	88
11:00	2	8	6	10	39	63	56	41	21	1	0	0	0	0	247	36-45	119
12 PM	1	3	4	13	40	75	60	44	14	2	0	0	0	0	256	36-45	135
13:00	1	4	5	5	22	71	71	68	19	3	0	0	0	0	269	36-45	142
14:00	0	4	0	3	28	78	80	55	31	6	2	0	0	0	287	36-45	158
15:00	1	0	1	9	46	73	64	48	25	0	0	0	0	0	267	36-45	137
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	6	34	35	70	317	662	597	457	185	27	6	1	0	0	2397		
Percent	0.3%	1.4%	1.5%	2.9%	13.2%	27.6%	24.9%	19.1%	7.7%	1.1%	0.3%	0.0%	0.0%	0.0%			
AM Peak	11:00	11:00	07:00	10:00	08:00	07:00	09:00	10:00	11:00	07:00	00:00	06:00			11:00		
Vol.	2	8	8	11	41	83	69	47	21	4	1	1			247		
PM Peak	12:00	13:00	13:00	12:00	15:00	14:00	14:00	13:00	14:00	14:00	14:00				14:00		
Vol.	1	4	5	13	46	78	80	68	31	6	2				287		
Total	98	333	252	948	3949	7742	8308	5674	1711	262	43	10	1	0	29331		
Percent	0.3%	1.1%	0.9%	3.2%	13.5%	26.4%	28.3%	19.3%	5.8%	0.9%	0.1%	0.0%	0.0%	0.0%			

15th Percentile: 33 MPH 50th Percentile: 40 MPH 85th Percentile: 47 MPH 95th Percentile: 51 MPH

Stats 10 MPH Pace Speed: 36-45 MPH Number in Pace: 16050

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Westbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	0	0	0	2	1	15	85	121	51	7	2	0	0	0	284	41-50	206
14:00	0	0	1	1	3	9	80	168	80	19	2	0	0	0	363	46-55	248
15:00	0	0	0	1	5	17	137	162	75	15	3	1	0	0	416	41-50	299
16:00	0	0	1	4	2	19	94	180	139	22	4	1	0	1	467	46-55	319
17:00	0	0	1	3	0	6	88	144	98	17	2	1	0	0	360	46-55	242
18:00	0	0	0	4	4	3	51	118	71	10	1	1	0	0	263	46-55	189
19:00	0	0	1	3	5	7	35	69	44	7	2	0	0	1	174	46-55	113
20:00	0	0	0	1	2	3	12	42	32	11	0	1	0	0	104	46-55	74
21:00	0	0	0	1	0	0	6	28	29	7	1	0	0	0	72	46-55	57
22:00	0	0	0	0	0	0	3	17	13	1	0	0	0	0	34	46-55	30
23:00	0	0	0	0	0	1	1	8	3	1	0	1	0	0	15	46-55	11
Total	0	0	4	20	22	80	592	1057	635	117	17	6	0	2	2552		
Percent	0.0%	0.0%	0.2%	0.8%	0.9%	3.1%	23.2%	41.4%	24.9%	4.6%	0.7%	0.2%	0.0%	0.1%			
AM Peak																	
Vol.																	
PM Peak			14:00	16:00	15:00	16:00	15:00	16:00	16:00	16:00	16:00	15:00		16:00	16:00		
Vol.			1	4	5	19	137	180	139	22	4	1		1	467		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Westbound															Latitado.	0 0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	0	3	0	7	2	0	0	0	0	12	50-59	9
01:00	0	0	0	0	0	0	0	2	0	1	0	0	0	0	3	40-49	2
02:00	0	0	0	0	0	0	0	2	12	2	1	0	0	0	17	46-55	14
03:00	0	0	0	0	0	0	0	7	7	9	2	1	0	0	26	51-60	16
04:00	0	0	0	0	0	0	16	39	34	12	6	0	0	0	107	46-55	73
05:00	0	0	0	3	0	2	27	122	111	25	2	1	0	0	293	46-55	233
06:00	0	0	0	1	2	15	131	218	127	24	2	0	0	0	520	41-50	349
07:00	0	0	0	1	3	7	45	189	112	22	5	0	1	0	385	46-55	301
08:00	0	0	0	1	4	8	45	118	86	34	4	0	0	0	300	46-55	204
09:00	0	0	0	2	3	4	51	104	54	17	2	1	0	0	238	46-55	158
10:00	0	0	0	1	0	9	49	115	69	15	1	1	0	1	261	46-55	184
11:00	0	0	0	1	1	8	60	112	80	8	3	1	0	0	274	46-55	192
12 PM	0	0	0	1	4	3	38	105	75	15	3	0	0	0	244	46-55	180
13:00	0	0	0	5	1	9	70	127	80	20	2	0	0	1	315	46-55	207
14:00	0	0	1	2	5	8	73	155	71	10	1	0	0	0	326	41-50	228
15:00	0	0	0	5	1	3	81	155	140	19	6	1	0	0	411	46-55	295
16:00	0	0	0	2	3	8	59	175	130	32	2	1	1	0	413	46-55	305
17:00	0	0	0	4	3	5	47	119	111	18	2	1	0	0	310	46-55	230
18:00	0	0	0	4	4	4	38	77	50	8	3	0	0	0	188	46-55	127
19:00	0	0	1	3	7	17	28	49	39	4	1	1	0	0	150	46-55	88
20:00	0	0	0	2	2	0	20	48	22	4	1	0	0	0	99	46-55	70
21:00	0	0	0	0	0	4	12	15	23	7	0	0	0	0	61	46-55	38
22:00	0	0	1	1	0	0	2	9	19	5	2	0	0	0	39	46-55	28
23:00	0	0	0	0	0	0	1_	7	3	1_	0	0	0	0	12	45-54	10
Total	0	0	3	39	43	114	896	2069	1462	314	51	9	2	2	5004		
Percent	0.0%	0.0%	0.1%	0.8%	0.9%	2.3%	17.9%	41.3%	29.2%	6.3%	1.0%	0.2%	0.0%	0.0%	20.00		
AM Peak				05:00	08:00	06:00	06:00	06:00	06:00	08:00	04:00	03:00	07:00	10:00	06:00		
Vol.			44.00	3	44	15	131	218	127	34	6	1 1 1 1 1 1 1	10.00	1 10.00	520		
PM Peak			14:00	13:00	19:00	19:00	15:00	16:00	15:00	16:00	15:00	15:00	16:00	13:00	16:00		
Vol.			1	5	1	17	81	175	140	32	6	1	1	1	413		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Westbound															Latitado.	0.0000	Oridefilied
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	0	0	1	6	1	1	0	0	0	9	51-60	7
01:00	0	0	0	0	0	0	0	3	3	0	0	0	0	0	6	46-55	6
02:00	0	0	0	0	0	1	1	3	3	2	1	0	0	0	11	46-55	6
03:00	0	0	0	0	0	0	3	9	12	6	1	1	1	0	33	46-55	21
04:00	0	0	0	0	0	3	4	41	38	15	3	2	0	0	106	46-55	79
05:00	0	0	0	2	1	3	52	103	117	24	3	2	0	0	307	46-55	220
06:00	0	0	0	0	1	9	136	220	133	23	2	0	0	0	524	41-50	356
07:00	0	0	0	3	0	2	42	191	140	25	2	2	0	0	407	46-55	331
08:00	0	0	0	1	0	13	42	125	94	24	2	0	0	0	301	46-55	219
09:00	0	0	0	0	4	5	46	123	80	20	1	0	0	0	279	46-55	203
10:00	0	0	0	3	0	0	42	124	102	18	1	0	0	0	290	46-55	226
11:00	0	0	3	2	3	8	78	129	76	15	3	0	0	0	317	41-50	207
12 PM	2	1	0	9	6	20	60	120	62	13	2	1	0	0	296	45-54	182
13:00	0	0	1	1	4	16	89	170	70	14	1	1	0	0	367	41-50	259
14:00	0	0	2	2	0	17	79	159	80	10	2	0	0	0	351	46-55	239
15:00	0	0	1	2	3	17	82	220	117	18	5	2	0	0	467	46-55	337
16:00	0	0	0	3	4	7	73	229	139	25	3	0	0	1	484	46-55	368
17:00	0	0	0	7	2	4	74	164	111	20	1	0	0	0	383	46-55	275
18:00	0	0	2	5	4	4	31	93	81	13	2	0	1	0	236	46-55	174
19:00	0	0	1	2	1	4	53	73	48	13	2	0	0	0	197	41-50	126
20:00	0	0	1	1	4	1	22	37	43	12	1	0	0	0	122	46-55	80
21:00	0	0	0	1	0	2	9	28	28	8	2	1	0	1	80	46-55	56
22:00	0	0	0	1	0	0	2	26	12	3	1	0	0	0	45	46-55	38
23:00	0	0	0	0	0	1	0	8	5	2	0	0	0	0	16	46-55	13_
Total	2	1_	11	45	37	137	1020	2399	1600	324	42	12	2	2	5634		
Percent	0.0%	0.0%	0.2%	0.8%	0.7%	2.4%	18.1%	42.6%	28.4%	5.8%	0.7%	0.2%	0.0%	0.0%			
AM Peak			11:00	07:00	09:00	08:00	06:00	06:00	07:00	07:00	04:00	04:00	03:00		06:00		
Vol.	40.00	40.00	3	3	4	13	136	220	140	25	3	2	1 1	40.00	524		
PM Peak	12:00	12:00	14:00	12:00	12:00	12:00	13:00	16:00	16:00	16:00	15:00	15:00	18:00	16:00	16:00		
Vol.	2	1	2	9	6	20	89	229	139	25	5	2	1	1	484		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Westbound															Latitado.	0 0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	0	2	4	3	0	0	0	0	0	9	44-53	7
01:00	0	0	0	0	0	0	0	0	2	2	2	0	0	0	6	50-59	4
02:00	0	0	0	0	0	0	2	1	0	3	1	0	0	0	7	56-65	4
03:00	0	0	0	0	0	0	1	9	18	6	2	0	0	0	36	46-55	27
04:00	0	0	0	0	0	0	4	35	43	22	6	2	0	0	112	46-55	78
05:00	0	0	0	2	5	2	34	85	130	58	6	0	0	0	322	46-55	215
06:00	0	7	2	0	1	10	82	227	151	43	3	0	0	0	526	46-55	378
07:00	0	0	0	1	0	1	46	141	141	50	9	1	1	0	391	46-55	282
08:00	0	0	1	0	2	6	41	143	125	26	6	0	0	0	350	46-55	268
09:00	0	0	0	0	7	6	40	129	95	18	3	0	0	0	298	46-55	224
10:00	0	0	0	3	3	29	75	150	62	9	0	0	0	0	331	41-50	225
11:00	0	0	1	2	3	14	73	136	83	12	4	1	0	0	329	46-55	219
12 PM	0	0	0	2	6	15	69	148	94	9	3	0	0	0	346	46-55	242
13:00	0	0	2	6	2	4	52	130	102	32	3	3	0	0	336	46-55	232
14:00	0	0	0	4	5	11	57	138	101	22	6	1	0	0	345	46-55	239
15:00	0	0	0	2	7	11	92	174	126	24	3	1	0	0	440	46-55	300
16:00	0	0	1	5	11	21	125	212	97	16	4	0	0	0	492	41-50	337
17:00	0	0	0	5	12	7	60	138	100	21	2	1	0	0	346	46-55	238
18:00	0	0	2	6	11	5	47	92	55	20	3	0	0	0	241	46-55	147
19:00	0	0	0	6	4	14	48	94	34	10	2	0	0	0	212	41-50	142
20:00	0	1	2	1	2	4	18	59	31	8	0	0	0	0	126	46-55	90
21:00	0	0	0	4	1	2	18	31	29	4	2	0	0	0	91	46-55	60
22:00	0	0	0	0	1	5	12	33	16	7	3	0	0	0	77	46-55	49
23:00	0	0	0	0	0	2	13	14	13	4	1	0	0	0	47	46-55	27
Total	0	8	11	49	83	169	1011	2323	1651	426	74	10	1	0	5816		
Percent	0.0%	0.1%	0.2%	0.8%	1.4%	2.9%	17.4%	39.9%	28.4%	7.3%	1.3%	0.2%	0.0%	0.0%			
AM Peak		06:00	06:00	10:00	09:00	10:00	06:00	06:00	06:00	05:00	07:00	04:00	07:00		06:00		
Vol.		7	2	3	17.00	29	82	227	151	58	9	2	1		526		
PM Peak		20:00	13:00	13:00	17:00	16:00	16:00	16:00	15:00	13:00	14:00	13:00			16:00		
Vol.		1	2	6	12	21	125	212	126	32	6	3			492		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Westbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	0	1	3	5	6	2	1	0	0	0	18	46-55	11
01:00	0	0	1	0	0	0	1	0	3	3	0	1	0	0	9	51-60	6
02:00	0	0	0	0	0	0	0	3	2	1	0	0	0	0	6	46-55	5
03:00	0	0	0	0	0	0	1	3	6	1	1	0	1	0	13	46-55	9
04:00	0	0	1	0	0	0	1	7	20	15	4	1	0	0	49	51-60	35
05:00	0	0	0	0	0	0	3	32	45	12	5	0	0	0	97	46-55	77
06:00	0	0	0	0	1	1	16	59	71	21	5	0	0	0	174	46-55	130
07:00	0	0	0	0	0	0	12	87	108	35	4	0	0	0	246	46-55	195
08:00	0	0	0	0	0	1	51	165	105	24	1	0	0	0	347	46-55	270
09:00	0	0	0	1	1	11	68	181	108	19	4	0	0	0	393	46-55	289
10:00	0	0	0	0	2	9	95	173	79	13	0	0	0	0	371	41-50	268
11:00	0	0	0	3	3	10	97	184	111	18	2	0	1	0	429	46-55	295
12 PM	0	1	1	1	6	11	106	172	84	9	3	0	0	0	394	41-50	278
13:00	0	0	0	8	6	7	47	181	101	14	4	0	0	0	368	46-55	282
14:00	0	1	2	2	1	16	112	178	78	16	3	0	0	0	409	41-50	290
15:00	0	0	0	8	5	10	88	174	86	12	4	2	0	0	389	41-50	262
16:00	0	0	1	7	5	6	75	180	76	17	5	1	0	0	373	44-53	256
17:00	0	0	0	5	4	7	53	113	87	15	3	1	0	0	288	46-55	200
18:00	0	0	2	1	2	7	44	108	73	16	5	1	0	2	261	46-55	181
19:00	0	0	1	8	2	4	38	78	35	7	4	2	0	0	179	41-50	116
20:00	0	0	0	3	2	2	31	63	21	6	0	0	0	0	128	41-50	94
21:00	0	0	0	0	1	5	19	53	47	5	5	1	0	0	136	46-55	100
22:00	0	0	0	0	0	1	12	28	20	4	1	0	1	0	67	46-55	48
23:00	0	0	0	0	0	0	3	15	15	5	1	1	0	0	40	46-55	30
Total	0	2	9	47	41	109	976	2242	1387	290	65	11	3	2	5184		
Percent	0.0%	0.0%	0.2%	0.9%	0.8%	2.1%	18.8%	43.2%	26.8%	5.6%	1.3%	0.2%	0.1%	0.0%			
AM Peak			01:00	11:00	11:00	09:00	11:00	11:00	11:00	07:00	05:00	01:00	03:00		11:00		
Vol.			1_	3	3	11	97	184	111	35	5	1	1		429		
PM Peak		12:00	14:00	13:00	12:00	14:00	14:00	13:00	13:00	16:00	16:00	15:00	22:00	18:00	14:00		
Vol.		1	2	8	6	16	112	181	101	17	5	2	1	2	409		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Westbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	0	1	9	11	5	1	1	0	0	28	46-55	20
01:00	0	0	0	0	0	0	1	1	6	3	1	0	0	1	13	50-59	9
02:00	0	0	0	0	0	0	1	2	4	1	0	0	0	0	8	46-55	6
03:00	0	0	0	0	0	0	1	7	9	1	0	0	0	0	18	46-55	16
04:00	0	0	1	0	0	1	2	7	15	7	1	1	0	0	35	46-55	22
05:00	0	0	0	0	0	1	10	19	31	7	1	2	0	0	71	46-55	50
06:00	0	0	0	0	0	2	8	29	39	13	2	0	0	0	93	46-55	68
07:00	0	0	0	0	0	1	24	83	55	17	3	0	0	0	183	46-55	138
08:00	0	0	0	0	0	2	48	115	88	19	0	0	0	0	272	46-55	203
09:00	0	0	0	1	0	4	64	140	93	25	5	0	0	0	332	46-55	233
10:00	0	0	0	0	1	28	89	160	71	13	1	0	0	0	363	41-50	249
11:00	0	0	0	2	4	7	75	150	117	24	5	0	0	0	384	46-55	267
12 PM	0	0	0	2	4	7	57	180	112	19	2	0	0	0	383	46-55	292
13:00	0	0	1	5	1	9	65	159	101	17	3	0	0	0	361	46-55	260
14:00	0	0	2	2	4	7	47	158	109	18	5	0	0	0	352	46-55	267
15:00	0	0	0	2	2	4	44	128	97	16	2	2	0	0	297	46-55	225
16:00	0	0	0	5	5	9	43	121	95	18	5	0	0	1	302	46-55	216
17:00	0	0	1	7	5	3	40	99	68	13	1	1	0	0	238	46-55	167
18:00	0	0	1	2	6	1	35	65	56	13	2	1	0	0	182	46-55	121
19:00	0	0	0	0	3	9	19	54	24	3	4	0	0	0	116	46-55	78
20:00	0	0	0	1	0	2	12	30	19	8	3	0	1	0	76	46-55	49
21:00	0	0	0	0	0	1	4	15	21	11	2	0	0	2	56	46-55	36
22:00	0	0	0	0	0	1	1	13	11	0	2	0	0	0	28	46-55	24
23:00	0	0	0	0	0	0	1_	6	2	1_	0	0	0	0	10	46-55	8
Total	0	0	6	29	35	99	692	1750	1254	272	51	8	1	4	4201		
Percent	0.0%	0.0%	0.1%	0.7%	0.8%	2.4%	16.5%	41.7%	29.9%	6.5%	1.2%	0.2%	0.0%	0.1%			
AM Peak			04:00	11:00	11:00	10:00	10:00	10:00	11:00	09:00	09:00	05:00		01:00	11:00		
Vol.			1 1	2	4	28	89	160	117	25	5_	2	20.00	1_	384		
PM Peak			14:00	17:00	18:00	13:00	13:00	12:00	12:00	12:00	14:00	15:00	20:00	21:00	12:00		
Vol.			2	7	6	9	65	180	112	19	5	2	1	2	383		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Latitude: 0' 0.0000 Undefined

Westbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	0	2	6	4	0	0	0	0	0	12	45-54	10
01:00	0	0	0	0	0	0	1	2	0	0	0	0	0	0	3	40-49	3
02:00	0	0	0	0	0	0	1	2	2	2	1	0	0	0	8	51-60	4
03:00	0	0	0	0	0	0	3	11	12	6	0	1	0	0	33	46-55	23
04:00	0	0	0	0	0	0	11	34	37	12	5	0	0	0	99	46-55	71
05:00	0	0	0	3	0	7	23	109	123	37	9	0	1	0	312	46-55	232
06:00	0	1	3	4	3	5	106	253	130	23	1	0	0	0	529	46-55	383
07:00	0	0	0	2	1	17	59	166	130	31	4	0	0	0	410	46-55	296
08:00	0	0	0	1	1	2	36	109	106	10	3	0	0	0	268	46-55	215
09:00	0	0	0	0	1	5	38	128	118	18	2	1	0	0	311	46-55	246
10:00	0	0	0	0	1	7	58	107	73	13	6	1	0	0	266	46-55	180
11:00	0	0	0	1	0	2	60	122	88	23	1	1	0	0	298	46-55	210
12 PM	0	0	0	0	0	8	42	124	76	20	4	1	0	0	275	46-55	200
13:00	0	0	1	0	0	4	51	163	101	18	2	0	0	0	340	46-55	264
14:00	0	0	0	0	1	3	36	68	34	8	1	0	0	0	151	41-50	104
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	1_	4	11	8	60	527	1404	1034	221	39	5	1	0	3315		
Percent	0.0%	0.0%	0.1%	0.3%	0.2%	1.8%	15.9%	42.4%	31.2%	6.7%	1.2%	0.2%	0.0%	0.0%			
AM Peak		06:00	06:00	06:00	06:00	07:00	06:00	06:00	06:00	05:00	05:00	03:00	05:00		06:00		
Vol.		1	3	4	3	17	106	253	130	37	9	1	1		529		
PM Peak			13:00		14:00	12:00	13:00	13:00	13:00	12:00	12:00	12:00			13:00		
Vol.			1_		1	8	51	163	101	20	4	1_			340		
Total	2	12	48	240	269	768	5714	13244	9023	1964	339	61	10	12	31706		
Percent	0.0%	0.0%	0.2%	0.8%	0.8%	2.4%	18.0%	41.8%	28.5%	6.2%	1.1%	0.2%	0.0%	0.0%			

15th Percentile: 42 MPH 50th Percentile: 48 MPH 85th Percentile: 53 MPH 95th Percentile: 57 MPH

Stats 10 MPH Pace Speed : 46-55 MPH Number in Pace : 22267

Percent in Pace: 70.2%

Number of Vehicles > 40 MPH: 30367

Percent of Vehicles > 40 MPH: 95.8%

Mean Speed(Average): 49 MPH

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	0	0	0	0	15	11	62	78	48	18	3	0	1	0	236	41-50	140
14:00	1	4	1	5	14	31	80	156	114	37	7	4	1	0	455	46-55	270
15:00	1	3	3	1	16	36	113	184	116	46	8	0	0	0	527	46-55	300
16:00	0	0	4	4	10	20	88	206	157	54	12	1	0	0	556	46-55	363
17:00	0	0	0	0	5	12	51	142	136	65	11	3	1	0	426	46-55	278
18:00	0	0	0	2	2	3	33	79	107	32	11	2	0	0	271	46-55	186
19:00	0	0	0	7	3	6	32	53	56	18	3	0	0	0	178	46-55	109
20:00	0	0	0	0	3	4	26	38	45	17	3	0	1	0	137	46-55	83
21:00	0	0	0	0	0	2	3	11	23	7	4	0	0	0	50	46-55	34
22:00	0	0	2	0	0	1	6	18	9	8	3	2	0	0	49	46-55	27
23:00	0	0	0	0	0	0	6	7	10	8	11	0	0	0	32	49-58	18
Total	2	7	10	19	68	126	500	972	821	310	66	12	4	0	2917		
Percent	0.1%	0.2%	0.3%	0.7%	2.3%	4.3%	17.1%	33.3%	28.1%	10.6%	2.3%	0.4%	0.1%	0.0%			
AM Peak Vol.																	
PM Peak	14:00	14:00	16:00	19:00	15:00	15:00	15:00	16:00	16:00	17:00	16:00	14:00	13:00		16:00		
Vol.	1	4	4	7	16	36	113	206	157	65	12	4	1		556		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Eastbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	1	0	1	2	1	0	0	0	1	6	51-60	3
01:00	0	0	0	0	0	1	0	1	1	2	0	0	0	0	5	49-58	3
02:00	0	0	0	0	0	1	7	2	3	1	0	0	0	0	14	39-48	9
03:00	0	0	0	0	1	0	4	2	6	3	1	0	0	0	17	49-58	9
04:00	0	0	0	0	4	1	6	10	13	7	1	0	0	0	42	46-55	23
05:00	0	0	0	0	8	9	18	64	41	29	6	1	1	0	177	46-55	105
06:00	1	0	12	2	6	20	68	128	98	31	7	1	0	0	374	46-55	226
07:00	0	2	3	4	8	22	79	92	77	23	8	3	0	1	322	41-50	171
08:00	0	0	0	0	0	16	40	85	65	29	7	0	0	0	242	46-55	150
09:00	0	0	0	2	7	13	32	65	67	19	8	0	0	0	213	46-55	132
10:00	0	0	0	3	6	17	51	80	76	21	6	0	0	0	260	46-55	156
11:00	0	0	0	0	9	23	33	82	74	24	3	0	0	1	249	46-55	156
12 PM	0	0	0	0	4	9	44	85	76	33	8	5	1	0	265	46-55	161
13:00	0	0	0	1	4	10	52	84	79	27	6	0	1	0	264	46-55	163
14:00	0	0	1	5	10	17	64	132	109	34	6	0	0	0	378	46-55	241
15:00	0	0	1	1	9	19	79	191	125	42	8	1	0	0	476	46-55	316
16:00	0	1	0	2	6	16	53	211	182	33	5	3	2	0	514	46-55	393
17:00	0	0	3	5	15	13	47	98	114	37	8	1	1	0	342	46-55	212
18:00	0	0	0	0	3	9	35	77	80	21	2	2	1	0	230	46-55	157
19:00	0	0	0	4	3	15	59	65	29	4	2	0	0	0	181	41-50	124
20:00	0	0	0	0	1	10	13	46	28	6	4	0	0	0	108	46-55	74
21:00	0	0	0	0	0	3	11	21	29	5	1	0	0	0	70	46-55	50
22:00	0	0	0	0	0	1	11	14	16	6	0	1	1	0	50	46-55	30
23:00	0	0	0	0	0	0	5	15	4	3	2	0	0	0	29	41-50	20
Total	11	3	20	29	104	246	811	1651	1394	441	99	18	8	3	4828		
Percent	0.0%	0.1%	0.4%	0.6%	2.2%	5.1%	16.8%	34.2%	28.9%	9.1%	2.1%	0.4%	0.2%	0.1%			
AM Peak	06:00	07:00	06:00	07:00	11:00	11:00	07:00	06:00	06:00	06:00	07:00	07:00	05:00	00:00	06:00		
Vol.	1	2	12	4	9	23	79	128	98	31	8	3	1	1	374		
PM Peak		16:00	17:00	14:00	17:00	15:00	15:00	16:00	16:00	15:00	12:00	12:00	16:00		16:00		
Vol.		1	3	5	15	19	79	211	182	42	8	5	2		514		

Site Code:

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 East of Barton Hill Road East Hampton, Connecticut

Station ID: 4633

Eastbound															Latitado.	0.0000	Oridefilied
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	1	0	4	3	5	0	2	0	0	0	15	46-55	8
01:00	0	0	0	0	0	1	0	0	2	0	0	0	0	0	3	45-54	2
02:00	0	0	0	0	0	3	3	3	2	0	1	0	0	0	12	41-50	6
03:00	0	0	0	0	0	2	1	2	4	2	0	0	0	0	11	51-60	6
04:00	0	0	0	4	0	2	2	11	11	3	1	0	0	0	34	46-55	22
05:00	0	0	3	0	0	8	23	45	55	23	4	1	1	0	163	46-55	100
06:00	2	0	1	0	6	18	100	108	98	33	12	3	2	0	383	41-50	208
07:00	0	0	1	4	8	32	61	104	75	45	14	0	0	0	344	46-55	179
08:00	0	0	0	4	6	6	35	96	78	32	12	3	0	1	273	46-55	174
09:00	0	0	0	0	2	7	38	90	91	30	13	2	0	0	273	46-55	181
10:00	1	3	1	1	1	10	32	82	76	34	9	0	0	0	250	46-55	158
11:00	0	0	0	1	1	13	54	113	76	38	5	5	0	0	306	46-55	189
12 PM	0	3	8	1	8	21	62	82	61	23	2	2	0	2	275	41-50	144
13:00	0	0	0	2	5	15	58	84	110	38	4	0	0	0	316	46-55	194
14:00	0	0	1	9	21	40	103	132	142	33	9	1	0	0	491	46-55	274
15:00	0	1	9	12	15	32	53	163	146	59	11	0	0	0	501	46-55	309
16:00	0	0	2	8	11	17	55	185	154	74	16	1	1	0	524	46-55	339
17:00	0	0	2	7	12	26	48	144	120	49	12	2	1	0	423	46-55	264
18:00	0	0	0	2	13	9	33	91	100	38	11	0	1	0	298	46-55	191
19:00	0	0	0	0	9	8	41	64	67	17	6	1	0	0	213	46-55	131
20:00	0	0	0	1	1	6	32	51	42	16	7	0	1	1	158	46-55	93
21:00	0	0	0	0	0	9	21	33	23	9	2	2	0	0	99	45-54	56
22:00	0	0	0	1	1	1		12	15	12	3	0	0	0	52	46-55	27
23:00	0	7	0	0	0	11	5	17	9	10	11	0	0	0	43	46-55	26
Total	3		28	57	121	287	871	1715	1562	618	157	23	7	4	5460		
Percent	0.1%	0.1%	0.5%	1.0%	2.2%	5.3%	16.0%	31.4%	28.6%	11.3%	2.9%	0.4%	0.1%	0.1%	00.00		
AM Peak	06:00	10:00	05:00	04:00	07:00	07:00	06:00	11:00	06:00	07:00	07:00	11:00	06:00	08:00	06:00		
Vol.	2	3	3	4	8 44.00	32	100	113	98	45	14	5	16:00	12:00	383		
PM Peak		12:00	15:00	15:00	14:00	14:00	14:00	16:00	16:00	16:00	16:00	12:00	16:00	12:00	16:00		
Vol.		3	9	12	21	40	103	185	154	74	16	2	1	2	524		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Eastbound															Lamuuc.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	1	2	3	4	0	0	2	0	0	12	46-55	7
01:00	0	0	0	0	0	2	1	2	2	1	1	0	0	0	9	46-55	4
02:00	0	0	0	0	2	0	3	3	4	1	0	1	1	0	15	46-55	7
03:00	0	0	1	0	0	0	2	11	5	1	0	0	0	0	20	46-55	16
04:00	0	0	0	0	0	3	6	15	18	4	3	0	0	0	49	46-55	33
05:00	0	0	0	1	4	7	16	51	52	32	10	0	0	0	173	46-55	103
06:00	0	0	1	4	5	17	61	126	122	53	18	1	0	0	408	46-55	248
07:00	0	0	0	2	11	15	55	88	111	55	13	7	0	0	357	46-55	199
08:00	0	10	2	6	8	17	40	75	72	34	5	2	0	0	271	46-55	147
09:00	0	0	2	4	2	8	42	76	90	37	10	2	0	0	273	46-55	166
10:00	0	0	2	4	5	19	75	101	91	28	8	0	0	0	333	46-55	192
11:00	1	3	1	3	14	30	66	114	81	32	0	1	0	0	346	46-55	195
12 PM	0	1	2	2	8	19	43	102	97	24	3	1	0	0	302	46-55	199
13:00	0	0	0	1	2	22	77	114	112	35	7	0	0	0	370	46-55	226
14:00	1	2	10	30	14	31	75	126	122	38	9	2	1	0	461	46-55	248
15:00	2	5	5	10	11	29	109	176	132	42	12	0	0	0	533	46-55	308
16:00	3	5	15	14	27	29	94	171	164	28	8	1	0	0	559	46-55	335
17:00	0	1	2	15	25	20	65	131	118	34	6	4	0	0	421	46-55	249
18:00	0	1	4	8	18	18	42	92	56	27	4	0	1	0	271	46-55	148
19:00	0	0	1	2	0	15	42	71	58	11	2	0	0	0	202	46-55	129
20:00	0	0	1	1	0	10	22	48	39	19	3	0	0	0	143	46-55	87
21:00	0	0	0	0	0	6	30	29	30	9	2	0	0	1	107	41-50	59
22:00	0	0	0	0	0	6	15	18	16	7	6	2	1	0	71	46-55	34
23:00	0	0	0	0	0	1_	13	22	14	8	0	1	0	0	59	44-53	36
Total	7	28	49	107	156	325	996	1765	1610	560	130	27	4	1	5765		
Percent	0.1%	0.5%	0.8%	1.9%	2.7%	5.6%	17.3%	30.6%	27.9%	9.7%	2.3%	0.5%	0.1%	0.0%			
AM Peak	11:00	08:00	08:00	08:00	11:00	11:00	10:00	06:00	06:00	07:00	06:00	07:00	02:00		06:00		
Vol.	1	10	2	6	14	30	75	126	122	55	18	7	1		408		
PM Peak	16:00	15:00	16:00	14:00	16:00	14:00	15:00	15:00	16:00	15:00	15:00	17:00	14:00	21:00	16:00		
Vol.	3	5	15	30	27	31	109	176	164	42	12	4	1	1	559		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	0	2	1	5	12	4	1	1	1	1	28	46-55	17
01:00	0	0	0	1	0	3	2	5	3	0	0	1	0	0	15	44-53	8
02:00	0	0	0	0	0	0	2	4	2	2	1	0	0	0	11	46-55	6
03:00	0	0	0	0	0	0	2	0	5	1	0	0	0	1	9	49-58	6
04:00	0	0	0	1	1	3	4	3	11	1	2	0	1	0	27	46-55	14
05:00	0	0	0	0	0	3	9	20	31	11	6	1	0	0	81	46-55	51
06:00	0	0	0	0	2	4	21	33	66	32	15	2	0	0	175	46-55	99
07:00	0	1	0	0	2	7	19	81	93	43	6	2	0	0	254	46-55	174
08:00	1	0	3	1	2	6	36	110	122	42	10	7	1	0	341	46-55	232
09:00	0	0	0	0	3	17	44	106	131	58	8	2	0	0	369	46-55	237
10:00	1	3	0	1	4	4	45	149	110	45	14	1	1	0	378	46-55	259
11:00	0	0	0	1	2	11	32	142	118	44	13	0	0	0	363	46-55	260
12 PM	0	0	0	1	7	17	60	130	109	41	10	3	0	1	379	46-55	239
13:00	0	0	1	1	3	14	65	141	121	32	6	1	0	0	385	46-55	262
14:00	1	1	1	1	6	11	68	124	102	39	10	5	1	0	370	46-55	226
15:00	0	0	1	3	6	21	59	114	124	34	6	2	0	0	370	46-55	238
16:00	0	0	4	7	10	13	58	153	99	40	7	1	1	0	393	46-55	252
17:00	0	2	4	2	11	15	49	111	103	36	9	1	0	0	343	46-55	214
18:00	0	0	0	1	7	8	34	66	76	30	10	1	1	0	234	46-55	142
19:00	0	1	1	2	4	7	39	59	60	17	2	1	1	0	194	46-55	119
20:00	0	0	0	1	2	5	32	57	49	14	2	1	0	1	164	46-55	106
21:00	0	0	0	0	0	12	26	45	36	4	2	0	0	0	125	46-55	81
22:00	0	0	0	0	0	4	13	48	24	15	3	0	0	1	108	46-55	72
23:00	0	0	0	0	0	2	6	14	13	5_	6	2	1	0	49	46-55	27
Total	3	8	15	24	72	189	726	1720	1620	590	149	35	9	5	5165		
Percent	0.1%	0.2%	0.3%	0.5%	1.4%	3.7%	14.1%	33.3%	31.4%	11.4%	2.9%	0.7%	0.2%	0.1%	40.00		
AM Peak	08:00	10:00	08:00	01:00	10:00	09:00	10:00	10:00	09:00	09:00	06:00	08:00	00:00	00:00	10:00		
Vol.	1 1 1 2 2	33	3	1 1 2 2 2	44	17	45	149	131	58	15	11.00	1 1 1 2 2	1 1 2 2 2	378		
PM Peak	14:00	17:00	16:00	16:00	17:00	15:00	14:00	16:00	15:00	12:00	12:00	14:00	14:00	12:00	16:00		
Vol.	1	2	4	7	11	21	68	153	124	41	10	5	1	1	393		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Eastbound															Lantado.	0.0000	Oridefilied
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	0	6	9	4	6	3	2	0	0	30	41-50	15
01:00	0	0	0	0	0	0	1	1	6	2	0	0	0	0	10	51-60	8
02:00	0	0	0	0	0	0	0	3	0	2	0	0	0	0	5	41-50	3
03:00	0	0	0	0	0	0	0	3	0	2	1	0	0	0	6	56-65	3
04:00	0	0	0	0	0	0	3	2	3	1	2	0	0	1	12	46-55	5
05:00	0	0	0	0	0	1	7	12	14	7	0	0	0	0	41	46-55	26
06:00	0	0	0	0	0	7	25	26	45	16	0	0	0	0	119	46-55	71
07:00	0	0	0	0	1	3	19	46	38	26	11	0	3	0	147	46-55	84
08:00	0	0	1	0	2	3	32	89	72	21	5	0	0	0	225	46-55	161
09:00	0	0	0	2	0	6	42	77	103	43	10	4	0	0	287	46-55	180
10:00	1	1	0	2	6	23	57	137	80	27	11	0	1	0	346	46-55	217
11:00	0	0	0	1	1	6	41	117	132	38	14	6	2	0	358	46-55	249
12 PM	0	0	0	3	6	12	44	109	119	60	19	1	0	1	374	46-55	228
13:00	0	0	0	2	6	13	32	105	131	55	11	0	0	0	355	46-55	236
14:00	0	0	0	2	0	5	27	83	113	64	11	5	1	0	311	46-55	196
15:00	0	0	0	0	5	17	27	112	129	39	7	2	0	0	338	46-55	241
16:00	0	1	5	8	13	11	23	62	113	68	12	1	1	0	318	51-60	181
17:00	0	0	0	3	5	11	26	73	83	46	9	2	0	0	258	46-55	156
18:00	0	0	0	3	6	0	10	50	68	31	7	0	0	0	175	46-55	118
19:00	0	0	0	1	2	4	20	49	29	9	2	1	0	0	117	46-55	78
20:00	0	0	0	0	2	3	9	25	33	12	4	0	0	1	89	46-55	58
21:00	0	0	0	0	0	0	8	13	20	3	0	3	0	0	47	46-55	33
22:00	0	0	0	0	1	2	5	12	13	8	0	2	0	0	43	46-55	25
23:00	0	0	0	0	0	0	0	8	3	2	2	0	1	1	17	46-55	11_
Total	1	2	6	27	56	127	464	1223	1351	588	141	29	9	4	4028		
Percent	0.0%	0.0%	0.1%	0.7%	1.4%	3.2%	11.5%	30.4%	33.5%	14.6%	3.5%	0.7%	0.2%	0.1%			
AM Peak	10:00	10:00	08:00	09:00	10:00	10:00	10:00	10:00	11:00	09:00	11:00	11:00	07:00	04:00	11:00		
Vol.	1	1	1_	2	6	23	57	137	132	43	14	6	3	1	358		
PM Peak		16:00	16:00	16:00	16:00	15:00	12:00	15:00	13:00	16:00	12:00	14:00	14:00	12:00	12:00		
Vol.		1	5	8	13	17	44	112	131	68	19	5	1	1	374		

Route 66 East of Barton Hill Road East Hampton, Connecticut

Site Code: Station ID: 4633

Latitude: 0' 0.0000 Undefined

Eastbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	0	2	5	2	0	0	0	0	0	9	46-55	7
01:00	0	0	0	0	0	0	0	1	2	0	1	0	0	0	4	45-54	3
02:00	0	0	0	0	0	0	2	0	1	2	0	0	0	0	5	50-59	3
03:00	0	1	0	0	3	1	1	4	2	1	1	0	0	0	14	46-55	6
04:00	0	0	0	0	0	1	8	12	15	5	1	0	0	0	42	46-55	27
05:00	0	0	0	0	1	6	21	52	53	25	8	1	0	1	168	46-55	105
06:00	0	0	1	1	2	15	63	164	90	27	10	4	0	0	377	46-55	254
07:00	0	0	0	0	2	13	56	94	131	55	6	1	1	0	359	46-55	225
08:00	0	0	0	0	0	3	20	64	112	38	9	3	0	0	249	46-55	176
09:00	0	0	0	0	3	4	24	62	77	35	8	1	1	1	216	46-55	139
10:00	0	0	1	0	3	30	40	78	75	25	9	0	1	0	262	46-55	153
11:00	0	0	0	0	0	11	47	79	95	44	12	1	0	0	289	46-55	174
12 PM	0	0	0	3	3	5	34	81	101	37	12	3	0	0	279	46-55	182
13:00	0	0	0	1	3	5	29	78	127	46	19	4	0	0	312	46-55	205
14:00	0	0	0	1	7	10	39	56	55	18	4	0	0	0	190	46-55	111
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	11	2	6	27	104	386	830	938	358	100	18	3	2	2775		
Percent	0.0%	0.0%	0.1%	0.2%	1.0%	3.7%	13.9%	29.9%	33.8%	12.9%	3.6%	0.6%	0.1%	0.1%			
AM Peak		03:00	06:00	06:00	03:00	10:00	06:00	06:00	07:00	07:00	11:00	06:00	07:00	05:00	06:00		
Vol.		11	11	1	3	30	63	164	131	55	12	4	1	1	377		
PM Peak				12:00	14:00	14:00	14:00	12:00	13:00	13:00	13:00	13:00			13:00		
Vol.				3	7	10	39	81	127	46	19	4			312		
Total	17	56	130	269	604	1404	4754	9876	9296	3465	842	162	44	19	30938		
Percent	0.1%	0.2%	0.4%	0.9%	2.0%	4.5%	15.4%	31.9%	30.0%	11.2%	2.7%	0.5%	0.1%	0.1%			

15th Percentile: 42 MPH 50th Percentile: 49 MPH 85th Percentile: 54 MPH 95th Percentile: 59 MPH

Stats 10 MPH Pace Speed: 46-55 MPH Number in Pace: 19172

Percent in Pace : 62.0%

Number of Vehicles > 40 MPH : 28458

Percent of Vehicles > 40 MPH : 92.0%

Mean Speed(Average) : 49 MPH

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	0	0	0	1	0	0	0	0	0	0	0	0	0	0	1	19-28	1
14:00	2	27	88	157	107	29	4	0	0	0	0	0	0	0	414	26-35	264
15:00	4	27	93	177	130	31	4	0	0	0	0	0	0	0	466	26-35	307
16:00	22	47	126	210	112	18	1	0	0	0	0	0	0	0	536	21-30	336
17:00	34	39	171	239	121	9	0	0	0	0	0	0	0	0	613	21-30	410
18:00	1	11	64	135	157	25	6	0	0	0	0	0	0	0	399	26-35	292
19:00	1	3	34	91	96	31	7	1	0	0	0	0	0	0	264	26-35	187
20:00	3	8	28	45	70	34	4	0	0	0	0	0	0	0	192	26-35	115
21:00	1	8	20	20	50	29	6	1	0	0	0	0	0	0	135	31-40	79
22:00	0	1	17	13	30	27	2	1	0	0	0	0	0	0	91	31-40	57
23:00	0	11	6	5	6	14	4	1	0	0	0	0	0	0	37	31-40	20
Total	68	172	647	1093	879	247	38	4	0	0	0	0	0	0	3148		
Percent	2.2%	5.5%	20.6%	34.7%	27.9%	7.8%	1.2%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak Vol.																	
PM Peak	17:00	16:00	17:00	17:00	18:00	20:00	19:00	19:00							17:00		
Vol.	34	47	171	239	157	34	7	1							613		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Westbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	2	2	2	4	6	2	1	0	0	0	0	0	0	19	31-40	10
01:00	0	1	1	1	3	5	3	0	0	0	0	0	0	0	14	31-40	8
02:00	0	1	0	1	3	0	0	0	0	0	0	0	0	0	5	26-35	4
03:00	0	0	1	1	6	5	2	1	0	0	0	0	0	0	16	31-40	11
04:00	0	1	5	6	12	4	4	2	1	0	0	0	0	0	35	26-35	18
05:00	4	3	9	21	29	22	2	3	0	0	0	0	0	0	93	29-38	51
06:00	0	3	31	65	91	59	11	0	0	0	0	0	0	0	260	26-35	156
07:00	0	16	73	122	140	47	4	0	0	0	0	0	0	0	402	26-35	262
08:00	3	11	51	119	111	50	5	1	0	0	0	0	0	0	351	26-35	230
09:00	0	18	40	93	76	40	5	0	0	0	0	0	0	0	272	26-35	169
10:00	1	12	34	102	84	36	6	0	0	0	0	0	0	0	275	26-35	186
11:00	3	10	38	100	97	32	4	0	0	0	0	0	0	0	284	26-35	197
12 PM	2	10	66	141	97	26	1	0	0	0	0	0	0	0	343	26-35	238
13:00	1	8	32	95	114	40	7	0	0	0	0	0	0	0	297	26-35	209
14:00	3	13	61	86	107	45	5	0	0	0	0	0	0	0	320	26-35	193
15:00	7	21	74	153	135	32	4	0	0	0	0	0	0	0	426	26-35	288
16:00	5	21	94	180	150	53	10	0	0	0	0	0	0	0	513	26-35	330
17:00	7	23	83	172	173	48	4	0	0	0	0	0	0	0	510	26-35	345
18:00	1	8	72	137	123	39	3	1	0	0	0	0	0	0	384	26-35	260
19:00	2	9	21	69	97	36	5	0	0	0	0	0	0	0	239	26-35	166
20:00	1	6	11	44	70	37	3	0	0	0	0	0	0	0	172	26-35	114
21:00	0	3	17	25	41	29	13	0	1	0	0	0	0	0	129	31-40	70
22:00	1	1	7	17	25	25	5	0	1	0	0	0	0	0	82	31-40	50
23:00	0	1_	5	6	7	12	1	1	1	0	0	0	0	0	34	31-40	19
Total	41	202	828	1758	1795	728	109	10	4	0	0	0	0	0	5475		
Percent	0.7%	3.7%	15.1%	32.1%	32.8%	13.3%	2.0%	0.2%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	05:00	09:00	07:00	07:00	07:00	06:00	06:00	05:00	04:00						07:00		
Vol.	4	18	73	122	140	59	11	3	11						402		
PM Peak	15:00	17:00	16:00	16:00	17:00	16:00	21:00	18:00	21:00						16:00		
Vol.	7	23	94	180	173	53	13	1	1						513		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	1	3	6	6	2	0	0	0	0	0	0	0	18	31-40	12
01:00	1	0	2	0	2	4	1	0	0	0	0	0	0	0	10	31-40	6
02:00	0	0	0	0	1	2	2	1	0	0	0	0	0	0	6	36-45	4
03:00	0	0	4	2	7	2	0	0	0	0	0	0	0	0	15	31-40	9
04:00	0	4	5	5	8	12	4	1	0	0	0	0	0	0	39	31-40	20
05:00	0	4	8	24	26	26	10	2	1	0	0	0	0	0	101	31-40	52
06:00	1	4	31	72	103	45	14	1	0	0	0	0	0	0	271	26-35	175
07:00	11	19	73	139	125	36	1	0	0	0	0	0	0	0	404	26-35	264
08:00	1	4	45	123	127	54	4	0	0	0	0	0	0	0	358	26-35	250
09:00	1	13	59	95	95	27	4	0	0	0	0	0	0	0	294	26-35	190
10:00	4	11	43	124	85	33	4	0	0	0	0	0	0	0	304	26-35	209
11:00	3	21	75	145	96	25	4	0	0	0	0	0	0	0	369	26-35	241
12 PM	9	20	69	132	124	31	1	1	0	0	0	0	0	0	387	26-35	256
13:00	5	13	65	127	121	33	3	0	0	0	0	0	0	0	367	26-35	248
14:00	2	16	57	143	126	39	5	0	0	0	0	0	0	0	388	26-35	269
15:00	4	22	105	179	105	35	3	0	0	0	0	0	0	0	453	21-30	284
16:00	13	28	122	211	144	35	5	0	0	0	0	0	0	0	558	26-35	355
17:00	10	30	70	178	182	53	9	0	0	0	0	0	0	0	532	26-35	360
18:00	2	14	73	129	153	52	8	0	0	0	0	0	0	0	431	26-35	282
19:00	3	7	33	83	89	41	7	1	0	0	0	0	0	0	264	26-35	172
20:00	1	4	21	48	102	32	7	1	0	0	0	0	0	0	216	26-35	150
21:00	1	4	5	30	60	28	7	0	0	0	0	0	0	0	135	26-35	90
22:00	0	2	6	12	39	22	12	0	0	0	0	0	0	0	93	31-40	61
23:00	1	2	2	7	15	10	2	1	0	0	0	0	0	0	40	31-40	25
Total	73	242	974	2011	1941	683	119	9	1	0	0	0	0	0	6053		
Percent	1.2%	4.0%	16.1%	33.2%	32.1%	11.3%	2.0%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	07:00	11:00	11:00	11:00	08:00	08:00	06:00	05:00	05:00						07:00		
Vol.	11	21	75	145	127	54	14	2	1						404		
PM Peak	16:00	17:00	16:00	16:00	17:00	17:00	22:00	12:00							16:00		
Vol.	13	30	122	211	182	53	12	1							558		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Westbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	1	5	4	5	6	3	0	1	0	0	0	0	0	25	30-39	11
01:00	0	1	1	4	3	1	0	0	0	0	0	0	0	0	10	25-34	7
02:00	0	1	0	1	1	3	2	0	0	0	0	0	0	0	8	36-45	5
03:00	1	1	2	0	6	2	1	0	0	0	0	0	0	0	13	31-40	8
04:00	0	2	3	3	9	12	3	2	1	0	0	0	0	0	35	31-40	21
05:00	1	4	9	28	26	26	14	0	2	0	0	0	0	0	110	26-35	54
06:00	1	4	39	75	107	49	11	1	0	0	0	0	0	0	287	26-35	182
07:00	14	15	77	135	134	48	4	0	0	0	0	0	0	0	427	26-35	269
08:00	5	23	60	131	102	24	10	0	0	0	0	0	0	0	355	26-35	233
09:00	0	10	64	118	104	30	3	0	0	0	0	0	0	0	329	26-35	222
10:00	1	18	55	106	104	25	4	0	0	0	0	0	0	0	313	26-35	210
11:00	3	15	71	155	117	27	1	0	0	0	0	0	0	0	389	26-35	272
12 PM	2	22	89	162	105	27	0	0	0	0	0	0	0	0	407	26-35	267
13:00	7	27	89	114	99	30	5	0	0	0	0	0	0	0	371	26-35	213
14:00	1	5	41	118	122	54	5	1	0	0	0	0	0	0	347	26-35	240
15:00	3	12	94	195	121	28	1	1	0	0	0	0	0	0	455	26-35	316
16:00	8	41	120	201	136	27	3	0	0	0	0	0	0	0	536	26-35	337
17:00	9	26	125	232	142	25	4	0	0	0	0	0	0	0	563	26-35	374
18:00	2	5	65	145	156	54	1	0	0	0	0	0	0	0	428	26-35	301
19:00	2	5	47	73	80	44	11	0	0	0	0	0	0	0	262	26-35	153
20:00	1	4	20	46	73	50	11	1	0	0	0	0	0	0	206	31-40	123
21:00	0	0	12	30	50	34	13	4	1	0	0	0	0	0	144	31-40	84
22:00	0	0	13	24	44	27	9	0	0	0	0	0	0	0	117	31-40	71
23:00	2	2	7	11	30	27	12	0	0	0	0	0	0	0	91	31-40	57
Total	63	244	1108	2111	1876	680	131	10	5	0	0	0	0	0	6228		
Percent	1.0%	3.9%	17.8%	33.9%	30.1%	10.9%	2.1%	0.2%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	07:00	08:00	07:00	11:00	07:00	06:00	05:00	04:00	05:00						07:00		
Vol.	14	23	77	155	134	49	14	2	2						427		
PM Peak	17:00	16:00	17:00	17:00	18:00	14:00	21:00	21:00	21:00						17:00		
Vol.	9	41	125	232	156	54	13	4	1						563		

Site Code:

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 East of Main Street # 2 East Hampton, Connecticut

Station ID: 4640

Westbound															Latitado.	0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	2	7	7	14	10	4	2	1	1	0	0	0	0	48	31-40	24
01:00	0	0	0	1	8	5	4	1	2	0	0	0	0	0	21	31-40	13
02:00	0	1	1	2	3	3	3	0	0	0	0	0	0	0	13	29-38	6
03:00	0	0	3	2	2	2	0	1	0	0	0	0	0	0	10	21-30	5
04:00	0	1	0	1	2	5	3	2	0	0	0	0	0	0	14	34-43	8
05:00	1	2	5	8	11	14	9	1	0	0	0	0	0	0	51	31-40	25
06:00	0	5	7	37	25	23	8	1	0	0	0	0	0	0	106	26-35	62
07:00	0	6	22	60	77	28	4	1	0	0	0	0	0	0	198	26-35	137
08:00	2	16	44	105	89	38	7	1	0	0	0	0	0	0	302	26-35	194
09:00	6	33	99	164	82	22	1	0	0	0	0	0	0	0	407	21-30	263
10:00	1	29	104	173	90	25	1	0	0	0	0	0	0	0	423	21-30	277
11:00	11	30	134	158	81	20	0	0	0	0	0	0	0	0	434	21-30	292
12 PM	14	42	131	197	90	10	1	0	0	0	0	0	0	0	485	21-30	328
13:00	6	19	75	198	127	21	2	0	0	0	0	0	0	0	448	26-35	325
14:00	7	23	74	171	140	20	2	0	0	0	0	0	0	0	437	26-35	311
15:00	2	10	74	168	153	25	2	0	0	0	0	0	0	0	434	26-35	321
16:00	5	10	72	136	155	35	5	1	0	0	0	0	0	0	419	26-35	291
17:00	5	19	67	103	142	47	7	0	0	0	0	0	0	0	390	26-35	245
18:00	0	10	39	102	129	59	7	0	0	0	0	0	0	0	346	26-35	231
19:00	2	1	24	84	108	48	8	1	0	0	0	0	0	0	276	26-35	192
20:00	3	7	35	53	64	42	0	0	0	0	0	0	0	0	204	26-35	117
21:00	0	6	16	32	54	41	1	1	0	0	0	0	0	0	151	31-40	95
22:00	0	4	9	36	48	36	12	3	0	0	0	0	0	0	148	30-39	84
23:00	0	1_	11	15	33	14	10	0	0	0	0	0	0	0	84	26-35	48_
Total	65	277	1053	2013	1727	593	101	16	3	1	0	0	0	0	5849		
Percent	1.1%	4.7%	18.0%	34.4%	29.5%	10.1%	1.7%	0.3%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	11:00	09:00	11:00	10:00	10:00	08:00	05:00	00:00	01:00	00:00					11:00		
Vol.	11	33	134	173	90	38	9	2	2	1					434		
PM Peak	12:00	12:00	12:00	13:00	16:00	18:00	22:00	22:00							12:00		
Vol.	14	42	131	198	155	59	12	3							485		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Westbound															Lalliuue.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	9	4	14	12	3	3	0	0	0	0	0	0	45	31-40	26
01:00	1	0	3	3	8	10	10	1	0	0	0	0	0	0	36	35-44	20
02:00	0	1	1	1	4	6	5	0	0	0	0	0	0	0	18	34-43	11
03:00	0	0	2	0	4	2	1	0	0	0	0	0	0	0	9	31-40	6
04:00	0	2	2	1	4	3	1	0	0	0	0	0	0	0	13	30-39	7
05:00	3	1	4	10	5	8	4	1	0	0	0	0	0	0	36	24-33	15
06:00	0	4	9	13	21	14	11	0	0	0	0	0	0	0	72	29-38	35
07:00	0	5	19	27	26	22	7	0	0	0	0	0	0	0	106	26-35	53
08:00	3	6	20	54	87	36	11	1	0	0	0	0	0	0	218	26-35	141
09:00	2	12	41	93	87	28	1	0	0	0	0	0	0	0	264	26-35	180
10:00	4	23	79	176	91	17	2	0	0	0	0	0	0	0	392	26-35	267
11:00	2	21	71	131	105	23	2	0	0	0	0	0	0	0	355	26-35	236
12 PM	3	27	90	154	94	35	4	0	0	0	0	0	0	0	407	26-35	248
13:00	2	18	69	173	100	26	3	0	0	0	0	0	0	0	391	26-35	273
14:00	1	17	70	165	118	27	1	0	0	0	0	0	0	0	399	26-35	283
15:00	2	12	73	155	101	47	4	0	0	0	0	0	0	0	394	26-35	256
16:00	0	11	58	138	125	48	6	0	0	0	0	0	0	0	386	26-35	263
17:00	1	8	43	101	134	65	13	0	0	0	0	0	0	0	365	26-35	235
18:00	0	1	26	74	110	45	12	1	0	0	0	0	0	0	269	26-35	184
19:00	0	4	13	49	80	49	9	0	0	0	0	0	0	0	204	26-35	129
20:00	0	3	17	30	63	37	9	1	0	0	0	0	0	0	160	31-40	100
21:00	1	1	11	11	30	26	8	2	0	0	0	0	0	0	90	31-40	56
22:00	0	2	11	12	20	17	4	2	0	0	0	0	0	0	68	31-40	37
23:00	0	0	1_	5	11	5	6	1	0	0	0	0	0	0	29	26-35	16
Total	25	179	742	1580	1442	608	137	13	0	0	0	0	0	0	4726		
Percent	0.5%	3.8%	15.7%	33.4%	30.5%	12.9%	2.9%	0.3%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	10:00	10:00	10:00	10:00	11:00	08:00	06:00	00:00							10:00		
Vol.	44	23	79	176	105	36	11	3							392		
PM Peak	12:00	12:00	12:00	13:00	17:00	17:00	17:00	21:00							12:00		
Vol.	3	27	90	173	134	65	13	2							407		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Latitude: 0' 0.0000 Undefined

Westbound																0.0000	0.1.4004
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	1	3	5	2	1	2	0	0	0	0	0	0	14	26-35	8
01:00	0	0	0	2	4	9	0	0	0	0	0	0	0	0	15	31-40	13
02:00	0	0	1	1	1	1	0	0	0	0	0	0	0	0	4	19-28	2
03:00	0	0	0	2	5	2	1	0	0	0	0	0	0	0	10	31-40	7
04:00	0	2	6	10	6	9	1	1	1	0	0	0	0	0	36	21-30	16
05:00	1	3	8	14	26	28	10	1	0	0	0	0	0	0	91	31-40	54
06:00	1	8	33	89	93	46	14	0	0	0	0	0	0	0	284	26-35	182
07:00	0	6	49	141	174	47	3	0	0	0	0	0	0	0	420	26-35	315
08:00	0	11	45	143	141	41	4	1	0	0	0	0	0	0	386	26-35	284
09:00	0	12	42	84	82	42	4	2	0	0	0	0	0	0	268	26-35	166
10:00	3	22	44	92	96	40	3	0	0	0	0	0	0	0	300	26-35	188
11:00	4	6	46	100	96	34	4	0	0	0	0	0	0	0	290	26-35	196
12 PM	1	13	89	137	99	14	4	0	1	0	0	0	0	0	358	26-35	236
13:00	1	9	62	137	94	26	1	0	0	0	0	0	0	0	330	26-35	231
14:00	3	11	80	138	94	23	5	2	0	0	0	0	0	0	356	26-35	232
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	14	103	506	1093	1016	364	55	9	2	0	0	0	0	0	3162		
Percent	0.4%	3.3%	16.0%	34.6%	32.1%	11.5%	1.7%	0.3%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	11:00	10:00	07:00	08:00	07:00	07:00	06:00	00:00	04:00						07:00		
Vol.	4	22	49	143	174	47	14	2	11						420		
PM Peak	14:00	12:00	12:00	14:00	12:00	13:00	14:00	14:00	12:00						12:00		
Vol.	3	13	89	138	99	26	5	2	11						358		
_ Total	349	1419	5858	11659	10676	3903	690	71	15	1	0	0	0	0	34641		
Percent	1.0%	4.1%	16.9%	33.7%	30.8%	11.3%	2.0%	0.2%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%			

15th Percentile: 22 MPH 50th Percentile: 29 MPH 85th Percentile: 34 MPH 95th Percentile: 38 MPH

Stats 10 MPH Pace Speed: 26-35 MPH Number in Pace: 22335

Percent in Pace : 64.5%

Number of Vehicles > 40 MPH : 777

Percent of Vehicles > 40 MPH : 2.2%

Mean Speed(Average) : 30 MPH

Site Code:

Station ID: 4640

Connecticut Counts LLC Kensington, Connecticut 06037 (860) 828-1693

Route 66 East of Main Street # 2 East Hampton, Connecticut

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	0	0	0	0	1	0	0	0	0	0	0	0	0	0	1	24-33	1
14:00	11	32	89	143	104	66	14	1	0	0	0	0	0	0	460	26-35	247
15:00	10	40	77	172	163	60	16	1	0	0	0	0	0	0	539	26-35	335
16:00	26	63	112	181	135	62	9	0	0	0	0	0	0	0	588	26-35	316
17:00	18	62	140	165	136	39	4	1	0	0	0	0	0	0	565	21-30	305
18:00	13	20	55	145	176	66	18	1	0	0	0	0	0	0	494	26-35	321
19:00	10	9	34	99	112	41	22	3	0	0	0	0	0	0	330	26-35	211
20:00	9	6	14	48	67	60	20	2	0	0	0	0	0	0	226	31-40	127
21:00	6	1	10	25	45	22	18	2	0	1	0	0	0	0	130	26-35	70
22:00	1	1	2	9	23	12	6	2	1	0	0	0	0	0	57	31-40	35
23:00	11	0	2	1	3	14	11	1	1	0	0	0	0	0	34	36-45	25
Total	105	234	535	988	965	442	138	14	2	1	0	0	0	0	3424		
Percent	3.1%	6.8%	15.6%	28.9%	28.2%	12.9%	4.0%	0.4%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak																	
Vol.																	
PM Peak	16:00	16:00	17:00	16:00	18:00	14:00	19:00	19:00	22:00	21:00					16:00		
Vol.	26	63	140	181	176	66	22	3	1	1					588		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Eastbound															Latitude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	1	3	12	8	3	2	0	0	0	0	0	0	29	31-40	20
01:00	0	1	0	2	3	1	0	0	0	1	0	0	0	0	8	26-35	5
02:00	0	0	0	0	1	3	1	0	0	0	0	0	0	0	5	36-45	4
03:00	0	0	0	0	6	4	2	1	0	0	0	0	0	0	13	31-40	10
04:00	0	1	2	5	16	16	0	3	0	0	0	0	0	0	43	31-40	32
05:00	1	8	17	21	35	19	7	2	1	0	0	0	0	0	111	26-35	56
06:00	2	8	36	62	94	78	26	2	1	0	0	0	0	0	309	31-40	172
07:00	13	30	90	154	148	68	13	1	0	0	0	0	0	0	517	26-35	302
08:00	10	25	92	125	136	70	14	3	1	0	0	0	0	0	476	26-35	261
09:00	11	23	49	113	97	47	9	0	0	0	0	0	0	0	349	26-35	210
10:00	7	15	52	99	83	56	10	1	1	0	0	0	0	0	324	26-35	182
11:00	7	23	55	116	112	53	13	3	0	0	0	0	0	0	382	26-35	228
12 PM	11	23	63	129	114	56	6	0	0	0	0	0	0	0	402	26-35	243
13:00	3	14	51	123	104	61	12	1	0	0	0	0	0	0	369	26-35	227
14:00	7	21	60	108	121	59	12	2	0	0	0	0	0	0	390	26-35	229
15:00	11	30	71	148	139	82	14	3	0	0	0	0	0	0	498	26-35	287
16:00	11	14	74	165	153	90	11	0	0	0	0	0	0	0	518	26-35	318
17:00	16	27	66	145	161	102	29	3	0	0	0	0	0	0	549	26-35	306
18:00	9	10	42	115	131	61	19	1	1	0	0	0	0	0	389	26-35	246
19:00	8	10	27	61	101	49	19	3	1	0	0	0	0	0	279	26-35	162
20:00	1	6	15	37	75	51	10	1	0	0	0	0	0	0	196	31-40	126
21:00	4	3	9	25	34	27	15	3	0	0	0	0	0	0	120	31-40	61
22:00	1	0	5	8	20	19	10	1	2	0	0	0	0	0	66	31-40	39
23:00	1	0	1_	5	12	27	8	3	1	0	0	0	0	0	58	31-40	39
Total	134	292	878	1769	1908	1107	263	39	9	11	0	0	0	0	6400		
Percent	2.1%	4.6%	13.7%	27.6%	29.8%	17.3%	4.1%	0.6%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	07:00	07:00	08:00	07:00	07:00	06:00	06:00	04:00	05:00	01:00					07:00		
Vol.	13	30	92	154	148	78	26	3	1	1					517		
PM Peak	17:00	15:00	16:00	16:00	17:00	17:00	17:00	15:00	22:00						17:00		
Vol.	16	30	74	165	161	102	29	3	2						549		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Station ID: 4640

Site Code:

Eastbound															Latitado.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	3	5	7	5	1	0	0	0	0	0	0	21	31-40	12
01:00	1	0	1	0	2	3	4	1	0	0	0	0	0	0	12	36-45	7
02:00	0	0	0	1	2	1	0	0	0	0	0	0	0	0	4	25-34	3
03:00	0	0	0	0	9	4	1	1	0	0	0	0	0	0	15	31-40	13
04:00	0	0	0	4	6	16	6	1	1	0	0	0	0	0	34	31-40	22
05:00	2	5	13	15	26	24	7	4	0	0	0	0	0	0	96	31-40	50
06:00	6	15	42	77	97	59	23	4	0	0	0	0	0	0	323	26-35	174
07:00	15	39	107	148	133	68	19	1	1	0	0	0	0	0	531	26-35	281
08:00	15	22	79	109	165	75	17	1	0	0	0	0	0	0	483	26-35	274
09:00	8	18	56	110	91	54	6	0	1	0	0	0	0	0	344	26-35	201
10:00	16	35	80	133	109	41	8	3	0	0	0	0	0	0	425	26-35	242
11:00	12	35	65	101	104	51	12	0	1	0	0	0	0	0	381	26-35	205
12 PM	14	24	72	149	139	55	9	0	0	0	0	0	0	0	462	26-35	288
13:00	16	27	67	109	135	59	16	0	0	0	0	0	0	0	429	26-35	244
14:00	15	19	62	137	132	75	12	2	0	0	0	0	0	0	454	26-35	269
15:00	18	28	114	182	143	52	11	0	0	0	0	0	0	0	548	26-35	325
16:00	18	49	73	143	169	97	20	7	0	0	0	0	0	0	576	26-35	312
17:00	19	27	69	147	158	78	19	3	0	0	0	0	0	0	520	26-35	305
18:00	16	13	49	98	143	82	13	1	1	0	0	0	0	0	416	26-35	241
19:00	7	10	23	74	111	73	18	3	0	0	0	0	0	0	319	26-35	185
20:00	5	8	17	59	111	54	16	2	2	0	0	0	0	0	274	26-35	170
21:00	6	6	5	18	56	41	18	8	0	0	0	0	0	0	158	31-40	97
22:00	3	2	6	13	28	23	17	3	0	0	0	0	0	0	95	31-40	51
23:00	0	1_	3	4	15	15	11	5	0	0	0	0	0	0	54	31-40	30
Total	212	383	1003	1834	2089	1107	288	51	7	0	0	0	0	0	6974		
Percent	3.0%	5.5%	14.4%	26.3%	30.0%	15.9%	4.1%	0.7%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%	07.00		
AM Peak	10:00	07:00	07:00	07:00	08:00	08:00	06:00	05:00	04:00						07:00		
Vol.	16	39	107	148	165	75	23	4	1 00.00						531		
PM Peak	17:00	16:00	15:00	15:00	16:00	16:00	16:00	21:00	20:00						16:00		
Vol.	19	49	114	182	169	97	20	8	2						576		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76	-	Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	2	4	7	19	4	0	1	0	0	0	0	0	37	31-40	26
01:00	0	0	1	4	2	3	1	2	0	0	0	0	0	0	13	26-35	6
02:00	1	0	0	0	1	4	0	1	1	0	0	0	0	0	8	31-40	5
03:00	0	0	0	1	6	5	0	3	1	0	0	0	0	0	16	31-40	11
04:00	0	0	1	1	3	20	4	3	3	0	0	0	0	0	35	34-43	24
05:00	0	1	11	20	42	23	14	2	0	0	0	0	0	0	113	31-40	65
06:00	5	16	44	72	98	83	21	4	1	0	0	0	0	0	344	31-40	181
07:00	16	34	93	142	155	99	18	1	1	0	0	0	0	0	559	26-35	297
08:00	14	23	71	118	145	71	17	3	0	0	0	0	0	0	462	26-35	263
09:00	14	23	81	143	120	33	5	1	0	0	0	0	0	0	420	26-35	263
10:00	14	30	75	142	125	40	11	2	0	0	0	0	0	0	439	26-35	267
11:00	6	36	80	132	145	45	8	1	0	0	0	0	0	0	453	26-35	277
12 PM	15	25	66	155	142	60	9	1	0	0	0	0	0	1	474	26-35	297
13:00	11	39	85	122	131	48	5	0	0	0	0	0	0	0	441	26-35	253
14:00	10	17	61	137	165	85	12	1	0	0	0	0	0	0	488	26-35	302
15:00	13	35	87	209	141	60	7	0	0	0	0	0	0	0	552	26-35	350
16:00	19	24	71	165	174	84	18	3	0	0	0	0	0	0	558	26-35	339
17:00	12	37	108	152	151	61	12	0	0	0	0	0	0	0	533	26-35	303
18:00	16	23	42	113	174	85	9	5	0	0	0	0	0	0	467	26-35	287
19:00	8	16	19	78	100	62	14	5	0	0	0	0	0	0	302	26-35	178
20:00	6	8	12	52	80	64	26	1	2	0	0	0	0	0	251	31-40	144
21:00	3	5	7	12	65	45	16	4	0	1	0	0	0	0	158	31-40	110
22:00	2	0	3	6	37	49	13	4	2	0	0	0	0	0	116	31-40	86
23:00	0	0	2	2	18	33	13	3	1	0	0	0	0	0	72	31-40	51
Total	185	392	1022	1982	2227	1181	257	50	13	1	0	0	0	1	7311		
Percent	2.5%	5.4%	14.0%	27.1%	30.5%	16.2%	3.5%	0.7%	0.2%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	07:00	11:00	07:00	09:00	07:00	07:00	06:00	06:00	04:00						07:00		
Vol.	16	36	93	143	155	99	21	4	3						559		
PM Peak	16:00	13:00	17:00	15:00	16:00	14:00	20:00	18:00	20:00	21:00				12:00	16:00		
Vol.	19	39	108	209	174	85	26	5	2	1				1	558		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Eastbound															Lantado.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	3	0	6	15	11	6	1	0	0	0	0	0	0	42	31-40	26
01:00	1	1	0	1	3	7	5	3	0	0	0	0	0	0	21	35-44	12
02:00	1	0	0	2	6	2	2	0	0	0	0	0	0	0	13	31-40	8
03:00	0	0	0	1	4	6	1	1	0	0	0	0	0	0	13	31-40	10
04:00	1	1	2	0	2	3	4	3	0	0	2	0	0	0	18	35-44	7
05:00	0	4	8	12	19	10	8	1	0	0	0	0	0	0	62	26-35	31
06:00	6	7	29	42	33	33	8	1	0	0	0	0	0	0	159	26-35	75
07:00	9	12	43	104	76	50	16	2	1	0	0	0	0	0	313	26-35	180
08:00	12	23	71	125	111	54	19	6	1	0	0	0	0	0	422	26-35	236
09:00	33	54	111	157	130	44	8	1	0	0	0	0	0	0	538	26-35	287
10:00	16	56	131	219	106	42	3	0	0	0	0	0	0	0	573	21-30	350
11:00	22	47	133	174	131	39	3	0	0	0	0	0	0	0	549	21-30	307
12 PM	20	45	121	226	105	38	1	1	0	0	0	0	0	0	557	21-30	347
13:00	21	26	74	159	165	56	7	0	0	0	0	0	0	0	508	26-35	324
14:00	15	27	72	157	160	47	12	2	0	0	0	0	0	0	492	26-35	317
15:00	10	17	58	120	182	66	20	4	0	0	0	0	0	0	477	26-35	302
16:00	18	27	66	132	160	87	9	5	0	0	0	0	0	0	504	26-35	292
17:00	13	25	70	125	117	85	26	1	0	0	0	0	0	0	462	26-35	242
18:00	4	12	29	80	152	71	20	3	0	0	0	0	0	0	371	26-35	232
19:00	13	7	23	57	138	59	14	1	1	0	0	0	0	0	313	30-39	197
20:00	5	2	9	45	91	55	18	5	0	0	0	0	0	0	230	31-40	146
21:00	1	0	14	23	54	44	19	9	0	0	0	0	0	0	164	31-40	98
22:00	3	3	3	5	28	45	26	6	0	0	0	0	0	0	119	31-40	73
23:00	3	2	2	7	41	27	11	5	1	0	0	0	0	0	99	31-40	68
Total	227	401	1069	1979	2029	981	266	61	4	0	2	0	0	0	7019		
Percent	3.2%	5.7%	15.2%	28.2%	28.9%	14.0%	3.8%	0.9%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	09:00	10:00	11:00	10:00	11:00	08:00	08:00	08:00	07:00		04:00				10:00		
Vol.	33	56	133	219	131	54	19	6_	1		2				573		
PM Peak	13:00	12:00	12:00	12:00	15:00	16:00	17:00	21:00	19:00						12:00		
Vol.	21	45	121	226	182	87	26	9	1						557		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Eastbound															Latitude.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	3	17	19	6	2	2	1	0	0	0	0	50	31-40	36
01:00	1	0	1	1	9	6	7	3	1	0	0	0	0	0	29	31-40	15
02:00	0	0	0	0	0	5	3	1	0	0	0	0	0	0	9	36-45	8
03:00	0	0	0	1	4	1	0	0	0	0	0	0	0	0	6	28-37	5
04:00	0	0	1	1	6	1	1	2	0	0	0	0	0	0	12	31-40	7
05:00	2	1	5	6	5	4	3	2	0	0	0	0	0	0	28	26-35	11
06:00	1	6	13	13	17	12	7	2	0	0	0	0	0	0	71	26-35	30
07:00	3	10	26	46	52	28	9	2	0	0	0	0	0	0	176	26-35	98
08:00	7	9	51	67	91	36	7	0	0	1	0	0	0	0	269	26-35	158
09:00	7	27	56	99	85	54	19	1	0	0	0	0	0	0	348	26-35	184
10:00	13	37	100	145	99	52	14	1	0	0	0	0	0	0	461	21-30	245
11:00	19	49	120	153	108	46	11	0	0	0	0	0	0	0	506	21-30	273
12 PM	17	26	106	166	136	54	11	1	0	0	0	0	0	0	517	26-35	302
13:00	17	28	73	166	158	52	5	3	0	0	0	0	0	0	502	26-35	324
14:00	15	32	57	117	148	54	16	0	1	0	0	0	0	0	440	26-35	265
15:00	17	24	55	126	133	51	23	1	0	0	0	0	0	0	430	26-35	259
16:00	19	15	48	105	134	73	22	2	0	0	0	0	0	0	418	26-35	239
17:00	14	17	49	82	141	59	22	3	0	0	0	0	0	0	387	26-35	223
18:00	2	6	29	72	120	80	30	4	1	0	0	0	0	0	344	31-40	200
19:00	6	3	14	28	94	62	20	4	1	0	0	0	0	0	232	31-40	156
20:00	2	5	6	19	66	40	6	3	0	1	0	0	0	0	148	31-40	106
21:00	0	1	7	18	40	34	9	4	0	0	0	0	0	0	113	31-40	74
22:00	2	0	6	10	16	9	4	3	1	0	0	0	0	0	51	26-35	26
23:00	1	2	11	4	9	13	6	5	0	0	0	0	0	0	41	31-40	22
Total	165	298	824	1448	1688	845	261	49	7	3	0	0	0	0	5588		
Percent	3.0%	5.3%	14.7%	25.9%	30.2%	15.1%	4.7%	0.9%	0.1%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak	11:00	11:00	11:00	11:00	11:00	09:00	09:00	01:00	00:00	00:00					11:00		
Vol.	19	49	120	153	108	54	19	3	2	1					506		
PM Peak	16:00	14:00	12:00	12:00	13:00	18:00	18:00	23:00	14:00	20:00					12:00		
Vol.	19	32	106	166	158	80	30	5	1	1					517		

Route 66 East of Main Street # 2 East Hampton, Connecticut

Site Code: Station ID: 4640

Latitude: 0' 0.0000 Undefined

Eastbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	2	2	5	0	0	0	0	1	0	0	0	10	31-40	7
01:00	0	0	0	4	3	2	0	0	0	0	0	0	0	0	9	26-35	7
02:00	0	0	0	0	3	1	0	0	0	0	0	0	0	0	4	29-38	4
03:00	0	0	0	0	6	4	0	1	0	0	0	0	0	0	11	31-40	10
04:00	0	1	1	7	5	8	3	1	1	0	0	0	0	0	27	29-38	13
05:00	5	1	10	16	33	25	14	8	0	0	0	0	0	0	112	31-40	58
06:00	8	14	39	69	103	59	26	2	0	0	0	0	0	0	320	26-35	172
07:00	8	43	101	142	159	65	14	3	0	0	0	0	0	0	535	26-35	301
08:00	7	24	72	108	150	89	22	3	0	0	0	0	0	0	475	26-35	258
09:00	12	16	46	85	109	57	26	1	0	0	0	0	0	0	352	26-35	194
10:00	11	23	51	116	90	44	16	3	0	0	0	0	0	0	354	26-35	206
11:00	13	16	49	152	96	44	9	0	0	0	0	0	0	0	379	26-35	248
12 PM	11	22	61	175	122	37	7	0	0	0	0	0	0	0	435	26-35	297
13:00	16	17	42	143	113	55	11	3	0	0	0	0	0	0	400	26-35	256
14:00	17	19	69	125	131	63	17	6	0	0	0	0	0	0	447	26-35	256
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	108	196	541	1144	1125	558	165	31	1	0	1	0	0	0	3870		
Percent	2.8%	5.1%	14.0%	29.6%	29.1%	14.4%	4.3%	0.8%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%			
AM Peak	11:00	07:00	07:00	11:00	07:00	08:00	06:00	05:00	04:00		00:00				07:00		
Vol.	13	43	101	152	159	89	26	8	1		1				535		
PM Peak	14:00	12:00	14:00	12:00	14:00	14:00	14:00	14:00							14:00		
Vol.	17	22	69	175	131	63	17	6							447		
Total	1136	2196	5872	11144	12031	6221	1638	295	43	6	3	0	0	1	40586		
Percent	2.8%	5.4%	14.5%	27.5%	29.6%	15.3%	4.0%	0.7%	0.1%	0.0%	0.0%	0.0%	0.0%	0.0%			

15th Percentile: 22 MPH 50th Percentile: 29 MPH 85th Percentile: 36 MPH 95th Percentile: 39 MPH

Stats 10 MPH Pace Speed: 26-35 MPH Number in Pace: 23175

Percent in Pace : 57.1%

Number of Vehicles > 40 MPH : 1986

Percent of Vehicles > 40 MPH : 4.9%

Mean Speed(Average) : 30 MPH

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Eastbound Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	0	0	0	3	24	143	205	62	5	0	0	0	0	0	442	36-45	348
15:00	0	0	0	3	42	194	226	61	1	0	0	0	0	0	527	36-45	420
16:00	0	0	4	2	55	247	236	47	6	1	0	0	0	0	598	36-45	483
17:00	0	0	0	3	29	180	258	57	5	1	0	0	0	0	533	36-45	438
18:00	0	0	0	3	25	145	196	61	7	2	0	0	0	0	439	36-45	341
19:00	1	0	0	1	18	125	150	43	6	1	0	0	0	0	345	36-45	275
20:00	0	0	0	2	24	89	122	35	5	0	1	0	0	0	278	36-45	211
21:00	0	0	0	0	18	38	57	22	1	0	0	0	0	0	136	36-45	95
22:00	0	0	0	2	15	38	34	7	3	0	0	0	0	0	99	36-45	72
23:00	0	0	0	2	2	10	24	9	1	1	0	0	0	0	49	36-45	34
Total	1	0	4	21	252	1209	1508	404	40	6	1	0	0	0	3446		
Percent	0.0%	0.0%	0.1%	0.6%	7.3%	35.1%	43.8%	11.7%	1.2%	0.2%	0.0%	0.0%	0.0%	0.0%			
AM Peak																	
Vol.																	
PM Peak	19:00		16:00	14:00	16:00	16:00	17:00	14:00	18:00	18:00	20:00				16:00		
Vol.	1		4	3	55	247	258	62	7	2	1				598		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Eastbound															Latitude.	0 0.0000	Onacimica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	1	7	13	14	6	5	0	0	0	0	0	46	36-45	27
01:00	0	0	0	0	3	5	2	2	1	0	0	0	0	0	13	31-40	8
02:00	0	0	0	0	2	1	2	0	0	0	0	0	0	0	5	29-38	3
03:00	0	0	0	0	2	2	4	2	0	0	0	0	0	0	10	41-50	6
04:00	0	0	0	0	2	10	15	15	1	1	0	0	0	0	44	41-50	30
05:00	0	0	0	0	6	33	68	29	1	0	0	0	0	0	137	36-45	101
06:00	0	0	0	2	26	150	185	53	4	0	0	0	0	0	420	36-45	335
07:00	0	0	0	5	33	242	275	79	7	1	0	0	0	0	642	36-45	517
08:00	0	1	0	0	57	263	210	60	8	2	0	0	0	0	601	36-45	473
09:00	0	0	0	9	65	177	162	28	4	1	0	0	0	0	446	36-45	339
10:00	0	0	0	4	33	166	121	28	4	0	0	0	0	0	356	36-45	287
11:00	0	0	2	5	48	145	143	24	2	0	0	0	0	0	369	36-45	288
12 PM	0	0	1	13	63	177	162	28	3	0	0	0	0	0	447	36-45	339
13:00	0	0	0	9	59	161	163	31	5	0	0	0	0	0	428	36-45	324
14:00	0	2	2	8	50	163	175	35	6	1	0	0	0	0	442	36-45	338
15:00	0	0	0	3	33	182	243	58	1	0	0	0	0	0	520	36-45	425
16:00	0	0	0	4	52	192	208	79	3	0	0	0	0	0	538	36-45	400
17:00	0	1	3	4	28	225	250	50	1	0	0	0	0	0	562	36-45	475
18:00	0	0	0	0	39	188	181	49	9	2	0	0	0	0	468	36-45	369
19:00	0	0	0	0	22	126	153	35	5	1	1	0	0	0	343	36-45	279
20:00	0	0	0	2	17	81	91	30	5	1	0	0	0	0	227	36-45	172
21:00	0	0	1	0	13	53	57	18	5	0	0	0	0	0	147	36-45	110
22:00	0	0	0	1	1	29	50	21	1	0	0	0	0	0	103	36-45	79
23:00	0	0	0	0	1	23	33	6	2	0	0	0	0	0	65	36-45	56
Total	0	4	9	70	662	2807	2967	766	83	10	1	0	0	0	7379		
Percent	0.0%	0.1%	0.1%	0.9%	9.0%	38.0%	40.2%	10.4%	1.1%	0.1%	0.0%	0.0%	0.0%	0.0%			-
AM Peak		08:00	11:00	09:00	09:00	08:00	07:00	07:00	08:00	08:00					07:00		
Vol.		11	2	9	65	263	275	79	8	2					642		
PM Peak		14:00	17:00	12:00	12:00	17:00	17:00	16:00	18:00	18:00	19:00				17:00		
Vol.		2	3	13	63	225	250	79	9	2	1				562		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Eastbound															Lantauc.	0 0.0000	Ondemica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	0	3	12	20	5	3	0	0	0	0	0	43	36-45	32
01:00	0	0	0	0	3	7	4	2	0	0	0	0	0	0	16	36-45	11
02:00	0	0	0	0	2	2	4	1	1	0	0	0	0	0	10	36-45	6
03:00	0	0	0	0	2	4	4	3	2	0	0	0	0	0	15	35-44	8
04:00	0	0	0	0	1	8	24	8	2	0	0	0	0	0	43	36-45	32
05:00	0	0	0	0	7	36	59	27	2	0	0	0	0	0	131	36-45	95
06:00	0	0	0	0	26	147	204	56	10	0	0	0	0	0	443	36-45	351
07:00	0	0	0	2	31	228	280	61	9	0	0	0	0	0	611	36-45	508
08:00	0	0	1	1	45	262	254	45	3	0	1	0	0	0	612	36-45	516
09:00	0	0	0	5	40	176	148	42	6	0	0	0	0	1	418	36-45	324
10:00	2	3	8	20	42	157	117	35	4	1	0	0	0	0	389	36-45	274
11:00	0	1	9	19	67	170	131	19	0	0	0	0	0	0	416	36-45	301
12 PM	0	0	1	12	56	191	141	31	2	0	1	0	0	0	435	36-45	332
13:00	0	0	0	6	58	186	138	27	4	2	0	0	0	0	421	36-45	324
14:00	0	0	2	9	56	190	155	39	6	0	0	0	0	0	457	36-45	345
15:00	3	3	5	15	74	218	196	36	4	0	0	0	0	0	554	36-45	414
16:00	0	0	3	18	64	289	227	24	1	0	0	0	0	0	626	36-45	516
17:00	0	1	2	14	48	233	222	51	6	2	0	0	0	0	579	36-45	455
18:00	0	0	2	11	36	151	204	84	7	1	0	0	0	0	496	36-45	355
19:00	0	0	0	3	27	94	168	50	12	1	1	0	0	0	356	36-45	262
20:00	0	2	2	3	23	100	100	30	1	0	0	0	0	0	261	36-45	200
21:00	0	2	0	3	18	74	80	14	1	0	0	0	0	0	192	36-45	154
22:00	0	0	0	0	16	53	49	19	4	1	0	0	0	0	142	36-45	102
23:00	0	0	0	3	5	34	53	13	5	11	0	0	0	0	114	36-45	87
Total	5	12	35	144	750	3022	2982	722	95	9	3	0	0	1	7780		
Percent	0.1%	0.2%	0.4%	1.9%	9.6%	38.8%	38.3%	9.3%	1.2%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak	10:00	10:00	11:00	10:00	11:00	08:00	07:00	07:00	06:00	10:00	08:00			09:00	08:00		
Vol.	2	3	9	20	67	262	280	61	10	1	1			1	612		
PM Peak	15:00	15:00	15:00	16:00	15:00	16:00	16:00	18:00	19:00	13:00	12:00				16:00		
Vol.	3	3	5	18	74	289	227	84	12	2	1				626		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Eastbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	0	0	0	4	14	32	12	2	1	0	1	0	0	66	36-45	46
01:00	0	0	0	0	2	4	7	3	1	0	1	0	0	0	18	36-45	11
02:00	0	0	0	0	1	5	9	2	1	0	0	0	0	0	18	36-45	14
03:00	0	0	0	0	1	3	3	1	2	0	0	0	0	0	10	36-45	6
04:00	0	0	1	1	1	1	10	11	0	0	0	0	0	0	25	41-50	21
05:00	0	0	0	1	6	15	26	16	2	1	0	0	0	0	67	41-50	42
06:00	0	0	0	0	3	23	59	33	6	0	0	0	0	0	124	41-50	92
07:00	0	0	0	4	15	85	117	45	11	2	0	0	0	0	279	36-45	202
08:00	0	1	3	10	50	138	150	28	5	0	1	0	0	0	386	36-45	288
09:00	0	1	3	29	64	191	122	36	6	0	0	0	0	0	452	36-45	313
10:00	0	0	0	13	79	241	193	33	4	0	0	0	0	0	563	36-45	434
11:00	1	1	1	19	74	241	143	41	4	0	0	0	0	0	525	36-45	384
12 PM	0	4	2	11	86	232	174	19	5	0	0	0	0	0	533	36-45	406
13:00	0	0	2	5	75	220	150	35	4	0	0	0	0	0	491	36-45	370
14:00	0	0	4	11	72	211	193	24	3	0	0	0	0	0	518	36-45	404
15:00	0	0	0	15	79	198	167	28	2	1	0	0	0	0	490	36-45	365
16:00	0	0	0	3	30	161	163	41	3	0	0	0	0	0	401	36-45	324
17:00	0	0	0	8	30	153	176	33	3	0	0	0	0	0	403	36-45	329
18:00	0	0	0	0	25	114	156	37	12	0	0	0	0	0	344	36-45	270
19:00	0	0	0	0	13	99	116	26	3	0	0	0	0	0	257	36-45	215
20:00	0	0	0	1	9	70	80	24	5	1	0	0	0	0	190	36-45	150
21:00	0	0	0	0	21	49	71	18	4	0	0	0	0	0	163	36-45	120
22:00	0	0	0	0	10	46	50	23	4	1	0	0	0	0	134	36-45	96
23:00	0	0	0	0	6	39	33	6	1	0	0	0	0	0	85	36-45	72
Total	1	7	16	131	756	2553	2400	575	93	7	2	1	0	0	6542		
Percent	0.0%	0.1%	0.2%	2.0%	11.6%	39.0%	36.7%	8.8%	1.4%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak	11:00	08:00	08:00	09:00	10:00	10:00	10:00	07:00	07:00	07:00	01:00	00:00			10:00		
Vol.	1	1	3	29	79	241	193	45	11	2	1	11			563		
PM Peak		12:00	14:00	15:00	12:00	12:00	14:00	16:00	18:00	15:00					12:00		
Vol.		4	4	15	86	232	193	41	12	1					533		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Start	Eastbound															Latitude.	0.0000	Undenned
OBMON OBMO		1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
01:00 0 0 0 0 0 1 6 9 2 2 2 0 0 0 0 0 0 0 2 36:45 15 03:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
02:00 0 0 0 0 0 0 0 5 3 2 1 0 0 0 0 0 0 0 0 10 36-45 8 0 0 0 0 0 0 0 0 0 10 36-45 8 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	06/03/18	0	0	0	0	3	16	13	6	2	3	1	0	0	0	44	36-45	29
03:00 0 0 0 0 0 0 1 5 2 1 0 0 2 0 0 0 0 0 0 0 5 29:38 12 05:00 0 0 0 0 0 0 1 1 8 4 2 0 0 0 0 0 0 0 15 41-50 12 06:00 0 0 0 0 0 0 5 13 13 13 6 0 0 0 0 0 0 0 0 0 37 36-45 26 06:00 0 0 0 0 0 0 5 10 40 67 24 9 0 0 0 0 0 0 0 155 36-45 10 08:00 0 0 0 0 0 2 24 36 21 2 0 0 0 0 0 0 0 155 36-45 10 08:00 0 0 0 0 0 2 2 20 97 113 33 4 0 0 0 0 0 0 0 269 36-45 211 09:00 0 0 0 5 12 41 107 136 37 4 0 0 0 0 0 0 269 36-45 211 09:00 0 0 0 5 12 41 107 136 37 4 0 0 0 0 0 0 342 36-45 331 11:00 0 0 0 2 13 51 169 161 33 3 3 0 0 0 0 0 0 0 342 36-45 331 11:00 0 0 0 2 14 55 201 160 39 4 0 0 0 0 0 0 475 36-45 36 12:PM 0 0 0 3 13 66 243 141 30 3 3 0 1 0 0 0 0 475 36-45 36 13:00 0 0 0 9 15 67 212 159 26 6 0 0 0 0 0 0 474 36-45 37 14:00 0 0 0 0 9 35 227 195 36 2 0 0 0 0 0 0 443 36-45 34 15:00 0 0 0 0 0 2 8 189 178 40 7 1 0 0 0 0 0 443 36-45 34 16:00 0 0 0 0 0 2 1 8 189 178 40 7 1 0 0 0 0 0 443 36-45 36 18:00 0 0 0 0 0 12 1 88 166 48 10 3 0 0 0 0 0 0 0 379 36-45 28 18:00 0 0 0 0 0 0 12 78 128 167 61 11 0 0 0 0 0 0 379 36-45 28 18:00 0 0 0 0 0 0 12 78 120 50 7 0 0 0 0 0 0 0 379 36-45 28 18:00 0 0 0 0 0 0 12 78 120 50 7 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	01:00	0	0	0	0	1	6	9	2	2	0	0	0	0	0	20	36-45	15
04:00 0 0 0 0 0 0 1 8 4 4 2 0 0 0 0 0 0 15 41-50 11 05:00 0 0 0 0 0 0 15 41-50 11 05:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	02:00	0	0	0	0	0	5	3	2	0	0	0	0	0	0	10	36-45	8
06:00 0 0 0 0 0 0 5 13 13 13 6 0 0 0 0 0 0 0 0 37 36-45 26 06:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	03:00	0	0	0	0	2	1	0	2	0	0	0	0	0	0	5	29-38	3
06:00 0 0 0 0 0 0 2 24 36 21 2 0 0 0 0 0 0 85 36-45 60 07:00 0 0 0 0 5 10 40 67 24 9 0 0 0 0 0 0 0 155 36-45 107 08:00 0 0 0 0 0 2 20 97 113 33 4 0 0 0 0 0 0 0 269 36-45 210 08:00 0 0 0 5 12 41 107 136 37 4 0 0 0 0 0 0 342 36-45 24 10:00 0 0 0 2 13 51 169 161 33 3 0 0 0 0 0 0 342 36-45 33 11:00 0 0 0 2 14 55 201 160 39 4 0 0 0 0 0 0 0 475 36-45 33 11:00 0 0 0 2 14 55 201 160 39 4 0 0 0 0 0 0 0 475 36-45 36 12 PM 0 0 0 3 13 66 243 141 30 3 0 0 1 0 0 0 0 500 36-45 38 13:00 0 0 0 9 15 67 212 159 26 6 0 0 0 0 0 0 494 36-45 37 14:00 0 0 0 0 9 35 227 195 36 2 0 0 0 0 0 0 0 448 36-45 37 16:00 0 0 0 0 0 0 8 18 122 167 61 11 0 0 0 0 0 0 448 36-45 36-45 16:00 0 0 0 0 0 18 122 167 61 11 0 0 0 0 0 379 36-45 38 18:00 0 0 0 0 0 18 122 167 61 11 0 0 0 0 0 379 36-45 38 18:00 0 0 0 0 0 0 21 88 166 48 10 3 0 0 0 0 0 0 379 36-45 28 18:00 0 0 0 0 0 0 21 88 166 48 10 3 0 0 0 0 0 0 336 36-45 28 18:00 0 0 0 0 0 0 25 74 90 24 4 0 0 0 0 0 0 0 267 36-45 196 20:00 0 0 0 0 0 0 25 74 90 24 4 0 0 0 0 0 0 0 267 36-45 196 20:00 0 0 0 0 0 0 8 40 39 13 3 3 1 0 0 0 0 0 0 267 36-45 196 21:00 0 0 0 0 0 0 0 12 78 120 50 77 0 0 0 0 0 0 267 36-45 196 22:00 0 0 0 0 0 0 0 8 40 39 13 3 3 1 0 0 0 0 0 267 36-45 196 22:00 0 0 0 0 0 0 0 8 40 39 13 3 3 1 0 0 0 0 0 0 267 36-45 196 22:00 0 0 0 0 0 0 0 8 40 39 13 3 3 1 0 0 0 0 0 0 0 0 36-45 31 Total 0 0 0 1 89 519 2154 2185 585 91 8 2 0 0 0 0 0 0 0 564 Percent 0.0% 0.0% 0.0% 11:00 11:00 11:00 10:00 11:00 07:00 18:00 12:00	04:00	0	0	0	0	0	1	-	4	2	0	0	0	0	0	15	41-50	12
07:00 0 0 0 0 5 10 40 67 24 9 0 0 0 0 0 155 36-45 107 08:00 0 0 0 0 2 2 0 97 113 33 4 0 0 0 0 0 0 0 269 36-45 210 09:00 0 0 5 12 41 107 136 37 4 0 0 0 0 0 0 0 342 36-45 243 10:00 0 0 0 0 269 36-45 210 10:00 0 0 0 0 2 13 51 169 161 33 3 3 0 0 0 0 0 0 0 432 36-45 331 11:00 0 0 0 0 2 14 55 201 160 39 4 0 0 0 0 0 0 0 432 36-45 361 12 PM 0 0 3 3 13 66 243 141 30 3 3 0 1 0 0 0 0 0 0 475 36-45 361 12 PM 0 0 0 3 13 13 66 243 141 30 3 3 0 1 0 0 0 0 0 0 500 36-45 384 13:00 0 0 0 9 15 67 212 159 26 6 0 0 0 0 0 0 0 0 494 36-45 371 14:00 0 0 0 0 0 0 9 35 227 195 36 2 0 0 0 0 0 0 0 0 494 36-45 422 15:00 0 0 0 0 0 0 418 36-45 422 15:00 0 0 0 0 0 0 418 36-45 424 16:00 0 0 0 0 0 0 28 189 178 40 7 1 0 0 0 0 0 0 443 36-45 364 16:00 0 0 0 0 0 0 18 122 167 61 11 0 0 0 0 0 0 379 36-45 288 18:00 0 0 0 0 0 0 18 122 188 166 48 10 3 0 0 0 0 0 336 36-45 254 18:00 0 0 0 0 0 0 0 12 78 120 18 166 48 10 3 0 0 0 0 0 336 36-45 124 18:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			-	-	-	-	-	-	-	-	-	-	-	-	-			26
08:00 0 0 0 0 2 2 20 97 113 33 4 0 0 0 0 0 0 269 36:45 210 09:00 0 0 0 5 12 41 107 136 37 4 0 0 0 0 0 0 342 36:45 240 10:00 0 0 0 0 2 2 13 51 169 161 33 3 3 0 0 0 0 0 0 0 0 432 36:45 343 11:00 0 0 0 0 0 2 14 55 201 160 39 4 0 0 0 0 0 0 0 432 36:45 36:45 36:11:00 0 0 0 0 3 3 13 66 243 141 30 3 0 0 1 0 0 0 0 0 0 475 36:45 36:11:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0															0	85		60
09:00 0 0 0 5 12 41 107 136 37 4 0 0 0 0 0 0 342 36-45 243 10:00 0 0 0 0 2 13 51 169 161 33 3 0 0 0 0 0 0 0 432 36-45 333 11:00 0 0 0 0 2 14 55 201 160 39 4 0 0 0 0 0 0 0 475 36-45 364 364 12:PM 0 0 0 3 3 13 66 243 141 30 3 0 1 1 0 0 0 0 500 36-45 364 13:00 0 0 0 9 15 67 212 159 26 6 0 0 0 0 0 0 0 0 494 36-45 374 13:00 0 0 0 0 0 9 35 227 195 36 2 0 0 0 0 0 0 0 494 36-45 374 14:00 0 0 0 0 0 0 0 443 36-45 374 15:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		0	0	0	5		-	-		9	0	0	0	0	0		36-45	107
10:00 0 0 0 2 13 51 169 161 33 3 0 0 0 0 0 0 432 36-45 330 11:00 0 0 0 2 14 55 201 160 39 4 0 0 0 0 0 0 0 475 36-45 361 12 PM 0 0 0 3 3 13 66 243 141 30 3 0 1 0 0 0 0 0 0 500 36-45 384 13:00 0 0 9 15 67 212 159 26 6 0 0 0 0 0 0 0 494 36-45 371 14:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		0								4	-		0	0	0		36-45	210
11:00 0 0 0 2 14 55 201 160 39 4 0 0 0 0 0 0 475 36-45 361 12 PM 0 0 0 3 3 13 66 243 141 30 3 0 1 0 0 0 0 0 500 36-45 384 13:00 0 0 0 9 15 67 212 159 26 6 0 0 0 0 0 0 0 0 494 36-45 371 14:00 0 0 0 0 0 9 35 227 195 36 2 0 0 0 0 0 0 0 504 36-45 344 16:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	09:00	0	0	5	12	41	107	136		4	0	0	0	0	0	342	36-45	243
12 PM 0 0 0 3 13 66 243 141 30 3 0 1 0 0 0 0 500 36-45 334 13:00 0 0 0 9 15 67 212 159 26 6 0 0 0 0 0 0 0 494 36-45 371 14:00 0 0 0 0 0 0 9 35 227 195 36 2 0 0 0 0 0 0 0 0 494 36-45 371 14:00 0 0 0 0 0 0 6 41 177 167 25 2 0 0 0 0 0 0 0 418 36-45 344 16:00 0 0 0 0 0 0 28 189 178 40 7 1 0 0 0 0 0 0 443 36-45 367 17:00 0 0 0 0 0 18 122 167 61 11 0 0 0 0 0 0 379 36-45 285 18:00 0 0 0 0 0 0 18 122 167 61 11 0 0 0 0 0 0 336 36-45 265 19:00 0 0 0 0 0 0 267 36-45 195 20:00 0 0 0 0 0 0 25 74 90 24 4 0 0 0 0 0 0 0 267 36-45 195 20:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0													0	0	0			330
13:00 0 0 0 9 15 67 212 159 26 6 0 0 0 0 0 0 494 36-45 371 14:00 0 0 0 0 0 0 9 35 227 195 36 2 0 0 0 0 0 0 0 504 36-45 422 15:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		0	0	2			-	160		4	0	0	0	0	0	475	36-45	361
14:00 0 0 0 9 35 227 195 36 2 0 0 0 0 0 504 36-45 422 15:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 448 36-45 344 16:00 0 0 <td>12 PM</td> <td>0</td> <td>0</td> <td></td> <td></td> <td></td> <td>243</td> <td>141</td> <td></td> <td>3</td> <td>0</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>500</td> <td>36-45</td> <td>384</td>	12 PM	0	0				243	141		3	0	1	0	0	0	500	36-45	384
15:00 0 0 0 0 6 41 177 167 25 2 0 0 0 0 0 0 418 36-45 344 16:00 0 0 0 0 0 0 0 443 36-45 367 17:00 0 0 0 0 0 0 18 122 167 61 11 0 0 0 0 0 0 0 379 36-45 28 18:00 0 0 0 0 0 0 12 78 120 50 7 0 0 0 0 0 0 36-45 19:00 0 0 0 0 0 12 78 120 50 7 0 0 0 0 0 0 267 36-45 19:20:00 0 0 0 0 0 0 0 25 74 90 24 4 0 0 0 0 0 0 0 217 36-45 16:20:00 0 0 0 0 0 0 0 8 40 39 13 3 1 0 0 0 0 0 0 0 104 36-45 75 22:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	13:00	0	0	9	15	67	212	159	-	6	0	0	0	0	0	494	36-45	371
16:00 0 0 0 0 28 189 178 40 7 1 0 0 0 0 443 36-45 367 17:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 379 36-45 289 18:00 0								195					0	0	0	504	36-45	422
17:00 0 0 0 18 122 167 61 11 0 0 0 0 0 379 36-45 286 18:00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 379 36-45 286 18:00 0		0	0	0	6			-			0	0	0	0	0	-		344
18:00 0 0 0 0 0 0 21 88 166 48 10 3 0 0 0 0 0 336 36-45 254 19:00 0 0 0 0 0 0 12 78 120 50 7 0 0 0 0 0 0 267 36-45 198 20:00 0 0 0 0 0 0 25 74 90 24 4 0 0 0 0 0 0 0 217 36-45 164 21:00 0 0 0 0 0 0 8 40 39 13 3 1 0 0 0 0 0 0 0 104 36-45 75 22:00 0 0 0 0 0 0 5 14 23 19 2 0 0 0 0 0 0 0 363 41-50 42 23:00 0 0 0 0 0 1 89 519 2154 2185 585 91 8 2 0 0 0 0 0 0 5654 11:00 11:00 11:00 11:00 11:00 11:00 07:00 00:00 00:00 00:00 11:00 11:00 11:00 11:00 11:00 07:00 00:00 00:00 11:00	16:00	0	0	0	0	28	189	178			1	0	0	0	0	443	36-45	367
19:00 0 0 0 0 0 0 12 78 120 50 7 0 0 0 0 0 0 267 36-45 198 20:00 0 0 0 0 0 0 0 25 74 90 24 4 0 0 0 0 0 0 0 217 36-45 164 21:00 0 0 0 0 0 0 0 8 40 39 13 3 1 0 0 0 0 0 0 0 104 36-45 75 22:00 0 0 0 0 0 0 5 14 23 19 2 0 0 0 0 0 0 0 63 41-50 42 23:00 0 0 0 0 0 1 89 519 2154 2185 585 91 8 2 0 0 0 0 0 0 63 41-50 31 20:00 0 0 0 0 1:00 11:00 11:00 11:00 11:00 07:00 00:00 00:00 00:00 11:00 1	17:00	0	0	0	0	18		167	-		-	0	0	0	0	379	36-45	289
20:00 0 0 0 0 0 0 25 74 90 24 4 0 0 0 0 0 0 0 217 36-45 164 21:00 0 0 0 0 0 0 8 40 39 13 3 1 0 0 0 0 0 104 36-45 75 22:00 0 0 0 0 0 0 5 14 23 19 2 0 0 0 0 0 0 0 63 41-50 42 23:00 0 0 0 0 0 0 3 10 21 4 2 0 0 0 0 0 0 0 63 41-50 42 23:00 0 0 0 0 21 89 519 2154 2185 585 91 8 2 0 0 0 0 0 3654 Percent 0.0% 0.0% 0.4% 1.6% 9.2% 38.1% 38.6% 10.3% 1.6% 0.1% 0.0% 0.0% 0.0% 0.0% AM Peak 09:00 11:00 11:00 11:00 10:00 11:00 07:00 00:00 00:00 Vol. 5 14 55 201 161 39 9 3 1 475 PM Peak 13:00 13:00 13:00 12:00 14:00 17:00 18:00 12:00 14:00	18:00	0	0	0	0			166			3	0	0	0	0	336	36-45	254
21:00 0 0 0 0 8 40 39 13 3 1 0 0 0 104 36-45 75 22:00 0 0 0 0 5 14 23 19 2 0 0 0 0 0 63 41-50 42 23:00 0 0 0 0 3 10 21 4 2 0 0 0 0 40 36-45 31 Total 0 0 21 89 519 2154 2185 585 91 8 2 0 0 0 5654 Percent 0.0% 0.0% 0.4% 1.6% 9.2% 38.1% 38.6% 10.3% 1.6% 0.1% 0.0% 0.0% 0.0% 0.0% AM Peak 09:00 11:00 11:00 10:00 11:00 07:00 00:00 00:00 00:00 11:00 <td></td> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> <td>-</td> <td>-</td> <td></td> <td></td> <td>-</td> <td>-</td> <td>-</td> <td></td> <td></td> <td>-</td> <td></td> <td>198</td>				0	0		-	-			-	-	-			-		198
22:00 0 0 0 0 5 14 23 19 2 0 0 0 0 63 41-50 42 23:00 0 0 0 0 3 10 21 4 2 0 0 0 0 40 36-45 31 Total 0 0 21 89 519 2154 2185 585 91 8 2 0 0 0 5654 Percent 0.0% 0.0% 0.4% 1.6% 9.2% 38.1% 38.6% 10.3% 1.6% 0.1% 0.0% 0.0% 0.0% 0.0% AM Peak 09:00 11:00 11:00 11:00 11:00 11:00 10:00 11:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00 00:00										-	0							164
23:00 0 0 0 0 3 10 21 4 2 0 0 0 0 40 36-45 31 Total 0 0 0 21 89 519 2154 2185 585 91 8 2 0 0 0 5654 9564 </td <td></td> <td></td> <td></td> <td></td> <td>-</td> <td>-</td> <td></td> <td></td> <td></td> <td>-</td> <td>1</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td></td> <td>79</td>					-	-				-	1	-	-	-	-	-		79
Total 0 0 21 89 519 2154 2185 585 91 8 2 0 0 0 5654 Percent 0.0% 0.0% 0.4% 1.6% 9.2% 38.1% 38.6% 10.3% 1.6% 0.1% 0.0% 0.0% 0.0% 0.0% AM Peak 09:00 11:00 11:00 10:00 11:00 07:00 00:00 00:00 00:00 11:00 Vol. 5 14 55 201 161 39 9 3 1 475 PM Peak 13:00 13:00 12:00 14:00 17:00 17:00 18:00 12:00 14:00				~							-	-						42
Percent 0.0% 0.0% 0.4% 1.6% 9.2% 38.1% 38.6% 10.3% 1.6% 0.1% 0.0% 0.0% 0.0% 0.0% AM Peak 09:00 11:00 11:00 10:00 11:00 07:00 00:00 00:00 11:00 Vol. 5 14 55 201 161 39 9 3 1 475 PM Peak 13:00 13:00 12:00 14:00 17:00 17:00 18:00 12:00 14:00																	36-45	31
AM Peak 09:00 11:00 11:00 10:00 11:00 07:00 00:00 00:00 00:00 11:00 Vol. 5 14 55 201 161 39 9 3 1 475 PM Peak 13:00 13:00 12:00 14:00 17:00 18:00 12:00 14:00																5654		
Vol. 5 14 55 201 161 39 9 3 1 475 PM Peak 13:00 13:00 12:00 14:00 17:00 18:00 12:00 14:00		0.0%	0.0%										0.0%	0.0%	0.0%			
PM Peak 13:00 13:00 13:00 12:00 14:00 17:00 18:00 12:00 14:00 14:00												00:00						
												1						
Vol. 9 15 67 243 195 61 11 3 1 504												12:00						
	Vol.			9	15	67	243	195	61	11	3	1				504		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Latitude: 0' 0.0000 Undefined

Eastbound																	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/04/18	0	0	0	0	4	5	7	1	1	0	0	0	0	0	18	36-45	12
01:00	0	0	0	0	3	0	4	2	1	0	0	0	0	0	10	41-50	6
02:00	0	0	0	0	1	1	2	1	0	0	0	0	0	0	5	41-50	3
03:00	0	0	0	1	4	7	3	2	1	0	0	0	0	0	18	31-40	11
04:00	0	0	0	1	2	11	24	3	2	1	0	0	0	0	44	36-45	35
05:00	0	0	0	1	7	36	54	26	6	0	0	0	0	0	130	36-45	90
06:00	0	0	0	1	19	123	196	37	3	1	0	0	0	0	380	36-45	319
07:00	0	0	0	5	61	272	254	25	0	0	0	0	0	0	617	36-45	526
08:00	0	0	1	6	42	295	189	36	2	0	0	0	0	0	571	36-45	484
09:00	0	0	2	4	44	143	155	30	4	0	0	0	0	0	382	36-45	298
10:00	0	0	2	12	44	133	133	30	0	0	0	0	0	0	354	36-45	266
11:00	0	0	0	3	11	36	34	7	1	0	0	0	0	0	92	36-45	70
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	0	5	34	242	1062	1055	200	21	2	0	0	0	0	2621		
Percent	0.0%	0.0%	0.2%	1.3%	9.2%	40.5%	40.3%	7.6%	0.8%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak			09:00	10:00	07:00	08:00	07:00	06:00	05:00	04:00					07:00		
Vol.			2	12	61	295	254	37	6	1					617		
PM Peak Vol.																	
Total	7	23	90	489	3181	12807	13097	3252	423	42	9	1	0	1	33422		
Percent	0.0%	0.1%	0.3%	1.5%	9.5%	38.3%	39.2%	9.7%	1.3%	0.1%	0.0%	0.0%	0.0%	0.0%			
-						-											

15th Percentile: 35 MPH 50th Percentile: 40 MPH 85th Percentile: 44 MPH 95th Percentile: 48 MPH

 Stats
 10 MPH Pace Speed : Number in Pace : 25904

 Percent in Pace : 77.5%

Number of Vehicles > 40 MPH: 16825 Percent of Vehicles > 40 MPH: 50.3% Mean Speed(Average): 40 MPH

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/30/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
14:00	0	0	0	3	58	191	154	33	7	0	0	0	0	0	446	36-45	345
15:00	0	1	14	14	91	251	167	30	2	0	0	0	0	0	570	36-45	418
16:00	0	2	8	30	114	304	221	34	2	0	0	0	0	0	715	36-45	52
17:00	0	0	0	10	132	308	241	26	2	1	0	0	0	0	720	36-45	549
18:00	0	0	1	3	39	231	282	29	1	0	0	0	0	0	586	36-45	513
19:00	0	0	0	4	40	151	112	38	3	0	0	0	0	0	348	36-45	263
20:00	0	Ö	Ō	3	35	119	86	23	1	0	Ō	Ö	0	Ō	267	36-45	20
21:00	0	0	0	4	20	73	60	17	5	0	0	0	0	0	179	36-45	133
22:00	0	1	0	0	16	53	31	14	1	1	0	0	0	0	117	36-45	8
23:00	0	0	0	4	8	17	23	3	1	0	0	0	0	0	56	36-45	4
Total	0	4	23	75	553	1698	1377	247	25	2	0	0	0	0	4004		
Percent	0.0%	0.1%	0.6%	1.9%	13.8%	42.4%	34.4%	6.2%	0.6%	0.0%	0.0%	0.0%	0.0%	0.0%			
M Peak Vol.																	
PM Peak		16:00	15:00	16:00	17:00	17:00	18:00	19:00	14:00	17:00					17:00		
Vol.		2	14	30	132	308	282	38	7	1					720		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Westbound															Lantado.	0 0.0000	Oridoninod
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
05/31/18	0	0	0	1	3	12	18	2	2	1	0	0	0	0	39	36-45	30
01:00	0	0	0	0	0	2	9	1	0	0	0	0	0	0	12	36-45	11
02:00	0	0	0	0	2	2	0	2	0	0	0	0	0	0	6	30-39	4
03:00	0	0	0	1	0	3	3	1	1	0	0	0	0	0	9	36-45	6
04:00	0	0	0	0	3	6	9	2	1	0	0	0	0	0	21	36-45	15
05:00	0	0	0	1	4	17	37	12	2	0	0	0	0	0	73	36-45	54
06:00	0	0	0	9	28	75	99	26	2	1	0	0	0	0	240	36-45	174
07:00	0	0	0	18	66	164	183	27	1	0	0	0	0	0	459	36-45	347
08:00	0	0	1	15	66	210	150	30	5	0	0	0	0	0	477	36-45	360
09:00	0	0	0	8	45	175	94	23	1	1	0	0	0	0	347	36-45	269
10:00	0	0	0	8	58	181	121	19	3	0	0	0	0	0	390	36-45	302
11:00	0	0	1	5	70	164	128	21	4	0	0	0	0	0	393	36-45	292
12 PM	0	0	0	18	87	181	126	22	1	0	0	0	0	0	435	36-45	307
13:00	1	0	2	18	65	143	120	19	1	0	0	0	0	0	369	36-45	263
14:00	0	0	1	8	68	187	178	29	6	0	0	0	0	0	477	36-45	365
15:00	0	1	1	7	91	243	174	23	2	0	0	0	0	0	542	36-45	417
16:00	0	0	1	13	120	271	258	21	3	0	0	0	0	0	687	36-45	529
17:00	1	2	5	23	143	336	254	31	4	0	0	0	0	0	799	36-45	590
18:00	0	0	1	1	43	213	206	53	4	2	0	0	0	0	523	36-45	419
19:00	0	0	3	1	35	147	164	25	4	0	0	0	0	0	379	36-45	311
20:00	0	0	0	1	46	98	87	22	7	0	0	0	0	0	261	36-45	185
21:00	0	0	1	5	18	69	81	13	1	0	0	0	0	0	188	36-45	150
22:00	0	0	0	1	18	43	46	11	3	2	0	0	0	0	124	36-45	89
23:00	0	11	0	0	6	22	20	6	2	0	0	0	0	0	57	36-45	42
Total	2	4	17	162	1085	2964	2565	441	60	7	0	0	0	0	7307		
Percent	0.0%	0.1%	0.2%	2.2%	14.8%	40.6%	35.1%	6.0%	0.8%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak			08:00	07:00	11:00	08:00	07:00	08:00	08:00	00:00					08:00		
Vol.			11	18	70	210	183	30	5	1					477		
PM Peak	13:00	17:00	17:00	17:00	17:00	17:00	16:00	18:00	20:00	18:00					17:00		
Vol.	1	2	5	23	143	336	258	53	7	2					799		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Westbound															Lamuuc.	0.0000	Ondonnoa
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/01/18	0	0	0	0	5	7	13	8	1	0	0	0	0	0	34	39-48	21
01:00	0	0	0	1	4	5	4	2	0	0	0	0	0	0	16	36-45	9
02:00	0	0	0	0	0	2	3	2	0	0	0	0	0	0	7	41-50	5
03:00	0	0	0	1	2	3	2	1	0	0	0	0	0	0	9	36-45	5
04:00	0	0	0	0	4	8	8	5	1	1	0	0	0	0	27	36-45	16
05:00	0	0	0	1	7	29	52	13	1	1	1	0	0	0	105	36-45	81
06:00	0	0	0	2	28	90	114	19	4	1	0	0	0	0	258	36-45	204
07:00	0	0	0	4	38	183	183	26	3	0	0	0	0	0	437	36-45	366
08:00	0	0	0	6	43	197	167	37	1	0	0	0	0	0	451	36-45	364
09:00	0	0	2	10	50	178	116	23	2	0	0	0	0	0	381	36-45	294
10:00	0	0	4	13	44	190	110	23	2	0	0	0	0	0	386	36-45	300
11:00	0	0	4	20	74	183	90	18	2	0	0	0	0	0	391	36-45	273
12 PM	0	2	0	20	72	210	125	22	1	0	0	0	0	0	452	36-45	335
13:00	0	0	3	8	75	187	140	19	1	1	0	0	0	0	434	36-45	327
14:00	0	1	12	20	63	226	146	28	3	0	0	0	0	0	499	36-45	372
15:00	6	5	12	24	138	267	133	36	2	0	0	0	0	0	623	31-40	405
16:00	0	0	14	44	127	319	178	21	2	0	0	0	0	0	705	36-45	497
17:00	0	0	4	51	121	303	236	30	4	1	0	0	0	0	750	36-45	539
18:00	0	0	7	12	41	182	210	44	5	0	0	0	0	0	501	36-45	392
19:00	0	0	1	6	20	134	124	34	2	2	0	0	0	0	323	36-45	258
20:00	0	0	1	3	41	139	115	20	1	0	0	0	0	0	320	36-45	254
21:00	0	0	1	4	30	109	66	31	5	1	0	0	0	0	247	36-45	175
22:00	0	0	0	2	12	49	58	16	3	1	0	0	0	0	141	36-45	107
23:00	0	0	0	2	8	22	41	21	5	2	0	0	0	0	101	36-45	63
Total	6	8	65	254	1047	3222	2434	499	51	11	1	0	0	0	7598		
Percent	0.1%	0.1%	0.9%	3.3%	13.8%	42.4%	32.0%	6.6%	0.7%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak			10:00	11:00	11:00	08:00	07:00	08:00	06:00	04:00	05:00				08:00		
Vol.			4	20	74	197	183	37	4	1	1				451		
PM Peak	15:00	15:00	16:00	17:00	15:00	16:00	17:00	18:00	18:00	19:00					17:00		
Vol.	6	5	14	51	138	319	236	44	5	2					750		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Westbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/02/18	0	0	0	1	11	14	21	8	2	0	0	0	0	0	57	36-45	35
01:00	0	0	0	0	1	5	4	7	1	0	0	0	0	0	18	40-49	11
02:00	0	0	0	0	1	3	6	3	0	1	0	0	0	0	14	36-45	9
03:00	0	0	0	0	1	2	4	2	1	0	0	0	0	0	10	41-50	6
04:00	0	0	0	2	2	6	6	5	0	0	0	0	0	0	21	36-45	12
05:00	0	0	1	1	3	21	12	12	4	1	0	0	0	0	55	36-45	33
06:00	0	0	0	0	7	21	47	16	6	2	0	0	0	0	99	36-45	68
07:00	0	0	1	6	28	53	82	30	10	0	0	0	0	0	210	36-45	135
08:00	0	0	1	4	31	145	136	22	4	0	0	0	0	0	343	36-45	281
09:00	0	3	16	29	84	185	121	19	1	0	0	0	0	0	458	36-45	306
10:00	0	0	11	35	118	222	128	10	1	0	0	0	0	0	525	36-45	350
11:00	0	0	5	39	97	251	147	20	2	0	0	0	0	0	561	36-45	398
12 PM	0	0	3	13	101	238	139	26	1	0	0	0	0	0	521	36-45	377
13:00	0	0	5	33	86	222	159	23	3	0	0	0	0	0	531	36-45	381
14:00	0	0	4	21	100	251	154	20	0	0	1	0	0	0	551	36-45	405
15:00	0	0	0	19	64	218	144	24	1	0	0	0	0	0	470	36-45	362
16:00	0	0	2	20	89	164	148	31	1	1	0	0	0	0	456	36-45	312
17:00	0	0	1	5	49	160	129	29	4	0	0	0	0	0	377	36-45	289
18:00	0	0	0	6	19	131	144	39	1	0	0	0	0	0	340	36-45	275
19:00	0	0	0	2	22	102	106	25	3	0	0	0	0	0	260	36-45	208
20:00	0	0	0	1	29	73	79	20	4	0	0	0	0	0	206	36-45	152
21:00	0	1	0	0	13	79	64	19	2	0	0	0	0	0	178	36-45	143
22:00	0	0	0	1	13	50	40	10	1	1	0	0	0	0	116	36-45	90
23:00	0	0	1	2	10	39	33	10	4	0	1	0	0	0	100	36-45	72
Total	0	4	51	240	979	2655	2053	430	57	6	2	0	0	0	6477		
Percent	0.0%	0.1%	0.8%	3.7%	15.1%	41.0%	31.7%	6.6%	0.9%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak		09:00	09:00	11:00	10:00	11:00	11:00	07:00	07:00	06:00					11:00		
Vol.		3	16	39	118	251	147	30	10	2					561		
PM Peak		21:00	13:00	13:00	12:00	14:00	13:00	18:00	17:00	16:00	14:00				14:00		
Vol.		1	5	33	101	251	159	39	4	1	1				551		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Westbound															Lantado.	0 0.0000	Oridennica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/03/18	0	0	0	0	6	16	18	8	1	2	1	0	0	0	52	36-45	34
01:00	0	0	0	0	2	9	10	2	0	0	0	0	0	0	23	36-45	19
02:00	0	0	0	1	3	11	5	3	0	0	0	0	0	0	23	35-44	16
03:00	0	0	0	0	2	2	3	7	0	1	0	0	0	0	15	41-50	10
04:00	0	0	0	0	0	1	4	4	1	0	0	0	0	0	10	41-50	8
05:00	0	0	0	0	1	10	13	7	1	1	0	0	0	0	33	36-45	23
06:00	0	0	0	0	0	12	25	13	4	2	0	0	0	0	56	39-48	38
07:00	0	0	1	0	9	40	58	23	5	3	0	0	0	0	139	36-45	98
08:00	0	0	0	3	13	64	87	21	5	0	0	0	0	0	193	36-45	151
09:00	0	0	6	29	41	119	119	19	2	0	0	0	0	0	335	36-45	238
10:00	0	0	4	15	72	187	181	19	0	0	0	0	0	0	478	36-45	368
11:00	0	0	2	16	78	197	124	20	4	0	1	0	0	0	442	36-45	321
12 PM	0	0	4	9	87	254	159	16	4	0	0	0	0	0	533	36-45	413
13:00	0	1	4	15	64	245	148	20	3	0	0	0	0	0	500	36-45	393
14:00	0	0	2	7	51	186	187	34	1	1	0	0	0	0	469	36-45	373
15:00	0	0	1	6	83	230	150	21	3	0	0	0	0	0	494	36-45	380
16:00	0	1	0	15	49	224	162	19	1	1	0	0	0	0	472	36-45	386
17:00	0	0	0	1	26	140	159	53	9	0	0	0	0	0	388	36-45	299
18:00	0	0	0	4	23	121	157	50	3	0	0	0	0	0	358	36-45	278
19:00	0	0	0	5	19	82	114	38	11	1	0	0	0	0	270	36-45	196
20:00	0	0	0	0	21	84	71	26	7	1	0	1	0	0	211	36-45	155
21:00	0	0	0	1	11	41	49	16	2	0	0	0	0	0	120	36-45	90
22:00	0	0	0	0	4	32	37	11	1	1	0	0	0	0	86	36-45	69
23:00	0	0	0	0	5	15	18	10	2	0	0	0	0	0	50	36-45	33
Total	0	2	24	127	670	2322	2058	460	70	14	2	1	0	0	5750		
Percent	0.0%	0.0%	0.4%	2.2%	11.7%	40.4%	35.8%	8.0%	1.2%	0.2%	0.0%	0.0%	0.0%	0.0%			
AM Peak			09:00	09:00	11:00	11:00	10:00	07:00	07:00	07:00	00:00				10:00		
Vol.			6	29	78	197	181	23	5	3	1				478		
PM Peak		13:00	12:00	13:00	12:00	12:00	14:00	17:00	19:00	14:00		20:00			12:00		
Vol.		1	4	15	87	254	187	53	11	1		1			533		

Route 66 East of Route 196 East Hampton, Connecticut

Site Code: Station ID: 4678

Latitude: 0' 0.0000 Undefined

Westbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
06/04/18	0	0	0	1	1	8	8	2	2	0	0	0	0	0	22	36-45	16
01:00	0	0	0	0	2	5	3	2	3	0	0	0	0	0	15	34-43	8
02:00	0	0	0	0	1	1	3	1	0	0	0	0	0	0	6	41-50	4
03:00	0	0	0	0	3	3	2	1	0	0	0	0	0	0	9	31-40	6
04:00	0	0	0	0	3	5	7	6	1	0	0	0	0	0	22	39-48	13
05:00	0	0	0	1	1	21	29	13	2	0	0	0	0	0	67	36-45	50
06:00	0	0	0	2	39	114	85	10	4	0	0	0	0	0	254	36-45	199
07:00	0	0	1	17	71	211	120	12	1	0	0	0	0	0	433	36-45	331
08:00	0	0	0	8	80	168	125	21	1	0	0	0	0	0	403	36-45	293
09:00	0	0	2	5	44	149	122	15	3	1	0	0	0	0	341	36-45	271
10:00	0	0	2	6	58	129	93	18	4	0	0	0	0	0	310	36-45	222
11:00	0	0	2	5	7	37	29	7	0	0	0	0	0	0	87	36-45	66
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	0	7	45	310	851	626	108	21	1	0	0	0	0	1969		
Percent	0.0%	0.0%	0.4%	2.3%	15.7%	43.2%	31.8%	5.5%	1.1%	0.1%	0.0%	0.0%	0.0%	0.0%			
AM Peak			09:00	07:00	08:00	07:00	08:00	08:00	06:00	09:00					07:00		
Vol.			2	17	80	211	125	21	4	1					433		
PM Peak																	
Vol.																	
Total	8	22	187	903	4644	13712	11113	2185	284	41	5	1	0	0	33105		-
Percent	0.0%	0.1%	0.6%	2.7%	14.0%	41.4%	33.6%	6.6%	0.9%	0.1%	0.0%	0.0%	0.0%	0.0%			
			File Democrati		O 4 MADLL												

15th Percentile: 34 MPH 50th Percentile: 38 MPH 85th Percentile: 43 MPH 95th Percentile: 46 MPH

Stats 10 MPH Pace Speed: 36-45 MPH Number in Pace: 24825

Percent in Pace: 75.0%

Number of Vehicles > 40 MPH: 13629

Percent of Vehicles > 40 MPH: 41.2%

Mean Speed(Average): 39 MPH

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	1
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	•
13:00	0	0	1	8	19	57	124	95	16	6	0	0	0	0	326	41-50	219
14:00	0	0	1	3	12	51	173	177	30	2	2	0	0	0	451	41-50	350
15:00	0	0	0	10	44	130	197	137	28	1	0	0	0	0	547	41-50	334
16:00	0	0	2	17	46	146	303	193	29	2	1	0	0	0	739	41-50	496
17:00	0	0	1	2	15	66	302	298	63	5	0	0	0	0	752	41-50	600
18:00	0	0	0	0	10	42	125	179	83	9	0	0	0	0	448	41-50	304
19:00	0	0	0	5	12	24	67	133	61	10	1	1	0	0	314	41-50	200
20:00	0	0	0	0	1	12	64	76	31	18	1	1	0	0	204	41-50	140
21:00	0	0	0	0	2	23	36	52	41	10	4	0	0	0	168	46-55	93
22:00	0	0	0	0	3	3	15	30	21	6	0	1	0	0	79	46-55	51
23:00	0	0	0	0	0	1	8	16	9	10	2	2	0	1	49	44-53	25
Total	0	0	5	45	164	555	1414	1386	412	79	11	5	0	1	4077		
Percent	0.0%	0.0%	0.1%	1.1%	4.0%	13.6%	34.7%	34.0%	10.1%	1.9%	0.3%	0.1%	0.0%	0.0%			
AM Peak																	
Vol.																	
PM Peak			16:00	16:00	16:00	16:00	16:00	17:00	18:00	20:00	21:00	23:00		23:00	17:00		
Vol.			2	17	46	146	303	298	83	18	4	2		1	752		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Westbound															Latitado.	0 0.0000	Oridoniilod
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	1	4	6	9	4	0	0	0	0	24	46-55	15
01:00	0	0	0	0	0	0	4	2	7	2	0	0	0	0	15	51-60	9
02:00	0	0	0	0	0	0	1	5	0	1	0	0	0	0	7	41-50	6
03:00	0	0	0	0	0	2	0	3	8	0	0	0	0	0	13	46-55	11
04:00	0	0	0	0	0	5	5	12	6	6	0	0	0	0	34	44-53	18
05:00	0	0	0	0	5	6	21	22	24	5	2	0	0	0	85	46-55	46
06:00	0	0	0	0	4	34	69	101	53	12	0	0	0	0	273	41-50	170
07:00	0	0	0	0	19	31	123	161	89	9	1	0	0	0	433	41-50	284
08:00	0	1	3	0	10	29	130	168	63	10	1	0	0	0	415	41-50	298
09:00	0	0	0	0	6	34	82	134	58	12	0	0	0	0	326	41-50	216
10:00	0	1	2	2	6	18	77	128	55	9	1	0	0	0	299	41-50	205
11:00	8	3	0	0	10	32	77	118	49	9	2	0	0	0	308	41-50	195
12 PM	0	0	4	5	18	42	119	97	46	8	1	0	0	0	340	41-50	216
13:00	0	0	0	0	6	25	104	136	54	10	1	1	0	0	337	41-50	240
14:00	0	0	1	2	3	28	115	162	59	7	2	0	0	0	379	41-50	277
15:00	0	0	0	3	27	81	191	145	49	10	0	0	0	0	506	41-50	336
16:00	0	0	0	3	20	44	146	292	129	15	1	0	0	0	650	41-50	438
17:00	0	0	2	4	11	47	200	278	112	13	0	0	0	0	667	41-50	478
18:00	0	0	0	0	9	40	114	198	92	14	3	0	0	0	470	41-50	312
19:00	0	0	0	0	0	24	89	86	40	4	0	0	0	0	243	41-50	175
20:00	0	0	0	3	6	13	51	71	34	3	2	0	0	0	183	41-50	122
21:00	0	0	0	0	0	17	44	54	36	9	3	0	0	0	163	41-50	98
22:00	0	0	0	0	1	2	18	30	18	7	2	1	0	0	79	41-50	48
23:00	0	0	0_	0	0	2	11	9	8	3	4	0	0	0	37	41-50	20
Total	8	5	12	22	161	557	1795	2418	1098	182	26	2	0	0	6286		
Percent	0.1%	0.1%	0.2%	0.3%	2.6%	8.9%	28.6%	38.5%	17.5%	2.9%	0.4%	0.0%	0.0%	0.0%	07.00		
AM Peak	11:00	11:00	08:00	10:00	07:00	06:00	08:00	08:00	07:00	06:00	05:00				07:00		
Vol.	8	3	3	2	19	34	130	168	89	12	2	40.00			433		
PM Peak			12:00	12:00	15:00	15:00	17:00	16:00	16:00	16:00	23:00	13:00			17:00		
Vol.			4	5	27	81	200	292	129	15	4	7			667		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Westbound															Lalliude.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	4	5	9	8	3	0	0	0	0	29	46-55	17
01:00	0	0	0	0	0	1	3	7	1	0	1	0	0	0	13	41-50	10
02:00	0	0	0	0	0	0	1	2	4	1	0	0	0	0	8	46-55	6
03:00	0	0	0	0	0	3	2	7	1	1	0	0	0	0	14	41-50	9
04:00	0	0	0	0	0	5	3	8	8	4	1	0	1	0	30	46-55	16
05:00	0	0	0	0	4	2	30	35	22	8	1	1	0	0	103	41-50	65
06:00	0	2	5	7	3	12	75	96	67	10	1	0	0	0	278	41-50	171
07:00	0	0	4	6	28	44	107	196	82	9	0	0	0	0	476	41-50	303
08:00	0	0	0	2	4	47	139	152	48	6	0	0	0	0	398	41-50	291
09:00	3	1	4	4	5	22	61	144	62	5	2	0	0	0	313	44-53	206
10:00	0	0	0	4	14	26	112	110	46	9	1	0	0	0	322	41-50	222
11:00	0	0	3	6	15	38	97	140	45	14	0	0	0	0	358	41-50	237
12 PM	0	0	1	8	10	52	130	130	40	5	1	1	0	0	378	41-50	260
13:00	0	0	0	0	16	62	153	121	30	2	1	0	0	0	385	41-50	274
14:00	0	0	0	3	20	54	112	196	42	7	0	0	0	0	434	41-50	308
15:00	1	11	16	24	39	87	164	163	34	4	1	0	0	0	544	41-50	327
16:00	0	2	2	13	34	46	248	283	66	4	1	0	0	0	699	41-50	531
17:00	1	3	4	3	21	55	224	303	101	10	1	0	0	0	726	41-50	527
18:00	0	0	0	1	3	8	64	203	184	27	4	0	0	0	494	46-55	387
19:00	0	0	0	0	0	13	82	125	78	16	1	0	0	0	315	41-50	207
20:00	0	0	0	0	6	14	72	94	53	7	3	1	0	0	250	41-50	166
21:00	0	0	0	0	0	4	38	73	27	5	2	1	0	0	150	41-50	111
22:00	0	0	0	0	0	7	18	35	22	4	3	0	0	0	89	46-55	57
23:00	0	0	0	1	11	2	12	10	13	5	1_	1_	0	0	46	44-53	23_
Total	5	19	39	82	223	608	1952	2642	1084	166	26	5	11	0	6852		
Percent	0.1%	0.3%	0.6%	1.2%	3.3%	8.9%	28.5%	38.6%	15.8%	2.4%	0.4%	0.1%	0.0%	0.0%			
AM Peak	09:00	06:00	06:00	06:00	07:00	08:00	08:00	07:00	07:00	11:00	09:00	05:00	04:00		07:00		
Vol.	3	2	5_	7	28	47	139	196	82	14	2	1_	1		476		
PM Peak	15:00	15:00	15:00	15:00	15:00	15:00	16:00	17:00	18:00	18:00	18:00	12:00			17:00		
Vol.	1	11	16	24	39	87	248	303	184	27	4	1			726		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Westbound															Latitude.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	2	5	10	5	4	0	1	0	1	28	41-50	15
01:00	0	0	0	0	0	0	4	2	6	0	0	0	0	1	13	45-54	8
02:00	0	0	0	0	0	1	2	2	3	3	0	0	1	0	12	49-58	6
03:00	0	0	0	0	1	2	6	2	3	0	0	0	0	1	15	36-45	8
04:00	0	0	0	0	0	1	9	5	6	5	2	0	0	0	28	41-50	14
05:00	0	0	0	0	2	4	23	26	23	13	6	1	1	0	99	46-55	49
06:00	0	0	0	1	3	23	74	134	60	8	2	0	0	0	305	41-50	208
07:00	0	0	0	3	19	48	145	165	92	14	1	0	0	0	487	41-50	310
08:00	0	0	0	1	2	15	108	174	73	23	4	0	0	0	400	41-50	282
09:00	1	1	3	2	8	19	111	133	57	11	0	0	0	0	346	41-50	244
10:00	0	0	0	0	8	43	127	116	37	8	0	0	1	0	340	41-50	243
11:00	0	0	0	0	11	38	148	126	42	1	0	0	0	0	366	41-50	274
12 PM	0	7	5	1	20	54	129	125	69	7	3	1	0	0	421	41-50	254
13:00	0	0	0	3	14	64	152	118	36	11	0	0	0	0	398	41-50	270
14:00	0	0	0	2	11	32	119	140	73	19	4	0	0	0	400	41-50	259
15:00	0	0	1	6	25	100	199	175	48	6	1	0	0	0	561	41-50	374
16:00	8	10	6	11	43	84	231	218	66	5	0	0	0	0	682	41-50	449
17:00	0	0	0	4	15	95	243	280	70	15	1	0	0	0	723	41-50	523
18:00	0	0	0	2	15	34	119	196	95	19	2	1	0	0	483	41-50	315
19:00	0	0	0	0	1	16	60	117	72	11	2	0	0	0	279	46-55	189
20:00	0	0	0	0	1	15	44	94	38	6	2	0	0	0	200	41-50	138
21:00	0	0	0	0	4	11	29	76	29	7	2	1	0	0	159	46-55	105
22:00	0	0	0	0	0	5	28	54	46	11	1	0	1	0	146	46-55	100
23:00	0	0	0	0	0	3	24	26	36	5	3	0	0	0	97	46-55	62
Total	9	18	15	36	203	709	2139	2514	1085	212	36	5	4	3	6988		
Percent	0.1%	0.3%	0.2%	0.5%	2.9%	10.1%	30.6%	36.0%	15.5%	3.0%	0.5%	0.1%	0.1%	0.0%			
AM Peak	09:00	09:00	09:00	07:00	07:00	07:00	11:00	08:00	07:00	08:00	05:00	00:00	02:00	00:00	07:00		
Vol.	1	1	3	3	19	48	148	174	92	23	6_	1	1	1_	487		
PM Peak	16:00	16:00	16:00	16:00	16:00	15:00	17:00	17:00	18:00	14:00	14:00	12:00	22:00		17:00		
Vol.	8	10	6	11	43	100	243	280	95	19	4	1	1		723		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Westbound															Latitado.	0 0.0000	Oridonnica
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	0	4	11	20	9	6	0	0	1	1	52	41-50	31
01:00	0	0	0	0	0	1	3	8	9	9	1	1	0	0	32	49-58	18
02:00	0	0	0	0	0	2	0	5	5	3	0	1	1	0	17	46-55	10
03:00	0	0	0	0	0	1	2	3	2	2	0	0	0	0	10	46-55	5
04:00	0	0	0	0	0	0	2	2	4	2	0	0	0	0	10	51-60	6
05:00	0	0	0	0	0	1	8	9	19	8	2	1	0	0	48	46-55	28
06:00	0	0	0	0	1	1	21	46	27	9	3	1	0	0	109	46-55	73
07:00	0	0	0	1	4	17	46	103	59	13	2	0	0	0	245	46-55	162
08:00	1	1	1	4	13	39	114	137	37	8	0	0	0	0	355	41-50	251
09:00	3	4	9	19	36	77	147	107	44	5	1	0	0	0	452	41-50	254
10:00	0	1	2	5	37	58	161	135	37	2	1	0	0	0	439	41-50	296
11:00	2	4	8	13	31	106	189	114	25	2	1	0	0	0	495	41-50	303
12 PM	5	11	16	7	28	109	212	112	20	2	1	0	0	0	523	41-50	324
13:00	1	4	14	23	34	85	188	108	27	3	0	0	0	0	487	41-50	296
14:00	5	7	10	11	37	84	173	136	35	3	0	0	0	0	501	41-50	309
15:00	0	1	2	2	11	96	198	121	29	5	0	0	0	0	465	41-50	319
16:00	0	0	0	4	10	60	190	128	42	0	0	0	0	0	434	41-50	318
17:00	0	0	0	3	14	39	125	165	35	8	0	0	0	0	389	41-50	290
18:00	0	0	0	2	2	27	112	148	55	7	2	0	0	0	355	41-50	260
19:00	0	0	0	2	5	10	70	118	47	14	5	1	0	0	272	41-50	188
20:00	0	0	0	0	0	4	52	91	42	14	1	1	0	0	205	41-50	143
21:00	0	0	0	0	2	6	37	58	39	10	3	0	0	0	155	45-54	97
22:00	0	0	0	0	1	10	27	69	37	14	3	0	0	1	162	46-55	106
23:00	0	0	0	0	0	4	12	34	21	8	2	0	0	0	81	46-55	55
Total	17	33	62	96	266	841	2100	1977	706	157	28	6	2	2	6293		
Percent	0.3%	0.5%	1.0%	1.5%	4.2%	13.4%	33.4%	31.4%	11.2%	2.5%	0.4%	0.1%	0.0%	0.0%			
AM Peak	09:00	09:00	09:00	09:00	10:00	11:00	11:00	08:00	07:00	07:00	06:00	01:00	00:00	00:00	11:00		
Vol.	3	4	9	19	37	106	189	137	59	13	3	1_	1	1	495		
PM Peak	12:00	12:00	12:00	13:00	14:00	12:00	12:00	17:00	18:00	19:00	19:00	19:00		22:00	12:00		
Vol.	5	11	16	23	37	109	212	165	55	14	5	1		1	523		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Westbound															Latitado.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	2	2	10	14	14	4	4	0	0	0	50	46-55	28
01:00	0	0	0	0	0	1	5	14	15	2	1	1	0	0	39	46-55	29
02:00	0	0	0	0	0	1	3	3	3	2	1	1	0	0	14	46-55	6
03:00	0	0	0	0	0	0	1	3	4	2	0	0	0	0	10	46-55	7
04:00	0	0	0	0	0	1	1	2	3	1	0	0	0	0	8	46-55	5
05:00	0	0	0	0	0	2	4	5	7	2	5	0	0	0	25	46-55	12
06:00	0	0	0	0	0	6	12	25	17	2	4	0	0	0	66	46-55	42
07:00	0	0	0	1	3	5	27	35	23	4	3	0	0	0	101	41-50	62
08:00	0	0	1	1	1	19	69	72	44	13	0	0	0	0	220	41-50	141
09:00	3	2	1	4	13	33	92	86	43	10	0	0	0	0	287	41-50	178
10:00	0	0	0	3	29	71	138	121	38	5	0	0	0	0	405	41-50	259
11:00	0	0	2	8	22	52	127	119	43	6	1	0	0	0	380	41-50	246
12 PM	0	0	2	10	21	71	159	143	56	3	0	0	0	0	465	41-50	302
13:00	0	0	2	3	27	51	123	139	47	10	1	0	0	0	403	41-50	262
14:00	0	0	1	4	11	55	125	135	57	13	1	0	0	0	402	41-50	260
15:00	0	1	2	4	12	60	120	141	66	11	3	0	0	0	420	41-50	261
16:00	0	1	2	5	7	34	84	139	92	20	3	0	0	0	387	46-55	231
17:00	0	0	3	2	10	31	76	102	103	15	2	0	0	0	344	46-55	205
18:00	0	0	0	1	6	20	63	105	68	14	5	1	0	0	283	46-55	173
19:00	0	0	0	0	1	11	50	74	49	11	5	0	1	0	202	41-50	124
20:00	0	0	0	0	1	9	37	56	39	14	2	1	0	0	159	46-55	95
21:00	0	0	0	0	1	5	18	24	23	9	2	1	1	0	84	46-55	47
22:00	0	0	0	0	0	4	8	19	14	6	5	0	0	0	56	46-55	33
23:00	0	0	0	0	1	2	7	8	12	1	1_	0	1	0	33	46-55	20
Total	3	4	16	46	168	546	1359	1584	880	180	49	5	3	0	4843		
Percent	0.1%	0.1%	0.3%	0.9%	3.5%	11.3%	28.1%	32.7%	18.2%	3.7%	1.0%	0.1%	0.1%	0.0%			
AM Peak	09:00	09:00	11:00	11:00	10:00	10:00	10:00	10:00	08:00	08:00	05:00	01:00			10:00		
Vol.	3	2	2	8	29	71	138	121	44	13	5_	1			405		
PM Peak		15:00	17:00	12:00	13:00	12:00	12:00	12:00	17:00	16:00	18:00	18:00	19:00		12:00		
Vol.		1	3	10	27	71	159	143	103	20	5	1	1		465		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Latitude: 0' 0.0000 Undefined

Westbound																0.0000	0
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	1	1	7	1	4	0	0	0	0	14	41-50	8
01:00	0	0	0	0	0	0	3	6	7	1	0	1	0	0	18	46-55	13
02:00	0	0	0	0	0	0	2	1	1	0	0	0	0	0	4	39-48	3
03:00	0	0	0	0	0	0	5	2	2	0	0	0	0	0	9	41-50	7
04:00	0	0	0	0	0	3	5	11	4	3	2	0	0	0	28	41-50	16
05:00	0	0	0	0	2	7	22	35	19	9	3	0	0	0	97	41-50	57
06:00	0	0	1	3	3	26	76	106	54	7	1	0	0	0	277	41-50	182
07:00	0	0	0	2	16	46	144	164	67	9	0	0	0	0	448	41-50	308
08:00	0	0	0	0	5	50	155	160	58	7	1	0	0	0	436	41-50	315
09:00	0	1	2	1	9	25	108	84	51	9	1	0	0	0	291	41-50	192
10:00	0	0	3	4	6	42	104	116	43	8	4	1	0	0	331	41-50	220
11:00	0	4	0	0	8	40	84	98	58	8	0	0	0	0	300	41-50	182
12 PM	0	0	0	1	14	40	116	123	51	9	1	1	0	0	356	41-50	239
13:00	0	0	0	0	7	49	99	143	39	8	2	0	0	0	347	41-50	242
14:00	0	0	0	0	2	55	112	121	59	9	3	0	0	0	361	41-50	233
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	5	6	11	72	384	1036	1177	514	91	18	3	0	0	3317		
Percent	0.0%	0.2%	0.2%	0.3%	2.2%	11.6%	31.2%	35.5%	15.5%	2.7%	0.5%	0.1%	0.0%	0.0%			
AM Peak		11:00	10:00	10:00	07:00	08:00	08:00	07:00	07:00	05:00	10:00	01:00			07:00		
Vol.		4	3	4	16	50	155	164	67	9	4	1			448		
PM Peak				12:00	12:00	14:00	12:00	13:00	14:00	12:00	14:00	12:00			14:00		
Vol.				11	14	55	116	143	59	9	3	1			361		
Total	42	84	155	338	1257	4200	11795	13698	5779	1067	194	31	10	6	38656		
Percent	0.1%	0.2%	0.4%	0.9%	3.3%	10.9%	30.5%	35.4%	14.9%	2.8%	0.5%	0.1%	0.0%	0.0%			

15th Percentile: 39 MPH 50th Percentile: 45 MPH 85th Percentile: 51 MPH 95th Percentile: 54 MPH

Stats 10 MPH Pace Speed: 41-50 MPH Number in Pace: 25493

Percent in Pace : 65.9%

Number of Vehicles > 40 MPH : 32580

Percent of Vehicles > 40 MPH : 84.3%

Mean Speed(Average) : 46 MPH

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	2	0	0	7	14	48	118	80	39	5	2	0	0	0	315	41-50	198
14:00	0	1	1	2	16	52	125	134	44	15	1	0	0	0	391	41-50	259
15:00	0	1	1	4	12	123	172	142	55	7	0	1	0	0	518	41-50	314
16:00	0	0	1	2	35	93	202	149	58	7	1	0	0	0	548	41-50	351
17:00	0	0	2	1	21	69	181	184	68	4	1	0	0	0	531	41-50	365
18:00	0	0	1	0	2	33	113	182	94	19	3	0	0	0	447	41-50	295
19:00	0	0	0	0	3	6	67	130	77	15	4	0	0	0	302	46-55	207
20:00	0	0	0	0	0	11	49	82	40	11	1	1	2	0	197	41-50	131
21:00	0	0	1	0	0	4	22	40	19	6	0	0	0	0	92	41-50	62
22:00	0	0	0	0	0	0	14	24	17	4	0	0	0	0	59	46-55	41
23:00	0	0	0	0	0	3	2	6	10	3	0	11	0	0	25	46-55	16
Total	2	2	7	16	103	442	1065	1153	521	96	13	3	2	0	3425		
Percent	0.1%	0.1%	0.2%	0.5%	3.0%	12.9%	31.1%	33.7%	15.2%	2.8%	0.4%	0.1%	0.1%	0.0%			
AM Peak Vol.																	
PM Peak	13:00	14:00	17:00	13:00	16:00	15:00	16:00	17:00	18:00	18:00	19:00	15:00	20:00		16:00		
Vol.	2	1 - 1 - 1	2	7	35	123	202	184	94	19	4	10.00	20.00		548		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Eastbound															Lalliuue.	0.0000	Undenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/25/18	0	0	0	0	1	1	6	11	6	2	0	0	0	0	27	41-50	17
01:00	0	0	0	0	0	1	2	2	0	0	0	0	1	0	6	41-50	4
02:00	0	0	0	0	1	0	3	0	3	0	0	0	0	0	7	51-60	3
03:00	0	0	0	0	0	2	2	2	2	1	0	0	0	0	9	46-55	4
04:00	0	0	0	0	0	3	11	24	12	1	0	0	0	0	51	44-53	36
05:00	0	0	1	0	2	15	20	51	32	10	0	0	0	0	131	46-55	83
06:00	0	1	1	1	3	25	123	155	102	14	3	0	0	0	428	41-50	278
07:00	0	0	0	0	10	47	217	249	89	13	3	0	0	0	628	41-50	466
08:00	0	1	3	5	2	28	161	204	90	19	1	0	0	0	514	41-50	365
09:00	0	0	1	3	4	19	96	153	69	16	0	1	0	0	362	41-50	249
10:00	0	0	0	0	9	37	101	110	50	7	1	0	0	0	315	41-50	211
11:00	0	3	1	7	12	36	95	110	57	9	3	0	0	0	333	41-50	205
12 PM	0	0	0	0	6	42	120	108	63	6	3	0	0	0	348	41-50	228
13:00	0	0	0	1	10	38	115	114	54	7	0	1	0	0	340	41-50	229
14:00	0	0	0	0	1	26	112	126	53	15	0	0	0	0	333	41-50	238
15:00	0	0	0	10	20	41	125	199	62	17	1	1	0	0	476	41-50	324
16:00	0	0	0	4	8	47	136	201	78	13	2	0	1	0	490	41-50	337
17:00	0	0	0	0	6	35	173	260	72	11	1	0	0	0	558	41-50	433
18:00	0	0	0	0	2	27	94	145	79	22	2	1	0	0	372	41-50	239
19:00	0	0	0	0	3	17	80	87	42	7	2	0	0	0	238	41-50	167
20:00	0	0	0	0	1	13	53	59	28	7	3	0	0	0	164	41-50	112
21:00	0	0	0	0	0	11	13	35	31	5	0	0	0	0	95	46-55	66
22:00	0	0	0	0	0	2	10	21	13	5	2	1	0	0	54	46-55	34
23:00	0	0	0	0	11	2	9	13	12	5	3	1_	0	0	46	46-55	25
Total	0	5	7	31	102	515	1877	2439	1099	212	30	6	2	0	6325		
Percent	0.0%	0.1%	0.1%	0.5%	1.6%	8.1%	29.7%	38.6%	17.4%	3.4%	0.5%	0.1%	0.0%	0.0%			
AM Peak		11:00	08:00	11:00	11:00	07:00	07:00	07:00	06:00	08:00	06:00	09:00	01:00		07:00		
Vol.		3	3	7	12	47	217	249	102	19	3	1	1		628		
PM Peak				15:00	15:00	16:00	17:00	17:00	18:00	18:00	12:00	13:00	16:00		17:00		
Vol.				10	20	47	173	260	79	22	3	1	1		558		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Eastbound															Lantado.	0.0000	Ondenned
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	1	5	3	6	0	1	0	0	0	16	46-55	9
01:00	0	0	0	0	0	1	4	5	2	2	0	0	0	0	14	41-50	9
02:00	0	0	0	0	0	0	0	1	1	1	0	0	0	0	3	44-53	2
03:00	0	0	0	0	0	3	3	3	5	0	0	0	0	0	14	45-54	8
04:00	0	0	0	0	0	4	8	11	19	1	0	0	0	0	43	46-55	30
05:00	0	0	0	0	2	12	26	42	30	10	3	0	0	0	125	46-55	72
06:00	0	0	0	10	1	15	95	191	87	18	2	1	0	0	420	41-50	286
07:00	0	0	1	4	9	66	162	270	106	30	3	1	0	0	652	41-50	432
08:00	0	1	6	10	16	60	140	177	93	11	2	0	0	0	516	41-50	317
09:00	0	0	0	2	1	24	115	116	72	12	3	0	0	0	345	41-50	231
10:00	0	3	0	1	13	63	143	111	29	8	0	0	0	0	371	41-50	254
11:00	0	0	1	2	8	51	129	95	39	6	2	0	0	0	333	41-50	224
12 PM	0	0	1	0	8	59	147	135	35	5	0	0	0	0	390	41-50	282
13:00	0	0	0	0	5	47	141	123	45	3	2	0	0	0	366	41-50	264
14:00	0	0	2	4	16	47	100	135	64	6	2	0	0	0	376	41-50	235
15:00	1	8	5	17	36	60	191	143	40	4	0	0	1	0	506	41-50	334
16:00	0	0	0	0	11	72	202	179	55	5	0	1	0	0	525	41-50	381
17:00	0	0	0	0	15	49	127	210	101	8	2	0	0	0	512	41-50	337
18:00	0	0	0	0	0	14	73	166	110	17	3	0	0	0	383	46-55	276
19:00	0	0	0	0	1	17	67	122	70	8	1	0	0	0	286	46-55	192
20:00	0	0	0	0	0	15	87	99	47	12	0	0	0	1	261	41-50	186
21:00	0	0	0	1	0	1	46	56	28	6	1	0	0	0	139	41-50	102
22:00	0	0	0	0	2	8	27	23	15	4	0	0	0	0	79	41-50	50
23:00	0	0	0	0	1	3	16	22	10	3	0	0	0	0	55	41-50	38
Total	11	12	16	51	145	692	2054	2438	1109	180	27	3	1	1	6730		
Percent	0.0%	0.2%	0.2%	0.8%	2.2%	10.3%	30.5%	36.2%	16.5%	2.7%	0.4%	0.0%	0.0%	0.0%			
AM Peak		10:00	08:00	06:00	08:00	07:00	07:00	07:00	07:00	07:00	05:00	06:00			07:00		
Vol.		3	6	10	16	66	162	270	106	30	3	11			652		
PM Peak	15:00	15:00	15:00	15:00	15:00	16:00	16:00	17:00	18:00	18:00	18:00	16:00	15:00	20:00	16:00		
Vol.	1	8	5	17	36	72	202	210	110	17	3	1	1	1	525		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Eastbound															Latitude.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	1	8	8	8	1	0	0	0	0	26	41-50	16
01:00	0	0	0	0	1	2	3	1	2	0	1	0	0	0	10	36-45	5
02:00	0	0	0	0	1	0	4	0	0	0	0	0	0	0	5	36-45	4
03:00	0	0	0	0	0	1	10	4	5	0	0	0	1	0	21	41-50	14
04:00	0	0	0	0	0	4	8	12	17	6	1	0	0	0	48	46-55	29
05:00	0	0	0	0	1	4	22	51	33	18	2	0	0	0	131	46-55	84
06:00	0	0	0	0	2	9	125	187	108	17	3	0	0	0	451	41-50	312
07:00	0	0	0	0	14	84	153	233	106	24	1	0	0	0	615	41-50	386
08:00	0	0	4	4	19	48	188	174	68	4	1	0	0	0	510	41-50	362
09:00	0	1	2	1	13	53	118	129	58	11	1	0	0	0	387	41-50	247
10:00	0	0	1	0	7	63	152	120	35	9	2	0	1	0	390	41-50	272
11:00	0	0	2	7	23	50	146	113	32	2	0	0	0	0	375	41-50	259
12 PM	0	0	0	1	7	48	157	128	53	4	4	0	0	0	402	41-50	285
13:00	0	0	0	2	11	56	134	140	59	8	0	0	0	0	410	41-50	274
14:00	0	0	0	0	1	26	146	146	71	13	3	0	0	0	406	41-50	292
15:00	0	0	0	6	18	78	189	184	58	8	1	0	0	0	542	41-50	373
16:00	0	0	1	3	17	77	191	188	55	9	0	0	0	0	541	41-50	379
17:00	0	0	0	4	9	65	210	174	61	9	3	0	0	0	535	41-50	384
18:00	0	0	0	0	12	31	104	203	89	14	2	0	0	0	455	41-50	307
19:00	0	0	0	0	0	23	90	124	47	14	3	0	0	0	301	41-50	214
20:00	0	0	1	0	2	30	63	78	35	7	1	0	0	0	217	41-50	141
21:00	0	0	0	1	4	14	48	48	18	6	0	0	0	0	139	41-50	96
22:00	0	0	0	0	0	6	35	50	19	6	0	0	1	0	117	41-50	85
23:00	0	0	0	0	0	2	16	31	18	3	2	0	0	0	72	45-54	49
Total	0	11	11	29	162	775	2320	2526	1055	193	31	0	3	0	7106		
Percent	0.0%	0.0%	0.2%	0.4%	2.3%	10.9%	32.6%	35.5%	14.8%	2.7%	0.4%	0.0%	0.0%	0.0%			
AM Peak		09:00	08:00	11:00	11:00	07:00	08:00	07:00	06:00	07:00	06:00		03:00		07:00		
Vol.		1_	4	7	23	84	188	233	108	24	3		1		615		
PM Peak			16:00	15:00	15:00	15:00	17:00	18:00	18:00	18:00	12:00		22:00		15:00		
Vol.			1	6	18	78	210	203	89	14	4		1		542		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Eastbound															Latitude:	0.0000	Undefined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/28/18	0	0	0	0	0	4	12	16	8	1	0	0	0	0	41	41-50	28
01:00	0	0	0	0	0	2	5	6	11	2	1	0	0	0	27	46-55	17
02:00	0	0	0	0	1	3	1	3	1	1	0	0	0	0	10	46-55	4
03:00	0	0	0	0	0	0	5	8	2	2	1	0	0	0	18	41-50	13
04:00	0	0	0	0	0	0	0	6	4	3	0	1	1	2	17	46-55	10
05:00	0	0	0	0	0	4	5	17	13	6	3	1	0	0	49	46-55	30
06:00	0	0	0	0	0	1	20	53	45	9	4	0	0	0	132	46-55	98
07:00	0	0	0	0	0	2	59	90	52	20	3	1	0	0	227	41-50	149
08:00	0	2	3	1	9	19	97	138	60	12	2	0	0	0	343	41-50	235
09:00	1	2	0	6	17	86	176	142	49	7	1	0	0	0	487	41-50	318
10:00	0	0	2	5	21	89	185	124	31	2	0	0	0	0	459	41-50	309
11:00	0	1	1	6	35	124	193	113	31	5	1	0	0	0	510	36-45	317
12 PM	1	1	5	8	32	124	171	118	35	4	0	0	0	0	499	36-45	295
13:00	0	1	1	2	28	114	168	111	26	3	1	0	0	0	455	36-45	282
14:00	1	1	3	5	25	98	197	125	23	12	0	1	0	0	491	41-50	322
15:00	0	0	1	8	15	69	187	157	37	2	1	0	0	0	477	41-50	344
16:00	0	0	4	6	25	79	179	129	49	7	0	1	1	1	481	41-50	308
17:00	0	0	0	3	1	55	149	160	59	7	1	0	1	0	436	41-50	309
18:00	0	0	0	1	0	23	99	146	74	17	2	1	0	0	363	41-50	245
19:00	0	0	0	0	4	16	65	108	58	12	5	1	0	0	269	41-50	173
20:00	0	0	0	0	0	6	55	87	48	9	4	0	1	0	210	41-50	142
21:00	0	0	0	0	2	10	50	48	32	8	0	1	1	0	152	41-50	98
22:00	0	0	0	0	1	2	27	47	33	3	2	0	0	0	115	46-55	80
23:00	0	0	0	0	0	7	11	41	15	7	0	11	0	0	82	46-55	56
Total	3	8	20	51	216	937	2116	1993	796	161	32	9	5	3	6350		
Percent	0.0%	0.1%	0.3%	0.8%	3.4%	14.8%	33.3%	31.4%	12.5%	2.5%	0.5%	0.1%	0.1%	0.0%			
AM Peak	09:00	08:00	08:00	09:00	11:00	11:00	11:00	09:00	08:00	07:00	06:00	04:00	04:00	04:00	11:00		
Vol.	1	2	3	6	35	124	193	142	60	20	4	1	1	2	510		
PM Peak	12:00	12:00	12:00	12:00	12:00	12:00	14:00	17:00	18:00	18:00	19:00	14:00	16:00	16:00	12:00		
Vol.	1	1	5	8	32	124	197	160	74	17	5	1	1	1	499		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Eastbound															Lamuuc.	0.0000	Oridenined
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	3	12	16	11	1	2	1	1	0	47	41-50	28
01:00	0	0	0	0	0	2	2	9	7	1	0	0	1	1	23	46-55	16
02:00	0	0	0	0	0	0	1	1	2	1	0	0	0	0	5	51-60	3
03:00	0	0	0	0	0	0	2	1	5	0	0	0	0	0	8	46-55	6
04:00	0	0	0	0	0	0	1	2	4	2	1	0	0	0	10	51-60	6
05:00	0	0	0	0	3	1	4	4	5	0	2	0	0	0	19	44-53	9
06:00	0	0	0	0	1	4	8	29	13	7	0	0	0	0	62	46-55	42
07:00	0	0	0	0	1	4	28	52	30	12	1	1	0	0	129	46-55	82
08:00	0	0	2	0	11	15	58	84	52	12	1	1	0	0	236	41-50	142
09:00	0	0	0	3	8	40	83	117	58	15	1	0	0	0	325	41-50	200
10:00	0	1	3	3	14	67	126	127	52	11	1	0	0	0	405	41-50	253
11:00	0	0	1	3	23	66	147	123	54	11	1	0	0	0	429	41-50	270
12 PM	0	0	2	4	9	78	162	132	48	13	1	0	0	0	449	41-50	294
13:00	0	0	3	3	18	88	162	108	31	7	2	1	0	0	423	41-50	270
14:00	0	0	5	5	23	65	127	136	38	4	0	0	0	0	403	41-50	263
15:00	0	0	0	12	16	56	151	104	29	7	2	0	0	0	377	41-50	255
16:00	0	0	0	1	7	42	129	125	64	2	2	0	0	0	372	41-50	254
17:00	0	0	1	2	16	31	117	123	44	14	0	0	0	0	348	41-50	240
18:00	0	0	0	1	2	23	85	87	69	13	1	0	1	0	282	41-50	172
19:00	0	0	0	1	0	7	55	86	44	7	3	0	1	2	206	41-50	141
20:00	0	0	0	0	0	10	37	53	17	7	0	0	0	0	124	41-50	90
21:00	0	0	0	0	0	9	26	28	21	5	0	0	0	0	89	41-50	54
22:00	0	0	0	0	0	1	7	9	10	6	1	0	0	0	34	46-55	19
23:00	1	0	0	0	1	3	5	8	10	4	3	1_	0	0	36	46-55	18
Total	1	1	17	38	153	615	1535	1564	718	162	25	5	4	3	4841		
Percent	0.0%	0.0%	0.4%	0.8%	3.2%	12.7%	31.7%	32.3%	14.8%	3.3%	0.5%	0.1%	0.1%	0.1%			
AM Peak		10:00	10:00	09:00	11:00	10:00	11:00	10:00	09:00	09:00	00:00	00:00	00:00	01:00	11:00		
Vol.		1	3	3	23	67	147	127	58	15	2	1_	1_	1	429		
PM Peak	23:00		14:00	15:00	14:00	13:00	12:00	14:00	18:00	17:00	19:00	13:00	18:00	19:00	12:00		
Vol.	1		5	12	23	88	162	136	69	14	3	1	1	2	449		

Route 66 at Paul & Sandy's Too East Hampton, Connecticut

Site Code: Station ID: 4632

Latitude: 0' 0.0000 Undefined

Eastbound																0.0000	0.1.0000
Start	1	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	2	9	5	1	1	0	0	0	0	18	41-50	14
01:00	0	0	0	0	0	3	1	3	0	0	0	0	0	0	7	41-50	4
02:00	0	0	0	0	0	0	1	3	1	0	0	0	0	0	5	46-55	4
03:00	0	0	0	0	0	0	6	3	3	1	0	0	0	0	13	41-50	9
04:00	0	0	0	0	0	5	8	13	10	3	2	0	0	0	41	45-54	23
05:00	0	0	0	0	2	4	23	50	46	13	1	1	0	0	140	46-55	96
06:00	0	0	0	0	2	25	101	180	94	13	1	0	0	0	416	41-50	281
07:00	0	0	0	2	8	49	212	248	110	11	1	0	0	0	641	41-50	460
08:00	0	0	0	4	7	38	203	185	82	10	2	1	0	0	532	41-50	388
09:00	0	0	1	1	11	45	159	118	47	10	0	0	0	0	392	41-50	277
10:00	0	2	0	1	8	32	100	105	48	4	2	1	0	0	303	41-50	205
11:00	0	0	0	1	8	74	132	107	22	6	0	0	0	0	350	41-50	239
12 PM	0	0	0	4	4	35	122	124	42	10	3	0	0	0	344	41-50	246
13:00	0	0	1	2	9	53	134	112	36	11	1	0	0	0	359	41-50	246
14:00	0	0	0	8	8	39	113	128	45	11	2	0	0	0	354	41-50	241
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	0	2	2	23	67	404	1324	1384	587	104	15	3	0	0	3915		
Percent	0.0%	0.1%	0.1%	0.6%	1.7%	10.3%	33.8%	35.4%	15.0%	2.7%	0.4%	0.1%	0.0%	0.0%			
AM Peak		10:00	09:00	08:00	09:00	11:00	07:00	07:00	07:00	05:00	04:00	05:00			07:00		
Vol.		2	1	4	11	74	212	248	110	13	2	1			641		
PM Peak			13:00	14:00	13:00	13:00	13:00	14:00	14:00	13:00	12:00				13:00		
Vol.			1	8	9	53	134	128	45	11	3				359		
Total	7	31	80	239	948	4380	12291	13497	5885	1108	173	29	17	7	38692		
Percent	0.0%	0.1%	0.2%	0.6%	2.5%	11.3%	31.8%	34.9%	15.2%	2.9%	0.4%	0.1%	0.0%	0.0%			

15th Percentile: 40 MPH 50th Percentile: 45 MPH 85th Percentile: 51 MPH 95th Percentile: 54 MPH

Stats 10 MPH Pace Speed: 41-50 MPH Number in Pace: 25788

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	,
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
14:00	0	0	0	1	8	29	139	182	62	11	1	2	0	0	435	41-50	32 ⁻
15:00	1	2	3	3	9	79	192	169	54	15	4	0	0	1	532	41-50	36
16:00	3	2	4	2	12	79	200	249	84	14	2	0	0	1	652	41-50	449
17:00	1	0	0	1	7	57	167	274	96	18	4	0	0	1	626	41-50	441
18:00	0	0	0	3	7	26	64	151	70	18	2	0	1	0	342	46-55	22
19:00	0	1	0	2	6	17	78	95	30	13	1	0	0	0	243	41-50	173
20:00	Ö	0	1	1	0	13	59	76	25	11	0	0	Ö	Ö	186	41-50	13
21:00	0	0	0	0	0	11	48	42	18	4	3	0	0	0	126	41-50	90
22:00	Ö	0	Ö	Ö	1	6	24	22	11	3	2	Ö	Ö	Ö	69	41-50	40
23:00	0	0	0	0	1	2	9	9	8	3	2	0	0	0	34	41-50	18
Total	5	5	8	13	51	319	980	1269	458	110	21	2	1	3	3245		
Percent	0.2%	0.2%	0.2%	0.4%	1.6%	9.8%	30.2%	39.1%	14.1%	3.4%	0.6%	0.1%	0.0%	0.1%	02.0		
M Peak Vol.											0.0,0						
M Peak	16:00	15:00	16:00	15:00	16:00	15:00	16:00	17:00	17:00	17:00	15:00	14:00	18:00	15:00	16:00		
Vol.	3	2	4	3	12	79	200	274	96	18	4	2	1	1	652		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Westbound															Lalliuue.	0.0000	Ondenned
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	2	1	14	3	1	0	0	0	0	21	45-54	17
01:00	0	0	0	2	0	2	2	6	0	0	0	0	0	0	12	41-50	8
02:00	0	0	0	0	1	2	1	4	3	0	0	0	0	0	11	45-54	7
03:00	0	0	1	0	0	2	3	4	2	1	0	0	0	0	13	41-50	7
04:00	0	0	0	0	1	0	8	9	5	3	0	1	1	1	29	41-50	17
05:00	0	0	0	0	1	10	29	33	18	3	0	0	0	0	94	41-50	62
06:00	0	0	0	1	6	9	81	92	41	17	2	0	0	0	249	41-50	173
07:00	3	1	1	1	11	16	73	131	49	21	3	2	0	0	312	41-50	204
08:00	1	0	1	2	5	22	87	113	32	16	2	0	0	0	281	41-50	200
09:00	1	0	1	0	4	30	57	103	35	13	4	0	0	1	249	41-50	160
10:00	2	0	0	3	5	18	76	101	43	7	2	0	0	0	257	41-50	177
11:00	3	0	0	2	6	15	94	116	31	14	2	0	0	0	283	41-50	210
12 PM	1	1	0	0	4	21	78	120	39	13	0	0	0	1	278	41-50	198
13:00	3	0	0	4	2	18	67	125	49	7	2	0	1	0	278	41-50	192
14:00	1	0	0	1	7	20	92	142	54	14	2	0	0	0	333	41-50	234
15:00	2	0	2	5	15	69	183	178	61	15	2	1	0	3	536	41-50	361
16:00	1	0	0	2	18	39	181	222	89	17	4	0	0	3	576	41-50	403
17:00	3	1	0	3	6	40	206	228	71	22	3	2	0	1	586	41-50	434
18:00	1	0	0	1	3	24	83	135	67	20	2	0	0	0	336	41-50	218
19:00	0	0	0	0	7	31	84	76	23	3	1	0	0	0	225	41-50	160
20:00	0	0	1	4	10	30	61	45	13	3	1	0	0	0	168	41-50	106
21:00	0	0	0	1	6	17	44	33	12	7	0	1	0	0	121	41-50	77
22:00	0	0	1	0	1	3	15	25	15	3	2	0	0	0	65	41-50	40
23:00	0	0	0	0	1	3	10	5	9	2	1_	0	0	0	31	41-50	15
Total	22	3	8	32	120	443	1616	2060	764	222	35	7	2	10	5344		
Percent	0.4%	0.1%	0.1%	0.6%	2.2%	8.3%	30.2%	38.5%	14.3%	4.2%	0.7%	0.1%	0.0%	0.2%			
AM Peak	07:00	07:00	03:00	10:00	07:00	09:00	11:00	07:00	07:00	07:00	09:00	07:00	04:00	04:00	07:00		
Vol.	3	1_	1	3	11	30	94	131	49	21	4	2	1	1	312		
PM Peak	13:00	12:00	15:00	15:00	16:00	15:00	17:00	17:00	16:00	17:00	16:00	17:00	13:00	15:00	17:00		
Vol.	3	1	2	5	18	69	206	228	89	22	4	2	1	3	586		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Westbound															Latitado.	0.0000	Oridonnica
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/26/18	0	0	0	0	0	6	10	6	1	0	0	0	0	0	23	36-45	16
01:00	0	0	0	0	0	0	5	4	1	0	0	0	0	0	10	41-50	9
02:00	0	0	0	0	1	1	4	3	1	1	0	0	0	0	11	40-49	7
03:00	0	0	1	1	2	3	5	1	0	1	0	0	0	0	14	36-45	8
04:00	0	0	0	0	0	5	4	11	3	0	3	1	0	0	27	41-50	15
05:00	0	0	0	0	1	8	31	43	12	7	0	1	0	0	103	41-50	74
06:00	0	1	0	2	6	23	91	92	40	13	4	1	0	1	274	41-50	183
07:00	6	0	1	2	10	18	70	127	65	16	2	0	0	0	317	41-50	197
08:00	1	0	1	2	5	28	76	129	51	20	2	0	0	0	315	41-50	205
09:00	0	0	1	2	11	23	73	96	30	12	2	0	0	0	250	41-50	169
10:00	0	0	1	0	3	18	95	97	36	14	4	0	0	1	269	41-50	192
11:00	1	0	3	8	6	33	91	115	55	8	2	1	0	0	323	41-50	206
12 PM	0	1	0	0	3	17	87	129	52	13	3	0	0	1	306	41-50	216
13:00	1	1	1	1	2	16	77	131	66	16	4	0	1	1	318	41-50	208
14:00	2	0	2	4	9	56	104	153	57	15	4	0	0	2	408	41-50	257
15:00	3	1	3	5	7	68	156	187	77	19	1	1	0	6	534	41-50	343
16:00	3	0	1	2	10	53	189	259	79	18	1	0	0	1	616	41-50	448
17:00	7	1	0	2	12	53	124	246	119	31	3	0	0	0	598	41-50	370
18:00	0	0	0	2	6	9	101	179	73	21	5	0	0	0	396	41-50	280
19:00	1	0	1	1	5	13	56	108	56	20	2	0	0	0	263	46-55	164
20:00	1	0	1	2	10	22	76	71	33	8	3	0	0	1	228	41-50	147
21:00	0	0	1	0	2	13	38	35	19	6	2	0	0	0	116	41-50	73
22:00	0	0	0	1	1	7	20	27	15	6	1	0	0	0	78	41-50	47
23:00	0	0	0	0	1	2	7	13	9	1	1_	0	0	1	35	45-54	22
Total	26	5	18	37	113	495	1590	2262	950	266	49	5	1	15	5832		
Percent	0.4%	0.1%	0.3%	0.6%	1.9%	8.5%	27.3%	38.8%	16.3%	4.6%	0.8%	0.1%	0.0%	0.3%			
AM Peak	07:00	06:00	11:00	11:00	09:00	11:00	10:00	08:00	07:00	08:00	06:00	04:00		06:00	11:00		
Vol.	6	1 1	3	8	11	33	95	129	65	20	4	1 1	40.00	11	323		
PM Peak	17:00	12:00	15:00	15:00	17:00	15:00	16:00	16:00	17:00	17:00	18:00	15:00	13:00	15:00	16:00		
Vol.	7	1	3	5	12	68	189	259	119	31	5	1	1	6	616		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Westbound															Latitude.	0.0000	Ondenned
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	1	4	7	5	3	2	0	0	0	22	44-53	12
01:00	0	0	0	0	0	0	4	5	2	2	1	0	0	1	15	41-50	9
02:00	0	0	0	0	0	0	2	0	4	1	0	0	0	0	7	49-58	5
03:00	0	0	0	0	1	3	4	5	3	0	0	0	0	1	17	40-49	9
04:00	0	0	0	0	0	1	6	7	10	6	1	0	0	0	31	46-55	17
05:00	0	0	0	0	1	12	15	41	24	9	7	1	0	1	111	46-55	65
06:00	4	0	0	1	10	21	54	93	52	19	7	0	0	2	263	41-50	147
07:00	1	0	1	0	14	14	89	157	51	16	4	1	0	0	348	41-50	246
08:00	0	0	1	2	8	14	69	102	39	18	5	0	0	1	259	41-50	171
09:00	1	0	0	1	2	14	71	106	47	19	2	0	0	1	264	41-50	177
10:00	0	0	0	0	6	15	123	126	34	12	0	2	0	1	319	41-50	249
11:00	0	1	1	4	0	27	104	121	41	9	2	0	0	0	310	41-50	225
12 PM	1	0	0	4	20	25	131	126	40	13	2	0	0	0	362	41-50	257
13:00	0	2	2	5	8	28	96	119	49	8	4	0	0	1	322	41-50	215
14:00	0	0	0	0	15	26	130	171	60	16	1	0	0	0	419	41-50	301
15:00	2	0	3	1	18	55	168	194	82	11	2	0	1	0	537	41-50	362
16:00	2	1	0	1	7	51	173	230	96	19	0	0	0	1	581	41-50	403
17:00	3	0	0	1	4	29	182	267	74	14	1	0	0	3	578	41-50	449
18:00	1	0	0	2	4	32	128	154	53	11	1	0	0	0	386	41-50	282
19:00	1	0	0	0	3	10	75	96	35	9	2	0	0	0	231	41-50	171
20:00	0	0	0	2	2	24	71	49	22	2	0	1	0	1	174	41-50	120
21:00	0	0	0	1	3	18	51	52	14	3	0	0	0	0	142	41-50	103
22:00	0	0	0	0	2	7	35	53	24	4	1	1	0	0	127	41-50	88
23:00	0	0	0	1	1	10	24	23	11	7	1_	0	0	0	78	41-50	47
Total	16	4	8	26	129	437	1809	2304	872	231	46	6	1	14	5903		
Percent	0.3%	0.1%	0.1%	0.4%	2.2%	7.4%	30.6%	39.0%	14.8%	3.9%	0.8%	0.1%	0.0%	0.2%			
AM Peak	06:00	11:00	07:00	11:00	07:00	11:00	10:00	07:00	06:00	06:00	05:00	10:00		06:00	07:00		
Vol.	4	1	1	4	14	27	123	157	52	19	7	2		2	348		
PM Peak	17:00	13:00	15:00	13:00	12:00	15:00	17:00	17:00	16:00	16:00	13:00	20:00	15:00	17:00	16:00		
Vol.	3	2	3	5	20	55	182	267	96	19	4	1	1	3	581		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Westbound															Latitude.	0.0000	Ondonnoa
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/28/18	0	0	0	0	0	1	13	15	1	0	1	0	0	1	32	41-50	28
01:00	0	0	0	0	0	3	11	8	4	3	1	0	0	0	30	41-50	19
02:00	0	0	0	0	1	0	3	3	4	3	0	0	0	0	14	44-53	7
03:00	0	0	0	0	0	2	1	2	1	1	0	0	0	0	7	46-55	3
04:00	0	0	0	0	0	1	2	8	3	1	1	0	0	0	16	46-55	11
05:00	0	0	0	0	0	1	7	15	13	9	3	0	0	0	48	46-55	28
06:00	0	0	1	1	1	0	10	40	29	10	3	0	0	1	96	46-55	69
07:00	1	0	0	1	11	5	63	80	59	10	0	0	0	3	233	41-50	143
08:00	2	1	0	6	8	4	84	125	43	19	4	0	1	0	297	41-50	209
09:00	1	0	0	7	4	20	83	148	70	18	4	0	0	2	357	41-50	231
10:00	0	1	1	0	6	34	110	144	54	14	0	0	1	0	365	41-50	254
11:00	2	0	0	5	6	23	124	181	55	13	3	1	0	1	414	41-50	305
12 PM	2	0	0	5	17	37	121	178	52	18	4	0	0	0	434	41-50	299
13:00	0	1	0	2	11	35	105	165	59	18	3	0	0	0	399	41-50	270
14:00	1	1	1	1	8	21	105	163	73	16	5	0	0	1	396	41-50	268
15:00	2	0	0	2	4	19	109	164	67	20	3	0	0	0	390	41-50	273
16:00	0	1	0	3	3	25	115	155	48	12	2	0	0	1	365	41-50	270
17:00	0	0	0	1	3	17	72	110	77	33	4	0	0	0	317	46-55	187
18:00	1	0	0	2	3	26	70	128	46	12	3	1	1	0	293	41-50	198
19:00	2	0	0	0	1	16	73	102	39	10	5	0	0	0	248	41-50	175
20:00	0	0	0	0	0	11	58	57	22	6	3	0	0	0	157	41-50	115
21:00	0	0	0	1	1	11	57	60	16	4	1	0	0	0	151	41-50	117
22:00	0	0	0	0	3	7	39	40	20	6	2	0	0	0	117	41-50	79
23:00	0	0	0	1	11	3	17	31	11	4_	0	0	0	0	68	41-50	48_
Total	14	5	3	38	92	322	1452	2122	866	260	55	2	3	10	5244		
Percent	0.3%	0.1%	0.1%	0.7%	1.8%	6.1%	27.7%	40.5%	16.5%	5.0%	1.0%	0.0%	0.1%	0.2%			
AM Peak	08:00	08:00	06:00	09:00	07:00	10:00	11:00	11:00	09:00	08:00	08:00	11:00	08:00	07:00	11:00		
Vol.	2	1	1	7	11	34	124	181	70	19	4	1	1	3	414		
PM Peak	12:00	13:00	14:00	12:00	12:00	12:00	12:00	12:00	17:00	17:00	14:00	18:00	18:00	14:00	12:00		
Vol.	2	1	1	5	17	37	121	178	77	33	5	1	1	1	434		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Westbound															Lalliuue.	0.0000	Ondenned
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	2	12	18	10	3	0	0	0	0	45	41-50	30
01:00	0	0	0	0	0	0	8	13	8	2	0	0	0	0	31	41-50	21
02:00	0	0	0	1	0	1	1	5	2	0	0	0	0	0	10	46-55	7
03:00	0	0	0	0	0	0	3	1	3	1	0	0	0	0	8	51-60	4
04:00	0	0	0	0	0	1	1	3	2	2	1	0	0	0	10	46-55	5
05:00	0	0	0	0	0	1	4	11	4	4	2	0	0	0	26	46-55	15
06:00	0	0	0	1	1	3	14	22	11	4	4	0	0	0	60	41-50	36
07:00	0	0	0	2	2	1	23	47	23	7	5	1	0	2	113	44-53	70
08:00	0	0	0	5	3	1	49	70	42	17	1	0	0	1	189	41-50	119
09:00	0	0	0	3	3	20	53	78	60	13	3	0	0	1	234	46-55	138
10:00	0	0	0	3	9	39	104	135	36	15	2	0	1	1	345	41-50	239
11:00	0	0	0	1	4	15	88	146	54	12	4	0	0	1	325	41-50	234
12 PM	2	0	0	1	1	19	94	152	69	17	1	0	0	2	358	41-50	246
13:00	0	0	0	4	8	17	84	128	64	21	3	0	0	2	331	41-50	212
14:00	1	0	0	3	1	13	88	137	75	27	2	0	1	0	348	41-50	225
15:00	0	1	0	3	2	8	70	149	79	29	4	1	0	0	346	46-55	228
16:00	0	0	0	0	1	5	67	175	87	17	2	0	0	0	354	46-55	262
17:00	0	0	0	1	2	12	60	105	68	19	1	0	0	1	269	46-55	173
18:00	0	0	1	2	3	12	56	105	33	13	3	1	0	2	231	41-50	161
19:00	0	0	0	1	1	4	39	65	37	11	6	0	0	0	164	41-50	104
20:00	0	0	0	0	0	10	30	57	20	7	0	0	0	0	124	41-50	87
21:00	0	0	0	1	0	5	20	24	13	6	0	1	1	1	72	41-50	44
22:00	0	0	0	0	1	4	6	18	10	8	0	0	0	0	47	46-55	28
23:00	0	0	0	0	1	3	7	12	5	1_	2	0	0	0	31	41-50	19
Total	3	11	11	32	43	196	981	1676	815	256	46	4	3	14	4071		
Percent	0.1%	0.0%	0.0%	0.8%	1.1%	4.8%	24.1%	41.2%	20.0%	6.3%	1.1%	0.1%	0.1%	0.3%			
AM Peak				08:00	10:00	10:00	10:00	11:00	09:00	08:00	07:00	07:00	10:00	07:00	10:00		
Vol.				5_	9	39	104	146	60	17	5	1_	1_	2	345		
PM Peak	12:00	15:00	18:00	13:00	13:00	12:00	12:00	16:00	16:00	15:00	19:00	15:00	14:00	12:00	12:00		
Vol.	2	1	1	4	8	19	94	175	87	29	6	1	1	2	358		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Latitude: 0' 0.0000 Undefined

Westbound																0.0000	0.1.40111.04
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	2	4	5	3	0	0	0	0	1	15	41-50	9
01:00	0	0	0	0	0	4	4	1	3	0	0	0	0	0	12	36-45	8
02:00	0	0	0	0	0	0	2	1	2	0	0	0	0	0	5	39-48	3
03:00	0	0	0	0	2	3	4	3	1	0	0	0	0	0	13	35-44	7
04:00	0	0	0	0	0	2	4	7	3	0	3	0	0	0	19	41-50	11
05:00	0	0	0	0	2	11	18	39	25	7	1	0	0	0	103	46-55	64
06:00	1	0	0	0	5	20	76	106	47	10	3	0	0	2	270	41-50	182
07:00	3	0	0	9	12	24	72	124	73	18	2	0	0	0	337	46-55	197
08:00	1	0	0	2	6	22	80	108	41	9	2	0	0	0	271	41-50	188
09:00	0	0	0	5	9	18	64	99	38	23	6	2	0	0	264	41-50	163
10:00	2	0	0	0	7	27	86	79	34	15	5	0	0	0	255	41-50	165
11:00	1	0	1	2	10	7	65	107	45	16	2	0	0	1	257	41-50	172
12 PM	0	2	1	10	9	22	93	112	44	13	0	0	0	0	306	41-50	205
13:00	0	1	0	2	9	16	77	99	42	24	2	0	0	2	274	41-50	176
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	8	3	2	30	71	178	649	890	401	135	26	2	0	6	2401		
Percent	0.3%	0.1%	0.1%	1.2%	3.0%	7.4%	27.0%	37.1%	16.7%	5.6%	1.1%	0.1%	0.0%	0.2%			
AM Peak	07:00		11:00	07:00	07:00	10:00	10:00	07:00	07:00	09:00	09:00	09:00		06:00	07:00		
Vol.	3		1_	9	12	27	86	124	73	23	6	2		2	337		
PM Peak		12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	13:00	13:00			13:00	12:00		
Vol.		2	1_	10	9	22	93	112	44	24	2			2	306		
Total	94	26	48	208	619	2390	9077	12583	5126	1480	278	28	11	72	32040		
Percent	0.3%	0.1%	0.1%	0.6%	1.9%	7.5%	28.3%	39.3%	16.0%	4.6%	0.9%	0.1%	0.0%	0.2%			

15th Percentile: 40 MPH 50th Percentile: 46 MPH 85th Percentile: 52 MPH 95th Percentile: 55 MPH

Stats 10 MPH Pace Speed : 41-50 MPH Number in Pace : 21664

Percent in Pace : 67.6%

Number of Vehicles > 45 MPH : 19578

Percent of Vehicles > 45 MPH : 61.1%

Mean Speed(Average) : 47 MPH

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Eastbound															Lalliuue.	0.0000	Ondenned
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/24/18	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
01:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
02:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
03:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
04:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
06:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
12 PM	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
13:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
14:00	2	1	0	1	1	21	51	128	75	47	5	0	0	0	332	46-55	203
15:00	3	0	0	0	3	24	125	148	60	22	4	1	0	0	390	41-50	273
16:00	4	2	0	1	1	24	94	190	82	24	3	0	1	0	426	41-50	284
17:00	0	0	0	4	2	14	53	167	85	36	5	1	0	1	368	46-55	252
18:00	0	1	0	1	3	2	45	110	76	36	9	0	0	0	283	46-55	186
19:00	1	0	0	1	4	6	28	88	58	18	4	0	0	1	209	46-55	146
20:00	1	0	0	0	4	1	22	63	27	10	1	0	0	0	129	46-55	90
21:00	0	0	0	0	0	2	20	22	24	5	2	0	0	0	75	46-55	46
22:00	0	0	0	0	1	0	9	14	10	2	4	1	0	0	41	44-53	24
23:00	0	0	0	0	0	0	6	6	6	4	3	0	0	0	25	46-55	12
Total	11	4	0	8	19	94	453	936	503	204	40	3	1	2	2278		
Percent	0.5%	0.2%	0.0%	0.4%	0.8%	4.1%	19.9%	41.1%	22.1%	9.0%	1.8%	0.1%	0.0%	0.1%			
AM Peak Vol.																	
PM Peak	16:00	16:00		17:00	19:00	15:00	15:00	16:00	17:00	14:00	18:00	15:00	16:00	17:00	16:00		
Vol.	4	2		4	4	24	125	190	85	47	9	1	1	1	426		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Eastbound															Lantado.	0 0.0000	Onacinica
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/25/18	0	0	0	0	0	0	6	4	4	2	2	0	0	1	19	41-50	10
01:00	0	0	0	0	0	1	1	0	1	0	0	0	0	0	3	34-43	2
02:00	0	0	0	0	0	1	1	5	1	1	0	0	0	0	9	44-53	6
03:00	0	0	1	0	0	0	3	5	1	1	1	0	0	0	12	41-50	8
04:00	0	0	0	0	0	1	10	20	21	10	4	0	0	0	66	46-55	41
05:00	0	0	0	0	0	10	35	91	43	23	7	0	0	0	209	46-55	134
06:00	1	1	8	6	7	20	85	217	115	35	3	0	0	0	498	46-55	332
07:00	1	1	2	3	9	48	118	224	117	36	8	0	0	0	567	41-50	342
08:00	1	1	0	1	7	23	89	187	101	34	13	2	0	2	461	46-55	288
09:00	0	0	0	0	0	5	52	124	65	32	5	1	0	1	285	46-55	189
10:00	1	0	0	2	1	7	39	114	77	19	8	1	0	0	269	46-55	191
11:00	0	0	0	0	0	7	66	124	59	21	3	0	0	0	280	41-50	190
12 PM	0	0	0	4	2	7	57	126	69	27	5	0	0	0	297	46-55	195
13:00	0	0	1	1	2	15	64	123	61	17	3	1	1	0	289	41-50	187
14:00	4	0	1	6	2	11	37	98	80	16	1	1	1	0	258	46-55	178
15:00	3	0	0	3	5	21	61	140	104	29	3	0	1	1	371	46-55	244
16:00	5	1	0	2	6	16	81	143	95	39	4	0	0	0	392	46-55	238
17:00	6	0	0	3	4	12	76	140	79	37	3	0	0	0	360	46-55	219
18:00	1	0	0	0	4	4	40	89	66	35	5	1	0	0	245	46-55	155
19:00	0	0	0	0	9	11	41	63	29	9	4	1	1	0	168	41-50	104
20:00	0	1	0	2	2	9	34	44	19	8	5	1	0	0	125	41-50	78
21:00	0	0	0	0	0	3	17	23	20	6	2	0	0	0	71	46-55	43
22:00	0	0	0	0	0	2	9	15	5	7	2	0	0	1	41	41-50	24
23:00	0	0	0	0	0	2	3	12	4	1	3	0	1	0	26	44-53	16
Total	23	5	13	33	60	236	1025	2131	1236	445	94	9	5	6	5321		
Percent	0.4%	0.1%	0.2%	0.6%	1.1%	4.4%	19.3%	40.0%	23.2%	8.4%	1.8%	0.2%	0.1%	0.1%			
AM Peak	06:00	06:00	06:00	06:00	07:00	07:00	07:00	07:00	07:00	07:00	08:00	08:00		08:00	07:00		
Vol.	11	11	8	6	9	48	118	224	117	36	13	2		2	567		
PM Peak	17:00	16:00	13:00	14:00	19:00	15:00	16:00	16:00	15:00	16:00	12:00	13:00	13:00	15:00	16:00		
Vol.	6	1	1	6	9	21	81	143	104	39	5	1	1	1	392		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Eastbound															Lantado.	0.0000	Onacinica
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/26/18	0	0	0	0	1	1	4	5	5	2	0	0	0	0	18	46-55	10
01:00	0	0	0	0	0	0	1	3	4	1	0	0	0	0	9	46-55	7
02:00	0	0	0	0	0	0	5	0	0	0	0	0	0	0	5	36-45	5
03:00	0	0	1	0	0	2	5	2	2	2	2	0	0	0	16	41-50	7
04:00	0	0	0	0	0	3	12	18	10	11	1	1	0	0	56	41-50	30
05:00	0	0	0	0	0	2	36	76	69	26	5	0	0	0	214	46-55	145
06:00	2	0	0	1	1	7	114	196	129	47	6	2	0	2	507	46-55	325
07:00	3	1	1	1	4	33	154	212	99	37	11	0	0	1	557	41-50	366
08:00	0	0	0	0	5	13	72	188	96	37	8	0	0	0	419	46-55	284
09:00	1	0	0	0	6	14	66	135	66	21	2	0	0	0	311	46-55	201
10:00	1	0	0	2	4	30	63	119	64	29	2	1	0	3	318	46-55	183
11:00	0	1	1	0	1	18	48	109	62	34	5	1	0	2	282	46-55	171
12 PM	2	1	0	1	0	12	60	155	79	20	0	0	0	0	330	46-55	234
13:00	1	0	0	0	1	5	68	104	63	28	4	0	0	1	275	41-50	172
14:00	1	3	2	1	6	19	49	118	86	32	4	1	0	2	324	46-55	204
15:00	3	0	0	4	8	21	102	188	80	18	3	0	0	4	431	41-50	290
16:00	4	0	2	4	11	25	59	152	93	44	10	1	0	2	407	46-55	245
17:00	1	0	0	0	0	9	48	158	104	45	5	0	1	2	373	46-55	262
18:00	1	0	0	2	3	7	39	112	70	40	4	0	0	0	278	46-55	182
19:00	0	0	0	0	2	1	27	96	69	22	4	0	1	0	222	46-55	165
20:00	0	1	0	1	1	7	35	64	29	14	4	0	0	1	157	41-50	99
21:00	0	0	0	0	0	4	18	44	14	16	2	0	0	0	98	41-50	62
22:00	0	0	0	0	2	1	13	24	6	9	3	1	0	0	59	41-50	37
23:00	0	0	0	0	0	11	8	11	12	6	2	0	0	0	40	46-55	23
Total	20	7	7	17	56	235	1106	2289	1311	541	87	8	2	20	5706		
Percent	0.4%	0.1%	0.1%	0.3%	1.0%	4.1%	19.4%	40.1%	23.0%	9.5%	1.5%	0.1%	0.0%	0.4%			
AM Peak	07:00	07:00	03:00	10:00	09:00	07:00	07:00	07:00	06:00	06:00	07:00	06:00		10:00	07:00		
Vol.	3	1_	1_	2	6	33	154	212	129	47	11	2		3	557		
PM Peak	16:00	14:00	14:00	15:00	16:00	16:00	15:00	15:00	17:00	17:00	16:00	14:00	17:00	15:00	15:00		
Vol.	4	3	2	4	11	25	102	188	104	45	10	1	1	4	431		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Eastbound															Lantado.	0.0000	Onacinica
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/27/18	0	0	0	0	0	1	5	5	8	3	1	0	0	0	23	46-55	13
01:00	0	0	0	0	0	0	3	2	1	0	1	0	0	0	7	41-50	5
02:00	0	0	0	0	0	1	1	3	3	1	0	0	0	0	9	46-55	6
03:00	0	0	1	0	0	0	5	6	5	3	2	0	0	2	24	41-50	11
04:00	0	0	0	0	2	0	6	13	14	12	8	1	0	0	56	46-55	27
05:00	0	0	0	0	0	3	21	82	74	25	7	1	0	0	213	46-55	156
06:00	1	1	0	3	1	12	76	213	145	51	4	0	0	0	507	46-55	358
07:00	4	1	2	2	5	27	103	224	120	44	5	1	0	1	539	46-55	344
08:00	1	0	0	1	1	10	77	169	116	38	4	0	0	1	418	46-55	285
09:00	0	0	0	0	3	8	66	152	77	27	5	0	1	1	340	46-55	229
10:00	2	0	0	2	1	9	70	160	70	22	3	1	0	2	342	46-55	230
11:00	0	0	0	4	7	22	65	159	45	19	2	0	0	0	323	41-50	224
12 PM	1	1	0	0	4	17	110	129	50	16	3	0	0	0	331	41-50	239
13:00	1	0	0	0	2	8	66	153	74	20	3	0	0	0	327	46-55	227
14:00	3	1	3	1	2	6	84	152	75	18	1	0	0	0	346	41-50	236
15:00	4	0	1	1	3	28	134	168	59	17	3	0	0	1	419	41-50	302
16:00	5	0	0	1	3	19	83	161	100	31	9	0	0	0	412	46-55	261
17:00	2	0	0	0	5	16	67	190	90	36	1	0	0	2	409	46-55	280
18:00	2	0	0	0	4	7	51	140	90	28	6	0	0	0	328	46-55	230
19:00	1	1	0	1	2	1	41	108	54	10	2	0	0	0	221	46-55	162
20:00	0	0	0	0	3	13	33	65	30	5	2	1	0	1	153	41-50	98
21:00	0	0	0	0	1	11	43	31	19	6	1	0	0	0	112	41-50	74
22:00	0	0	0	0	3	6	21	35	16	6	3	0	0	0	90	41-50	56
23:00	0	0	0	0	0	5	15	19	6	6	1_	0	0	0	52	41-50	34
Total	27	5	7	16	52	230	1246	2539	1341	444	77	5	1	11	6001		
Percent	0.4%	0.1%	0.1%	0.3%	0.9%	3.8%	20.8%	42.3%	22.3%	7.4%	1.3%	0.1%	0.0%	0.2%			
AM Peak	07:00	06:00	07:00	11:00	11:00	07:00	07:00	07:00	06:00	06:00	04:00	04:00	09:00	03:00	07:00		
Vol.	4	1_	2	4	7	27	103	224	145	51	8	1_	1_	2	539		
PM Peak	16:00	12:00	14:00	14:00	17:00	15:00	15:00	17:00	16:00	17:00	16:00	20:00		17:00	15:00		
Vol.	5	1	3	1	5	28	134	190	100	36	9	1		2	419		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Eastbound															Lalliuue.	0.0000	Ondenned
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/28/18	0	0	0	0	0	3	11	9	6	6	0	0	0	0	35	41-50	20
01:00	0	0	0	0	0	0	0	8	3	1	3	1	0	0	16	46-55	11
02:00	0	0	0	0	0	0	4	3	1	2	0	0	0	0	10	41-50	7
03:00	0	0	1	0	1	0	3	6	4	2	4	0	0	0	21	46-55	10
04:00	0	0	0	0	0	1	3	5	6	5	2	0	0	0	22	51-60	11
05:00	0	0	0	0	0	3	12	20	27	10	5	0	0	0	77	46-55	47
06:00	0	0	0	0	0	0	12	47	53	32	9	0	0	0	153	46-55	100
07:00	0	0	0	0	0	0	22	92	74	44	8	1	1	0	242	46-55	166
08:00	0	0	0	0	2	1	29	128	107	44	5	0	0	0	316	46-55	235
09:00	0	0	0	0	7	19	77	164	120	42	6	1	0	1	437	46-55	284
10:00	0	0	0	4	5	4	64	180	106	34	9	0	0	3	409	46-55	286
11:00	0	0	0	0	2	14	80	206	94	27	1	0	0	2	426	46-55	300
12 PM	1	2	1	1	1	9	109	161	83	29	3	0	0	0	400	41-50	270
13:00	0	1	1	2	5	10	81	154	107	24	5	0	1	0	391	46-55	261
14:00	3	0	1	4	2	15	63	157	82	38	5	0	0	1	371	46-55	239
15:00	0	0	3	3	3	8	66	152	109	32	4	0	0	1	381	46-55	261
16:00	3	0	0	0	1	5	66	154	98	36	10	1	1	0	375	46-55	252
17:00	0	0	0	0	4	16	79	127	86	40	3	0	0	0	355	46-55	213
18:00	1	0	0	0	0	2	37	109	77	36	7	1	0	0	270	46-55	186
19:00	0	0	0	0	2	11	26	62	52	22	8	1	0	1	185	46-55	114
20:00	0	0	0	0	0	1	26	59	40	16	4	0	0	0	146	46-55	99
21:00	0	0	2	2	6	10	29	49	22	5	3	0	0	0	128	41-50	78
22:00	0	0	0	0	0	1	18	32	35	13	1	0	0	0	100	46-55	67
23:00	0	0	0	1	0	5	11	16	15	9	3	1	0	0	61	46-55	31
Total	8	3	9	17	41	138	928	2100	1407	549	108	7	3	9	5327		
Percent	0.2%	0.1%	0.2%	0.3%	0.8%	2.6%	17.4%	39.4%	26.4%	10.3%	2.0%	0.1%	0.1%	0.2%			
AM Peak			03:00	10:00	09:00	09:00	11:00	11:00	09:00	07:00	06:00	01:00	07:00	10:00	09:00		
Vol.			1	4	7	19	80	206	120	44	9	1_	1	3	437		
PM Peak	14:00	12:00	15:00	14:00	21:00	17:00	12:00	12:00	15:00	17:00	16:00	16:00	13:00	14:00	12:00		
Vol.	3	2	3	4	6	16	109	161	109	40	10	1	1	1	400		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Eastbound															Lalliuue.	0.0000	Ondenned
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/29/18	0	0	0	0	0	1	6	10	7	1	1	0	0	2	28	44-53	17
01:00	0	0	0	0	0	0	2	4	5	3	0	0	0	0	14	46-55	9
02:00	0	0	0	0	0	0	0	0	1	3	0	0	0	0	4	51-60	4
03:00	0	0	1	0	0	0	2	1	0	0	0	0	0	0	4	39-48	3
04:00	0	0	0	0	0	1	0	3	1	7	2	1	0	0	15	56-65	9
05:00	0	0	0	0	0	1	5	7	8	6	0	0	1	0	28	46-55	15
06:00	0	0	0	0	0	1	15	21	19	11	5	1	0	0	73	46-55	40
07:00	0	0	0	1	1	0	20	40	44	13	4	0	0	0	123	46-55	84
08:00	0	2	0	0	4	1	31	97	51	19	3	0	0	0	208	46-55	148
09:00	0	0	0	0	2	12	52	128	84	19	2	0	0	1	300	46-55	212
10:00	0	0	0	0	8	21	72	153	88	15	3	0	0	0	360	46-55	241
11:00	1	0	0	0	7	8	60	185	74	33	2	0	0	0	370	46-55	259
12 PM	2	0	1	2	3	13	99	168	90	31	4	1	0	1	415	41-50	267
13:00	2	1	1	4	6	16	72	131	68	24	5	1	0	1	332	41-50	203
14:00	0	0	0	0	1	19	66	124	83	33	2	0	0	2	330	46-55	207
15:00	1	0	0	0	2	14	39	121	74	41	4	0	0	1	297	46-55	195
16:00	0	0	0	0	1	3	44	115	96	35	3	1	0	1	299	46-55	211
17:00	0	0	0	0	0	9	30	121	73	22	5	1	0	1	262	46-55	194
18:00	0	0	0	0	4	5	28	80	54	37	6	1	0	0	215	46-55	134
19:00	0	0	0	0	0	2	31	50	46	12	0	2	0	0	143	46-55	96
20:00	0	0	0	0	1	3	25	40	19	11	1	0	0	1	101	41-50	65
21:00	0	0	0	0	0	6	13	11	15	5	2	1	0	0	53	45-54	26
22:00	0	0	0	0	0	0	2	9	7	9	1	0	0	0	28	51-60	16
23:00	0	0	0	0	0	5	5	8	0	3	2	1	2	0	26	41-50	13
Total	6	3	3	7	40	141	719	1627	1007	393	57	11	3	11	4028		
Percent	0.1%	0.1%	0.1%	0.2%	1.0%	3.5%	17.9%	40.4%	25.0%	9.8%	1.4%	0.3%	0.1%	0.3%			
AM Peak	11:00	08:00	03:00	07:00	10:00	10:00	10:00	11:00	10:00	11:00	06:00	04:00	05:00	00:00	11:00		
Vol.	1	2	1_	1_	88	21	72	185	88	33	5_	1	1_	2	370		
PM Peak	12:00	13:00	12:00	13:00	13:00	14:00	12:00	12:00	16:00	15:00	18:00	19:00	23:00	14:00	12:00		
Vol.	2	1	1	4	6	19	99	168	96	41	6	2	2	2	415		

Route 66 at E. Hampton/Marlborough TL E. Hampton, Connecticut

Site Code: Station ID: 4639

Latitude: 0' 0.0000 Undefined

Eastbound																	
Start	0	16	21	26	31	36	41	46	51	56	61	66	71	76		Pace	Number
Time	15	20	25	30	35	40	45	50	55	60	65	70	75	9999	Total	Speed	in Pace
04/30/18	0	0	0	0	0	0	2	4	5	0	0	0	0	0	11	46-55	9
01:00	0	0	0	0	0	0	5	2	0	0	0	0	0	0	7	40-49	7
02:00	0	0	0	0	0	0	1	2	3	1	0	0	0	0	7	46-55	5
03:00	0	0	1	0	0	3	2	5	3	3	1	0	0	0	18	44-53	8
04:00	0	0	0	0	0	0	9	15	17	9	3	0	0	0	53	46-55	32
05:00	0	0	0	0	0	8	37	86	49	22	3	0	0	0	205	46-55	135
06:00	0	0	0	1	3	20	105	232	112	28	3	0	0	0	504	46-55	344
07:00	2	0	0	5	14	21	78	264	137	44	3	0	1	2	571	46-55	401
08:00	1	0	0	1	4	14	74	211	104	21	6	0	0	0	436	46-55	315
09:00	0	0	0	0	1	6	77	139	65	35	3	0	0	0	326	41-50	216
10:00	0	0	1	3	1	7	48	120	74	20	6	0	0	0	280	46-55	194
11:00	1	0	1	1	4	2	54	134	51	16	3	0	0	0	267	41-50	188
12 PM	0	0	0	0	2	2	61	119	82	26	3	0	0	1	296	46-55	201
13:00	0	0	0	0	0	1	62	119	80	24	4	1	0	1	292	46-55	199
14:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
15:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
16:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
19:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
20:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
21:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
22:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
23:00	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total	4	0	3	11	29	84	615	1452	782	249	38	1	1	4	3273		
Percent	0.1%	0.0%	0.1%	0.3%	0.9%	2.6%	18.8%	44.4%	23.9%	7.6%	1.2%	0.0%	0.0%	0.1%			
AM Peak	07:00		03:00	07:00	07:00	07:00	06:00	07:00	07:00	07:00	08:00		07:00	07:00	07:00		
Vol.	2		1	5	14	21	105	264	137	44	6		1	2	571		
PM Peak					12:00	12:00	13:00	12:00	12:00	12:00	13:00	13:00		12:00	12:00		
Vol.					2	2	62	119	82	26	4	1		1	296		
Total	99	27	42	109	297	1158	6092	13074	7587	2825	501	44	16	63	31934		
Percent	0.3%	0.1%	0.1%	0.3%	0.9%	3.6%	19.1%	40.9%	23.8%	8.8%	1.6%	0.1%	0.1%	0.2%			

15th Percentile: 42 MPH 50th Percentile: 48 MPH 85th Percentile: 54 MPH 95th Percentile: 58 MPH

Stats 10 MPH Pace Speed: 46-55 MPH Number in Pace: 20665

Percent in Pace : 64.7%

Number of Vehicles > 45 MPH : 24110

Percent of Vehicles > 45 MPH : 75.5%

Mean Speed(Average) : 49 MPH

APPENDIX F Capacity Analyses 2020 Corridor Conditions – Weekday Morning
Tighe & Bond

	•	•	†	~	-	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	ሻሻ		^	7		41
Traffic Volume (vph)	1311	34	283	518	40	573
Future Volume (vph)	1311	34	283	518	40	573
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1900	1900	1900	1900	1900	1900
			11			11
Storage Length (ft)	0	0		200	0	
Storage Lanes	2	0		1	0	
Taper Length (ft)	25				25	
Lane Util. Factor	0.97	0.95	0.95	1.00	0.95	0.95
Frt	0.996			0.850		
Flt Protected	0.954					0.997
Satd. Flow (prot)	3368	0	3355	1501	0	3345
Flt Permitted	0.954					0.925
Satd. Flow (perm)	3368	0	3355	1501	0	3104
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)	5	. 55		545		
Link Speed (mph)	35		35	040		30
Link Distance (ft)	2739		813			825
Travel Time (s)	53.4	0.05	15.8	0.05	0.05	18.8
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	1380	36	298	545	42	603
Shared Lane Traffic (%)						
Lane Group Flow (vph)	1416	0	298	545	0	645
Turn Type	Prot		NA	Free	D.P+P	NA
Protected Phases	4		2		1	12
Permitted Phases				Free	2	
Detector Phase	4				1	
Switch Phase	<u> </u>				•	
Minimum Initial (s)	10.0		15.0		4.0	
Minimum Split (s)	16.0		20.0		8.0	
Total Split (s)	46.0		22.0		12.0	
Total Split (%)	57.5%		27.5%		15.0%	
Yellow Time (s)	4.0		4.0		3.0	
All-Red Time (s)	2.0		1.0		1.0	
Lost Time Adjust (s)	0.0		0.0			
Total Lost Time (s)	6.0		5.0			
Lead/Lag			Lag		Lead	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		C-Max		Max	
Act Effct Green (s)	38.4		17.0	80.0		27.6
Actuated g/C Ratio	0.48		0.21	1.00		0.34
v/c Ratio	0.40		0.42	0.36		0.59
Control Delay	19.1		29.3	0.30		22.4
3						
Queue Delay	0.0		0.0	0.0		0.0
Total Delay	19.1		29.3	0.7		22.4
LOS	В		С	Α		С
Approach Delay	19.1		10.8			22.4
Approach LOS	В		В			С

	•	•	†	~	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Queue Length 50th (ft)	394		67	0		128	
Queue Length 95th (ft)	357		105	0		178	
Internal Link Dist (ft)	2659		733			745	
Turn Bay Length (ft)				200			
Base Capacity (vph)	1686		712	1501		1099	
Starvation Cap Reductn	0		0	0		0	
Spillback Cap Reductn	0		0	0		0	
Storage Cap Reductn	0		0	0		0	
Reduced v/c Ratio	0.84		0.42	0.36		0.59	
Intersection Summary							
Area Type:	Other						
Cycle Length: 80							
Actuated Cycle Length: 80							
Offset: 0 (0%), Referenced	to phase 2:	NBSB, Sta	art of Yel	low			
Natural Cycle: 60							
Control Type: Actuated-Co	ordinated						
Maximum v/c Ratio: 0.87							
Intersection Signal Delay:					ersection		
Intersection Capacity Utiliz	ation 80.5%			IC	U Level o	f Service	D
Analysis Period (min) 15							
Splits and Dhases: 101.	Main Stroot	Doute 4	. 4				
	Main Street	a Roule C	υ	Τ,			
Mo1 ↓Tø	02 (R)		V	√ Ø4			

	٠	→	←	•	>	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	<u> </u>	† †	† ‡		¥	
Traffic Volume (vph)	111	440	1124	166	72	106
Future Volume (vph)	111	440	1124	166	72	106
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	16	11
Storage Length (ft)	225	• • •	• • •	0	0	0
Storage Lanes	1			0	1	0
Taper Length (ft)	50				25	J
Lane Util. Factor	1.00	0.95	0.95	0.95	1.00	1.00
Frt	1.00	0.75	0.981	0.75	0.920	1.00
Flt Protected	0.950		0.701		0.980	
Satd. Flow (prot)	1678	3355	3292	0	1867	0
Flt Permitted		3333	3292	U	0.980	U
	0.138	2255	2202	0		0
Satd. Flow (perm)	244	3355	3292	0	1867	0
Right Turn on Red			0.5	Yes	07	Yes
Satd. Flow (RTOR)			25		97	
Link Speed (mph)		35	35		30	
Link Distance (ft)		2739	241		643	
Travel Time (s)		53.4	4.7		14.6	
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	118	468	1196	177	77	113
Shared Lane Traffic (%)						
Lane Group Flow (vph)	118	468	1373	0	190	0
Turn Type	pm+pt	NA	NA		Prot	
Protected Phases	1	2	2		5	
Permitted Phases	2				-	
Detector Phase	1				5	
Switch Phase						
Minimum Initial (s)	3.0	20.0	20.0		9.0	
Minimum Split (s)	6.5	26.0	26.0		13.7	
Total Split (s)	9.5	40.0	40.0		30.5	
		50.0%	50.0%			
Total Split (%)	11.9%				38.1%	
Yellow Time (s)	3.0	4.3	4.3		3.2	
All-Red Time (s)	0.5	1.7	1.7		1.5	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	
Total Lost Time (s)	3.5	6.0	6.0		4.7	
Lead/Lag	Lead	Lag	Lag			
Lead-Lag Optimize?	Yes	Yes	Yes			
Recall Mode	None	C-Min	C-Min		None	
Act Effct Green (s)	58.8	49.9	49.9		10.2	
Actuated g/C Ratio	0.74	0.62	0.62		0.13	
v/c Ratio	0.38	0.22	0.67		0.59	
Control Delay	6.4	7.5	3.6		24.2	
Queue Delay	0.0	0.0	0.0		0.0	
Total Delay	6.4	7.5	3.6		24.2	
LOS	A	A	A		C	
Approach Delay	, , , , , , , , , , , , , , , , , , ,	7.2	3.6		24.2	
Approach LOS		Α.2	3.0 A		C C	
Approacti LOS		А	А		C	

	•	-	•	•	-	4	
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	
Queue Length 50th (ft)	9	43	11	WDIX	44	ODIC	
Queue Length 95th (ft)	m25	88	40		101		
Internal Link Dist (ft)	11120	2659	161		563		
Turn Bay Length (ft)	225	_30,	, 0 .		200		
Base Capacity (vph)	319	2091	2062		667		
Starvation Cap Reductn	0	0	0		0		
Spillback Cap Reductn	0	0	0		0		
Storage Cap Reductn	0	0	0		0		
Reduced v/c Ratio	0.37	0.22	0.67		0.28		
Intersection Summary							
Area Type:	Other						
Cycle Length: 80							

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBWB, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 6.4 Intersection LOS: A Intersection Capacity Utilization 65.3% ICU Level of Service C

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 102: Route 66 & High Street



	-	•	•	←	•	<i>></i>
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	†		ኻ	^	Y	
Traffic Volume (vph)	494	14	24	1255	42	19
Future Volume (vph)	494	14	24	1255	42	19
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1700	11	1700	1700	12	12
Storage Length (ft)	''	0	175		0	0
Storage Lanes		0	1/3		1	0
Taper Length (ft)		U	50		25	U
Lane Util. Factor	0.95	0.95	1.00	0.95	1.00	1.00
		0.95	1.00	0.95		1.00
Frt	0.996		0.050		0.957	
Flt Protected			0.950		0.967	
Satd. Flow (prot)	3342	0	1678	3355	1691	0
Flt Permitted			0.458		0.967	
Satd. Flow (perm)	3342	0	809	3355	1691	0
Right Turn on Red		Yes				Yes
Satd. Flow (RTOR)	4				20	
Link Speed (mph)	35			35	25	
Link Distance (ft)	241			1093	405	
Travel Time (s)	4.7			21.3	11.0	
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	509	14	25	1294	43	20
Shared Lane Traffic (%)	307	14	25	1274	43	20
. ,	Enn	Λ)E	1204	42	Λ
Lane Group Flow (vph)	523	0	25	1294	63 Dret	0
Turn Type	NA		pm+pt	NA	Prot	
Protected Phases	2		1	2	5	
Permitted Phases			2			
Detector Phase			1		5	
Switch Phase						
Minimum Initial (s)	20.0		3.0	20.0	9.0	
Minimum Split (s)	26.0		6.5	26.0	13.7	
Total Split (s)	40.0		9.5	40.0	30.5	
Total Split (%)	50.0%		11.9%	50.0%	38.1%	
Yellow Time (s)	4.3		3.0	4.3	3.2	
All-Red Time (s)	1.7		0.5	1.7	1.5	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	6.0		3.5	6.0	4.7	
					4.7	
Lead/Lag Ontimize?	Lag		Lead	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes	Maria	
Recall Mode	C-Min		None	C-Min	None	
Act Effct Green (s)	49.9		58.8	49.9	10.2	
Actuated g/C Ratio	0.62		0.74	0.62	0.13	
v/c Ratio	0.25		0.04	0.62	0.27	
Control Delay	3.5		1.5	11.9	25.9	
Queue Delay	0.2		0.0	0.0	0.0	
Total Delay	3.7		1.5	11.9	25.9	
LOS	А		Α	В	С	
Approach Delay	3.7			11.7	25.9	
Approach LOS	Α			В	C	
Approach LOS	Α.			ט	C	

	-	•	•	-	1	
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Queue Length 50th (ft)	21		4	313	20	
Queue Length 95th (ft)	33		m0	2	52	
Internal Link Dist (ft)	161			1013	325	
Turn Bay Length (ft)			175			
Base Capacity (vph)	2085		680	2091	558	
Starvation Cap Reductn	758		0	0	0	
Spillback Cap Reductn	0		0	0	0	
Storage Cap Reductn	0		0	0	0	
Reduced v/c Ratio	0.39		0.04	0.62	0.11	

Intersection Summary

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBWB, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 10.0 Intersection LOS: A Intersection Capacity Utilization 51.1% ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 103: Airline Avenue & Route 66



	٠	→	←	•	\	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	<u> </u>	† †	† 1>		ኘ	7
Traffic Volume (vph)	25	483	1254	30	7	3
Future Volume (vph)	25	483	1254	30	7	3
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	10	11
Storage Length (ft)	350			0	0	0
Storage Lanes	1			0	1	1
Taper Length (ft)	50			U U	25	ı
Lane Util. Factor	1.00	0.95	0.95	0.95	1.00	1.00
Frt	1.00	0.75	0.997	0.75	1.00	0.850
Flt Protected	0.950		0.771		0.950	0.000
Satd. Flow (prot)	1662	3323	3314	0	1604	1501
Fit Permitted		3323	3314	U	0.950	1001
	0.183	2222	221/	0		1501
Satd. Flow (perm)	320	3323	3314	0	1604	1501
Right Turn on Red				Yes		Yes
Satd. Flow (RTOR)			4			3
Link Speed (mph)		35	35		10	
Link Distance (ft)		1093	417		223	
Travel Time (s)		21.3	8.1		15.2	
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96
Heavy Vehicles (%)	5%	5%	5%	5%	5%	4%
Adj. Flow (vph)	26	503	1306	31	7	3
Shared Lane Traffic (%)						
Lane Group Flow (vph)	26	503	1337	0	7	3
Turn Type	D.P+P	NA	NA		Prot	Prot
Protected Phases	1	12	2		4	4
Permitted Phases	2	1 2			7	
Detector Phase	1				4	4
Switch Phase	I				4	4
	FΛ		1E 0		0.0	0.0
Minimum Initial (s)	5.0		15.0		9.0	9.0
Minimum Split (s)	9.0		20.0		21.0	21.0
Total Split (s)	9.0		47.0		24.0	24.0
Total Split (%)	11.3%		58.8%		30.0%	30.0%
Yellow Time (s)	3.0		4.3		3.0	3.0
All-Red Time (s)	1.0		0.7		1.9	1.9
Lost Time Adjust (s)	0.0		0.0		0.0	0.0
Total Lost Time (s)	4.0		5.0		4.9	4.9
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Recall Mode	None		C-Max		None	None
Act Effct Green (s)	71.6	76.4	71.2		9.0	9.0
Actuated g/C Ratio	0.90	0.96	0.89		0.11	0.11
v/c Ratio	0.90	0.70	0.45		0.11	0.11
Control Delay	4.1	3.1	7.5		32.3	22.3
	0.0		0.1			0.0
Queue Delay		0.0			0.0	
Total Delay	4.1	3.1	7.5		32.3	22.3
LOS	Α	A	A		C	С
Approach Delay		3.1	7.5		29.3	
Approach LOS		Α	Α		С	

	٠	→	←	•	>	4	
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	
Queue Length 50th (ft)	1	0	0		3	0	
Queue Length 95th (ft)	0	130	455		15	8	
Internal Link Dist (ft)		1013	337		143		
Turn Bay Length (ft)	350						
Base Capacity (vph)	384	3174	2949		382	360	
Starvation Cap Reductn	0	0	305		0	0	
Spillback Cap Reductn	0	0	0		0	0	
Storage Cap Reductn	0	0	0		0	0	
Reduced v/c Ratio	0.07	0.16	0.51		0.02	0.01	
Intersection Summary							
Area Type:	Other						
Cycle Length: 80							
Actuated Cycle Length: 80							
Offset: 50 (63%), Referen	ced to phase	2:EBWB	Start of	Yellow			
Natural Cycle: 60							
Control Type: Actuated-Co	oordinated						
Maximum v/c Ratio: 0.45							
ntersection Signal Delay:				***	tersection		
ntersection Capacity Utiliz	zation 51.4%			IC	U Level c	f Service A	4
Analysis Period (min) 15							
Splits and Phases: 104	: Route 66 &	Portland	Shonning	Center D	riveway		
A		. Ortiuriu	Shopping	J COINCI D	Tivevay		人 ~
4 ø₁ 4 ø₂ (R	.)						™ Ø4

	۶	→	•	•	←	•	•	†	~	>	↓	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	∱ î≽		ሻ	∱ 1≽			4			4	
Traffic Volume (vph)	5	490	12	3	1236	1	19	0	9	6	0	0
Future Volume (vph)	5	490	12	3	1236	1	19	0	9	6	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	12	12	12	12	12	12
Storage Length (ft)	125		0	150		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	50			50			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.996						0.956				
Flt Protected	0.950			0.950				0.967			0.950	
Satd. Flow (prot)	1662	3310	0	1662	3323	0	0	1673	0	0	1719	0
Flt Permitted	0.180			0.448				0.932				
Satd. Flow (perm)	315	3310	0	784	3323	0	0	1612	0	0	1810	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		5						100				
Link Speed (mph)		35			45			25			25	
Link Distance (ft)		417			1869			435			271	
Travel Time (s)		8.1			28.3			11.9			7.4	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Adj. Flow (vph)	5	533	13	3	1343	1	21	0	10	7	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	546	0	3	1344	0	0	31	0	0	7	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases	5	2		1	6			4			4	
Permitted Phases	2			6			4			4		
Detector Phase	5			1			4	4		4	4	
Switch Phase	0.0	45.0		0.0	45.0						/ 0	
Minimum Initial (s)	3.0	15.0		3.0	15.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	7.0	21.3		7.0	21.3		23.2	23.2		23.2	23.2	
Total Split (s)	7.0	49.8		7.0	49.8		23.2	23.2		23.2	23.2	
Total Split (%)	8.8%	62.3%		8.8%	62.3%		29.0%	29.0%		29.0%	29.0%	
Yellow Time (s)	3.0	4.3		3.0	4.3		3.2	3.2		3.2	3.2	
All-Red Time (s)	1.0	2.0		1.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	4.0	6.3		4.0	6.3			5.2			5.2	
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize? Recall Mode	Yes	Yes C-Min		Yes	Yes C-Min		Mono	None		Mono	None	
Act Effct Green (s)	None 68.5			None			None	6.0		None	None	
Actuated g/C Ratio	0.86	67.9 0.85		68.4 0.86	67.8 0.85			0.0			6.0 0.08	
v/c Ratio	0.00	0.63		0.00	0.63			0.08			0.06	
Control Delay	0.6	0.19		1.7	4.0			1.4			35.3	
-								0.0				
Queue Delay	0.0	0.0		0.0	0.1 4.1			1.4			0.0 35.3	
Total Delay LOS	0.6 A	0.6 A		1.7 A	4. I A			1.4 A			35.3 D	
Approach Delay	A	0.6		A	4.1			1.4			35.3	
Approach LOS		0.6 A			4. I A			1.4 A			35.3 D	
Appluacii LU3		А			А			А			D	

	۶	→	•	•	•	•	•	†	~	>	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	0	5		0	95			0			3	
Queue Length 95th (ft)	1	10		1	217			0			15	
Internal Link Dist (ft)		337			1789			355			191	
Turn Bay Length (ft)	125			150								
Base Capacity (vph)	341	2808		715	2817			440			407	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	315			9			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.01	0.19		0.00	0.54			0.07			0.02	
Intersection Summary												

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 48 (60%), Referenced to phase 2:EBTL and 6:WBTL, Start of Yellow

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.48

Intersection Signal Delay: 3.2 Intersection LOS: A Intersection Capacity Utilization 48.8% ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 105: Grove Street/Grandview Terrace & Route 66



	٠	→	←	•	>	4			
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	Ø2	Ø3	
Lane Configurations	ሻ	† †	† †	7	ሻ	7			
Traffic Volume (vph)	76	385	978	199	84	112			
Future Volume (vph)	76	385	978	199	84	112			
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900			
Lane Width (ft)	11	11	11	11	11	11			
Storage Length (ft)	200			200	0	100			
Storage Lanes	1			1	1	1			
Taper Length (ft)	50				25				
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00			
Frt				0.850		0.850			
Flt Protected	0.950				0.950				
Satd. Flow (prot)	1646	3292	3292	1473	1646	1473			
Flt Permitted	0.950				0.950				
Satd. Flow (perm)	1646	3292	3292	1473	1646	1473			
Right Turn on Red				Yes		Yes			
Satd. Flow (RTOR)				221		124			
Link Speed (mph)		45	35		45				
Link Distance (ft)		1735	1238		958				
Travel Time (s)		26.3	24.1		14.5				
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90			
Heavy Vehicles (%)	6%	6%	6%	6%	6%	6%			
Adj. Flow (vph)	84	428	1087	221	93	124			
Shared Lane Traffic (%)									
Lane Group Flow (vph)	84	428	1087	221	93	124			
Turn Type	Prot	NA	NA	Prot	Prot	Prot			
Protected Phases	1	123	23	23	4	4	2	3	
Permitted Phases									
Detector Phase	1	123	23	23	4	4			
Switch Phase									
Minimum Initial (s)	5.0				7.0	7.0	15.0	3.0	
Minimum Split (s)	10.0				20.0	20.0	21.0	9.0	
Total Split (s)	13.0				20.0	20.0	18.0	9.0	
Total Split (%)	21.7%				33.3%	33.3%	30%	15%	
Yellow Time (s)	3.0				3.0	3.0	4.0	4.0	
All-Red Time (s)	2.0				2.0	2.0	2.0	2.0	
Lost Time Adjust (s)	0.0				0.0	0.0			
Total Lost Time (s)	5.0				5.0	5.0			
Lead/Lag	Lead				Lag	Lag	Lag	Lead	
Lead-Lag Optimize?	Yes				Yes	Yes	Yes	Yes	
Recall Mode	None				None	None	Min	None	
Act Effct Green (s)	6.0	34.8	21.4	21.4	7.9	7.9			
Actuated g/C Ratio	0.12	0.72	0.44	0.44	0.16	0.16			
v/c Ratio	0.41	0.18	0.75	0.29	0.35	0.36			
Control Delay	27.7	3.7	17.9	3.3	23.5	8.2			
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0			
Total Delay	27.7	3.7	17.9	3.3	23.5	8.2			
LOS	C	A	В	A	C	A			
Approach Delay		7.6	15.4		14.8				
Approach LOS		A	В		В				
PE		, ,							

<u>Larroo</u> , voiarrioo,	1 1111111190								J ·	
	۶	→	+	•	>	4				
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	Ø2	Ø3		
Queue Length 50th (ft)	23	20	131	0	25	0				
Queue Length 95th (ft)	60	41	#280	34	61	36				
Internal Link Dist (ft)		1655	1158		878					
Turn Bay Length (ft)	200			200		100				
Base Capacity (vph)	276	2224	1452	773	518	548				
Starvation Cap Reductn	0	0	0	0	0	0				
Spillback Cap Reductn	0	0	0	0	0	0				
Storage Cap Reductn	0	0	0	0	0	0				
Reduced v/c Ratio	0.30	0.19	0.75	0.29	0.18	0.23				
Intersection Summary										
Area Type:	Other									
Cycle Length: 60										
Actuated Cycle Length: 4	8.5									
Natural Cycle: 60										
Control Type: Actuated-U	Incoordinated									
Maximum v/c Ratio: 0.75										
Intersection Signal Delay					tersection					
Intersection Capacity Util	ization 50.4%			IC	U Level c	of Service	A			
Analysis Period (min) 15										
# 95th percentile volum			eue may	be longer						
Queue shown is maxii	mum after two	cycles.								

Splits and Phases: 106: Route 66 & Gospel Lane (Route 17)

	100.100	Late	10 17)	44				
→ø ₁		→ø2		— Ø3	3	Ø4		
13 c		18 s		9.5		20 s		

	۶	→	•	•	+	•	•	†	<i>></i>	>	ţ	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ሻ	1>		ሻ	f)			4			4	
Traffic Volume (vph)	18	429	2	2	1074	0	22	0	5	0	3	0
Future Volume (vph)	18	429	2	2	1074	0	22	0	5	0	3	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	11	11	11	11	11	11
Storage Length (ft)	193		0	300		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	100			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999						0.976				
Flt Protected	0.950			0.950				0.961				
Satd. Flow (prot)	1678	1764	0	1678	1766	0	0	1656	0	0	1766	0
Flt Permitted	0.138			0.499								
Satd. Flow (perm)	244	1764	0	881	1766	0	0	1724	0	0	1766	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)								94				
Link Speed (mph)		45			45			25			25	
Link Distance (ft)		293			793			336			474	
Travel Time (s)		4.4			12.0			9.2			12.9	
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	19	456	2	2	1143	0	23	0	5	0	3	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	19	458	0	2	1143	0	0	28	0	0	3	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA			NA	
Protected Phases	1	6		5	2			4			4	
Permitted Phases	6			2			4			4		
Detector Phase	1	6		5	2		4	4		4	4	
Switch Phase												
Minimum Initial (s)	4.0	15.0		4.0	15.0		7.0	7.0		7.0	7.0	
Minimum Split (s)	8.6	22.0		8.6	22.0		19.6	19.6		19.6	19.6	
Total Split (s)	8.6	61.0		8.6	61.0		30.4	30.4		30.4	30.4	
Total Split (%)	8.6%	61.0%		8.6%	61.0%		30.4%	30.4%		30.4%	30.4%	
Yellow Time (s)	3.6	5.0		3.6	5.0		3.6	3.6		3.6	3.6	
All-Red Time (s)	1.0	2.0		1.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	4.6	7.0		4.6	7.0			5.6			5.6	
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	Min		None	Min		None	None		None	None	
Act Effct Green (s)	68.4	69.6		67.5	68.0			7.0			7.0	
Actuated g/C Ratio	0.87	0.88		0.86	0.86			0.09			0.09	
v/c Ratio	0.07	0.29		0.00	0.75			0.12			0.02	
Control Delay	2.1	3.4		1.5	13.0			1.0			34.7	
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	
Total Delay	2.1	3.4		1.5	13.0			1.0			34.7	
LOS	А	А		Α	В			А			С	
Approach Delay		3.3			13.0			1.0			34.7	
Approach LOS		Α			В			Α			С	

	۶	-	•	•	←	•	4	†	~	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	1	0		0	0			0			1	
Queue Length 95th (ft)	5	148		1	#848			0			10	
Internal Link Dist (ft)		213			713			256			394	
Turn Bay Length (ft)	193			300								
Base Capacity (vph)	285	1559		796	1525			608			557	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.07	0.29		0.00	0.75			0.05			0.01	
Intersection Summary												
Area Type:	Other											

Cycle Length: 100

Actuated Cycle Length: 78.7

Natural Cycle: 100

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.75


Intersection Signal Delay: 10.0 Intersection LOS: B
Intersection Capacity Utilization 75.2% ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 107: Payne Blvd/Middle Haddam Rd & Route 66



	۶	→	•	•	←	•	•	†	<i>></i>	>	↓	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4	ř		4	
Traffic Volume (vph)	1	382	34	3	923	2	156	12	3	39	11	25
Future Volume (vph)	1	382	34	3	923	2	156	12	3	39	11	25
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	12	13	13	12	13	12
Storage Length (ft)	0		0	0		0	0		100	0		0
Storage Lanes	0		0	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.989							0.850		0.956	
Flt Protected								0.956			0.975	
Satd. Flow (prot)	0	1747	0	0	1766	0	0	1805	1605	0	1760	0
Flt Permitted		0.999			0.999			0.681			0.695	
Satd. Flow (perm)	0	1745	0	0	1764	0	0	1286	1605	0	1254	0
Right Turn on Red			Yes			No			Yes			Yes
Satd. Flow (RTOR)		6							56		25	
Link Speed (mph)		35			35			35			25	
Link Distance (ft)		1284			1455			649			549	
Travel Time (s)		25.0			28.3			12.6			15.0	
Peak Hour Factor	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	1	434	39	3	1049	2	177	14	3	44	13	28
Shared Lane Traffic (%)	•		0,		1017	_						
Lane Group Flow (vph)	0	474	0	0	1054	0	0	191	3	0	85	0
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2			2			4			4	
Permitted Phases	2	_		2	_		4	•	4	4		
Detector Phase	2	2		2	2		4	4	4	4	4	
Switch Phase												
Minimum Initial (s)	15.0	15.0		15.0	15.0		5.0	5.0	5.0	5.0	5.0	
Minimum Split (s)	23.6	23.6		23.6	23.6		12.5	12.5	12.5	12.5	12.5	
Total Split (s)	64.0	64.0		64.0	64.0		46.0	46.0	46.0	46.0	46.0	
Total Split (%)	58.2%	58.2%		58.2%	58.2%		41.8%	41.8%	41.8%	41.8%	41.8%	
Yellow Time (s)	4.3	4.3		4.3	4.3		4.2	4.2	4.2	4.2	4.2	
All-Red Time (s)	4.3	4.3		4.3	4.3		3.3	3.3	3.3	3.3	3.3	
Lost Time Adjust (s)		0.0			0.0			0.0	0.0		0.0	
Total Lost Time (s)		8.6			8.6			7.5	7.5		7.5	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	Min	Min		Min	Min		None	None	None	None	None	
Act Effct Green (s)		55.6			55.6			17.0	17.0		17.0	
Actuated g/C Ratio		0.63			0.63			0.19	0.19		0.19	
v/c Ratio		0.43			0.95			0.78	0.01		0.33	
Control Delay		10.9			36.6			55.0	0.0		25.6	
Queue Delay		0.0			0.0			0.0	0.0		0.0	
Total Delay		10.9			36.6			55.0	0.0		25.6	
LOS		В			D			D	Α		23.0 C	
Approach Delay		10.9			36.6			54.1	Α		25.6	
Approach LOS		10.9 B			30.0 D			D D			23.0 C	
Approach LOS		D			D			D			C	

Laries, volumes, i	imings								Hilling	riaii. W	chuay Ai	VIFCAN
	۶	→	•	•	←	•	4	†	/	>	ţ	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)		121			494			102	0		29	
Queue Length 95th (ft)		231			#923			171	0		67	
Internal Link Dist (ft)		1204			1375			569			469	
Turn Bay Length (ft)									100			
Base Capacity (vph)		1095			1105			559	729		559	
Starvation Cap Reductn		0			0			0	0		0	
Spillback Cap Reductn		0			0			0	0		0	
Storage Cap Reductn		0			0			0	0		0	
Reduced v/c Ratio		0.43			0.95			0.34	0.00		0.15	
Intersection Summary												
Area Type:	Other											
Cycle Length: 110												
Actuated Cycle Length: 88.8	3											
Natural Cycle: 90												
Control Type: Actuated-Unc	coordinated											
Maximum v/c Ratio: 0.95												
Intersection Signal Delay: 3					tersection							
Intersection Capacity Utiliza	tion 79.5%			IC	CU Level	of Service	D					
Analysis Period (min) 15												

⁹⁵th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.

Splits and Phases: 108: Route 151/Depot Hill Rd & Route 66



109: Middletown Avenue/Commuter Parking Lot Dwy & R@0@066orridor Conditions - Optimized Lanes, Volumes, Timing Plan: Weekday AM Peak

Lancs, volumes, i	iiiiiigs									g 1 1a11. 11		
	•	-	•	•	←	•	•	†	~	>	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ર્ન	7	ሻ	1>			4	7		4	
Traffic Volume (vph)	0	287	193	4	564	1	401	0	2	0	0	1
Future Volume (vph)	0	287	193	4	564	1	401	0	2	0	0	1
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	11	11	11	11	11	11
Storage Length (ft)	0		250	125		0	0		100	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.865	
Flt Protected				0.950				0.950				
Satd. Flow (prot)	0	1766	1501	1678	1766	0	0	1678	1501	0	1528	0
Flt Permitted				0.557		-	-	0.757				
Satd. Flow (perm)	0	1766	1501	984	1766	0	0	1337	1501	0	1528	0
Right Turn on Red		.,,	Yes	, , ,	.,,,,	Yes			Yes		.020	Yes
Satd. Flow (RTOR)			219			. 00			71		171	. 00
Link Speed (mph)		45			45			50			15	
Link Distance (ft)		546			525			823			174	
Travel Time (s)		8.3			8.0			11.2			7.9	
Peak Hour Factor	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	0	326	219	5	641	1	456	0	2	0	0	1
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	326	219	5	642	0	0	456	2	0	1	0
Turn Type		NA	Perm	Perm	NA		Perm	NA	Perm		NA	
Protected Phases		2			2			4			4	
Permitted Phases	2		2	2			4		4	4		
Detector Phase	2	2	2	2	2		4	4	4	4	4	
Switch Phase												
Minimum Initial (s)	15.0	15.0	15.0	15.0	15.0		6.0	6.0	6.0	6.0	6.0	
Minimum Split (s)	22.9	22.9	22.9	22.9	22.9		21.0	21.0	21.0	21.0	21.0	
Total Split (s)	42.0	42.0	42.0	42.0	42.0		33.0	33.0	33.0	33.0	33.0	
Total Split (%)	56.0%	56.0%	56.0%	56.0%	56.0%		44.0%	44.0%	44.0%	44.0%	44.0%	
Yellow Time (s)	5.0	5.0	5.0	5.0	5.0		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.9	2.9	2.9	2.9	2.9		1.0	1.0	1.0	1.0	1.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Lost Time (s)		7.9	7.9	7.9	7.9			4.0	4.0		4.0	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	Min	Min	Min	Min	Min		None	None	None	None	None	
Act Effct Green (s)		27.5	27.5	27.5	27.5			25.3	25.3		25.3	
Actuated g/C Ratio		0.42	0.42	0.42	0.42			0.39	0.39		0.39	
v/c Ratio		0.44	0.29	0.01	0.86			0.88	0.00		0.00	
Control Delay		15.8	3.1	11.5	31.3			41.3	0.0		0.0	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		15.8	3.1	11.5	31.3			41.3	0.0		0.0	
LOS		В	Α	В	С			D	Α		Α	
Approach Delay		10.7			31.1			41.2				
Approach LOS		В			С			D				

109: Middletown Avenue/Commuter Parking Lot Dwy & Ra020066orridor Conditions - Optimized Timing Plan: Weekday AM Peak Lanes, Volumes, Timings

Laries, volumes, i	iiiiiigs								riiiiiig	r ian. wc	citady 7 ii	vi i cuit
	۶	-	•	•	←	•	4	†	~	>	ţ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)		97	0	1	245			183	0		0	
Queue Length 95th (ft)		155	32	7	#385			#352	0		0	
Internal Link Dist (ft)		466			445			743			94	
Turn Bay Length (ft)			250	125					100			
Base Capacity (vph)		967	921	539	967			623	737		803	
Starvation Cap Reductn		0	0	0	0			0	0		0	
Spillback Cap Reductn		0	0	0	0			0	0		0	
Storage Cap Reductn		0	0	0	0			0	0		0	
Reduced v/c Ratio		0.34	0.24	0.01	0.66			0.73	0.00		0.00	
Intersection Summary												
Area Type:	Other											
Cycle Length: 75												
Actuated Cycle Length: 65.2	2											
Natural Cycle: 75												
Control Type: Actuated-Unc	coordinated											
Maximum v/c Ratio: 0.88												
Intersection Signal Delay: 2	7.2			In	tersection	LOS: C						
Intersection Capacity Utiliza	tion 68.5%			IC	U Level o	of Service	С					
Analysis Period (min) 15												
// OF the managed the continues a		!		la a I a .a a. a .								

Splits and Phases: 109: Middletown Avenue/Commuter Parking Lot Dwy & Route 66

\$ ø2	₩ ø4
42 s	33 s

⁹⁵th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

110: Maple Street/North Maple Street & Route 66 & Old W2020-10gbrnStreetConditions - Optimized Lanes, Volumes, Timing Plan: Weekday AM Peak

	•				—	4	•	+			ı	
		-	*	*	WDT		7	l NDT	/	001	*	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR2	NBL2	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	44	357	1	9	474	9	10	50	14	32	22	52
Future Volume (vph)	44	357	1	9	474	9	10	50	14	32	22	52
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	11	12	12	11	12	12	11	12	12	11	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.997			0.975			0.934	
Flt Protected		0.995			0.999			0.993			0.985	
Satd. Flow (prot)	0	1724	0	0	1726	0	0	1678	0	0	1594	0
Flt Permitted		0.892			0.989			0.954			0.886	
Satd. Flow (perm)	0	1546	0	0	1709	0	0	1612	0	0	1434	0
Right Turn on Red			No			No			No			
Satd. Flow (RTOR)												
Link Speed (mph)		45			30			25			25	
Link Distance (ft)		2724			782			976			892	
Travel Time (s)		41.3			17.8			26.6			24.3	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Heavy Vehicles (%)	6%	6%	6%	6%	6%	6%	6%	6%	6%	6%	6%	6%
Adj. Flow (vph)	52	420	1	11	558	11	12	59	16	38	26	61
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	473	0	0	580	0	0	87	0	0	125	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			2			4			4	
Permitted Phases	2			2			4			4		
Detector Phase	2	2		2	2		4	4		4	4	
Switch Phase												
Minimum Initial (s)	25.0	25.0		25.0	25.0		9.0	9.0		9.0	9.0	
Minimum Split (s)	32.2	32.2		32.2	32.2		16.9	16.9		16.9	16.9	
Total Split (s)	34.6	34.6		34.6	34.6		16.9	16.9		16.9	16.9	
Total Split (%)	53.2%	53.2%		53.2%	53.2%		26.0%	26.0%		26.0%	26.0%	
Yellow Time (s)	4.0	4.0		4.0	4.0		3.3	3.3		3.3	3.3	
All-Red Time (s)	3.2	3.2		3.2	3.2		1.6	1.6		1.6	1.6	
Lost Time Adjust (s)		0.0			0.0			0.0			0.0	
Total Lost Time (s)		7.2			7.2			4.9			4.9	
Lead/Lag							Lead	Lead		Lead	Lead	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Recall Mode	Min	Min		Min	Min		None	None		None	None	
Act Effct Green (s)		31.1			31.1			9.9			9.9	
Actuated g/C Ratio		0.61			0.61			0.19			0.19	
v/c Ratio		0.50			0.56			0.28			0.45	
Control Delay		12.3			13.4			21.7			25.4	
Queue Delay		0.0			0.0			0.0			0.0	
Total Delay		12.3			13.4			21.7			25.4	
LOS		В			В			С			С	
Approach Delay		12.3			13.4			21.7			25.4	
Approach LOS		В			В			C			C	
Queue Length 50th (ft)		72			92			20			30	
Queue Length 95th (ft)		233			#306			62			86	
Internal Link Dist (ft)		2644			702			896			812	

	\	>
Lane Group	SEL	SER
Lane Configurations	M	
Traffic Volume (vph)	0	1
Future Volume (vph)	0	1
Ideal Flow (vphpl)	1900	1900
Lane Width (ft)	10	12
Lane Util. Factor	1.00	1.00
Frt	0.865	1.00
Flt Protected	0.000	
Satd. Flow (prot)	1447	0
Flt Permitted	1447	U
	1//7	0
Satd. Flow (perm)	1447	0
Right Turn on Red		
Satd. Flow (RTOR)	0.5	
Link Speed (mph)	25	
Link Distance (ft)	421	
Travel Time (s)	11.5	
Peak Hour Factor	0.85	0.85
Heavy Vehicles (%)	6%	6%
Adj. Flow (vph)	0	1
Shared Lane Traffic (%)		
Lane Group Flow (vph)	1	0
Turn Type	Prot	
Protected Phases	5	
Permitted Phases		
Detector Phase	5	
Switch Phase		
Minimum Initial (s)	9.0	
Minimum Split (s)	13.5	
Total Split (s)	13.5	
Total Split (%)	20.8%	
Yellow Time (s)	3.3	
All-Red Time (s)	1.2	
Lost Time Adjust (s)	0.0	
Total Lost Time (s)	4.5	
Lead/Lag	Lag	
Lead-Lag Optimize?	Yes	
Recall Mode	None	
Act Effct Green (s)	9.2	
Actuated g/C Ratio	0.18	
v/c Ratio	0.00	
Control Delay	22.0	
Queue Delay	0.0	
Total Delay	22.0	
LOS	С	
Approach Delay	22.0	
Approach LOS	С	
Queue Length 50th (ft)	0	
Queue Length 95th (ft)	4	
Internal Link Dist (ft)	341	

Lanes, volumes,	imes, Timings											
	٠	→	•	•	←	•	•	†	<i>></i>	>	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR2	NBL2	NBT	NBR	SBL	SBT	SBR
Turn Bay Length (ft)												
Base Capacity (vph)		976			1079			386			344	
Starvation Cap Reductn		0			0			0			0	
Spillback Cap Reductn		0			0			0			0	
Storage Cap Reductn		0			0			0			0	
Reduced v/c Ratio		0.48			0.54			0.23			0.36	
Intersection Summary												
Area Type:	Other											
Cycle Length: 65												
Actuated Cycle Length: 50).9											
Natural Cycle: 65												
Control Type: Actuated-Ur	ncoordinated											
Maximum v/c Ratio: 0.56												
Intersection Signal Delay:						n LOS: B						
Intersection Capacity Utiliz	zation 76.5%			IC	CU Level	of Service	e D					
Analysis Period (min) 15												
# 95th percentile volume	e exceeds cap	acity, qu	eue may	be longe	r.							

Queue shown is maximum after two cycles.

Splits and Phases: 110: Maple Street/North Maple Street & Route 66 & Old West High Street

\$ ø₂	₩ ø4	√ _{ø5}
34.6 s	16.9 s	13.5 s

	>	→			
Lane Group	SEL	SER			
Turn Bay Length (ft)					
Base Capacity (vph)	260				
Starvation Cap Reductn	0				
Spillback Cap Reductn	0				
Storage Cap Reductn	0				
Reduced v/c Ratio	0.00				
Intersection Summary					

	۶	→	•	€	←	•	4	†	~	>	ţ	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	¥	4		ř	4		۲	4		۲	f)	
Traffic Volume (vph)	39	372	19	55	374	76	35	45	95	96	49	91
Future Volume (vph)	39	372	19	55	374	76	35	45	95	96	49	91
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	12	11	11	12	12	12	12	12	12	12
Storage Length (ft)	275		0	225		0	225		0	175		0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (ft)	50			75			50			50		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00
Frt		0.993			0.975			0.901			0.902	
Flt Protected	0.950			0.950			0.950	0.999		0.950		
Satd. Flow (prot)	1662	1737	0	1662	1705	0	1633	1547	0	1719	1632	0
Flt Permitted	0.402			0.431			0.660	0.993		0.653		
Satd. Flow (perm)	703	1737	0	754	1705	0	1135	1538	0	1182	1632	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4			18			103			99	
Link Speed (mph)		30			30			30			25	
Link Distance (ft)		594			597			644			540	
Travel Time (s)		13.5			13.6			14.6			14.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Adj. Flow (vph)	42	404	21	60	407	83	38	49	103	104	53	99
Shared Lane Traffic (%)							10%					
Lane Group Flow (vph)	42	425	0	60	490	0	34	156	0	104	152	0
Turn Type	pm+pt	NA		pm+pt	NA		pm+pt	NA		pm+pt	NA	
Protected Phases	1	6		5	2		3	8		7	4	
Permitted Phases	6			2			8			4		
Detector Phase	1	6		5	2		3	8		7	4	
Switch Phase												
Minimum Initial (s)	4.0	15.0		4.0	15.0		4.0	8.0		4.0	8.0	
Minimum Split (s)	8.0	21.6		8.0	21.6		8.0	13.3		8.0	13.3	
Total Split (s)	8.0	45.0		8.0	45.0		8.0	19.0		8.0	19.0	
Total Split (%)	10.0%	56.3%		10.0%	56.3%		10.0%	23.8%		10.0%	23.8%	
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	3.3		3.0	3.3	
All-Red Time (s)	1.0	2.6		1.0	2.6		1.0	2.0		1.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	4.0	6.6		4.0	6.6		4.0	5.3		4.0	5.3	
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Recall Mode	None	C-Min		None	C-Min		None	None		None	None	
Act Effct Green (s)	49.2	42.7		50.3	44.5		14.6	11.6		18.1	12.3	
Actuated g/C Ratio	0.62	0.53		0.63	0.56		0.18	0.14		0.23	0.15	
v/c Ratio	0.09	0.46		0.11	0.51		0.14	0.50		0.33	0.46	
Control Delay	6.6	15.5		3.3	12.2		22.8	15.9		26.1	17.5	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	6.6	15.5		3.3	12.2		22.8	15.9		26.1	17.5	
LOS	Α	В		Α	В		C	В		C	В	
Approach Delay	, ,	14.7		,,	11.2			17.1			21.0	
Approach LOS		В			В			В			C C	
Approach LOO		D			D			D			C	

111: Main Street #2/North Main Street & Route 66 /Route **26**20 Corridor Conditions - Optimized Lanes, Volumes, Timing Plan: Weekday AM Peak

	۶	-	•	•	←	•	•	†	/	-	↓	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	7	136		9	162		13	22		40	24	
Queue Length 95th (ft)	19	227		6	302		34	68		77	76	
Internal Link Dist (ft)		514			517			564			460	
Turn Bay Length (ft)	275			225			225			175		
Base Capacity (vph)	490	940		530	967		239	396		314	381	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.09	0.45		0.11	0.51		0.14	0.39		0.33	0.40	

Intersection Summary

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:WBTL and 6:EBTL, Start of Yellow

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.51

Intersection Signal Delay: 14.8 Intersection LOS: B
Intersection Capacity Utilization 60.1% ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 111: Main Street #2/North Main Street & Route 66 /Route 66



	•		_		←	•	•	†	<i>></i>	<u></u>	1	/
Long Croup	EBL	EBT	EBR	₩BL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EDL.		EDK			WDK	INDL		NDK	SDL		
Lane Configurations		^}	,	<u>ነ</u>	100	4.4	10	4	7	20	4	10
Traffic Volume (vph)	19	545	6	11	488	44	10	0	7	39	0	18
Future Volume (vph)	19	545	6	11	488	44	10	0	7	39	0	18
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	11	12	12	12	12	12	12	12	12
Storage Length (ft)	225		0	125		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		1
Taper Length (ft)	75			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.998			0.988			0.943				0.850
Flt Protected	0.950			0.950				0.972			0.950	
Satd. Flow (prot)	1662	1806	0	1662	1788	0	0	1659	0	0	1719	1538
Flt Permitted	0.407			0.415				0.802			0.745	
Satd. Flow (perm)	712	1806	0	726	1788	0	0	1369	0	0	1348	1538
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)		1			11							102
Link Speed (mph)		30			30			25			25	
Link Distance (ft)		597			1042			185			376	
Travel Time (s)		13.6			23.7			5.0			10.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Adj. Flow (vph)	21	592	7	12	530	48	11	0	8	42	0	20
Shared Lane Traffic (%)												
Lane Group Flow (vph)	21	599	0	12	578	0	0	19	0	0	42	20
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	Perm
Protected Phases	1	6		5	2			4			4	
Permitted Phases	6			2			4			4		4
Detector Phase	1	6		5	2		4	4		4	4	4
Switch Phase												
Minimum Initial (s)	5.0	18.0		5.0	18.0		9.0	9.0		9.0	9.0	9.0
Minimum Split (s)	9.0	24.5		9.0	24.5		13.0	13.0		13.0	13.0	13.0
Total Split (s)	9.0	56.0		9.0	56.0		15.0	15.0		15.0	15.0	15.0
Total Split (%)	11.3%	70.0%		11.3%	70.0%		18.8%	18.8%		18.8%	18.8%	18.8%
Yellow Time (s)	3.0	5.2		3.0	5.2		3.0	3.0		3.0	3.0	3.0
All-Red Time (s)	1.0	1.3		1.0	1.3		1.0	1.0		1.0	1.0	1.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	0.0
Total Lost Time (s)	4.0	6.5		4.0	6.5			4.0			4.0	4.0
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	C-Min		None	C-Min		None	None		None	None	None
Act Effct Green (s)	67.0	66.0		66.1	64.1			9.5			9.5	9.5
Actuated g/C Ratio	0.84	0.82		0.83	0.80			0.12			0.12	0.12
v/c Ratio	0.03	0.40		0.02	0.40			0.12			0.26	0.07
Control Delay	3.7	8.5		2.3	6.2			32.9			36.3	0.5
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	0.0
Total Delay	3.7	8.5		2.3	6.2			32.9			36.3	0.5
LOS	А	Α		Α	Α			С			D	Α
Approach Delay		8.3			6.1			32.9			24.8	
Approach LOS		А			Α			С			С	

112: Eversource Dwy/East Hampton Commons Dwy & Roll & Corridor Conditions - Optimized Lanes, Volumes, Timing Plan: Weekday AM Peak

	۶	-	•	•	←	•	4	†	/	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	1	69		1	78			9			20	0
Queue Length 95th (ft)	m10	353		4	225			27			49	0
Internal Link Dist (ft)		517			962			105			296	
Turn Bay Length (ft)	225			125								
Base Capacity (vph)	656	1491		658	1438			188			185	299
Starvation Cap Reductn	0	0		0	0			0			0	0
Spillback Cap Reductn	0	0		0	0			0			0	0
Storage Cap Reductn	0	0		0	0			0			0	0
Reduced v/c Ratio	0.03	0.40		0.02	0.40			0.10			0.23	0.07

Intersection Summary

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:WBTL and 6:EBTL, Start of Yellow

Natural Cycle: 55

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.40

Intersection Signal Delay: 8.5 Intersection LOS: A Intersection Capacity Utilization 55.4% ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 112: Eversource Dwy/East Hampton Commons Dwy & Route 66



	→	•	•	←	4	<i>></i>
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	1		ሻ	<u></u>	ሻ	7
Traffic Volume (vph)	470	36	112	429	75	247
Future Volume (vph)	470	36	112	429	75	247
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1900	1900	1900	1900	1900	1900
	12			11		
Storage Length (ft)		0	250		0	0
Storage Lanes		0	1		1	1
Taper Length (ft)			40		25	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.990					0.850
Flt Protected			0.950		0.950	
Satd. Flow (prot)	1791	0	1662	1749	1662	1538
Flt Permitted			0.315		0.950	
Satd. Flow (perm)	1791	0	551	1749	1662	1538
Right Turn on Red		Yes				Yes
Satd. Flow (RTOR)	9					257
Link Speed (mph)	30			30	25	
Link Distance (ft)	628			459	953	
Travel Time (s)	14.3			10.4	26.0	
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96
	5%	5%	5%	5%	5%	5%
Heavy Vehicles (%)						
Adj. Flow (vph)	490	38	117	447	78	257
Shared Lane Traffic (%)	=					
Lane Group Flow (vph)	528	0	117	447	78	257
Turn Type	NA		D.P+P	NA	Prot	Prot
Protected Phases	2		1	12	4	4
Permitted Phases			2			
Detector Phase	2		1	12	4	4
Switch Phase						
Minimum Initial (s)	15.0		5.0		9.0	9.0
Minimum Split (s)	21.5		9.5		13.4	13.4
Total Split (s)	34.0		12.0		14.0	14.0
Total Split (%)	56.7%		20.0%		23.3%	23.3%
Yellow Time (s)	4.5		3.0		3.4	3.4
All-Red Time (s)	2.0		1.5		1.0	1.0
Lost Time Adjust (s)	0.0		0.0		0.0	0.0
Total Lost Time (s)	6.5		4.5		4.4	4.4
Lead/Lag	Lag		Lead			
Lead-Lag Optimize?	Yes		Yes			
Recall Mode	Min		None		None	None
Act Effct Green (s)	20.4		29.4	33.9	9.3	9.3
Actuated g/C Ratio	0.39		0.56	0.65	0.18	0.18
v/c Ratio	0.75		0.26	0.39	0.27	0.53
Control Delay	20.8		4.9	5.3	23.5	8.4
Queue Delay	0.0		0.0	0.0	0.0	0.0
Total Delay	20.8		4.9	5.3	23.5	8.4
LOS	C		A	A	C	A
Approach Delay	20.8			5.2	11.9	Α
Approach LOS	20.6 C				11.9 B	
Approacti LOS	C			Α	D	

	→	•	•	←	•	~
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Queue Length 50th (ft)	132		10	50	21	0
Queue Length 95th (ft)	228		23	89	59	54
Internal Link Dist (ft)	548			379	873	
Turn Bay Length (ft)			250			
Base Capacity (vph)	959		478	1339	309	495
Starvation Cap Reductn	0		0	0	0	0
Spillback Cap Reductn	0		0	0	0	0
Storage Cap Reductn	0		0	0	0	0
Reduced v/c Ratio	0.55		0.24	0.33	0.25	0.52
Intersection Summary						
Area Type:	Other					
Cycle Length: 60						
Actuated Cycle Length: 53	2.2					
Natural Cycle: 60						
Control Type: Actuated-U	ncoordinated					
Maximum v/c Ratio: 0.75						
Intersection Signal Delay:				Int	tersection	LOS: B
Intersection Capacity Utili	zation 53.5%			IC	U Level c	of Service
Analysis Period (min) 15						

Splits and Phases: 113: Lakeview Street (Route 196) & Route 66

▼ ø1	Ø1 ♣ Ø2		₩ ø4	
12 s	34 s		14 s	

APPENDIX F Capacity Analyses 2020 Corridor Conditions – Weekday Afternoon	
Tighe & Bond	

	•	•	†	~	\	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Ϋ́Υ		†	7		414
Traffic Volume (vph)	699	69	650	1281	52	388
Future Volume (vph)	699	69	650	1281	52	388
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1700	1700	1700	1700	1700	1700
Storage Length (ft)	0	0	11	200	0	11
	2	0			0	
Storage Lanes	25	U		1	25	
Taper Length (ft) Lane Util. Factor	0.97	0.05	0.05	1.00	0.95	0.95
		0.95	0.95	1.00	0.95	0.95
Frt	0.987			0.850		0.004
Flt Protected	0.956		0.404	4504		0.994
Satd. Flow (prot)	3410	0	3421	1531	0	3401
Flt Permitted	0.956					0.886
Satd. Flow (perm)	3410	0	3421	1531	0	3031
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)	20			1012		
Link Speed (mph)	35		35			30
Link Distance (ft)	2739		813			825
Travel Time (s)	53.4		15.8			18.8
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97
Adj. Flow (vph)	721	71	670	1321	54	400
Shared Lane Traffic (%)	, 4 1	, ,	070	1021	J-T	100
Lane Group Flow (vph)	792	0	670	1321	0	454
Turn Type	Prot	U	NA	Free	D.P+P	NA
Protected Phases	4			riee		1 2
	4		2	Fran	1	ΙZ
Permitted Phases	4			Free	2	
Detector Phase	4				1	
Switch Phase	4.5.					
Minimum Initial (s)	10.0		15.0		4.0	
Minimum Split (s)	16.0		20.0		8.0	
Total Split (s)	48.0		24.0		8.0	
Total Split (%)	60.0%		30.0%		10.0%	
Yellow Time (s)	4.0		4.0		3.0	
All-Red Time (s)	2.0		1.0		1.0	
Lost Time Adjust (s)	0.0		0.0			
Total Lost Time (s)	6.0		5.0			
Lead/Lag	- 0.0		Lag		Lead	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		C-Max		Max	
Act Effct Green (s)	25.3		19.0	80.0	IVIAN	40.7
, ,	0.32		0.24	1.00		0.51
Actuated g/C Ratio						
v/c Ratio	0.73		0.83	0.86		0.28
Control Delay	20.7		39.2	7.6		10.6
Queue Delay	0.0		0.0	0.0		0.0
Total Delay	20.7		39.2	7.6		10.6
LOS	С		D	Α		В
Approach Delay	20.7		18.2			10.6
Approach LOS	С		В			В
Queue Length 50th (ft)	181		167	0		56

	•	•	†	/	>	ļ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Queue Length 95th (ft)	196		#252	#20		100
Internal Link Dist (ft)	2659		733			745
Turn Bay Length (ft)				200		
Base Capacity (vph)	1799		812	1531		1637
Starvation Cap Reductn	0		0	0		0
Spillback Cap Reductn	0		0	0		0
Storage Cap Reductn	0		0	0		0
Reduced v/c Ratio	0.44		0.83	0.86		0.28
Intersection Summary						

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:NBSB, Start of Yellow

Natural Cycle: 45

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.86

Intersection Signal Delay: 17.8

Intersection Capacity Utilization 64.8%

Intersection LOS: B ICU Level of Service C

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 101: Main Street & Route 66



Route 66 Corridor Study 2020 Corridor Conditions

	٦	→	←	•	/	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	7	†	†	WDI.	₩.	ODIN
Traffic Volume (vph)	119	1249	641	172	137	86
Future Volume (vph)	119	1249	641	172	137	86
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1700	1700	11	11	16	1700
Storage Length (ft)	225	11	11	0	0	0
Storage Lanes	1			0	1	0
Taper Length (ft)	50			U	25	U
Lane Util. Factor	1.00	0.95	0.95	0.95	1.00	1.00
Frt	1.00	0.73	0.968	0.73	0.948	1.00
Flt Protected	0.050		0.900		0.940	
	0.950	2/121	2212	0		0
Satd. Flow (prot)	1711	3421	3312	0	1941	0
Flt Permitted	0.310	0.404	0040	^	0.970	
Satd. Flow (perm)	558	3421	3312	0	1941	0
Right Turn on Red				Yes		Yes
Satd. Flow (RTOR)			60		38	
Link Speed (mph)		35	35		30	
Link Distance (ft)		2739	241		643	
Travel Time (s)		53.4	4.7		14.6	
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98
Adj. Flow (vph)	121	1274	654	176	140	88
Shared Lane Traffic (%)						
Lane Group Flow (vph)	121	1274	830	0	228	0
Turn Type	pm+pt	NA	NA		Prot	
Protected Phases	1	2	2		5	
Permitted Phases	2				<u> </u>	
Detector Phase	1				5	
Switch Phase	l l				J	
Minimum Initial (s)	3.0	20.0	20.0		9.0	
	6.5	26.0	26.0		13.7	
Minimum Split (s)						
Total Split (s)	9.5	45.8	45.8		24.7	
Total Split (%)	11.9%	57.3%	57.3%		30.9%	
Yellow Time (s)	3.0	4.3	4.3		3.2	
All-Red Time (s)	0.5	1.7	1.7		1.5	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	
Total Lost Time (s)	3.5	6.0	6.0		4.7	
Lead/Lag	Lead	Lag	Lag			
Lead-Lag Optimize?	Yes	Yes	Yes			
Recall Mode	None	C-Min	C-Min		None	
Act Effct Green (s)	56.5	49.1	49.1		12.5	
Actuated g/C Ratio	0.71	0.61	0.61		0.16	
v/c Ratio	0.25	0.61	0.40		0.68	
Control Delay	4.2	11.7	2.6		36.6	
Queue Delay	0.0	0.0	0.1		0.0	
Total Delay	4.2	11.7	2.7		36.6	
LOS	4.2 A	В	A A		D	
	H	11.1	2.7		36.6	
Approach LOS						
Approach LOS	10	102	A		D 01	
Queue Length 50th (ft)	12	193	0		91	

Timino	Plan:	Weekday	PM	Peak

Lane Group EBL EBT WBT WBR SBL SBR Queue Length 95th (ft) m21 m318 25 151
• • • • • • • • • • • • • • • • • • • •
Internal Link Dist (ft) 2659 161 563
Turn Bay Length (ft) 225
Base Capacity (vph) 488 2098 2055 513
Starvation Cap Reductn 0 0 247 0
Spillback Cap Reductn 0 14 0 0
Storage Cap Reductn 0 0 0
Reduced v/c Ratio 0.25 0.61 0.46 0.44

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBWB, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.68

Intersection Signal Delay: 10.6 Intersection LOS: B
Intersection Capacity Utilization 56.3% ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 102: Route 66 & High Street



	→	•	•	←	•	<i>></i>
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	† 1>		ሻ	^	¥	
Traffic Volume (vph)	1323	28	21	786	51	40
Future Volume (vph)	1323	28	21	786	51	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1700	11	1700	1700	12	12
Storage Length (ft)	11	0	175	11	0	0
Storage Lanes		0	1/3		1	0
		U	50		25	U
Taper Length (ft) Lane Util. Factor	0.05	O 0E	1.00	0.05	1.00	1.00
	0.95	0.95	1.00	0.95		1.00
Frt	0.997		0.050		0.941	
Flt Protected	0.111	^	0.950	0.404	0.973	
Satd. Flow (prot)	3411	0	1711	3421	1706	0
Flt Permitted			0.130		0.973	
Satd. Flow (perm)	3411	0	234	3421	1706	0
Right Turn on Red		Yes				Yes
Satd. Flow (RTOR)	4				41	
Link Speed (mph)	35			35	25	
Link Distance (ft)	241			1093	405	
Travel Time (s)	4.7			21.3	11.0	
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97
Adj. Flow (vph)	1364	29	22	810	53	41
Shared Lane Traffic (%)	.001	_,		3.0		
Lane Group Flow (vph)	1393	0	22	810	94	0
Turn Type	NA	U	pm+pt	NA	Prot	U
Protected Phases	2		μπ+μι 1	2	5	
Permitted Phases			2	Z	ິວ	
					г	
Detector Phase			1		5	
Switch Phase	00.0		2.2	00.0	0.0	
Minimum Initial (s)	20.0		3.0	20.0	9.0	
Minimum Split (s)	26.0		6.5	26.0	13.7	
Total Split (s)	45.8		9.5	45.8	24.7	
Total Split (%)	57.3%		11.9%	57.3%	30.9%	
Yellow Time (s)	4.3		3.0	4.3	3.2	
All-Red Time (s)	1.7		0.5	1.7	1.5	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	6.0		3.5	6.0	4.7	
Lead/Lag	Lag		Lead	Lag		
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	C-Min		None	C-Min	None	
Act Effct Green (s)	49.1		56.5	49.1	12.5	
Actuated g/C Ratio	0.61		0.71	0.61	0.16	
v/c Ratio					0.10	
	0.67		0.08	0.39		
Control Delay	4.9		1.7	3.3	20.3	
Queue Delay	0.0		0.0	0.0	0.0	
Total Delay	4.9		1.7	3.3	20.3	
LOS	А		А	Α	С	
Approach Delay	4.9			3.3	20.3	
Approach LOS	А			А	С	
Queue Length 50th (ft)	56		1	23	24	

	→	•	•	←	1	/
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Queue Length 95th (ft)	68		m3	39	60	
Internal Link Dist (ft)	161			1013	325	
Turn Bay Length (ft)			175			
Base Capacity (vph)	2094		284	2098	457	
Starvation Cap Reductn	11		0	0	0	
Spillback Cap Reductn	0		0	0	0	
Storage Cap Reductn	0		0	0	0	
Reduced v/c Ratio	0.67		0.08	0.39	0.21	

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBWB, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.68

Intersection Signal Delay: 5.0 Intersection LOS: A Intersection Capacity Utilization 53.9% ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 103: Airline Avenue & Route 66



	٠	→	←	1	\	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	ነ	† †	† 1>		<u> </u>	7
Traffic Volume (vph)	148	1237	685	71	113	45
Future Volume (vph)	148	1237	685	71	113	45
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	10	11
Storage Length (ft)	350			0	0	0
Storage Lanes	1			0	1	1
Taper Length (ft)	50			U U	25	ı
Lane Util. Factor	1.00	0.95	0.95	0.95	1.00	1.00
Frt	1.00	0.75	0.986	0.75	1.00	0.850
Flt Protected	0.950		0.700		0.950	0.000
Satd. Flow (prot)	1694	3388	3341	0	1636	1516
		ააბბ	3341	U		1010
Flt Permitted	0.328	2200	2241	0	0.950	151/
Satd. Flow (perm)	585	3388	3341	0	1636	1516
Right Turn on Red			47	Yes		Yes
Satd. Flow (RTOR)			17			46
Link Speed (mph)		35	35		10	
Link Distance (ft)		1093	417		223	
Travel Time (s)		21.3	8.1		15.2	
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98
Heavy Vehicles (%)	3%	3%	3%	3%	3%	3%
Adj. Flow (vph)	151	1262	699	72	115	46
Shared Lane Traffic (%)						
Lane Group Flow (vph)	151	1262	771	0	115	46
Turn Type	D.P+P	NA	NA		Prot	Prot
Protected Phases	1	1.2	2		4	4
Permitted Phases	2	1 2				
Detector Phase	1				4	4
Switch Phase	The state of the s					
Minimum Initial (s)	5.0		15.0		9.0	9.0
Minimum Split (s)	9.0		20.0		21.0	21.0
Total Split (s)	16.0		39.1		24.9	24.9
Total Split (%)	20.0%		48.9%		31.1%	31.1%
Yellow Time (s)	3.0		4.3		3.0	3.0
All-Red Time (s)	1.0		0.7		1.9	1.9
Lost Time Adjust (s)	0.0		0.0		0.0	0.0
Total Lost Time (s)	4.0		5.0		4.9	4.9
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Recall Mode	None		C-Max		None	None
Act Effct Green (s)	58.2	63.0	49.4		11.7	11.7
Actuated g/C Ratio	0.73	0.79	0.62		0.15	0.15
v/c Ratio	0.28	0.47	0.37		0.48	0.18
Control Delay	8.6	11.5	7.2		37.7	10.8
Queue Delay	0.0	0.0	0.0		0.0	0.0
Total Delay	8.6	11.5	7.2		37.7	10.8
						10.8 B
LOS	Α	B	A		D	В
Approach Delay		11.2	7.2		30.0	
Approach LOS		В	Α		С	

Timing Plan: Weekday PM Peak

	•	-	←	•	>	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Queue Length 50th (ft)	35	211	101		54	0
Queue Length 95th (ft)	m76	387	173		98	27
Internal Link Dist (ft)		1013	337		143	
Turn Bay Length (ft)	350					
Base Capacity (vph)	617	2667	2070		409	413
Starvation Cap Reductn	0	0	0		0	0
Spillback Cap Reductn	0	0	0		0	0
Storage Cap Reductn	0	0	0		0	0
Reduced v/c Ratio	0.24	0.47	0.37		0.28	0.11
Intersection Summary						
Area Type:	Other					
Cycle Length: 80						
Actuated Cycle Length: 80						
Offset: 44 (55%), Reference	ced to phase	2:EBWB,	Start of	Yellow		
Natural Cycle: 60						
Control Type: Actuated-Co	oordinated					
Maximum v/c Ratio: 0.48						
Intersection Signal Delay:					tersection	
Intersection Capacity Utiliz	zation 49.1%			IC	U Level o	f Service A
Analysis Period (min) 15						
m Volume for 95th perce	entile queue is	s metered	by upstr	ream sign	al.	

Splits and Phases: 104: Route 66 & Portland Shopping Center Driveway

∠ _{Ø1}	 Ø2 (R)	▼
16 s	39.1 s	24.9 s

	۶	→	•	•	←	•	•	†	~	>	↓	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	∱ î≽		ሻ	† 1>			4			4	
Traffic Volume (vph)	19	1298	32	10	720	3	13	0	14	2	1	23
Future Volume (vph)	19	1298	32	10	720	3	13	0	14	2	1	23
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	12	12	12	12	12	12
Storage Length (ft)	125		0	150		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	50			50			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.996			0.999			0.930			0.880	
Flt Protected	0.950			0.950				0.976			0.996	
Satd. Flow (prot)	1694	3374	0	1694	3385	0	0	1674	0	0	1617	0
Flt Permitted	0.360			0.173				0.833			0.970	
Satd. Flow (perm)	642	3374	0	308	3385	0	0	1429	0	0	1575	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4			1			100			24	
Link Speed (mph)		35			45			25			25	
Link Distance (ft)		417			1869			435			271	
Travel Time (s)		8.1			28.3			11.9			7.4	
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Heavy Vehicles (%)	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%
Adj. Flow (vph)	20	1352	33	10	750	3	14	0	15	2	1	24
Shared Lane Traffic (%)												
Lane Group Flow (vph)	20	1385	0	10	753	0	0	29	0	0	27	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases	5	2		1	6		_	4			4	
Permitted Phases	2			6			4			4		
Detector Phase	5			1			4	4		4	4	
Switch Phase	0.0	45.0		0.0	45.0							
Minimum Initial (s)	3.0	15.0		3.0	15.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	7.0	21.3		7.0	21.3		23.2	23.2		23.2	23.2	
Total Split (s)	16.0	38.8		16.0	38.8		25.2	25.2		25.2	25.2	
Total Split (%)	20.0%	48.5%		20.0%	48.5%		31.5%	31.5%		31.5%	31.5%	
Yellow Time (s)	3.0	4.3		3.0	4.3		3.2	3.2		3.2	3.2	
All-Red Time (s)	1.0	2.0		1.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	4.0	6.3		4.0	6.3			5.2			5.2	
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Mono	None		None	Mono	
Recall Mode Act Effct Green (s)	None 68.5	C-Min		None	C-Min		None	None 6.1		None	None	
. ,	0.86	67.7 0.85		67.5 0.84	66.0 0.82			0.08			6.1 0.08	
Actuated g/C Ratio v/c Ratio	0.03	0.63		0.04	0.62			0.06			0.06	
	0.03	2.0		1.8	3.6			1.5			19.3	
Control Delay	0.7	0.0		0.0	0.0			0.0			0.0	
Queue Delay	0.0	2.0		1.8	3.6			1.5			19.3	
Total Delay LOS	0.7 A	2.0 A		1.8 A	3.0 A			1.5 A			19.3 B	
Approach Delay	A	2.0		A	3.6			1.5			19.3	
Approach LOS		2.0 A			3.0 A			1.5 A			19.3 B	
Appluacii LU3		А			А			А			D	

2020 Corridor Conditions

Timing Plan: Weekday PM Peak

	۶	-	•	€	←	•	1	†	/	-	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	1	127		1	41			0			1	
Queue Length 95th (ft)	m1	55		3	99			0			25	
Internal Link Dist (ft)		337			1789			355			191	
Turn Bay Length (ft)	125			150								
Base Capacity (vph)	712	2857		474	2792			432			411	
Starvation Cap Reductn	0	8		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.03	0.49		0.02	0.27			0.07			0.07	

Intersection Summary

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 52 (65%), Referenced to phase 2:EBTL and 6:WBTL, Start of Yellow

Natural Cycle: 65

Control Type: Actuated-Coordinated


Maximum v/c Ratio: 0.48

Intersection Signal Delay: 2.7 Intersection LOS: A Intersection Capacity Utilization 52.2% ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 105: Grove Street/Grandview Terrace & Route 66



	٦	→	+	4	/	4			
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	Ø2	Ø3	
Lane Configurations	*	† †	↑ ↑	7	ኘ	7	~Z	20	
Traffic Volume (vph)	148	1149	581	120	141	89			
Future Volume (vph)	148	1149	581	120	141	89			
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900			
Lane Width (ft)	11	11	11	11	11	11			
Storage Length (ft)	200			200	0	100			
Storage Lanes	1			1	1	1			
Taper Length (ft)	50				25				
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00			
Frt				0.850		0.850			
Flt Protected	0.950				0.950				
Satd. Flow (prot)	1711	3421	3421	1531	1711	1531			
Flt Permitted	0.950				0.950				
Satd. Flow (perm)	1711	3421	3421	1531	1711	1531			
Right Turn on Red				Yes		Yes			
Satd. Flow (RTOR)				125		93			
Link Speed (mph)		45	35		45				
Link Distance (ft)		1735	1238		958				
Travel Time (s)		26.3	24.1		14.5				
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96			
Adj. Flow (vph)	154	1197	605	125	147	93			
Shared Lane Traffic (%)									
Lane Group Flow (vph)	154	1197	605	125	147	93			
Turn Type	Prot	NA	NA	Prot	Prot	Prot			
Protected Phases	1	123	23	2 3	4	4	2	3	
Permitted Phases									
Detector Phase	1	123	23	2 3	4	4			
Switch Phase									
Minimum Initial (s)	5.0				7.0	7.0	15.0	3.0	
Minimum Split (s)	10.0				20.0	20.0	21.0	9.0	
Total Split (s)	20.0				22.0	22.0	34.0	9.0	
Total Split (%)	23.5%				25.9%	25.9%	40%	11%	
Yellow Time (s)	3.0				3.0	3.0	4.0	4.0	
All-Red Time (s)	2.0				2.0	2.0	2.0	2.0	
Lost Time Adjust (s)	0.0				0.0	0.0			
Total Lost Time (s)	5.0				5.0	5.0			
Lead/Lag	Lead				Lag	Lag	Lag	Lead	
Lead-Lag Optimize?	Yes				Yes	Yes	Yes	Yes	
Recall Mode	None				None	None	Min	None	
Act Effct Green (s)	14.3	54.6	34.2	34.2	10.9	10.9			
Actuated g/C Ratio	0.19	0.72	0.45	0.45	0.14	0.14			
v/c Ratio	0.48	0.48	0.39	0.16	0.60	0.31			
Control Delay	34.8	5.5	15.1	3.4	42.1	10.1			
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0			
Total Delay	34.8	5.5	15.1	3.4	42.1	10.1			
LOS	С	Α	В	Α	D	В			
Approach Delay		8.9	13.1		29.7				
Approach LOS		Α	В		С				
Queue Length 50th (ft)	68	98	95	0	69	0			

	•	-	←	•	-	4			
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	Ø2	Ø3	
Queue Length 95th (ft)	134	175	152	29	126	38			
Internal Link Dist (ft)		1655	1158		878				
Turn Bay Length (ft)	200			200		100			
Base Capacity (vph)	344	2457	1540	758	390	421			
Starvation Cap Reductn	0	0	0	0	0	0			
Spillback Cap Reductn	0	0	0	0	0	0			
Storage Cap Reductn	0	0	0	0	0	0			
Reduced v/c Ratio	0.45	0.49	0.39	0.16	0.38	0.22			
Intersection Summary									
Area Type:	Other								
Cycle Length: 85									

Actuated Cycle Length: 75.6 Natural Cycle: 60

Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.60

Intersection Signal Delay: 12.4 Intersection Capacity Utilization 47.9% Intersection LOS: B ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 106: Route 66 & Gospel Lane (Route 17)

4 _{Ø1}	→ ø2	≠ ø3	™ Ø4	
20.0	24 c	0 c	77 c	

	•	→	_	<u> </u>	—	•	•	†	<i>></i>	<u> </u>	1	- -
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
	LDL		LDK	VVDL	₩ 	WDK	NDL	TION	NDK	SDL	301 ♣	SDK
Lane Configurations			10			2	1.4		2	2		
Traffic Volume (vph)	119	1123	18	3	597	2	14	2	3	3	0	55
Future Volume (vph)	119	1123	18	3	597	2	14	2	3	3	1000	55
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	11	11	11	11	11	11
Storage Length (ft)	193		0	300		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	100			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.998						0.980			0.872	
Flt Protected	0.950			0.950				0.964			0.998	
Satd. Flow (prot)	1711	1797	0	1711	1801	0	0	1701	0	0	1567	0
Flt Permitted	0.354			0.118				0.883			0.980	
Satd. Flow (perm)	637	1797	0	212	1801	0	0	1558	0	0	1539	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		1						3			84	
Link Speed (mph)		45			45			25			25	
Link Distance (ft)		293			793			336			474	
Travel Time (s)		4.4			12.0			9.2			12.9	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Adj. Flow (vph)	125	1182	19	3	628	2	15	2	3	3	0	58
Shared Lane Traffic (%)												
Lane Group Flow (vph)	125	1201	0	3	630	0	0	20	0	0	61	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases	1	6		5	2			4			4	
Permitted Phases	6			2			4			4		
Detector Phase	1	6		5	2		4	4		4	4	
Switch Phase												
Minimum Initial (s)	4.0	15.0		4.0	15.0		7.0	7.0		7.0	7.0	
Minimum Split (s)	8.6	22.0		8.6	22.0		19.6	19.6		19.6	19.6	
Total Split (s)	14.6	77.0		14.6	77.0		20.6	20.6		20.6	20.6	
Total Split (%)	13.0%	68.6%		13.0%	68.6%		18.4%	18.4%		18.4%	18.4%	
Yellow Time (s)	3.6	5.0		3.6	5.0		3.6	3.6		3.6	3.6	
All-Red Time (s)	1.0	2.0		1.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	4.6	7.0		4.6	7.0			5.6			5.6	
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	Min		None	Min		None	None		None	None	
Act Effct Green (s)	76.7	74.5		71.6	65.2			7.2			7.2	
Actuated g/C Ratio	0.83	0.81		0.78	0.71			0.08			0.08	
v/c Ratio	0.21	0.82		0.01	0.49			0.16			0.31	
Control Delay	2.6	14.6		2.0	8.4			39.6			9.7	
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	
Total Delay	2.6	14.6		2.0	8.4			39.6			9.7	
LOS	2.0 A	14.0 B		2.0 A	0.4 A			J7.0			7. <i>1</i>	
Approach Delay		13.4			8.4			39.6			9.7	
Approach LOS		13.4 B			0.4 A			39.0 D			9.7 A	
Queue Length 50th (ft)	11	343		0	156			9			0	
Queue Lengin 30in (ii)	11	343		U	100			7			U	

0.19

	٠	→	•	•	+	•	•	†	<i>></i>	\	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)	20	#1002		2	247			34			24	
Internal Link Dist (ft)		213			713			256			394	
Turn Bay Length (ft)	193			300								
Base Capacity (vph)	650	1456		340	1398			257			321	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	

0.08

Intersection Summary

Reduced v/c Ratio

Area Type: Other

Cycle Length: 112.2 Actuated Cycle Length: 92 Natural Cycle: 100

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.82

Intersection Signal Delay: 12.0 Intersection LOS: B Intersection Capacity Utilization 84.8% ICU Level of Service E

0.82


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

0.19

Queue shown is maximum after two cycles.

Splits and Phases: 107: Payne Blvd/Middle Haddam Rd & Route 66



0.01

0.45

	•	-	•	•	←	•	1	†	_	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			र्स	7		4	
Traffic Volume (vph)	24	990	136	6	503	5	63	4	3	44	15	9
Future Volume (vph)	24	990	136	6	503	5	63	4	3	44	15	9
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	12	13	13	12	13	12
Storage Length (ft)	0		0	0		0	0		100	0		0
Storage Lanes	0		0	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.984			0.999				0.850		0.982	
Flt Protected		0.999			0.999			0.955			0.969	
Satd. Flow (prot)	0	1770	0	0	1797	0	0	1838	1636	0	1832	0
Flt Permitted		0.982			0.983			0.761			0.761	
Satd. Flow (perm)	0	1740	0	0	1768	0	0	1465	1636	0	1438	0
Right Turn on Red			Yes			No			Yes			Yes
Satd. Flow (RTOR)		13							48		5	
Link Speed (mph)		35			35			35			25	
Link Distance (ft)		1284			1455			649			549	
Travel Time (s)		25.0			28.3			12.6			15.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	26	1076	148	7	547	5	68	4	3	48	16	10
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	1250	0	0	559	0	0	72	3	0	74	0
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2			2			4			4	
Permitted Phases	2			2			4		4	4		
Detector Phase	2	2		2	2		4	4	4	4	4	
Switch Phase												
Minimum Initial (s)	15.0	15.0		15.0	15.0		5.0	5.0	5.0	5.0	5.0	
Minimum Split (s)	23.6	23.6		23.6	23.6		12.5	12.5	12.5	12.5	12.5	
Total Split (s)	98.6	98.6		98.6	98.6		29.5	29.5	29.5	29.5	29.5	
Total Split (%)	77.0%	77.0%		77.0%	77.0%		23.0%	23.0%	23.0%	23.0%	23.0%	
Yellow Time (s)	4.3	4.3		4.3	4.3		4.2	4.2	4.2	4.2	4.2	
All-Red Time (s)	4.3	4.3		4.3	4.3		3.3	3.3	3.3	3.3	3.3	
Lost Time Adjust (s)		0.0			0.0			0.0	0.0		0.0	
Total Lost Time (s)		8.6			8.6			7.5	7.5		7.5	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	Min	Min		Min	Min		None	None	None	None	None	
Act Effct Green (s)		92.2			92.2			10.1	10.1		10.1	
Actuated g/C Ratio		0.78			0.78			0.09	0.09		0.09	
v/c Ratio		0.92			0.41			0.58	0.02		0.58	
Control Delay		24.1			5.6			69.5	0.0		65.9	
Queue Delay		0.0			0.0			0.0	0.0		0.0	
Total Delay		24.1			5.6			69.5	0.0		65.9	
LOS		С			А			Е	Α		Е	
Approach Delay		24.1			5.6			66.7			65.9	
Approach LOS		С			А			Е			Е	
Queue Length 50th (ft)		612			114			53	0		50	

Timing Plan: Weekday PM Peak

	٠	-	•	•	←	•	4	†	~	>	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)		#1244			201			102	0		100	
Internal Link Dist (ft)		1204			1375			569			469	
Turn Bay Length (ft)									100			
Base Capacity (vph)		1357			1376			272	343		271	
Starvation Cap Reductn		0			0			0	0		0	
Spillback Cap Reductn		0			0			0	0		0	
Storage Cap Reductn		0			0			0	0		0	
Reduced v/c Ratio		0.92			0.41			0.26	0.01		0.27	

Intersection Summary

Area Type: Other

Cycle Length: 128.1

Actuated Cycle Length: 118.4

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.92

Intersection Signal Delay: 22.0 Intersection LOS: C
Intersection Capacity Utilization 98.8% ICU Level of Service F

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 108: Route 151/Depot Hill Rd & Route 66



	•				—	4	•	+			ı	7
	_	-	*	₩			-/		/	001	*	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		र्स	7	ሻ	4			ની	7		4	
Traffic Volume (vph)	3	616	441	3	375	2	227	4	6	2	2	2
Future Volume (vph)	3	616	441	3	375	2	227	4	6	2	2	2
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	11	11	11	11	11	11
Storage Length (ft)	0		250	125		0	0		100	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.999				0.850		0.955	
Flt Protected				0.950				0.953			0.984	
Satd. Flow (prot)	0	1801	1531	1711	1799	0	0	1716	1531	0	1692	0
Flt Permitted	•	0.998		0.324		•	•	0.726			0.927	
Satd. Flow (perm)	0	1797	1531	583	1799	0	0	1307	1531	0	1594	0
Right Turn on Red		1,,,,	Yes	000	1,,,,	Yes		1007	Yes	· ·	1071	Yes
Satd. Flow (RTOR)			455		1	103			62		2	103
Link Speed (mph)		45	100		45			50	02		15	
Link Distance (ft)		546			525			823			174	
Travel Time (s)		8.3			8.0			11.2			7.9	
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Adj. Flow (vph)	3	635	455	3	387	0.97	234	0.97	0.97	2	2	0.97
Shared Lane Traffic (%)	ა	033	400	ა	307	Z	234	4	O		Z	Z
• •	0	638	455	3	389	0	0	238		0	4	0
Lane Group Flow (vph)	0 Dorm	NA		Perm	NA	0	0 Dorm	NA	6 Perm	0 Perm	6 NA	0
Turn Type	Perm		Perm	Pellii			Perm		Pellii	Pellii		
Protected Phases	2	2	2	2	2		4	4	1	1	4	
Permitted Phases	2	2	2	2	2		4	4	4	4	4	
Detector Phase	2	2	2	2	2		4	4	4	4	4	
Switch Phase	15.0	15.0	15.0	15.0	15.0							
Minimum Initial (s)	15.0	15.0	15.0	15.0	15.0		6.0	6.0	6.0	6.0	6.0	
Minimum Split (s)	22.9	22.9	22.9	22.9	22.9		21.0	21.0	21.0	21.0	21.0	
Total Split (s)	57.9	57.9	57.9	57.9	57.9		29.0	29.0	29.0	29.0	29.0	
Total Split (%)	66.6%	66.6%	66.6%	66.6%	66.6%		33.4%	33.4%	33.4%	33.4%	33.4%	
Yellow Time (s)	5.0	5.0	5.0	5.0	5.0		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.9	2.9	2.9	2.9	2.9		1.0	1.0	1.0	1.0	1.0	
Lost Time Adjust (s)		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Lost Time (s)		7.9	7.9	7.9	7.9			4.0	4.0		4.0	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	Min	Min	Min	Min	Min		None	None	None	None	None	
Act Effct Green (s)		29.2	29.2	29.2	29.2			14.9	14.9		14.9	
Actuated g/C Ratio		0.51	0.51	0.51	0.51			0.26	0.26		0.26	
v/c Ratio		0.70	0.45	0.01	0.42			0.70	0.01		0.01	
Control Delay		15.6	2.5	7.7	10.6			33.3	0.0		17.3	
Queue Delay		0.0	0.0	0.0	0.0			0.0	0.0		0.0	
Total Delay		15.6	2.5	7.7	10.6			33.3	0.0		17.3	
LOS		В	Α	Α	В			С	Α		В	
Approach Delay		10.1			10.6			32.5			17.3	
Approach LOS		В			В			С			В	
Queue Length 50th (ft)		139	0	0	70			66	0		1	
			•	•					•		•	

2020 Corridor Conditions Timing Plan: Weekday PM Peak

	•	-	•	•	←	•	•	†	~	>	↓	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)		321	38	4	165			194	0		11	
Internal Link Dist (ft)		466			445			743			94	
Turn Bay Length (ft)			250	125					100			
Base Capacity (vph)		1536	1375	498	1538			627	766		765	
Starvation Cap Reductn		0	0	0	0			0	0		0	
Spillback Cap Reductn		0	0	0	0			0	0		0	
Storage Cap Reductn		0	0	0	0			0	0		0	
Reduced v/c Ratio		0.42	0.33	0.01	0.25			0.38	0.01		0.01	

Intersection Summary

Area Type: Other

Cycle Length: 86.9 Actuated Cycle Length: 57.1

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.70

Intersection Signal Delay: 13.4 Intersection LOS: B
Intersection Capacity Utilization 68.7% ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 109: Middletown Avenue/Commuter Parking Lot Dwy & Route 66

\$\int \tilde{\pi}\til

	۶	→	•	•	←	*_	•	•	†	~	>	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	WBR2	NBL2	NBT	NBR	SBL	SBT
Lane Configurations		4			4				4			4
Traffic Volume (vph)	45	519	2	10	472	1	17	10	13	11	38	24
Future Volume (vph)	45	519	2	10	472	1	17	10	13	11	38	24
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	11	12	12	11	12	12	12	11	12	12	11
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.995				0.956			0.952
Flt Protected		0.996			0.999				0.985			0.981
Satd. Flow (prot)	0	1793	0	0	1790	0	0	0	1696	0	0	1682
Flt Permitted		0.929			0.986				0.884			0.855
Satd. Flow (perm)	0	1673	0	0	1767	0	0	0	1522	0	0	1466
Right Turn on Red			No				No			No		
Satd. Flow (RTOR)												
Link Speed (mph)		45			30				25			25
Link Distance (ft)		2724			782				976			892
Travel Time (s)		41.3			17.8				26.6			24.3
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Adj. Flow (vph)	48	552	2	11	502	1	18	11	14	12	40	26
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	602	0	0	532	0	0	0	37	0	0	102
Turn Type	Perm	NA		Perm	NA			Perm	NA		Perm	NA
Protected Phases		2			2				4			4
Permitted Phases	2			2				4			4	
Detector Phase	2	2		2	2			4	4		4	4
Switch Phase												
Minimum Initial (s)	25.0	25.0		25.0	25.0			9.0	9.0		9.0	9.0
Minimum Split (s)	32.2	32.2		32.2	32.2			16.9	16.9		16.9	16.9
Total Split (s)	52.2	52.2		52.2	52.2			24.9	24.9		24.9	24.9
Total Split (%)	55.8%	55.8%		55.8%	55.8%			26.6%	26.6%		26.6%	26.6%
Yellow Time (s)	4.0	4.0		4.0	4.0			3.3	3.3		3.3	3.3
All-Red Time (s)	3.2	3.2		3.2	3.2			1.6	1.6		1.6	1.6
Lost Time Adjust (s)		0.0			0.0				0.0			0.0
Total Lost Time (s)		7.2			7.2				4.9			4.9
Lead/Lag								Lead	Lead		Lead	Lead
Lead-Lag Optimize?								Yes	Yes		Yes	Yes
Recall Mode	Min	Min		Min	Min			None	None		None	None
Act Effct Green (s)		35.4			35.4				10.2			10.2
Actuated g/C Ratio		0.67			0.67				0.19			0.19
v/c Ratio		0.54			0.45				0.13			0.36
Control Delay		9.0			7.7				21.7			25.1
Queue Delay		0.0			0.0				0.0			0.0
Total Delay		9.0			7.7				21.7			25.1
LOS		Α			Α				С			С
Approach Delay		9.0			7.7				21.7			25.1
Approach LOS		Α			Α				С			С
Queue Length 50th (ft)		99			80				8			24
Queue Length 95th (ft)		205			163				37			82
Internal Link Dist (ft)		2644			702				896			812
Turn Bay Length (ft)												

Route 66 Corridor Study 2020 Corridor Conditions

	4	\
Lane Group	SBR	SEL
Land Configurations		M
Traffic Volume (vph)	34	0
Future Volume (vph)	34	0
Ideal Flow (vphpl)	1900	1900
Lane Width (ft)	12	100
Lane Util. Factor	1.00	1.00
Frt	1.00	1.00
Flt Protected		
Satd. Flow (prot)	0	1739
Flt Permitted	U	1737
Satd. Flow (perm)	0	1739
Right Turn on Red	U	1137
Satd. Flow (RTOR)		
Link Speed (mph)		25
Link Distance (ft)		421
		11.5
Travel Time (s) Peak Hour Factor	0.94	0.94
	36	
Adj. Flow (vph)	30	0
Shared Lane Traffic (%)	0	0
Lane Group Flow (vph)	U	
Turn Type		Prot
Protected Phases		5
Permitted Phases		
Detector Phase		5
Switch Phase		0.0
Minimum Initial (s)		9.0
Minimum Split (s)		13.5
Total Split (s)		16.5
Total Split (%)		17.6%
Yellow Time (s)		3.3
All-Red Time (s)		1.2
Lost Time Adjust (s)		0.0
Total Lost Time (s)		4.5
Lead/Lag		Lag
Lead-Lag Optimize?		Yes
Recall Mode		None
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (ft)		
Queue Length 95th (ft)		
Internal Link Dist (ft)		341
Turn Bay Length (ft)		

Route 66 Corridor Study 2020 Corridor Conditions

110: Maple Street/North Maple Street & Route 66 & Old West High Str2020 Corridor Conditions Lanes. Volumes. Timing Plan: Weekday PM Peak

Base Capacity (vph) 1453 1535 587 56 Starvation Cap Reductn 0 0 0 Spillback Cap Reductn 0 0 0 Storage Cap Reductn 0 0 0	Lanes, volumes,	<u> </u>	→	•	•	—	*_	•	•	†	riali. We	\	↓
Starvation Cap Reductn 0 0 0 0 0 0 Spillback Cap Reductn 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	WBR2	NBL2	NBT	NBR	SBL	SBT
Spillback Cap Reductn 0 0 0 0 Storage Cap Reductn 0 0 0 0 Reduced v/c Ratio 0.41 0.35 0.06 0.1 Intersection Summary Area Type: Other Cycle Length: 93.6 Actuated Cycle Length: 53.2 Natural Cycle: 65 Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection LOS: B Intersection Capacity Utilization 69.7% Analysis Period (min) 15	Base Capacity (vph)		1453			1535				587			566
Storage Cap Reductn 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Starvation Cap Reductn		0			0				0			0
Reduced v/c Ratio 0.41 0.35 0.06 0.1 Intersection Summary Area Type: Other Cycle Length: 93.6 Actuated Cycle Length: 53.2 Natural Cycle: 65 Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection LOS: B Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Spillback Cap Reductn		0			0				0			0
Intersection Summary Area Type: Other Cycle Length: 93.6 Actuated Cycle Length: 53.2 Natural Cycle: 65 Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection LOS: B Intersection Capacity Utilization 69.7% Analysis Period (min) 15	Storage Cap Reductn		0			0				0			0
Area Type: Other Cycle Length: 93.6 Actuated Cycle Length: 53.2 Natural Cycle: 65 Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection LOS: B Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Reduced v/c Ratio		0.41			0.35				0.06			0.18
Cycle Length: 93.6 Actuated Cycle Length: 53.2 Natural Cycle: 65 Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection LOS: B Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Intersection Summary												
Actuated Cycle Length: 53.2 Natural Cycle: 65 Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection Capacity Utilization 69.7% Intersection Compacity Utilization 69.7% Intersection Compacity Utilization 69.7% Intersection Compacity Utilization 69.7%	Area Type:	Other											
Natural Cycle: 65 Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection Capacity Utilization 69.7% Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Cycle Length: 93.6												
Control Type: Actuated-Uncoordinated Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Actuated Cycle Length: 53	3.2											
Maximum v/c Ratio: 0.54 Intersection Signal Delay: 10.1 Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Natural Cycle: 65												
Intersection Signal Delay: 10.1 Intersection LOS: B Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Control Type: Actuated-U	ncoordinated											
Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Maximum v/c Ratio: 0.54												
Intersection Capacity Utilization 69.7% ICU Level of Service C Analysis Period (min) 15	Intersection Signal Delay:	10.1			Int	ersection	LOS: B						
Analysis Period (min) 15					IC	U Level	of Service	e C					
Splits and Phases: 110: Maple Street/North Maple Street & Route 66 & Old West High Street													
Splits and Friases. The wapie street/worthwapie street a route of a Old West right street	Splits and Dhases: 110	· Manlo Stroo	t/North M	anla Stra	ot & Dout	o 66 & O	ld Woet I	Jiah Stroc	\ †				
\$\psi_\overline{\psi_02}\$. iviapie Stree	WINOI (II IVI	apie Sile	ei a Roui	e 00 & O	1.4		; l		1.4		

Route 66 Corridor Study 2020 Corridor Conditions

	1	\	
Lane Group	SBR	SEL	
Base Capacity (vph)			
Starvation Cap Reductn			
Spillback Cap Reductn			
Storage Cap Reductn			
Reduced v/c Ratio			
Intersection Summary			

Route 66 Corridor Study
2020 Corridor Conditions

Synchro 10 Report
Page 22

	۶	→	•	•	←	•	•	†	<i>></i>	>	↓	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ň	f		ሻ	4î		ሻ	4		ň	f)	
Traffic Volume (vph)	137	413	48	139	395	136	31	107	80	93	87	80
Future Volume (vph)	137	413	48	139	395	136	31	107	80	93	87	80
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	12	11	11	12	12	12	12	12	12	12
Storage Length (ft)	275		0	225		0	225		0	175		0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (ft)	50			75			50			50		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00
Frt		0.984			0.962			0.937			0.928	
Flt Protected	0.950			0.950			0.950	0.999		0.950		
Satd. Flow (prot)	1711	1772	0	1711	1732	0	1681	1656	0	1770	1729	0
Flt Permitted	0.307			0.383			0.645	0.997		0.625		
Satd. Flow (perm)	553	1772	0	690	1732	0	1141	1653	0	1164	1729	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		6			19			45			46	
Link Speed (mph)		30			30			30			25	
Link Distance (ft)		594			597			644			540	
Travel Time (s)		13.5			13.6			14.6			14.7	
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Adj. Flow (vph)	146	439	51	148	420	145	33	114	85	99	93	85
Shared Lane Traffic (%)		,	<u> </u>		.20		10%			.,	,,,	
Lane Group Flow (vph)	146	490	0	148	565	0	30	202	0	99	178	0
Turn Type	pm+pt	NA		pm+pt	NA		pm+pt	NA		pm+pt	NA	J
Protected Phases	1	6		5	2		3	8		7	4	
Permitted Phases	6			2			8			4	•	
Detector Phase	1	6		5	2		3	8		7	4	
Switch Phase	•									•	•	
Minimum Initial (s)	4.0	15.0		4.0	15.0		4.0	8.0		4.0	8.0	
Minimum Split (s)	8.0	21.6		8.0	21.6		8.0	13.3		8.0	13.3	
Total Split (s)	13.0	34.7		13.0	34.7		19.0	28.3		19.0	28.3	
Total Split (%)	13.7%	36.5%		13.7%	36.5%		20.0%	29.8%		20.0%	29.8%	
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	3.3		3.0	3.3	
All-Red Time (s)	1.0	2.6		1.0	2.6		1.0	2.0		1.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	4.0	6.6		4.0	6.6		4.0	5.3		4.0	5.3	
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Recall Mode	None	C-Min		None	C-Min		None	None		None	None	
Act Effct Green (s)	60.9	50.2		59.5	49.4		17.0	14.0		22.5	15.3	
Actuated g/C Ratio	0.64	0.53		0.63	0.52		0.18	0.15		0.24	0.16	
v/c Ratio	0.32	0.52		0.29	0.62		0.13	0.72		0.30	0.56	
Control Delay	8.9	19.3		5.5	18.9		26.1	41.4		29.1	33.8	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	8.9	19.3		5.5	18.9		26.1	41.4		29.1	33.8	
LOS	0.9 A	19.3 B		3.3 A	10.9 B		20.1 C	41.4 D		29.1 C	33.0 C	
Approach Delay	А	16.9		H			C	39.4		C	32.1	
					16.1							
Approach LOS	20	101		25	B		1/	D or		40	C 76	
Queue Length 50th (ft)	28	181		25	282		14	85		48	76	

111: Main Street #2/North Main Street & Route 66 /Route 66 Lanes, Volumes, Timings

2020 Corridor Conditions Timing Plan: Weekday PM Peak

	۶	-	•	•	←	•	•	†	~	>	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)	64	348		m20	#480		33	140		81	136	
Internal Link Dist (ft)		514			517			564			460	
Turn Bay Length (ft)	275			225			225			175		
Base Capacity (vph)	483	938		545	910		372	485		389	453	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.30	0.52		0.27	0.62		0.08	0.42		0.25	0.39	

Intersection Summary

Area Type: Other

Cycle Length: 95

Actuated Cycle Length: 95

Offset: 6 (6%), Referenced to phase 2:WBTL and 6:EBTL, Start of Yellow

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.72

Intersection Signal Delay: 21.7

1.7 Intersection LOS: C ation 70.5% ICU Level of Service C


Intersection Capacity Utilization 70.5%

Analysis Period (min) 15

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 111: Main Street #2/North Main Street & Route 66 /Route 66



^{# 95}th percentile volume exceeds capacity, queue may be longer.

	•	-	•	•	—	•	•	†	~	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	¥	4		J.	f)			4			ર્ન	7
Traffic Volume (vph)	49	543	1	4	593	116	5	0	2	103	0	78
Future Volume (vph)	49	543	1	4	593	116	5	0	2	103	0	78
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	11	12	12	12	12	12	12	12	12
Storage Length (ft)	225		0	125		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		1
Taper Length (ft)	75			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			1,00		0.975			0.961				0.850
Flt Protected	0.950			0.950	01770			0.966			0.950	0.000
Satd. Flow (prot)	1711	1863	0	1711	1816	0	0	1729	0	0	1770	1583
Flt Permitted	0.269	.000		0.425				0.855			0.753	
Satd. Flow (perm)	484	1863	0	765	1816	0	0	1531	0	0	1403	1583
Right Turn on Red	101	1000	Yes	700	1010	Yes	· ·	1001	No	· ·	1100	Yes
Satd. Flow (RTOR)			103		15	103			110			86
Link Speed (mph)		30			30			25			25	00
Link Distance (ft)		597			1042			185			376	
Travel Time (s)		13.6			23.7			5.0			10.3	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Adj. Flow (vph)	52	572	1	4	624	122	5	0.70	2	108	0	82
Shared Lane Traffic (%)	02	0,2	•		021	,	, i			100		02
Lane Group Flow (vph)	52	573	0	4	746	0	0	7	0	0	108	82
Turn Type	pm+pt	NA		pm+pt	NA	-	Perm	NA		Perm	NA	Perm
Protected Phases	1	6		5	2			4			4	
Permitted Phases	6			2			4			4		4
Detector Phase	1	6		5	2		4	4		4	4	4
Switch Phase												
Minimum Initial (s)	5.0	18.0		5.0	18.0		9.0	9.0		9.0	9.0	9.0
Minimum Split (s)	9.0	24.5		9.0	24.5		13.0	13.0		13.0	13.0	13.0
Total Split (s)	13.0	53.0		13.0	53.0		29.0	29.0		29.0	29.0	29.0
Total Split (%)	13.7%	55.8%		13.7%	55.8%		30.5%	30.5%		30.5%	30.5%	30.5%
Yellow Time (s)	3.0	5.2		3.0	5.2		3.0	3.0		3.0	3.0	3.0
All-Red Time (s)	1.0	1.3		1.0	1.3		1.0	1.0		1.0	1.0	1.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	0.0
Total Lost Time (s)	4.0	6.5		4.0	6.5			4.0			4.0	4.0
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	C-Min		None	C-Min		None	None		None	None	None
Act Effct Green (s)	73.4	69.6		70.3	63.8			13.1			13.1	13.1
Actuated g/C Ratio	0.77	0.73		0.74	0.67			0.14			0.14	0.14
v/c Ratio	0.12	0.42		0.01	0.61			0.03			0.56	0.28
Control Delay	5.0	9.9		3.2	12.7			33.3			48.9	9.8
Queue Delay	0.0	0.3		0.0	0.0			0.0			0.0	0.0
Total Delay	5.0	10.2		3.2	12.7			33.3			48.9	9.8
LOS	А	В		Α	В			С			D	Α
Approach Delay		9.7			12.6			33.3			32.0	
Approach LOS		Α			В			С			С	
Queue Length 50th (ft)	7	126		1	228			4			62	0

	۶	→	•	•	←	•	•	†	<i>></i>	>	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)	m19	292		3	422			16			109	37
Internal Link Dist (ft)		517			962			105			296	
Turn Bay Length (ft)	225			125								
Base Capacity (vph)	492	1365		681	1223			402			369	479
Starvation Cap Reductn	0	287		0	0			0			0	0
Spillback Cap Reductn	0	0		0	0			0			0	0
Storage Cap Reductn	0	0		0	0			0			0	0
Reduced v/c Ratio	0.11	0.53		0.01	0.61			0.02			0.29	0.17

Area Type: Other

Cycle Length: 95

Actuated Cycle Length: 95

Offset: 0 (0%), Referenced to phase 2:WBTL and 6:EBTL, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.61

Intersection Signal Delay: 13.9

Intersection LOS: B Intersection Capacity Utilization 65.3% ICU Level of Service C

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

112: Eversource Dwy/East Hampton Commons Dwy & Route 66



EBT	EBR	WDI			
		WBL	WBT	NBL	NBR
		ሻ	†	ሻ	7
499	93	257	563	87	135
499		257	563	87	135
					1900
					12
					0
					1
		· -		-	
1 00	1.00		1.00		1.00
	1.00	1.00	1.00	1.00	0.850
5.777		0.950		0.950	0.000
1824	0		1801		1583
1027	0		1001		1303
1824	0		1801		1583
1024		J71	1001	1711	Yes
12	162				142
			20)E	142
	0.05	0.05			0.05
					0.95
525	98	2/1	593	92	142
	_				
	0				142
					Prot
2		1	12	4	4
2		1	1 2	4	4
15.0		5.0		9.0	9.0
21.5		9.5		13.4	13.4
34.5		24.5		19.4	19.4
44.0%		31.3%		24.7%	24.7%
					3.4
					1.0
					0.0
					4.4
				4.4	4.4
				Mono	Mona
			F0.0		None
					10.5
					0.16
					0.38
					9.1
					0.0
					9.1
		Α			Α
С			Α	В	
216		27	74	36	0
	1900 12 1.00 0.979 1824 1824 13 30 628 14.3 0.95 525 623 NA 2 2 2 15.0 21.5 34.5 44.0% 4.5 2.0 0.0 6.5 Lag Yes Min 27.1 0.42 0.80 29.0 C 29.0 C 29.0 C	1900 1900 12 12 0 0 1.00 1.00 0.979 1824 0 Yes 13 30 628 14.3 0.95 0.95 525 98 623 0 NA 2 2 2 15.0 21.5 34.5 44.0% 4.5 2.0 0.0 6.5 Lag Yes Min 27.1 0.42 0.80 29.0 0.0 29.0 C 29.0 C	1900 1900 1900 12 12 11 0 250 0 1 40 1.00 1.00 1.00 0.979 0.950 1824 0 1711 0.217 1824 0 391 Yes 13 30 628 14.3 0.95 0.95 0.95 525 98 271 623 0 271 NA D.P+P 2 1 2 2 1 15.0 5.0 21.5 9.5 34.5 24.5 44.0% 31.3% 4.5 3.0 2.0 1.5 0.0 0.0 6.5 4.5 Lag Lead Yes Yes Min None 27.1 43.7 0.42 0.68 0.80 0.48 29.0 0.0 29.0 8.0 C A 29.0 C	1900 1900 1900 1900 12 12 11 11 0 250 0 1 40 1.00 1.00 1.00 1.00 1.00 0.979 0.950 1824 0 1711 1801 0.217 1824 0 391 1801 Yes 13 30 30 628 459 14.3 10.4 0.95 0.95 0.95 0.95 525 98 271 593 623 0 271 593 NA D.P+P NA 2 1 12 2 2 1 12 2 2 1 12 15.0 5.0 21.5 9.5 34.5 24.5 44.0% 31.3% 4.5 3.0 2.0 1.5 0.0 0.0 6.5 4.5 Lag Lead Yes Yes Min None 27.1 43.7 50.0 0.42 0.68 0.78 0.80 0.48 0.42 29.0 8.0 4.9 0.0 0.0 0.0 29.0 8.0 4.9 C A A 29.0 5.9 C A	1900 1900 1900 1900 1900 12 12 11 11 11 0 250 0 0 0 1 1 40 25 1.00 1.00 1.00 1.00 0.00 0.979 0.950 0.955 0.953 0.95 0.955 0.955 0.955 0.955 0.955 0.955 0.955 0.955 0.955 0.955 0.955 0.955 0.955 0.95

2020 Corridor Conditions

Timing Plan: Weekday PM Peak

	-	•	•	-	1	
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Queue Length 95th (ft)	#479		82	153	80	46
Internal Link Dist (ft)	548			379	873	
Turn Bay Length (ft)			250			
Base Capacity (vph)	851		723	1386	424	499
Starvation Cap Reductn	0		0	0	0	0
Spillback Cap Reductn	0		0	0	0	0
Storage Cap Reductn	0		0	0	0	0
Reduced v/c Ratio	0.73		0.37	0.43	0.22	0.28

Intersection Summary

Area Type: Other

Cycle Length: 78.4

Actuated Cycle Length: 64.1

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.80

Intersection Signal Delay: 15.8 Intersection LOS: B
Intersection Capacity Utilization 66.5% ICU Level of Service C

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 113: Lakeview Street (Route 196) & Route 66

♥ ø1	₩ _{Ø2}	1 Ø4	
24.5 s	34.5 s	19.4 s	

2020 Corridor Cond	itions Opti	APPENDIX Capacity Analyse mized – Weekda Mornin	es Iy
		Tighe&Bo r	nd

	•	•	†	~	-	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	ሻሻ		^	7		414
Traffic Volume (vph)	1311	34	283	518	40	573
Future Volume (vph)	1311	34	283	518	40	573
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1900	1900	1900	1900	1900	1900
			11			11
Storage Length (ft)	0	0		200	0	
Storage Lanes	2	0		1	0	
Taper Length (ft)	25				25	
Lane Util. Factor	0.97	0.95	0.95	1.00	0.95	0.95
Frt	0.996			0.850		
Flt Protected	0.954					0.997
Satd. Flow (prot)	3368	0	3355	1501	0	3345
Flt Permitted	0.954					0.925
Satd. Flow (perm)	3368	0	3355	1501	0	3104
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)	5	. 55		545		
Link Speed (mph)	35		35	040		30
Link Distance (ft)	2739		813			825
Travel Time (s)	53.4	0.05	15.8	0.05	0.05	18.8
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	1380	36	298	545	42	603
Shared Lane Traffic (%)						
Lane Group Flow (vph)	1416	0	298	545	0	645
Turn Type	Prot		NA	Free	D.P+P	NA
Protected Phases	4		2		1	12
Permitted Phases				Free	2	
Detector Phase	4				1	
Switch Phase	<u> </u>				•	
Minimum Initial (s)	10.0		15.0		4.0	
Minimum Split (s)	16.0		20.0		8.0	
Total Split (s)	46.0		22.0		12.0	
Total Split (%)	57.5%		27.5%		15.0%	
Yellow Time (s)	4.0		4.0		3.0	
All-Red Time (s)	2.0		1.0		1.0	
Lost Time Adjust (s)	0.0		0.0			
Total Lost Time (s)	6.0		5.0			
Lead/Lag			Lag		Lead	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	None		C-Max		Max	
Act Effct Green (s)	38.4		17.0	80.0		27.6
Actuated g/C Ratio	0.48		0.21	1.00		0.34
v/c Ratio	0.40		0.42	0.36		0.59
Control Delay	19.1		29.3	0.30		22.4
3						
Queue Delay	0.0		0.0	0.0		0.0
Total Delay	19.1		29.3	0.7		22.4
LOS	В		С	Α		С
Approach Delay	19.1		10.8			22.4
Approach LOS	В		В			С

	•	•	†	~	>	ļ	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT	
Queue Length 50th (ft)	394		67	0		128	
Queue Length 95th (ft)	357		105	0		178	
Internal Link Dist (ft)	2659		733			745	
Turn Bay Length (ft)				200			
Base Capacity (vph)	1686		712	1501		1099	
Starvation Cap Reductn	0		0	0		0	
Spillback Cap Reductn	0		0	0		0	
Storage Cap Reductn	0		0	0		0	
Reduced v/c Ratio	0.84		0.42	0.36		0.59	
Intersection Summary							
Area Type:	Other						
Cycle Length: 80							
Actuated Cycle Length: 80							
Offset: 0 (0%), Referenced	d to phase 2:	NBSB, Sta	art of Yel	low			
Natural Cycle: 60							
Control Type: Actuated-Co	ordinated						
Maximum v/c Ratio: 0.87							
Intersection Signal Delay: 17.4					ersection		
Intersection Capacity Utiliz	ation 80.5%			IC	U Level o	f Service	D
Analysis Period (min) 15							
Calita and Dhagae. 101.	Main Ctraat	0 Davita /	,				
	Main Street	a Route t	00	Т.			
Vø1 √Vø	02 (R)			ÿ4			

	٠	→	←	•	>	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	<u> </u>	† †	† ‡		¥	
Traffic Volume (vph)	111	440	1124	166	72	106
Future Volume (vph)	111	440	1124	166	72	106
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	16	11
Storage Length (ft)	225	• • •		0	0	0
Storage Lanes	1			0	1	0
Taper Length (ft)	50				25	J
Lane Util. Factor	1.00	0.95	0.95	0.95	1.00	1.00
Frt	1.00	0.75	0.981	0.75	0.920	1.00
Flt Protected	0.950		0.701		0.980	
Satd. Flow (prot)	1678	3355	3292	0	1867	0
Flt Permitted		3333	3292	U	0.980	U
	0.138	2255	2202	0		0
Satd. Flow (perm)	244	3355	3292	0	1867	0
Right Turn on Red			0.5	Yes	07	Yes
Satd. Flow (RTOR)			25		97	
Link Speed (mph)		35	35		30	
Link Distance (ft)		2739	241		643	
Travel Time (s)		53.4	4.7		14.6	
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	118	468	1196	177	77	113
Shared Lane Traffic (%)						
Lane Group Flow (vph)	118	468	1373	0	190	0
Turn Type	pm+pt	NA	NA		Prot	
Protected Phases	1	2	2		5	
Permitted Phases	2				-	
Detector Phase	1				5	
Switch Phase						
Minimum Initial (s)	3.0	20.0	20.0		9.0	
Minimum Split (s)	6.5	26.0	26.0		13.7	
Total Split (s)	9.5	40.0	40.0		30.5	
Total Split (%)	11.9%	50.0%	50.0%		38.1%	
Yellow Time (s)	3.0	4.3	4.3		3.2	
All-Red Time (s)	0.5	1.7	1.7		1.5	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	
Total Lost Time (s)	3.5	6.0	6.0		4.7	
Lead/Lag	Lead	Lag	Lag			
Lead-Lag Optimize?	Yes	Yes	Yes			
Recall Mode	None	C-Min	C-Min		None	
Act Effct Green (s)	58.8	49.9	49.9		10.2	
Actuated g/C Ratio	0.74	0.62	0.62		0.13	
v/c Ratio	0.38	0.22	0.67		0.59	
Control Delay	6.4	7.5	3.6		24.2	
Queue Delay	0.0	0.0	0.0		0.0	
Total Delay	6.4	7.5	3.6		24.2	
LOS	А	А	Α		С	
Approach Delay		7.2	3.6		24.2	
Approach LOS		Α	A		C	
Approach LOS		^	^		C	

	•	-	•	•	-	4	
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	
Queue Length 50th (ft)	9	43	11	WDIX	44	ODIC	
Queue Length 95th (ft)	m25	88	40		101		
Internal Link Dist (ft)	11123	2659	161		563		
Turn Bay Length (ft)	225	2007	101		000		
Base Capacity (vph)	319	2091	2062		667		
Starvation Cap Reductn	0	0	0		0		
Spillback Cap Reductn	0	0	0		0		
Storage Cap Reductn	0	0	0		0		
Reduced v/c Ratio	0.37	0.22	0.67		0.28		
latence all an Commence							
Intersection Summary							
Area Type:	Other						
Cycle Length: 80							

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBWB, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 6.4 Intersection LOS: A Intersection Capacity Utilization 65.3% ICU Level of Service C

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 102: Route 66 & High Street



	-	•	•	←	•	<i>></i>
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	† †		ኻ	^	¥	
Traffic Volume (vph)	494	14	24	1255	42	19
Future Volume (vph)	494	14	24	1255	42	19
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1700	1700	1700	1700	12	12
Storage Length (ft)	1 1	0	175	11	0	0
		0	1/3		1	0
Storage Lanes		U	·=		25	U
Taper Length (ft) Lane Util. Factor	0.05	0.05	50	0.05		1.00
	0.95	0.95	1.00	0.95	1.00	1.00
Frt	0.996		0.050		0.957	
Flt Protected			0.950		0.967	
Satd. Flow (prot)	3342	0	1678	3355	1691	0
Flt Permitted			0.458		0.967	
Satd. Flow (perm)	3342	0	809	3355	1691	0
Right Turn on Red		Yes				Yes
Satd. Flow (RTOR)	4				20	
Link Speed (mph)	35			35	25	
Link Distance (ft)	241			1093	405	
Travel Time (s)	4.7			21.3	11.0	
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	509	14	25	1294	43	20
Shared Lane Traffic (%)	509	14	23	1294	43	20
. ,	Faa	0	2F	1204	/2	0
Lane Group Flow (vph)	523	0	25	1294	63 Drot	0
Turn Type	NA		pm+pt	NA	Prot	
Protected Phases	2		1	2	5	
Permitted Phases			2			
Detector Phase			1		5	
Switch Phase						
Minimum Initial (s)	20.0		3.0	20.0	9.0	
Minimum Split (s)	26.0		6.5	26.0	13.7	
Total Split (s)	40.0		9.5	40.0	30.5	
Total Split (%)	50.0%		11.9%	50.0%	38.1%	
Yellow Time (s)	4.3		3.0	4.3	3.2	
All-Red Time (s)	1.7		0.5	1.7	1.5	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	6.0		3.5	6.0	4.7	
Lead/Lag			Lead		4.7	
	Lag			Lag		
Lead-Lag Optimize?	Yes		Yes	Yes	Nors	
Recall Mode	C-Min		None	C-Min	None	
Act Effct Green (s)	49.9		58.8	49.9	10.2	
Actuated g/C Ratio	0.62		0.74	0.62	0.13	
v/c Ratio	0.25		0.04	0.62	0.27	
Control Delay	3.5		1.5	11.9	25.9	
Queue Delay	0.2		0.0	0.0	0.0	
Total Delay	3.7		1.5	11.9	25.9	
LOS	А		А	В	С	
Approach Delay	3.7			11.7	25.9	
Approach LOS	А			В	С	
	, ,			5	0	

	-	•	•	-	1	
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Queue Length 50th (ft)	21		4	313	20	
Queue Length 95th (ft)	33		m0	2	52	
Internal Link Dist (ft)	161			1013	325	
Turn Bay Length (ft)			175			
Base Capacity (vph)	2085		680	2091	558	
Starvation Cap Reductn	758		0	0	0	
Spillback Cap Reductn	0		0	0	0	
Storage Cap Reductn	0		0	0	0	
Reduced v/c Ratio	0.39		0.04	0.62	0.11	

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBWB, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 10.0 Intersection LOS: A Intersection Capacity Utilization 51.1% ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 103: Airline Avenue & Route 66



	٠	→	←	•	\	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	<u> </u>	† †	† 1>		ኘ	7
Traffic Volume (vph)	25	483	1254	30	7	3
Future Volume (vph)	25	483	1254	30	7	3
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	10	11
Storage Length (ft)	350			0	0	0
Storage Lanes	1			0	1	1
Taper Length (ft)	50			U U	25	ı
Lane Util. Factor	1.00	0.95	0.95	0.95	1.00	1.00
Frt	1.00	0.75	0.997	0.75	1.00	0.850
Flt Protected	0.950		0.771		0.950	0.000
Satd. Flow (prot)	1662	3323	3314	0	1604	1501
Fit Permitted		3323	3314	U	0.950	1001
	0.183	2222	221/	0		1501
Satd. Flow (perm)	320	3323	3314	0	1604	1501
Right Turn on Red				Yes		Yes
Satd. Flow (RTOR)			4			3
Link Speed (mph)		35	35		10	
Link Distance (ft)		1093	417		223	
Travel Time (s)		21.3	8.1		15.2	
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96
Heavy Vehicles (%)	5%	5%	5%	5%	5%	4%
Adj. Flow (vph)	26	503	1306	31	7	3
Shared Lane Traffic (%)						
Lane Group Flow (vph)	26	503	1337	0	7	3
Turn Type	D.P+P	NA	NA		Prot	Prot
Protected Phases	1	12	2		4	4
Permitted Phases	2	1 2			7	
Detector Phase	1				4	4
Switch Phase	I				4	4
	FΛ		1E 0		0.0	0.0
Minimum Initial (s)	5.0		15.0		9.0	9.0
Minimum Split (s)	9.0		20.0		21.0	21.0
Total Split (s)	9.0		47.0		24.0	24.0
Total Split (%)	11.3%		58.8%		30.0%	30.0%
Yellow Time (s)	3.0		4.3		3.0	3.0
All-Red Time (s)	1.0		0.7		1.9	1.9
Lost Time Adjust (s)	0.0		0.0		0.0	0.0
Total Lost Time (s)	4.0		5.0		4.9	4.9
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Recall Mode	None		C-Max		None	None
Act Effct Green (s)	71.6	76.4	71.2		9.0	9.0
Actuated g/C Ratio	0.90	0.96	0.89		0.11	0.11
v/c Ratio	0.90	0.70	0.45		0.11	0.11
Control Delay	4.1	3.1	7.5		32.3	22.3
	0.0		0.1			0.0
Queue Delay		0.0			0.0	
Total Delay	4.1	3.1	7.5		32.3	22.3
LOS	A	A	A		C	С
Approach Delay		3.1	7.5		29.3	
Approach LOS		Α	Α		С	

	•	→	←	•	\	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Queue Length 50th (ft)	1	0	0		3	0
Queue Length 95th (ft)	0	130	455		15	8
Internal Link Dist (ft)		1013	337		143	
Turn Bay Length (ft)	350					
Base Capacity (vph)	384	3174	2949		382	360
Starvation Cap Reductn	0	0	305		0	0
Spillback Cap Reductn	0	0	0		0	0
Storage Cap Reductn	0	0	0		0	0
Reduced v/c Ratio	0.07	0.16	0.51		0.02	0.01
Intersection Summary						
Area Type:	Other					
Cycle Length: 80						
Actuated Cycle Length: 80						
Offset: 50 (63%), Reference	ced to phase	2:EBWB	Start of	Yellow		
Natural Cycle: 60						
Control Type: Actuated-Co	oordinated					
Maximum v/c Ratio: 0.45						
Intersection Signal Delay:					tersection	
Intersection Capacity Utiliz	zation 51.4%			IC	U Level c	of Service
Analysis Period (min) 15						
Calita and Dhagas 104.						

Splits and Phases: 104: Route 66 & Portland Shopping Center Driveway

∠ _{Ø1}	± Ø2 (R)	•	^ _{Ø4}
9 s	47 s		24 s

	۶	→	•	•	←	•	•	†	~	>	↓	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	*	∱ î≽		ሻ	∱ 1≽			4			4	
Traffic Volume (vph)	5	490	12	3	1236	1	19	0	9	6	0	0
Future Volume (vph)	5	490	12	3	1236	1	19	0	9	6	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	12	12	12	12	12	12
Storage Length (ft)	125		0	150		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	50			50			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.996						0.956				
Flt Protected	0.950			0.950				0.967			0.950	
Satd. Flow (prot)	1662	3310	0	1662	3323	0	0	1673	0	0	1719	0
Flt Permitted	0.180			0.448				0.932				
Satd. Flow (perm)	315	3310	0	784	3323	0	0	1612	0	0	1810	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		5						100				
Link Speed (mph)		35			45			25			25	
Link Distance (ft)		417			1869			435			271	
Travel Time (s)		8.1			28.3			11.9			7.4	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Adj. Flow (vph)	5	533	13	3	1343	1	21	0	10	7	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	5	546	0	3	1344	0	0	31	0	0	7	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases	5	2		1	6			4			4	
Permitted Phases	2			6			4			4		
Detector Phase	5			1			4	4		4	4	
Switch Phase	0.0	45.0		0.0	45.0						/ 0	
Minimum Initial (s)	3.0	15.0		3.0	15.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	7.0	21.3		7.0	21.3		23.2	23.2		23.2	23.2	
Total Split (s)	7.0	49.8		7.0	49.8		23.2	23.2		23.2	23.2	
Total Split (%)	8.8%	62.3%		8.8%	62.3%		29.0%	29.0%		29.0%	29.0%	
Yellow Time (s)	3.0	4.3		3.0	4.3		3.2	3.2		3.2	3.2	
All-Red Time (s)	1.0	2.0		1.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	4.0	6.3		4.0	6.3			5.2			5.2	
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize? Recall Mode	Yes	Yes C-Min		Yes	Yes C-Min		Mono	None		Mono	None	
Act Effct Green (s)	None 68.5			None			None	6.0		None	None	
Actuated g/C Ratio	0.86	67.9 0.85		68.4 0.86	67.8 0.85			0.0			6.0 0.08	
v/c Ratio	0.00	0.63		0.00	0.63			0.08			0.06	
Control Delay	0.6	0.19		1.7	4.0			1.4			35.3	
-								0.0				
Queue Delay	0.0	0.0		0.0	0.1 4.1			1.4			0.0 35.3	
Total Delay LOS	0.6 A	0.6 A		1.7 A	4. I A			1.4 A			35.3 D	
Approach Delay	A	0.6		A	4.1			1.4			35.3	
Approach LOS		0.6 A			4. I A			1.4 A			35.3 D	
Appluacii LU3		А			А			А			D	

	۶	→	•	•	•	•	•	†	~	>	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	0	5		0	95			0			3	
Queue Length 95th (ft)	1	10		1	217			0			15	
Internal Link Dist (ft)		337			1789			355			191	
Turn Bay Length (ft)	125			150								
Base Capacity (vph)	341	2808		715	2817			440			407	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	315			9			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.01	0.19		0.00	0.54			0.07			0.02	
Intersection Summary												

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 48 (60%), Referenced to phase 2:EBTL and 6:WBTL, Start of Yellow

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.48

Intersection Signal Delay: 3.2 Intersection LOS: A Intersection Capacity Utilization 48.8% ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 105: Grove Street/Grandview Terrace & Route 66



	٠	→	←	•	>	4			
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	Ø2	Ø3	
Lane Configurations	ሻ	† †	† †	7	ሻ	7			
Traffic Volume (vph)	76	385	978	199	84	112			
Future Volume (vph)	76	385	978	199	84	112			
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900			
Lane Width (ft)	11	11	11	11	11	11			
Storage Length (ft)	200			200	0	100			
Storage Lanes	1			1	1	1			
Taper Length (ft)	50				25				
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00			
Frt				0.850		0.850			
Flt Protected	0.950				0.950				
Satd. Flow (prot)	1646	3292	3292	1473	1646	1473			
Flt Permitted	0.950				0.950				
Satd. Flow (perm)	1646	3292	3292	1473	1646	1473			
Right Turn on Red				Yes		Yes			
Satd. Flow (RTOR)				221		124			
Link Speed (mph)		45	35		45				
Link Distance (ft)		1735	1238		958				
Travel Time (s)		26.3	24.1		14.5				
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90			
Heavy Vehicles (%)	6%	6%	6%	6%	6%	6%			
Adj. Flow (vph)	84	428	1087	221	93	124			
Shared Lane Traffic (%)									
Lane Group Flow (vph)	84	428	1087	221	93	124			
Turn Type	Prot	NA	NA	Prot	Prot	Prot			
Protected Phases	1	123	23	23	4	4	2	3	
Permitted Phases									
Detector Phase	1	123	23	23	4	4			
Switch Phase									
Minimum Initial (s)	5.0				7.0	7.0	15.0	3.0	
Minimum Split (s)	10.0				20.0	20.0	21.0	9.0	
Total Split (s)	13.0				20.0	20.0	18.0	9.0	
Total Split (%)	21.7%				33.3%	33.3%	30%	15%	
Yellow Time (s)	3.0				3.0	3.0	4.0	4.0	
All-Red Time (s)	2.0				2.0	2.0	2.0	2.0	
Lost Time Adjust (s)	0.0				0.0	0.0			
Total Lost Time (s)	5.0				5.0	5.0			
Lead/Lag	Lead				Lag	Lag	Lag	Lead	
Lead-Lag Optimize?	Yes				Yes	Yes	Yes	Yes	
Recall Mode	None				None	None	Min	None	
Act Effct Green (s)	6.0	34.8	21.4	21.4	7.9	7.9			
Actuated g/C Ratio	0.12	0.72	0.44	0.44	0.16	0.16			
v/c Ratio	0.41	0.18	0.75	0.29	0.35	0.36			
Control Delay	27.7	3.7	17.9	3.3	23.5	8.2			
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0			
Total Delay	27.7	3.7	17.9	3.3	23.5	8.2			
LOS	C	A	В	A	C	A			
Approach Delay		7.6	15.4		14.8				
Approach LOS		A	В		В				
PE		, ,							

<u>Larroo</u> , voiarrioo,	1 1111111190								J ·	
	۶	→	+	•	>	4				
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	Ø2	Ø3		
Queue Length 50th (ft)	23	20	131	0	25	0				
Queue Length 95th (ft)	60	41	#280	34	61	36				
Internal Link Dist (ft)		1655	1158		878					
Turn Bay Length (ft)	200			200		100				
Base Capacity (vph)	276	2224	1452	773	518	548				
Starvation Cap Reductn	0	0	0	0	0	0				
Spillback Cap Reductn	0	0	0	0	0	0				
Storage Cap Reductn	0	0	0	0	0	0				
Reduced v/c Ratio	0.30	0.19	0.75	0.29	0.18	0.23				
Intersection Summary										
Area Type:	Other									
Cycle Length: 60										
Actuated Cycle Length: 4	8.5									
Natural Cycle: 60										
Control Type: Actuated-U	Incoordinated									
Maximum v/c Ratio: 0.75										
Intersection Signal Delay					tersection					
Intersection Capacity Util	ization 50.4%			IC	U Level c	of Service	A			
Analysis Period (min) 15										
# 95th percentile volum			eue may	be longer						
Queue shown is maxii	mum after two	cycles.								

Splits and Phases: 106: Route 66 & Gospel Lane (Route 17)

	100.100	Late	10 17)	44				
→ø ₁		→ø2		— Ø3	3	Ø4		
13 c		18 s		9.5		20 s		

	۶	→	•	•	+	•	•	†	<i>></i>	>	ţ	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ሻ	1>		ሻ	f)			4			4	
Traffic Volume (vph)	18	429	2	2	1074	0	22	0	5	0	3	0
Future Volume (vph)	18	429	2	2	1074	0	22	0	5	0	3	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	11	11	11	11	11	11
Storage Length (ft)	193		0	300		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	100			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999						0.976				
Flt Protected	0.950			0.950				0.961				
Satd. Flow (prot)	1678	1764	0	1678	1766	0	0	1656	0	0	1766	0
Flt Permitted	0.138			0.499								
Satd. Flow (perm)	244	1764	0	881	1766	0	0	1724	0	0	1766	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)								94				
Link Speed (mph)		45			45			25			25	
Link Distance (ft)		293			793			336			474	
Travel Time (s)		4.4			12.0			9.2			12.9	
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	19	456	2	2	1143	0	23	0	5	0	3	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	19	458	0	2	1143	0	0	28	0	0	3	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA			NA	
Protected Phases	1	6		5	2			4			4	
Permitted Phases	6			2			4			4		
Detector Phase	1	6		5	2		4	4		4	4	
Switch Phase												
Minimum Initial (s)	4.0	15.0		4.0	15.0		7.0	7.0		7.0	7.0	
Minimum Split (s)	8.6	22.0		8.6	22.0		19.6	19.6		19.6	19.6	
Total Split (s)	8.6	61.0		8.6	61.0		30.4	30.4		30.4	30.4	
Total Split (%)	8.6%	61.0%		8.6%	61.0%		30.4%	30.4%		30.4%	30.4%	
Yellow Time (s)	3.6	5.0		3.6	5.0		3.6	3.6		3.6	3.6	
All-Red Time (s)	1.0	2.0		1.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	4.6	7.0		4.6	7.0			5.6			5.6	
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	Min		None	Min		None	None		None	None	
Act Effct Green (s)	68.4	69.6		67.5	68.0			7.0			7.0	
Actuated g/C Ratio	0.87	0.88		0.86	0.86			0.09			0.09	
v/c Ratio	0.07	0.29		0.00	0.75			0.12			0.02	
Control Delay	2.1	3.4		1.5	13.0			1.0			34.7	
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	
Total Delay	2.1	3.4		1.5	13.0			1.0			34.7	
LOS	А	А		Α	В			А			С	
Approach Delay		3.3			13.0			1.0			34.7	
Approach LOS		Α			В			Α			С	

	۶	-	•	•	←	•	4	†	~	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	1	0		0	0			0			1	
Queue Length 95th (ft)	5	148		1	#848			0			10	
Internal Link Dist (ft)		213			713			256			394	
Turn Bay Length (ft)	193			300								
Base Capacity (vph)	285	1559		796	1525			608			557	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.07	0.29		0.00	0.75			0.05			0.01	
Intersection Summary												
Area Type:	Other											

Cycle Length: 100

Actuated Cycle Length: 78.7

Natural Cycle: 100

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.75


Intersection Signal Delay: 10.0 Intersection LOS: B
Intersection Capacity Utilization 75.2% ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 107: Payne Blvd/Middle Haddam Rd & Route 66



Lancs, volunes, i	mmige									3	oonday 71	
	•	-	•	•	←	•	•	†	<i>></i>	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4	7		4	
Traffic Volume (vph)	1	382	34	3	923	2	156	12	3	39	11	25
Future Volume (vph)	1	382	34	3	923	2	156	12	3	39	11	25
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	12	13	13	12	13	12
Storage Length (ft)	0		0	0		0	0		100	0		0
Storage Lanes	0		0	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.989							0.850		0.956	
Flt Protected								0.956			0.975	
Satd. Flow (prot)	0	1747	0	0	1766	0	0	1805	1605	0	1760	0
Flt Permitted		0.999			0.999			0.681	.000		0.695	
Satd. Flow (perm)	0	1745	0	0	1764	0	0	1286	1605	0	1254	0
Right Turn on Red	· ·	17 10	Yes	Ü	1701	No	Ü	1200	Yes	Ū	1201	Yes
Satd. Flow (RTOR)		6	103			110			56		25	100
Link Speed (mph)		35			35			35	00		25	
Link Distance (ft)		1284			1455			649			549	
Travel Time (s)		25.0			28.3			12.6			15.0	
Peak Hour Factor	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	1/0	434	39	3	1049	2	177	14	3	44	13	28
Shared Lane Traffic (%)		101	0,	U	1017	_	1,,,	• •	· ·	• •	10	20
Lane Group Flow (vph)	0	474	0	0	1054	0	0	191	3	0	85	0
Turn Type	Perm	NA		Perm	NA	-	Perm	NA	Perm	Perm	NA	
Protected Phases		2			2			4			4	
Permitted Phases	2			2			4		4	4		
Detector Phase	2	2		2	2		4	4	4	4	4	
Switch Phase												
Minimum Initial (s)	15.0	15.0		15.0	15.0		5.0	5.0	5.0	5.0	5.0	
Minimum Split (s)	23.6	23.6		23.6	23.6		12.5	12.5	12.5	12.5	12.5	
Total Split (s)	64.0	64.0		64.0	64.0		46.0	46.0	46.0	46.0	46.0	
Total Split (%)	58.2%	58.2%		58.2%	58.2%		41.8%	41.8%	41.8%	41.8%	41.8%	
Yellow Time (s)	4.3	4.3		4.3	4.3		4.2	4.2	4.2	4.2	4.2	
All-Red Time (s)	4.3	4.3		4.3	4.3		3.3	3.3	3.3	3.3	3.3	
Lost Time Adjust (s)		0.0			0.0			0.0	0.0		0.0	
Total Lost Time (s)		8.6			8.6			7.5	7.5		7.5	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	Min	Min		Min	Min		None	None	None	None	None	
Act Effct Green (s)		55.6			55.6			17.0	17.0		17.0	
Actuated g/C Ratio		0.63			0.63			0.19	0.19		0.19	
v/c Ratio		0.43			0.95			0.78	0.01		0.33	
Control Delay		10.9			36.6			55.0	0.0		25.6	
Queue Delay		0.0			0.0			0.0	0.0		0.0	
Total Delay		10.9			36.6			55.0	0.0		25.6	
LOS		В			D			D	Α		С	
Approach Delay		10.9			36.6			54.1			25.6	
Approach LOS		В			D			D			С	

Laries, volumes, i	imings								Hilling	riaii. W	chuay Ai	VIFCAN
	۶	→	•	•	←	•	4	†	~	>	ţ	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)		121			494			102	0		29	
Queue Length 95th (ft)		231			#923			171	0		67	
Internal Link Dist (ft)		1204			1375			569			469	
Turn Bay Length (ft)									100			
Base Capacity (vph)		1095			1105			559	729		559	
Starvation Cap Reductn		0			0			0	0		0	
Spillback Cap Reductn		0			0			0	0		0	
Storage Cap Reductn		0			0			0	0		0	
Reduced v/c Ratio		0.43			0.95			0.34	0.00		0.15	
Intersection Summary												
Area Type:	Other											
Cycle Length: 110												
Actuated Cycle Length: 88.8	3											
Natural Cycle: 90												
Control Type: Actuated-Unc	coordinated											
Maximum v/c Ratio: 0.95												
Intersection Signal Delay: 3					tersection							
Intersection Capacity Utiliza	tion 79.5%			IC	CU Level	of Service	D					
Analysis Period (min) 15												

⁹⁵th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.

Splits and Phases: 108: Route 151/Depot Hill Rd & Route 66



109: Middletown Avenue/Commuter Parking Lot Dwy & Ra02066orridor Conditions - Optimized Lanes, Volumes, Timing Plan: Weekday AM Peak

	۶	→	•	€	←	•	•	†	~	>	ţ	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4	7	ሻ	f)			र्स	7		4	
Traffic Volume (vph)	0	287	193	4	564	1	401	0	2	0	0	1
Future Volume (vph)	0	287	193	4	564	1	401	0	2	0	0	1
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	11	11	11	11	11	11
Storage Length (ft)	0		250	125		0	0		100	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850						0.850		0.865	
Flt Protected				0.950				0.950				
Satd. Flow (prot)	0	1766	1501	1678	1766	0	0	1678	1501	0	1528	0
Flt Permitted				0.557				0.757				
Satd. Flow (perm)	0	1766	1501	984	1766	0	0	1337	1501	0	1528	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			219						71		171	
Link Speed (mph)		45			45			50			15	
Link Distance (ft)		546			525			823			174	
Travel Time (s)		8.3			8.0			11.2			7.9	
Peak Hour Factor	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	0	326	219	5	641	1	456	0	2	0	0	1
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	326	219	5	642	0	0	456	2	0	1	0
Turn Type		NA	Perm	Perm	NA		Perm	NA	Perm		NA	
Protected Phases		2			2			4			4	
Permitted Phases	2		2	2			4		4	4		
Detector Phase	2	2	2	2	2		4	4	4	4	4	
Switch Phase												
Minimum Initial (s)	15.0	15.0	15.0	15.0	15.0		6.0	6.0	6.0	6.0	6.0	
Minimum Split (s)	22.9	22.9	22.9	22.9	22.9		21.0	21.0	21.0	21.0	21.0	
Total Split (s)	42.0	42.0	42.0	42.0	42.0		33.0	33.0	33.0	33.0	33.0	
Total Split (%)	56.0%	56.0%	56.0%	56.0%	E / OO/			44.00/	44.0%	44.0%	44.0%	
Yellow Time (s)		30.070	30.070	30.0%	56.0%		44.0%	44.0%	44.070	44.070	11.070	
All-Red Time (s)	5.0	5.0	5.0	5.0	56.0%		44.0%	3.0	3.0	3.0	3.0	
Lost Time Adjust (s)	5.0 2.9											
Total Lost Time (s)		5.0	5.0	5.0	5.0		3.0	3.0	3.0	3.0	3.0	
		5.0 2.9	5.0 2.9	5.0 2.9	5.0 2.9		3.0	3.0 1.0	3.0 1.0	3.0	3.0 1.0	
Lead/Lag		5.0 2.9 0.0	5.0 2.9 0.0	5.0 2.9 0.0	5.0 2.9 0.0		3.0	3.0 1.0 0.0	3.0 1.0 0.0	3.0	3.0 1.0 0.0	
Lead/Lag Lead-Lag Optimize?		5.0 2.9 0.0	5.0 2.9 0.0	5.0 2.9 0.0	5.0 2.9 0.0		3.0	3.0 1.0 0.0	3.0 1.0 0.0	3.0	3.0 1.0 0.0	
•		5.0 2.9 0.0	5.0 2.9 0.0	5.0 2.9 0.0	5.0 2.9 0.0		3.0	3.0 1.0 0.0	3.0 1.0 0.0	3.0	3.0 1.0 0.0	
Lead-Lag Optimize?	2.9	5.0 2.9 0.0 7.9	5.0 2.9 0.0 7.9	5.0 2.9 0.0 7.9	5.0 2.9 0.0 7.9		3.0 1.0	3.0 1.0 0.0 4.0	3.0 1.0 0.0 4.0	3.0	3.0 1.0 0.0 4.0	
Lead-Lag Optimize? Recall Mode	2.9	5.0 2.9 0.0 7.9	5.0 2.9 0.0 7.9	5.0 2.9 0.0 7.9	5.0 2.9 0.0 7.9		3.0 1.0	3.0 1.0 0.0 4.0 None	3.0 1.0 0.0 4.0 None	3.0	3.0 1.0 0.0 4.0 None	
Lead-Lag Optimize? Recall Mode Act Effct Green (s)	2.9	5.0 2.9 0.0 7.9 Min 27.5	5.0 2.9 0.0 7.9 Min 27.5	5.0 2.9 0.0 7.9 Min 27.5	5.0 2.9 0.0 7.9 Min 27.5		3.0 1.0	3.0 1.0 0.0 4.0 None 25.3	3.0 1.0 0.0 4.0 None 25.3	3.0	3.0 1.0 0.0 4.0 None 25.3	
Lead-Lag Optimize? Recall Mode Act Effct Green (s) Actuated g/C Ratio	2.9	5.0 2.9 0.0 7.9 Min 27.5 0.42	5.0 2.9 0.0 7.9 Min 27.5 0.42	5.0 2.9 0.0 7.9 Min 27.5 0.42	5.0 2.9 0.0 7.9 Min 27.5 0.42		3.0 1.0	3.0 1.0 0.0 4.0 None 25.3 0.39	3.0 1.0 0.0 4.0 None 25.3 0.39	3.0	3.0 1.0 0.0 4.0 None 25.3 0.39	
Lead-Lag Optimize? Recall Mode Act Effct Green (s) Actuated g/C Ratio v/c Ratio	2.9	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.44	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.29	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.01	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.86		3.0 1.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.88	3.0 1.0 0.0 4.0 None 25.3 0.39 0.00	3.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.00	
Lead-Lag Optimize? Recall Mode Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay	2.9	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.44 15.8	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.29 3.1	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.01 11.5	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.86 31.3		3.0 1.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.88 41.3	3.0 1.0 0.0 4.0 None 25.3 0.39 0.00	3.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.00	
Lead-Lag Optimize? Recall Mode Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay	2.9	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.44 15.8 0.0	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.29 3.1 0.0	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.01 11.5 0.0	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.86 31.3 0.0		3.0 1.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.88 41.3 0.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.00 0.0	3.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.00 0.0	
Lead-Lag Optimize? Recall Mode Act Effct Green (s) Actuated g/C Ratio v/c Ratio Control Delay Queue Delay Total Delay	2.9	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.44 15.8 0.0	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.29 3.1 0.0 3.1	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.01 11.5 0.0	5.0 2.9 0.0 7.9 Min 27.5 0.42 0.86 31.3 0.0 31.3		3.0 1.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.88 41.3 0.0 41.3	3.0 1.0 0.0 4.0 None 25.3 0.39 0.00 0.0 0.0	3.0	3.0 1.0 0.0 4.0 None 25.3 0.39 0.00 0.0 0.0	

109: Middletown Avenue/Commuter Parking Lot Dwy & Ra020066orridor Conditions - Optimized Timing Plan: Weekday AM Peak Lanes, Volumes, Timings

Laries, volumes, i	iiiiiigs								riiiiiig	r ian. wc	citady 7 ii	vi i cuit
	۶	-	•	•	←	•	4	†	~	>	ţ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)		97	0	1	245			183	0		0	
Queue Length 95th (ft)		155	32	7	#385			#352	0		0	
Internal Link Dist (ft)		466			445			743			94	
Turn Bay Length (ft)			250	125					100			
Base Capacity (vph)		967	921	539	967			623	737		803	
Starvation Cap Reductn		0	0	0	0			0	0		0	
Spillback Cap Reductn		0	0	0	0			0	0		0	
Storage Cap Reductn		0	0	0	0			0	0		0	
Reduced v/c Ratio		0.34	0.24	0.01	0.66			0.73	0.00		0.00	
Intersection Summary												
Area Type:	Other											
Cycle Length: 75												
Actuated Cycle Length: 65.2	2											
Natural Cycle: 75												
Control Type: Actuated-Unc	coordinated											
Maximum v/c Ratio: 0.88												
Intersection Signal Delay: 2	7.2			In	tersection	LOS: C						
Intersection Capacity Utiliza	tion 68.5%			IC	U Level o	of Service	С					
Analysis Period (min) 15												
// OF the managed the continues a		!		la a I a .a a. a .								

Splits and Phases: 109: Middletown Avenue/Commuter Parking Lot Dwy & Route 66

\$ ø2	₩ ø4
42 s	33 s

⁹⁵th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

110: Maple Street/North Maple Street & Route 66 & Old W2020-10gbrnStreetConditions - Optimized Lanes, Volumes, Timing Plan: Weekday AM Peak

	•				—	4	•	+			ı	
		-	*	*	WDT		7	l NDT	/	001	*	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR2	NBL2	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Volume (vph)	44	357	1	9	474	9	10	50	14	32	22	52
Future Volume (vph)	44	357	1	9	474	9	10	50	14	32	22	52
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	11	12	12	11	12	12	11	12	12	11	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.997			0.975			0.934	
Flt Protected		0.995			0.999			0.993			0.985	
Satd. Flow (prot)	0	1724	0	0	1726	0	0	1678	0	0	1594	0
Flt Permitted		0.892			0.989			0.954			0.886	
Satd. Flow (perm)	0	1546	0	0	1709	0	0	1612	0	0	1434	0
Right Turn on Red			No			No			No			
Satd. Flow (RTOR)												
Link Speed (mph)		45			30			25			25	
Link Distance (ft)		2724			782			976			892	
Travel Time (s)		41.3			17.8			26.6			24.3	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Heavy Vehicles (%)	6%	6%	6%	6%	6%	6%	6%	6%	6%	6%	6%	6%
Adj. Flow (vph)	52	420	1	11	558	11	12	59	16	38	26	61
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	473	0	0	580	0	0	87	0	0	125	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			2			4			4	
Permitted Phases	2			2			4			4		
Detector Phase	2	2		2	2		4	4		4	4	
Switch Phase												
Minimum Initial (s)	25.0	25.0		25.0	25.0		9.0	9.0		9.0	9.0	
Minimum Split (s)	32.2	32.2		32.2	32.2		16.9	16.9		16.9	16.9	
Total Split (s)	34.6	34.6		34.6	34.6		16.9	16.9		16.9	16.9	
Total Split (%)	53.2%	53.2%		53.2%	53.2%		26.0%	26.0%		26.0%	26.0%	
Yellow Time (s)	4.0	4.0		4.0	4.0		3.3	3.3		3.3	3.3	
All-Red Time (s)	3.2	3.2		3.2	3.2		1.6	1.6		1.6	1.6	
Lost Time Adjust (s)		0.0			0.0			0.0			0.0	
Total Lost Time (s)		7.2			7.2			4.9			4.9	
Lead/Lag							Lead	Lead		Lead	Lead	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Recall Mode	Min	Min		Min	Min		None	None		None	None	
Act Effct Green (s)		31.1			31.1			9.9			9.9	
Actuated g/C Ratio		0.61			0.61			0.19			0.19	
v/c Ratio		0.50			0.56			0.28			0.45	
Control Delay		12.3			13.4			21.7			25.4	
Queue Delay		0.0			0.0			0.0			0.0	
Total Delay		12.3			13.4			21.7			25.4	
LOS		В			В			С			С	
Approach Delay		12.3			13.4			21.7			25.4	
Approach LOS		В			В			C			C	
Queue Length 50th (ft)		72			92			20			30	
Queue Length 95th (ft)		233			#306			62			86	
Internal Link Dist (ft)		2644			702			896			812	

	\	>
Lane Group	SEL	SER
Lane Configurations	M	
Traffic Volume (vph)	0	1
Future Volume (vph)	0	1
Ideal Flow (vphpl)	1900	1900
Lane Width (ft)	10	12
Lane Util. Factor	1.00	1.00
Frt	0.865	1.00
Flt Protected	0.000	
Satd. Flow (prot)	1447	0
Flt Permitted	1447	U
	1//7	0
Satd. Flow (perm)	1447	0
Right Turn on Red		
Satd. Flow (RTOR)	0.5	
Link Speed (mph)	25	
Link Distance (ft)	421	
Travel Time (s)	11.5	
Peak Hour Factor	0.85	0.85
Heavy Vehicles (%)	6%	6%
Adj. Flow (vph)	0	1
Shared Lane Traffic (%)		
Lane Group Flow (vph)	1	0
Turn Type	Prot	
Protected Phases	5	
Permitted Phases		
Detector Phase	5	
Switch Phase		
Minimum Initial (s)	9.0	
Minimum Split (s)	13.5	
Total Split (s)	13.5	
Total Split (%)	20.8%	
Yellow Time (s)	3.3	
All-Red Time (s)	1.2	
Lost Time Adjust (s)	0.0	
Total Lost Time (s)	4.5	
Lead/Lag	Lag	
Lead-Lag Optimize?	Yes	
Recall Mode	None	
Act Effct Green (s)	9.2	
Actuated g/C Ratio	0.18	
v/c Ratio	0.00	
Control Delay	22.0	
Queue Delay	0.0	
Total Delay	22.0	
LOS	С	
Approach Delay	22.0	
Approach LOS	С	
Queue Length 50th (ft)	0	
Queue Length 95th (ft)	4	
Internal Link Dist (ft)	341	

Lanes, volumes,	rimings							Hilling Plan: Weekday Alvi F									
	٠	→	•	•	←	•	•	†	<i>></i>	>	↓	4					
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR2	NBL2	NBT	NBR	SBL	SBT	SBR					
Turn Bay Length (ft)																	
Base Capacity (vph)		976			1079			386			344						
Starvation Cap Reductn		0			0			0		0							
Spillback Cap Reductn		0			0			0		0							
Storage Cap Reductn		0			0			0			0						
Reduced v/c Ratio		0.48			0.54			0.23			0.36						
Intersection Summary																	
Area Type:	Other																
Cycle Length: 65																	
Actuated Cycle Length: 50).9																
Natural Cycle: 65																	
Control Type: Actuated-Ur	ncoordinated																
Maximum v/c Ratio: 0.56																	
Intersection Signal Delay:						n LOS: B											
Intersection Capacity Utiliz	zation 76.5%			IC	CU Level	of Service	e D										
Analysis Period (min) 15																	
# 95th percentile volume	e exceeds cap	acity, qu	eue may	be longe	r.												

Queue shown is maximum after two cycles.

Splits and Phases: 110: Maple Street/North Maple Street & Route 66 & Old West High Street

\$ ø₂	₩ø4	√ _{ø5}
34.6 s	16.9 s	13.5 s

	>	→			
Lane Group	SEL	SER			
Turn Bay Length (ft)					
Base Capacity (vph)	260				
Starvation Cap Reductn	0				
Spillback Cap Reductn	0				
Storage Cap Reductn	0				
Reduced v/c Ratio	0.00				
Intersection Summary					

	۶	→	•	€	←	•	4	†	~	>	ţ	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	¥	4		ř	4		۲	4		۲	f)	
Traffic Volume (vph)	39	372	19	55	374	76	35	45	95	96	49	91
Future Volume (vph)	39	372	19	55	374	76	35	45	95	96	49	91
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	12	11	11	12	12	12	12	12	12	12
Storage Length (ft)	275		0	225		0	225		0	175		0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (ft)	50			75			50			50		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00
Frt		0.993			0.975			0.901			0.902	
Flt Protected	0.950			0.950			0.950	0.999		0.950		
Satd. Flow (prot)	1662	1737	0	1662	1705	0	1633	1547	0	1719	1632	0
Flt Permitted	0.402			0.431			0.660	0.993		0.653		
Satd. Flow (perm)	703	1737	0	754	1705	0	1135	1538	0	1182	1632	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4			18			103			99	
Link Speed (mph)		30			30			30			25	
Link Distance (ft)		594			597			644			540	
Travel Time (s)		13.5			13.6			14.6			14.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Adj. Flow (vph)	42	404	21	60	407	83	38	49	103	104	53	99
Shared Lane Traffic (%)							10%					
Lane Group Flow (vph)	42	425	0	60	490	0	34	156	0	104	152	0
Turn Type	pm+pt	NA		pm+pt	NA		pm+pt	NA		pm+pt	NA	
Protected Phases	1	6		5	2		3	8		7	4	
Permitted Phases	6			2			8			4		
Detector Phase	1	6		5	2		3	8		7	4	
Switch Phase												
Minimum Initial (s)	4.0	15.0		4.0	15.0		4.0	8.0		4.0	8.0	
Minimum Split (s)	8.0	21.6		8.0	21.6		8.0	13.3		8.0	13.3	
Total Split (s)	8.0	45.0		8.0	45.0		8.0	19.0		8.0	19.0	
Total Split (%)	10.0%	56.3%		10.0%	56.3%		10.0%	23.8%		10.0%	23.8%	
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	3.3		3.0	3.3	
All-Red Time (s)	1.0	2.6		1.0	2.6		1.0	2.0		1.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	4.0	6.6		4.0	6.6		4.0	5.3		4.0	5.3	
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Recall Mode	None	C-Min		None	C-Min		None	None		None	None	
Act Effct Green (s)	49.2	42.7		50.3	44.5		14.6	11.6		18.1	12.3	
Actuated g/C Ratio	0.62	0.53		0.63	0.56		0.18	0.14		0.23	0.15	
v/c Ratio	0.09	0.46		0.11	0.51		0.14	0.50		0.33	0.46	
Control Delay	6.6	15.5		3.3	12.2		22.8	15.9		26.1	17.5	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	6.6	15.5		3.3	12.2		22.8	15.9		26.1	17.5	
LOS	Α	В		Α	В		C	В		C	В	
Approach Delay	, ,	14.7		,,	11.2			17.1			21.0	
Approach LOS		В			В			В			C C	
Approach LOO		D			D			D			C	

111: Main Street #2/North Main Street & Route 66 /Route **26**20 Corridor Conditions - Optimized Lanes, Volumes, Timing Plan: Weekday AM Peak

	۶	-	•	•	←	•	•	†	/	-	↓	✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	7	136		9	162		13	22		40	24	
Queue Length 95th (ft)	19	227		6	302		34	68		77	76	
Internal Link Dist (ft)		514			517			564			460	
Turn Bay Length (ft)	275			225			225			175		
Base Capacity (vph)	490	940		530	967		239	396		314	381	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.09	0.45		0.11	0.51		0.14	0.39		0.33	0.40	

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:WBTL and 6:EBTL, Start of Yellow

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.51

Intersection Signal Delay: 14.8 Intersection LOS: B
Intersection Capacity Utilization 60.1% ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 111: Main Street #2/North Main Street & Route 66 /Route 66



	•		_		←	•	•	†	<i>></i>	<u></u>	1	/
Long Croup	EBL	EBT	EBR	₩BL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EDL.		EDK			WDK	INDL		NDK	SDL		
Lane Configurations		^}	,	<u>ነ</u>	100	4.4	10	4	7	20	4	10
Traffic Volume (vph)	19	545	6	11	488	44	10	0	7	39	0	18
Future Volume (vph)	19	545	6	11	488	44	10	0	7	39	0	18
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	11	12	12	12	12	12	12	12	12
Storage Length (ft)	225		0	125		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		1
Taper Length (ft)	75			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.998			0.988			0.943				0.850
Flt Protected	0.950			0.950				0.972			0.950	
Satd. Flow (prot)	1662	1806	0	1662	1788	0	0	1659	0	0	1719	1538
Flt Permitted	0.407			0.415				0.802			0.745	
Satd. Flow (perm)	712	1806	0	726	1788	0	0	1369	0	0	1348	1538
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)		1			11							102
Link Speed (mph)		30			30			25			25	
Link Distance (ft)		597			1042			185			376	
Travel Time (s)		13.6			23.7			5.0			10.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Adj. Flow (vph)	21	592	7	12	530	48	11	0	8	42	0	20
Shared Lane Traffic (%)												
Lane Group Flow (vph)	21	599	0	12	578	0	0	19	0	0	42	20
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	Perm
Protected Phases	1	6		5	2			4			4	
Permitted Phases	6			2			4			4		4
Detector Phase	1	6		5	2		4	4		4	4	4
Switch Phase												
Minimum Initial (s)	5.0	18.0		5.0	18.0		9.0	9.0		9.0	9.0	9.0
Minimum Split (s)	9.0	24.5		9.0	24.5		13.0	13.0		13.0	13.0	13.0
Total Split (s)	9.0	56.0		9.0	56.0		15.0	15.0		15.0	15.0	15.0
Total Split (%)	11.3%	70.0%		11.3%	70.0%		18.8%	18.8%		18.8%	18.8%	18.8%
Yellow Time (s)	3.0	5.2		3.0	5.2		3.0	3.0		3.0	3.0	3.0
All-Red Time (s)	1.0	1.3		1.0	1.3		1.0	1.0		1.0	1.0	1.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	0.0
Total Lost Time (s)	4.0	6.5		4.0	6.5			4.0			4.0	4.0
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	C-Min		None	C-Min		None	None		None	None	None
Act Effct Green (s)	67.0	66.0		66.1	64.1			9.5			9.5	9.5
Actuated g/C Ratio	0.84	0.82		0.83	0.80			0.12			0.12	0.12
v/c Ratio	0.03	0.40		0.02	0.40			0.12			0.26	0.07
Control Delay	3.7	8.5		2.3	6.2			32.9			36.3	0.5
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	0.0
Total Delay	3.7	8.5		2.3	6.2			32.9			36.3	0.5
LOS	А	Α		Α	Α			С			D	Α
Approach Delay		8.3			6.1			32.9			24.8	
Approach LOS		А			Α			С			С	

112: Eversource Dwy/East Hampton Commons Dwy & Roll & Corridor Conditions - Optimized Lanes, Volumes, Timing Plan: Weekday AM Peak

	۶	-	•	•	←	•	4	†	/	>	ļ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	1	69		1	78			9			20	0
Queue Length 95th (ft)	m10	353		4	225			27			49	0
Internal Link Dist (ft)		517			962			105			296	
Turn Bay Length (ft)	225			125								
Base Capacity (vph)	656	1491		658	1438			188			185	299
Starvation Cap Reductn	0	0		0	0			0			0	0
Spillback Cap Reductn	0	0		0	0			0			0	0
Storage Cap Reductn	0	0		0	0			0			0	0
Reduced v/c Ratio	0.03	0.40		0.02	0.40			0.10			0.23	0.07

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:WBTL and 6:EBTL, Start of Yellow

Natural Cycle: 55

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.40

Intersection Signal Delay: 8.5 Intersection LOS: A Intersection Capacity Utilization 55.4% ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 112: Eversource Dwy/East Hampton Commons Dwy & Route 66



	-	•	•	←	•	<i>></i>
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	1 >		*	†	ኘ	7
Traffic Volume (vph)	470	36	112	429	75	247
Future Volume (vph)	470	36	112	429	75	247
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1900	1900	1900	1900	1900	1900
	12			11		
Storage Length (ft)		0	250		0	0
Storage Lanes		0	1		1	1
Taper Length (ft)			40		25	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.990					0.850
Flt Protected			0.950		0.950	
Satd. Flow (prot)	1791	0	1662	1749	1662	1538
Flt Permitted			0.315		0.950	
Satd. Flow (perm)	1791	0	551	1749	1662	1538
Right Turn on Red		Yes				Yes
Satd. Flow (RTOR)	9	. 55				257
Link Speed (mph)	30			30	25	201
Link Distance (ft)	628			459	953	
Travel Time (s)	14.3	0.07	0.07	10.4	26.0	0.07
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96
Heavy Vehicles (%)	5%	5%	5%	5%	5%	5%
Adj. Flow (vph)	490	38	117	447	78	257
Shared Lane Traffic (%)						
Lane Group Flow (vph)	528	0	117	447	78	257
Turn Type	NA		D.P+P	NA	Prot	Prot
Protected Phases	2		1	12	4	4
Permitted Phases			2			
Detector Phase	2		1	12	4	4
Switch Phase	_					
Minimum Initial (s)	15.0		5.0		9.0	9.0
Minimum Split (s)	21.5		9.5		13.4	13.4
Total Split (s)	34.0		12.0		14.0	14.0
Total Split (%)	56.7%		20.0%		23.3%	23.3%
Yellow Time (s)	4.5		3.0		3.4	3.4
All-Red Time (s)	2.0		1.5		1.0	1.0
Lost Time Adjust (s)	0.0		0.0		0.0	0.0
Total Lost Time (s)	6.5		4.5		4.4	4.4
Lead/Lag	Lag		Lead			
Lead-Lag Optimize?	Yes		Yes			
Recall Mode	Min		None		None	None
Act Effct Green (s)	20.4		29.4	33.9	9.3	9.3
Actuated g/C Ratio	0.39		0.56	0.65	0.18	0.18
v/c Ratio	0.75		0.26	0.03	0.10	0.10
Control Delay			4.9	5.3	23.5	8.4
	20.8					
Queue Delay	0.0		0.0	0.0	0.0	0.0
Total Delay	20.8		4.9	5.3	23.5	8.4
LOS	С		А	A	С	А
Approach Delay				ГЭ	11 0	
Approach LOS	20.8 C			5.2 A	11.9 B	

	→	•	•	←	•	~
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Queue Length 50th (ft)	132		10	50	21	0
Queue Length 95th (ft)	228		23	89	59	54
Internal Link Dist (ft)	548			379	873	
Turn Bay Length (ft)			250			
Base Capacity (vph)	959		478	1339	309	495
Starvation Cap Reductn	0		0	0	0	0
Spillback Cap Reductn	0		0	0	0	0
Storage Cap Reductn	0		0	0	0	0
Reduced v/c Ratio	0.55		0.24	0.33	0.25	0.52
Intersection Summary						
Area Type:	Other					
Cycle Length: 60						
Actuated Cycle Length: 53	2.2					
Natural Cycle: 60						
Control Type: Actuated-U	ncoordinated					
Maximum v/c Ratio: 0.75						
Intersection Signal Delay:				Int	tersection	LOS: B
Intersection Capacity Utili	zation 53.5%			IC	U Level c	of Service
Analysis Period (min) 15						

Splits and Phases: 113: Lakeview Street (Route 196) & Route 66

▼ ø1	 ≠ ø2	↑ Ø4
12 s	34 s	14 s

APPENDIX G Capacity Analyses 2020 Corridor Conditions Optimized – Weekday Afternoon	
Tighe&Bond	

	•	4	†	<i>></i>	\	
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	<u>ሻሻ</u>	WER	<u>↑</u>	NDR 7	JDL	4↑
Traffic Volume (vph)	699	69	650	1281	52	388
Future Volume (vph)	699	69	650	1281	52	388
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1900	1900	1900	1900	1900	1900
			11	200		11
Storage Length (ft)	0	0			0	
Storage Lanes	2	0		1	0	
Taper Length (ft)	25	0.05	0.05	4.00	25	0.05
Lane Util. Factor	0.97	0.95	0.95	1.00	0.95	0.95
Frt	0.987			0.850		
Flt Protected	0.956					0.994
Satd. Flow (prot)	3410	0	3421	1531	0	3401
Flt Permitted	0.956					0.869
Satd. Flow (perm)	3410	0	3421	1531	0	2973
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)	18			1010		
Link Speed (mph)	35		35			30
Link Distance (ft)	2739		813			825
Travel Time (s)	53.4		15.8			18.8
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97
Adj. Flow (vph)	721	71	670	1321	54	400
Shared Lane Traffic (%)	121	/ 1	070	1341	34	400
	792	0	670	1321	0	454
Lane Group Flow (vph)		U			0	
Turn Type	Prot		NA	Free	D.P+P	NA 1.2
Protected Phases	4		2	-	1	12
Permitted Phases				Free	2	
Detector Phase	4				1	
Switch Phase						
Minimum Initial (s)	10.0		15.0		4.0	
Minimum Split (s)	16.0		20.0		8.0	
Total Split (s)	44.0		28.0		8.0	
Total Split (%)	55.0%		35.0%		10.0%	
Yellow Time (s)	4.0		4.0		3.0	
All-Red Time (s)	2.0		1.0		1.0	
Lost Time Adjust (s)	0.0		0.0			
Total Lost Time (s)	6.0		5.0			
Lead/Lag	0.0		Lag		Lead	
Lead-Lag Optimize?			Yes		Yes	
Recall Mode	Mono					
	None		C-Max	00.0	Max	11 1
Act Effet Green (s)	24.9		23.0	80.0		41.1
Actuated g/C Ratio	0.31		0.29	1.00		0.51
v/c Ratio	0.74		0.68	0.86		0.28
Control Delay	29.6		29.5	7.6		10.3
Queue Delay	0.0		0.0	0.0		0.0
Total Delay	29.6		29.5	7.6		10.3
LOS	С		С	Α		В
Approach Delay	29.6		15.0			10.3
Approach LOS	С		В			В
Queue Length 50th (ft)	213		155	0		55
Zacac Zongai com (ii)	210		100	U		00

	•	•	†	~	>	ļ
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Queue Length 95th (ft)	150		214	#20		98
Internal Link Dist (ft)	2659		733			745
Turn Bay Length (ft)				200		
Base Capacity (vph)	1629		983	1531		1617
Starvation Cap Reductn	0		0	0		0
Spillback Cap Reductn	0		0	0		0
Storage Cap Reductn	0		0	0		0
Reduced v/c Ratio	0.49		0.68	0.86		0.28
Intersection Summary						
Area Type:	Other					
Cycle Length: 80						
Actuated Cycle Length: 80						
Offset: 0 (0%), Referenced	to phase 2:	NBSB, St	art of Yel	low		
Natural Cycle: 45						
Control Type: Actuated-Coo	ordinated					
Maximum v/c Ratio: 0.86						
Intersection Signal Delay: 1					tersection	
Intersection Capacity Utiliza	ation 64.8%			IC	U Level c	t Service
Analysis Period (min) 15						


95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

Splits and Phases: 101: Main Street & Route 66

Mø₁	₩ ø2 (R)	,	√ Ø4
8 s	28 s		44 s

Route 66 Corridor Study 2020 Corridor Conditions- Optimized

Lane Group		٦	→	←	•	>	4
Lane Configurations	Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Traffic Volume (vph) 119 1249 641 172 137 86 Future Volume (vph) 119 1249 641 172 137 86 Ideal Flow (vphpl) 1900 100 0							
Future Volume (vph) 119 1249 641 172 137 86 Ideal Flow (vphpl) 1900 0					172		86
Ideal Flow (vphpl) 1900 100 0 <td>\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \						
Lane Width (ft) 11 11 11 11 11 16 11 Storage Length (ft) 225 0 0 0 0 Storage Lanes 1 0 1 0 1 0 Taper Length (ft) 50 25							
Storage Length (ft) 225 0 0 0 0 1 0 1 1 0 1 1							
Storage Lanes							
Taper Length (ft) 50 25 Lane Util. Factor 1.00 0.95 0.95 0.95 1.00 1.00 Frt 0.968 0.948 FIL 0.968 0.948 FIL Filt Pertoted 0.950 0.970 0.970 Satd. Flow (prot) 1711 3421 3312 0 1941 0 Filt Permitted 0.310 0.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 0.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 0.98 0.98 198 Yes Yes </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
Lane Util. Factor 1.00 0.95 0.95 0.95 1.00 1.00 Frt 0.968 0.948 0.948 0.948 0.948 0.948 0.948 0.948 0.970 Satd. Flow (prot) 1711 3421 3312 0 1941 0 0.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 0.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 0.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 0 970 Satd. Flow (perm) 558 3421 3312 0 1941 0 0 98 3421 312 0 1941 0 9 44 11 0 44 11 0 44 11 0 44 14 14 44 14 14 44 14 44 14 44 14 14 44 14 44 14 44 1					U U	-	U
Fit 0.968 0.948 Fit Protected 0.950 0.970 Satd. Flow (prot) 1711 3421 3312 0 1941 0 Fit Permitted 0.310 0.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 Right Turn on Red Yes Yes Yes Yes Satd. Flow (RTOR) 50 44 Link Speed (mph) 35 35 30 Link Distance (ft) 2739 241 643 Travel Time (s) 53.4 4.7 14.6 Peak Hour Factor 0.98			0.05	0.05	N 05		1 00
Fit Protected 0.950 0.970 Satd. Flow (prot) 1711 3421 3312 0 1941 0 O.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 O.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 O.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 O.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 O.970 Satd. Flow (perm) 550 44 U.000 Ves Ves Yes Satd. Flow (perm) 35 35 30 U.000 35 35 30 U.000		1.00	0.75		0.75		1.00
Satd. Flow (prot) 1711 3421 3312 0 1941 0 Flt Permitted 0.310 0.970 0.970 Satd. Flow (perm) 558 3421 3312 0 1941 0 Right Turn on Red Yes Yes Yes Yes Yes Satd. Flow (RTOR) 50 44		0.050		0.700			
Fit Permitted			2/121	2212	0		0
Satd. Flow (perm) 558 3421 3312 0 1941 0 Right Turn on Red Yes Yes Yes Satd. Flow (RTOR) 50 44 Link Speed (mph) 35 35 30 Link Distance (ft) 2739 241 643 Travel Time (s) 53.4 4.7 14.6 Peak Hour Factor 0.98 0.98 0.98 0.98 0.98 0.98 Adj. Flow (vph) 121 1274 654 176 140 88 Shared Lane Traffic (%) Lane Group Flow (vph) 121 1274 830 0 228 0 Turn Type pm+pt NA NA Prot Prot Protected Phases 1 2 2 5 Permitted Phases 2 2 5 Permitted Phases 2 2 5 Permitted Phases 1 2 2 5 Permitted Phases 2 2 5 Permitted Phases 1 2			3421	3312	U		U
Right Turn on Red Yes Yes Satd. Flow (RTOR) 50 44 Link Speed (mph) 35 35 30 Link Distance (ft) 2739 241 643 Travel Time (s) 53.4 4.7 14.6 Peak Hour Factor 0.98 0.98 0.98 0.98 0.98 Adj. Flow (vph) 121 1274 654 176 140 88 Shared Lane Traffic (%) 2 2 5 140 88 Shared Lane Traffic (%) 2 2 5 140 88 Shared Lane Traffic (%) 2 2 5 9 140 88 Shared Lane Traffic (%) 2 2 5 9 140 88 9 9.98 0.98			0.404	0040	0		•
Satd. Flow (RTOR) 50 44 Link Speed (mph) 35 35 30 Link Distance (ft) 2739 241 643 Travel Time (s) 53.4 4.7 14.6 Peak Hour Factor 0.98 0.98 0.98 0.98 0.98 Adj. Flow (vph) 121 1274 654 176 140 88 Shared Lane Traffic (%) Lane Group Flow (vph) 121 1274 830 0 228 0 Turn Type pm+pt NA NA Prot Protected Phases 1 2 2 5 Permitted Phases 1 2 2 5 Permitted Phases 2 2 5 Permitted Phases 1 2 2 5 Permitted Phases 2 2 5 Permitted Phases 1 2 2 5 Permitted Phases 0 0 0 0 0 0 0 0 0 0 0 0 0<		558	3421	3312		1941	
Link Speed (mph) 35 35 30 Link Distance (ft) 2739 241 643 Travel Time (s) 53.4 4.7 14.6 Peak Hour Factor 0.98 0.98 0.98 0.98 0.98 0.98 Adj. Flow (vph) 121 1274 654 176 140 88 Shared Lane Traffic (%) Lane Group Flow (vph) 121 1274 830 0 228 0 Turn Type pm+pt NA NA Prot Protected Phases 2 Detector Phase 1 2 2 5 Permitted Phases 1 5 Switch Phase Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 1.5 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Approach Delay 11.5 6.0 35.3 Approach LOS B A B A D					Yes		Yes
Link Distance (ft) 2739 241 643 Travel Time (s) 53.4 4.7 14.6 Peak Hour Factor 0.98 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 <							
Travel Time (s) 53.4 4.7 14.6 Peak Hour Factor 0.98 0.98 0.98 0.98 0.98 Adj. Flow (vph) 121 1274 654 176 140 88 Shared Lane Traffic (%) Lane Group Flow (vph) 121 1274 830 0 228 0 Turn Type pm+pt NA NA Prot <							
Peak Hour Factor 0.98 0.88 2 2 2 2 2 5 2 0.09 0.00 <td>Link Distance (ft)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	Link Distance (ft)						
Peak Hour Factor 0.98 0.88 2 2 2 2 5 7 7 0.08 0.08 0.08 0.09 <td>Travel Time (s)</td> <td></td> <td>53.4</td> <td>4.7</td> <td></td> <td>14.6</td> <td></td>	Travel Time (s)		53.4	4.7		14.6	
Adj. Flow (vph) 121 1274 654 176 140 88 Shared Lane Traffic (%) Lane Group Flow (vph) 121 1274 830 0 228 0 Turn Type pm+pt NA NA Prot Protected Phases 2 Detector Phase 5 Switch Phase Minimum Initial (s) 3.0 20.0 9.0 Minimum Split (s) 3.0 20.0 9.0 Minimum Initial (s) 3.0 20.0 9.0 Minimum Initial (s) 3.0 20.0 9.0 Minimum Initial (s) 3.0 20.0 9.0 Minimum Initial (s) 3.0 20.0 9.0 9.0 Minimum Initial (s) 3.0 20.0 9.0 9.0 9.0 9.0 9.0 9.0 9.0 9.0 9.0 9.0	. ,	0.98			0.98		0.98
Shared Lane Traffic (%) Lane Group Flow (vph) 121 1274 830 0 228 0 Turn Type pm+pt NA NA Prot Protected Phases 1 2 2 5 Permitted Phases 2 5 5 Detector Phase 1 5 5 Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead/Lag Optimize? Yes Yes Yes <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
Lane Group Flow (vph) 121 1274 830 0 228 0 Turn Type pm+pt NA NA Prot Protected Phases 1 2 2 5 Permitted Phases 2 5 5 Switch Phase Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min None							30
Turn Type pm+pt NA NA Prot Protected Phases 1 2 2 5 Permitted Phases 2 5 Detector Phase 1 5 5 Switch Phase 8 4 5 5 Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (s) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min None <td>, ,</td> <td>121</td> <td>1274</td> <td>830</td> <td>0</td> <td>228</td> <td>0</td>	, ,	121	1274	830	0	228	0
Protected Phases 1 2 2 5 Permitted Phases 2 5 Detector Phase 1 5 5 Switch Phase 8 4 5 Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (s) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effet Green (s) 56.6 48.9 <t< td=""><td></td><td></td><td></td><td></td><td>U U</td><td></td><td>U</td></t<>					U U		U
Permitted Phases 2 Switch Phase 1 5 Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>							
Detector Phase 1 5 Switch Phase Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Act Lag Ratio 0.25 0.61 0.41 0.67 Control Del				۷		: 	
Switch Phase Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0						Е	
Minimum Initial (s) 3.0 20.0 20.0 9.0 Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.0 35.3		<u> </u>				5	
Minimum Split (s) 6.5 26.0 26.0 13.7 Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0		2.2	00.0	20.2		0.0	
Total Split (s) 9.5 37.0 37.0 33.5 Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>							
Total Split (%) 11.9% 46.3% 46.3% 41.9% Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach LOS							
Yellow Time (s) 3.0 4.3 4.3 3.2 All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
All-Red Time (s) 0.5 1.7 1.7 1.5 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D	Yellow Time (s)	3.0	4.3	4.3		3.2	
Lost Time Adjust (s) 0.0 0.0 0.0 Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D	All-Red Time (s)	0.5	1.7	1.7		1.5	
Total Lost Time (s) 3.5 6.0 6.0 4.7 Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D	, ,						
Lead/Lag Lead Lag Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
Recall Mode None C-Min C-Min None Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
Act Effct Green (s) 56.6 48.9 48.9 12.4 Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D						None	
Actuated g/C Ratio 0.71 0.61 0.61 0.16 v/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
V/c Ratio 0.25 0.61 0.41 0.67 Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D	, ,						
Control Delay 4.2 12.2 6.0 35.3 Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
Queue Delay 0.0 0.0 0.1 0.0 Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
Total Delay 4.2 12.2 6.0 35.3 LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
LOS A B A D Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
Approach Delay 11.5 6.0 35.3 Approach LOS B A D							
Approach LOS B A D		Α					
Queue Length 50th (ft) 12 193 53 88							
J (7)	Queue Length 50th (ft)	12	193	53		88	

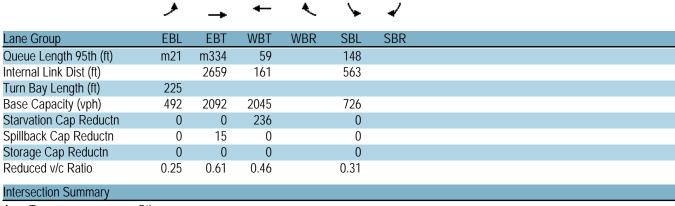

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBWB, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 11.9 Intersection LOS: B
Intersection Capacity Utilization 56.3% ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 102: Route 66 & High Street



	-	•	•	←	•	/
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	† ‡		ኘ	^	¥	
Traffic Volume (vph)	1323	28	21	786	51	40
Future Volume (vph)	1323	28	21	786	51	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1700	11	1700	1700	12	12
Storage Length (ft)	11	0	175	11	0	0
Storage Lanes		0	1/3		1	0
		U	•			U
Taper Length (ft)	0.05	0.05	50	0.05	25	1.00
Lane Util. Factor	0.95	0.95	1.00	0.95	1.00	1.00
Frt	0.997		0.050		0.941	
Flt Protected			0.950		0.973	
Satd. Flow (prot)	3411	0	1711	3421	1706	0
Flt Permitted			0.130		0.973	
Satd. Flow (perm)	3411	0	234	3421	1706	0
Right Turn on Red		Yes				Yes
Satd. Flow (RTOR)	3				41	
Link Speed (mph)	35			35	25	
Link Distance (ft)	241			1093	405	
Travel Time (s)	4.7			21.3	11.0	
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97
Adj. Flow (vph)	1364	29	22	810	53	41
Shared Lane Traffic (%)	1307	۷,		010	55	וד
Lane Group Flow (vph)	1393	0	22	810	94	0
	1393 NA	U		NA	Prot	U
Turn Type			pm+pt			
Protected Phases	2		1	2	5	
Permitted Phases			2		_	
Detector Phase			1		5	
Switch Phase						
Minimum Initial (s)	20.0		3.0	20.0	9.0	
Minimum Split (s)	26.0		6.5	26.0	13.7	
Total Split (s)	37.0		9.5	37.0	33.5	
Total Split (%)	46.3%		11.9%	46.3%	41.9%	
Yellow Time (s)	4.3		3.0	4.3	3.2	
All-Red Time (s)	1.7		0.5	1.7	1.5	
Lost Time Adjust (s)	0.0		0.0	0.0	0.0	
Total Lost Time (s)	6.0		3.5	6.0	4.7	
Lead/Lag	Lag		Lead	Lag	1.7	
Lead-Lag Optimize?	Yes		Yes	Yes		
Recall Mode	C-Min		None	C-Min	None	
	48.9		56.6	48.9	12.4	
Actuated a/C Patio						
Actuated g/C Ratio	0.61		0.71	0.61	0.16	
v/c Ratio	0.67		0.08	0.39	0.31	
Control Delay	5.1		7.2	12.4	20.4	
Queue Delay	0.0		0.0	0.0	0.0	
Total Delay	5.1		7.2	12.4	20.4	
LOS	А		Α	В	С	
Approach Delay	5.1			12.3	20.4	
Approach LOS	А			В	С	
Queue Length 50th (ft)	55		2	53	24	
3			_			

	-	•	•	-	1	~
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Queue Length 95th (ft)	68		m17	196	60	
Internal Link Dist (ft)	161			1013	325	
Turn Bay Length (ft)			175			
Base Capacity (vph)	2087		288	2092	640	
Starvation Cap Reductn	10		0	0	0	
Spillback Cap Reductn	0		0	0	0	
Storage Cap Reductn	0		0	0	0	
Reduced v/c Ratio	0.67		80.0	0.39	0.15	

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBWB, Start of Yellow, Master Intersection

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 8.3

Intersection Capacity Utilization 53.9%

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 103: Airline Avenue & Route 66

#102#103	#102#103		#102#103	
→ ✓ Ø1	⇒ Ø2 (R)	,	▶ √ Ø5	
9.5 s	37 s		33.5 s	

Intersection LOS: A

ICU Level of Service A

	٠	→	←	•	\	4
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	<u> </u>	† †	↑ ↑		<u> </u>	7
Traffic Volume (vph)	148	1237	685	71	113	45
Future Volume (vph)	148	1237	685	71	113	45
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	1700	11	11	11	10	1700
Storage Length (ft)	350		11	0	0	0
Storage Lanes	1			0	1	1
Taper Length (ft)	50			U U	25	<u> </u>
Lane Util. Factor	1.00	0.95	0.95	0.95	1.00	1.00
Frt	1.00	0.73	0.986	0.75	1.00	0.850
Flt Protected	0.950		0.700		0.950	0.000
Satd. Flow (prot)	1694	3388	3341	0	1636	1516
Flt Permitted	0.328	3300	JJ4 I	U	0.950	1310
	0.328 585	3388	3341	0	1636	1516
Satd. Flow (perm)	200	3300	334 I		1030	
Right Turn on Red			17	Yes		Yes
Satd. Flow (RTOR)		25	17 25		10	46
Link Speed (mph)		35	35		10	
Link Distance (ft)		1093	417		223	
Travel Time (s)	0.00	21.3	8.1	0.00	15.2	0.00
Peak Hour Factor	0.98	0.98	0.98	0.98	0.98	0.98
Heavy Vehicles (%)	3%	3%	3%	3%	3%	3%
Adj. Flow (vph)	151	1262	699	72	115	46
Shared Lane Traffic (%)						
Lane Group Flow (vph)	151	1262	771	0	115	46
Turn Type	D.P+P	NA	NA		Prot	Prot
Protected Phases	1	12	2		4	4
Permitted Phases	2					
Detector Phase	1				4	4
Switch Phase						
Minimum Initial (s)	5.0		15.0		9.0	9.0
Minimum Split (s)	9.0		20.0		21.0	21.0
Total Split (s)	12.0		40.0		28.0	28.0
Total Split (%)	15.0%		50.0%		35.0%	35.0%
Yellow Time (s)	3.0		4.3		3.0	3.0
All-Red Time (s)	1.0		0.7		1.9	1.9
Lost Time Adjust (s)	0.0		0.7		0.0	0.0
			5.0		4.9	4.9
Total Lost Time (s)	4.0				4.9	4.9
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Recall Mode	None		C-Max		None	None
Act Effct Green (s)	58.2	63.0	49.4		11.7	11.7
Actuated g/C Ratio	0.73	0.79	0.62		0.15	0.15
v/c Ratio	0.28	0.47	0.37		0.48	0.18
Control Delay	3.8	3.1	14.9		37.6	10.7
Queue Delay	0.0	0.0	0.0		0.3	0.0
Total Delay	3.8	3.1	14.9		37.9	10.7
LOS	А	Α	В		D	В
Approach Delay		3.1	14.9		30.1	
Approach LOS		A	В		С	
pp. 040 200		,,	D		0	

	۶	→	—	•	\	4	
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	
Queue Length 50th (ft)	9	43	154		54	0	
Queue Length 95th (ft)	m31	110	242		98	27	
Internal Link Dist (ft)		1013	337		143		
Turn Bay Length (ft)	350						
Base Capacity (vph)	548	2666	2069		472	470	
Starvation Cap Reductn	0	0	0		0	0	
Spillback Cap Reductn	0	0	0		96	0	
Storage Cap Reductn	0	0	0		0	0	
Reduced v/c Ratio	0.28	0.47	0.37		0.31	0.10	
Intersection Summary							
Area Type: (Other						
Cycle Length: 80							
Actuated Cycle Length: 80							
Offset: 0 (0%), Referenced to	o phase 2:	EBWB, S	tart of Ye	llow			
Natural Cycle: 60							
Control Type: Actuated-Coor	rdinated						
Maximum v/c Ratio: 0.48							
Intersection Signal Delay: 8.9					tersection		
Intersection Capacity Utilizat	ion 49.1%			IC	U Level o	of Service A	P
Analysis Period (min) 15							
m Volume for 95th percent	ile queue i	s metere	d by upstr	ream sign	al.		
	oute 66 &	Portland	Shopping	Center D	riveway		
	(R)					•	Ø4
12 s 40 s							28 s

	۶	→	•	•	←	•	•	†	~	>	ţ	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	¥	∱ ⊅		۲	∱ 1≽			4			4	
Traffic Volume (vph)	19	1298	32	10	720	3	13	0	14	2	1	23
Future Volume (vph)	19	1298	32	10	720	3	13	0	14	2	1	23
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	12	12	12	12	12	12
Storage Length (ft)	125		0	150		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	50			50			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.996			0.999			0.930			0.880	
Flt Protected	0.950			0.950				0.976			0.996	
Satd. Flow (prot)	1694	3374	0	1694	3385	0	0	1674	0	0	1617	0
Flt Permitted	0.360			0.173				0.833			0.970	
Satd. Flow (perm)	642	3374	0	308	3385	0	0	1429	0	0	1575	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4			1			100			24	
Link Speed (mph)		35			45			25			25	
Link Distance (ft)		417			1869			435			271	
Travel Time (s)		8.1			28.3			11.9			7.4	
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Heavy Vehicles (%)	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%	3%
Adj. Flow (vph)	20	1352	33	10	750	3	14	0	15	2	1	24
Shared Lane Traffic (%)												
Lane Group Flow (vph)	20	1385	0	10	753	0	0	29	0	0	27	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases	5	2		1	6			4			4	
Permitted Phases	2			6			4			4		
Detector Phase	5			1			4	4		4	4	
Switch Phase												
Minimum Initial (s)	3.0	15.0		3.0	15.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	7.0	21.3		7.0	21.3		23.2	23.2		23.2	23.2	
Total Split (s)	8.0	47.0		8.0	47.0		25.0	25.0		25.0	25.0	
Total Split (%)	10.0%	58.8%		10.0%	58.8%		31.3%	31.3%		31.3%	31.3%	
Yellow Time (s)	3.0	4.3		3.0	4.3		3.2	3.2		3.2	3.2	
All-Red Time (s)	1.0	2.0		1.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	4.0	6.3		4.0	6.3			5.2			5.2	
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	C-Min		None	C-Min		None	None		None	None	
Act Effct Green (s)	68.5	67.7		67.5	66.0			6.1			6.1	
Actuated g/C Ratio	0.86	0.85		0.84	0.82			0.08			0.08	
v/c Ratio	0.03	0.48		0.03	0.27			0.14			0.19	
Control Delay	2.7	8.9		1.8	3.6			1.5			19.3	
Queue Delay	0.0	0.1		0.0	0.0			0.0			0.0	
Total Delay	2.7	8.9		1.8	3.6			1.5			19.3	
LOS	Α.7	Α		Α	J.0			1.5 A			17.3 B	
Approach Delay	Λ	8.8		Α	3.6			1.5			19.3	
Approach LOS		Α			J.0			A			17.3 B	
Approach LOS		^			$\overline{}$			Λ			U	

	۶	-	•	•	←	•	4	†	~	-	ţ	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 50th (ft)	3	270		1	41			0			1	
Queue Length 95th (ft)	m4	357		3	99			0			25	
Internal Link Dist (ft)		337			1789			355			191	
Turn Bay Length (ft)	125			150								
Base Capacity (vph)	607	2857		332	2792			428			407	
Starvation Cap Reductn	0	287		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.03	0.54		0.03	0.27			0.07			0.07	

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:EBTL and 6:WBTL, Start of Yellow

Natural Cycle: 65

Control Type: Actuated-Coordinated


Maximum v/c Ratio: 0.48

Intersection Signal Delay: 7.1 Intersection LOS: A Intersection Capacity Utilization 52.2% ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 105: Grove Street/Grandview Terrace & Route 66



	٠	→	•	•	>	4			
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	Ø2	Ø3	
Lane Configurations	**	^	† †	7	ሻ	7			
Traffic Volume (vph)	148	1149	581	120	141	89			
Future Volume (vph)	148	1149	581	120	141	89			
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900			
Lane Width (ft)	11	11	11	11	11	11			
Storage Length (ft)	200			200	0	100			
Storage Lanes	1			1	1	1			
Taper Length (ft)	50				25				
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00			
Frt				0.850		0.850			
Flt Protected	0.950				0.950				
Satd. Flow (prot)	1711	3421	3421	1531	1711	1531			
Flt Permitted	0.950				0.950				
Satd. Flow (perm)	1711	3421	3421	1531	1711	1531			
Right Turn on Red				Yes		Yes			
Satd. Flow (RTOR)				125		93			
Link Speed (mph)		45	35		45				
Link Distance (ft)		1735	1238		958				
Travel Time (s)		26.3	24.1		14.5				
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96			
Adj. Flow (vph)	154	1197	605	125	147	93			
Shared Lane Traffic (%)									
Lane Group Flow (vph)	154	1197	605	125	147	93			
Turn Type	Prot	NA	NA	Prot	Prot	Prot			
Protected Phases	1	123	23	2 3	4	4	2	3	
Permitted Phases									
Detector Phase	1	123	23	2 3	4	4			
Switch Phase									
Minimum Initial (s)	5.0				7.0	7.0	15.0	3.0	
Minimum Split (s)	10.0				20.0	20.0	21.0	9.0	
Total Split (s)	15.0				20.0	20.0	16.0	9.0	
Total Split (%)	25.0%				33.3%	33.3%	27%	15%	
Yellow Time (s)	3.0				3.0	3.0	4.0	4.0	
All-Red Time (s)	2.0				2.0	2.0	2.0	2.0	
Lost Time Adjust (s)	0.0				0.0	0.0			
Total Lost Time (s)	5.0				5.0	5.0			
Lead/Lag	Lead				Lag	Lag	Lag	Lead	
Lead-Lag Optimize?	Yes				Yes	Yes	Yes	Yes	
Recall Mode	None				None	None	Min	None	
Act Effct Green (s)	9.2	36.3	19.6	19.6	9.1	9.1			
Actuated g/C Ratio	0.18	0.71	0.39	0.39	0.18	0.18			
v/c Ratio	0.50	0.49	0.46	0.19	0.48	0.27			
Control Delay	27.0	5.9	15.0	4.2	26.1	7.4			
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0			
Total Delay	27.0	5.9	15.0	4.2	26.1	7.4			
LOS	С	А	В	А	С	Α			
Approach Delay		8.3	13.1		18.8				
Approach LOS		А	В		В				
Queue Length 50th (ft)	44	84	76	0	44	0			

<u>Larioo, voiarrioo,</u>									
	٠	→	+	•	\	4			
Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	Ø2	Ø3	
Queue Length 95th (ft)	99	160	131	29	88	30			
Internal Link Dist (ft)		1655	1158		878				
Turn Bay Length (ft)	200			200		100			
Base Capacity (vph)	346	2421	1314	665	518	529			
Starvation Cap Reductn	0	0	0	0	0	0			
Spillback Cap Reductn	0	0	0	0	0	0			
Storage Cap Reductn	0	0	0	0	0	0			
Reduced v/c Ratio	0.45	0.49	0.46	0.19	0.28	0.18			
Intersection Summary									
Area Type:	Other								
Cycle Length: 60									
Actuated Cycle Length: 5	0.9								
Natural Cycle: 60									
Control Type: Actuated-U	Incoordinated								
Maximum v/c Ratio: 0.50									
Intersection Signal Delay				Int	tersection	LOS: B			
Intersection Capacity Utili	ization 47.9%			IC	U Level c	of Service	Α		
Analysis Period (min) 15									

Splits and Phases: 106: Route 66 & Gospel Lane (Route 17)

Spiils and Phases.	100. Roule of a Gospei Lane (Roule 17)		
♣ø1	s Ø2	♣ ø3	√ _{Ø4}	
15 c	16 c	0.0	20 c	

	۶	→	•	•	+	•	•	†	~	>	ţ	-√
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	7	f)		ሻ	1>			4			4	
Traffic Volume (vph)	119	1123	18	3	597	2	14	2	3	3	0	55
Future Volume (vph)	119	1123	18	3	597	2	14	2	3	3	0	55
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	11	11	11	11	11	11
Storage Length (ft)	193		0	300		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	100			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.998						0.980			0.872	
Flt Protected	0.950			0.950				0.964			0.998	
Satd. Flow (prot)	1711	1797	0	1711	1801	0	0	1701	0	0	1567	0
Flt Permitted	0.348			0.107				0.887			0.980	
Satd. Flow (perm)	627	1797	0	193	1801	0	0	1565	0	0	1539	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		2						3			94	
Link Speed (mph)		45			45			25			25	
Link Distance (ft)		293			793			336			474	
Travel Time (s)		4.4			12.0			9.2			12.9	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Adj. Flow (vph)	125	1182	19	3	628	2	15	2	3	3	0	58
Shared Lane Traffic (%)												
Lane Group Flow (vph)	125	1201	0	3	630	0	0	20	0	0	61	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases	1	6		5	2			4			4	
Permitted Phases	6			2			4			4		
Detector Phase	1	6		5	2		4	4		4	4	
Switch Phase												
Minimum Initial (s)	4.0	15.0		4.0	15.0		7.0	7.0		7.0	7.0	
Minimum Split (s)	8.6	22.0		8.6	22.0		19.6	19.6		19.6	19.6	
Total Split (s)	11.2	71.8		8.6	69.2		19.6	19.6		19.6	19.6	
Total Split (%)	11.2%	71.8%		8.6%	69.2%		19.6%	19.6%		19.6%	19.6%	
Yellow Time (s)	3.6	5.0		3.6	5.0		3.6	3.6		3.6	3.6	
All-Red Time (s)	1.0	2.0		1.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	4.6	7.0		4.6	7.0			5.6			5.6	
Lead/Lag	Lead	Lag		Lead	Lag			0.0			0.0	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	Min		None	Min		None	None		None	None	
Act Effct Green (s)	71.5	69.3		66.4	60.0		110110	7.2		110110	7.2	
Actuated g/C Ratio	0.82	0.80		0.76	0.69			0.08			0.08	
v/c Ratio	0.22	0.84		0.01	0.51			0.15			0.29	
Control Delay	2.7	15.6		2.0	9.0			36.8			7.2	
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	
Total Delay	2.7	15.6		2.0	9.0			36.8			7.2	
LOS	Α.7	13.0 B		Α.	7.0 A			D			Α.2	
Approach Delay		14.4			8.9			36.8			7.2	
Approach LOS		14.4 B			0.7 A			50.0 D			Α.Δ	
Queue Length 50th (ft)	11	343		0	156			9			0	
Quouc Longin Join (ii)	11	JHJ		U	130			7			U	

	٠	-	•	•	←	•	•	†	~	-	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)	21	#977		2	250			32			19	
Internal Link Dist (ft)		213			713			256			394	
Turn Bay Length (ft)	193			300								
Base Capacity (vph)	599	1435		217	1332			255			327	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.21	0.84		0.01	0.47			0.08			0.19	

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 86.8

Natural Cycle: 100

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.84

Intersection Signal Delay: 12.7 Intersection LOS: B
Intersection Capacity Utilization 84.8% ICU Level of Service E

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 107: Payne Blvd/Middle Haddam Rd & Route 66



	۶	→	•	•	←	•	1	†	~	>	ţ	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4	7		4	
Traffic Volume (vph)	24	990	136	6	503	5	63	4	3	44	15	9
Future Volume (vph)	24	990	136	6	503	5	63	4	3	44	15	9
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	12	13	13	12	13	12
Storage Length (ft)	0		0	0		0	0		100	0		0
Storage Lanes	0		0	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.984	1.00	1.00	0.999	1.00	1.00	1.00	0.850	1.00	0.982	1.00
Flt Protected		0.999			0.999			0.955	0.000		0.969	
Satd. Flow (prot)	0	1770	0	0	1797	0	0	1838	1636	0	1832	0
Flt Permitted		0.982	Ū	Ū	0.983			0.684	1000	· ·	0.761	Ŭ
Satd. Flow (perm)	0	1740	0	0	1768	0	0	1317	1636	0	1438	0
Right Turn on Red	U	1740	Yes	U	1700	No	U	1317	Yes	U	1430	Yes
Satd. Flow (RTOR)		11	103			INO			56		7	103
Link Speed (mph)		35			35			35	30		25	
Link Speed (mpn) Link Distance (ft)		1284			1455			649			549	
Travel Time (s)		25.0			28.3			12.6			15.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	26	1076	148	7	547	5	68	0.92	0.92	48	16	10
Shared Lane Traffic (%)	20	1070	140	/	347	J	00	4	J	40	10	10
Lane Group Flow (vph)	0	1250	0	0	559	0	0	72	3	0	74	0
Turn Type	Perm	1230 NA	U	Perm	NA	U	Perm	NA	Perm	Perm	NA	U
Protected Phases	Fellii	2		reiiii	2		Fellii	4	Fellii	Fellii	4	
Permitted Phases	2			2			4	4	4	4	4	
Detector Phase	2	2		2	2		4	4	4	4	4	
Switch Phase	Z						4	4	4	4	4	
Minimum Initial (s)	15.0	15.0		15.0	15.0		5.0	5.0	5.0	5.0	5.0	
Minimum Split (s)	23.6	23.6		23.6	23.6		12.5	12.5	12.5	12.5	12.5	
Total Split (s)	73.0	73.0		73.0	73.0		37.0	37.0	37.0	37.0	37.0	
Total Split (%)	66.4%	66.4%		66.4%	66.4%		33.6%	33.6%	33.6%	33.6%	33.6%	
Yellow Time (s)	4.3	4.3		4.3	4.3		4.2	4.2	4.2	4.2	4.2	
All-Red Time (s)	4.3	4.3		4.3	4.3		3.3	3.3	3.3	3.3	3.3	
	4.3	0.0		4.3			3.3	0.0	0.0	ა.ა	0.0	
Lost Time Adjust (s) Total Lost Time (s)		8.6			0.0			7.5	7.5		7.5	
Lead/Lag		0.0			0.0			7.3	7.3		7.5	
Lead-Lag Optimize? Recall Mode	Min	Min		Min	Min		None	Mono	None	None	None	
	IVIIIII			Min			None	None	None	None		
Act Effet Green (s)		69.9			69.9			8.9	8.9		8.9	
Actuated g/C Ratio		0.77			0.77			0.10	0.10		0.10	
v/c Ratio		0.93			0.41			0.56	0.01		0.50	
Control Delay		26.6			6.2			54.8	0.0		46.6	
Queue Delay		0.0			0.0			0.0	0.0		0.0	
Total Delay		26.6			6.2			54.8	0.0		46.6	
LOS		С			A			D	А		D	
Approach Delay		26.6			6.2			52.6			46.6	
Approach LOS		С			A			D			D	
Queue Length 50th (ft)		577			108			39	0		36	

	۶	-	•	•	•	•	•	†	~	>	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)		#1067			198			82	0		80	
Internal Link Dist (ft)		1204			1375			569			469	
Turn Bay Length (ft)									100			
Base Capacity (vph)		1344			1363			429	570		473	
Starvation Cap Reductn		0			0			0	0		0	
Spillback Cap Reductn		0			0			0	0		0	
Storage Cap Reductn		0			0			0	0		0	
Reduced v/c Ratio		0.93			0.41			0.17	0.01		0.16	
Intersection Summary												

Area Type: Other

Cycle Length: 110

Actuated Cycle Length: 90.6

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.93

Intersection Signal Delay: 22.5 Intersection LOS: C
Intersection Capacity Utilization 98.8% ICU Level of Service F

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 108: Route 151/Depot Hill Rd & Route 66

→ Ø2
73 s 37 s 37 s

109: Middletown Avenue/Commuter Parking Lot Dwy & Ro20266 orridor Conditions- Optimized Lanes, Volumes, Timing Plan: Weekday PM Peak

	۶	→	•	•	←	•	•	†	<i>></i>	>	ţ	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		र्स	7	ሻ	1>			4	7		4	
Traffic Volume (vph)	3	616	441	3	375	2	227	4	6	2	2	2
Future Volume (vph)	3	616	441	3	375	2	227	4	6	2	2	2
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	11	11	11	11	11	11	11	11	11
Storage Length (ft)	0		250	125		0	0		100	0		0
Storage Lanes	0		1	1		0	0		1	0		0
Taper Length (ft)	25			50			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt			0.850		0.999				0.850		0.955	
Flt Protected				0.950				0.953			0.984	
Satd. Flow (prot)	0	1801	1531	1711	1799	0	0	1716	1531	0	1692	0
Flt Permitted		0.998		0.329				0.726			0.919	
Satd. Flow (perm)	0	1797	1531	592	1799	0	0	1307	1531	0	1580	0
Right Turn on Red			Yes			Yes	-	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Yes			Yes
Satd. Flow (RTOR)			455		1	. 00			89		2	. 30
Link Speed (mph)		45	.00		45			50	0,		15	
Link Distance (ft)		546			525			823			174	
Travel Time (s)		8.3			8.0			11.2			7.9	
Peak Hour Factor	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97
Adj. Flow (vph)	3	635	455	3	387	2	234	4	6	2	2	2
Shared Lane Traffic (%)	J	000	100	<u> </u>	307		201	'	Ü			_
Lane Group Flow (vph)	0	638	455	3	389	0	0	238	6	0	6	0
Turn Type	Perm	NA	Perm	Perm	NA	- U	Perm	NA	Perm	Perm	NA	Ü
Protected Phases	1 01111	2	1 01111	1 01111	2		1 01111	4	1 OIIII	1 01111	4	
Permitted Phases	2		2	2			4	7	4	4	7	
Detector Phase	2	2	2	2	2		4	4	4	4	4	
Switch Phase							т	7		7	7	
Minimum Initial (s)	15.0	15.0	15.0	15.0	15.0		6.0	6.0	6.0	6.0	6.0	
Minimum Split (s)	22.9	22.9	22.9	22.9	22.9		21.0	21.0	21.0	21.0	21.0	
Total Split (s)	39.0	39.0	39.0	39.0	39.0		21.0	21.0	21.0	21.0	21.0	
Total Split (%)	65.0%	65.0%	65.0%	65.0%	65.0%		35.0%	35.0%	35.0%	35.0%	35.0%	
Yellow Time (s)	5.0	5.0	5.0	5.0	5.0		3.0	3.0	3.0	3.0	3.0	
All-Red Time (s)	2.9	2.9	2.9	2.9	2.9		1.0	1.0	1.0	1.0	1.0	
Lost Time Adjust (s)	2.7	0.0	0.0	0.0	0.0		1.0	0.0	0.0	1.0	0.0	
Total Lost Time (s)		7.9	7.9	7.9	7.9			4.0	4.0		4.0	
Lead/Lag		1.7	1.7	1.7	1.7			7.0	т.0		7.0	
Lead-Lag Optimize?												
Recall Mode	Min	Min	Min	Min	Min		None	None	None	None	None	
Act Effct Green (s)	IVIIII	25.7	25.7	25.7	25.7		None	12.8	12.8	NONE	12.8	
Actuated g/C Ratio		0.51	0.51	0.51	0.51			0.25	0.25		0.25	
v/c Ratio		0.31	0.31	0.01	0.31			0.23	0.23		0.25	
		15.2									13.7	
Control Delay		0.0	2.6	7.3	10.2			32.0	0.0		0.0	
Queue Delay												
Total Delay		15.2	2.6	7.3	10.2			32.0	0.0		13.7	
LOS Approach Dolay		10 O	А	А	10.1			21.2	А		B 12.7	
Approach LOS		10.0			10.1			31.3			13.7	
Approach LOS		A	^	0	В			C	^		В	
Queue Length 50th (ft)		135	0	0	68			62	0		1	

	۶	-	•	•	•	•	•	†	~	>	↓	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)		265	36	4	134			#161	0		8	
Internal Link Dist (ft)		466			445			743			94	
Turn Bay Length (ft)			250	125					100			
Base Capacity (vph)		1132	1133	373	1134			450	585		545	
Starvation Cap Reductn		0	0	0	0			0	0		0	
Spillback Cap Reductn		0	0	0	0			0	0		0	
Storage Cap Reductn		0	0	0	0			0	0		0	
Reduced v/c Ratio		0.56	0.40	0.01	0.34			0.53	0.01		0.01	

Area Type: Other

Cycle Length: 60

Actuated Cycle Length: 50.7

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.72

Intersection Signal Delay: 13.0 Intersection LOS: B
Intersection Capacity Utilization 68.7% ICU Level of Service C

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 109: Middletown Avenue/Commuter Parking Lot Dwy & Route 66

\$\vert\tilde{\phi}\tilde{\phi

110: Maple Street/North Maple Street & Route 66 & Old W**292HighrStree**Conditions- Optimized Lanes, Volumes, Timings

Timing Plan: Weekday PM Peak

	۶	→	•	•	+	*_	•	•	†	~	/	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	WBR2	NBL2	NBT	NBR	SBL	SBT
Lane Configurations		4			4				4			4
Traffic Volume (vph)	45	519	2	10	472	1	17	10	13	11	38	24
Future Volume (vph)	45	519	2	10	472	1	17	10	13	11	38	24
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	11	12	12	11	12	12	12	11	12	12	11
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.995				0.956			0.952
Flt Protected		0.996			0.999				0.985			0.981
Satd. Flow (prot)	0	1793	0	0	1790	0	0	0	1696	0	0	1682
Flt Permitted		0.928			0.985				0.880			0.855
Satd. Flow (perm)	0	1671	0	0	1765	0	0	0	1515	0	0	1466
Right Turn on Red			No				No			No		
Satd. Flow (RTOR)												
Link Speed (mph)		45			30				25			25
Link Distance (ft)		2724			782				976			892
Travel Time (s)		41.3			17.8				26.6			24.3
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Adj. Flow (vph)	48	552	2	11	502	1	18	11	14	12	40	26
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	602	0	0	532	0	0	0	37	0	0	102
Turn Type	Perm	NA		Perm	NA			Perm	NA		Perm	NA
Protected Phases		2			2				4			4
Permitted Phases	2			2				4			4	
Detector Phase	2	2		2	2			4	4		4	4
Switch Phase												
Minimum Initial (s)	25.0	25.0		25.0	25.0			9.0	9.0		9.0	9.0
Minimum Split (s)	32.2	32.2		32.2	32.2			16.9	16.9		16.9	16.9
Total Split (s)	34.6	34.6		34.6	34.6			16.9	16.9		16.9	16.9
Total Split (%)	53.2%	53.2%		53.2%	53.2%			26.0%	26.0%		26.0%	26.0%
Yellow Time (s)	4.0	4.0		4.0	4.0			3.3	3.3		3.3	3.3
All-Red Time (s)	3.2	3.2		3.2	3.2			1.6	1.6		1.6	1.6
Lost Time Adjust (s)		0.0			0.0				0.0			0.0
Total Lost Time (s)		7.2			7.2				4.9			4.9
Lead/Lag								Lead	Lead		Lead	Lead
Lead-Lag Optimize?								Yes	Yes		Yes	Yes
Recall Mode	Min	Min		Min	Min			None	None		None	None
Act Effct Green (s)		31.4			31.4				9.5			9.5
Actuated g/C Ratio		0.65			0.65				0.20			0.20
v/c Ratio		0.56			0.47				0.13			0.36
Control Delay		9.8			8.3				17.4			21.1
Queue Delay		0.0			0.0				0.0			0.0
Total Delay		9.8			8.3				17.4			21.1
LOS		Α			Α				В			С
Approach Delay		9.8			8.3				17.4			21.1
Approach LOS		Α			Α				В			С
Queue Length 50th (ft)		99			80				9			26
Queue Length 95th (ft)		209			164				27			60
Internal Link Dist (ft)		2644			702				896			812
Turn Bay Length (ft)												

34 34 1900 12	SEL M 0
34 1900 12	0
34 1900 12	
34 1900 12	
1900 12	0
12	1900
	10
1.00	1.00
0	1739
0	1739
	25
	421
	11.5
0.94	0.94
	0.71
0	0
	Prot
	5
	5
	9.0
	13.5
	13.5
	20.8%
	3.3
	1.2
	0.0
	4.5
	Lag
	Yes
	None
	TUOTIC
	341
	ודט
	0.94 36 0

110: Maple Street/North Maple Street & Route 66 & Old W262 Digbratee Conditions- Optimized Lanes, Volumes, Timings Timing Plan: Weekday PM Peak

	٠	-	•	•	←	*_	•	4	†	~	>	ļ
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	WBR2	NBL2	NBT	NBR	SBL	SBT
Base Capacity (vph)		1082			1143				373			361
Starvation Cap Reductn		0			0				0			0
Spillback Cap Reductn		0			0				0			0
Storage Cap Reductn		0			0				0			0
Reduced v/c Ratio		0.56			0.47				0.10			0.28
Intersection Summary												
Area Type:	Other											
Cycle Length: 65												
Actuated Cycle Length: 48.6	Ď											
Natural Cycle: 65												
Control Type: Actuated-Unc	oordinated											
Maximum v/c Ratio: 0.56												
Intersection Signal Delay: 10	0.3			In	tersection	LOS: B						
Intersection Capacity Utiliza	tion 69.7%			IC	CU Level of	of Servic	e C					
Analysis Period (min) 15												
Splits and Phases: 110: N	/laple Stree	t/North M	aple Stre	et & Rout	te 66 & O	ld West I	High Stree	et				

≠ _{ø2}		₩ ø4	√\$ø5	
34.6 s		16.9 s	13.5 s	

	4	\
Lane Group	SBR	SEL
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

	۶	→	•	•	←	•	•	†	~	>	ţ	- ✓
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	ሻ	4î		ሻ	f		ř	4		ሻ	f)	
Traffic Volume (vph)	137	413	48	139	395	136	31	107	80	93	87	80
Future Volume (vph)	137	413	48	139	395	136	31	107	80	93	87	80
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	12	11	11	12	12	12	12	12	12	12
Storage Length (ft)	275		0	225		0	225		0	175		0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (ft)	50			75			50			50		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	1.00	1.00
Frt		0.984			0.962			0.937			0.928	
Flt Protected	0.950			0.950			0.950	0.999		0.950		
Satd. Flow (prot)	1711	1772	0	1711	1732	0	1681	1656	0	1770	1729	0
Flt Permitted	0.276			0.347			0.645	0.996		0.625		
Satd. Flow (perm)	497	1772	0	625	1732	0	1141	1651	0	1164	1729	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		9			27			42			50	
Link Speed (mph)		30			30			30			25	
Link Distance (ft)		594			597			644			540	
Travel Time (s)		13.5			13.6			14.6			14.7	
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Adj. Flow (vph)	146	439	51	148	420	145	33	114	85	99	93	85
Shared Lane Traffic (%)							10%					
Lane Group Flow (vph)	146	490	0	148	565	0	30	202	0	99	178	0
Turn Type	pm+pt	NA		pm+pt	NA		pm+pt	NA		pm+pt	NA	
Protected Phases	1	6		5	2		3	8		7	4	
Permitted Phases	6			2			8			4		
Detector Phase	1	6		5	2		3	8		7	4	
Switch Phase												
Minimum Initial (s)	4.0	15.0		4.0	15.0		4.0	8.0		4.0	8.0	
Minimum Split (s)	8.0	21.6		8.0	21.6		8.0	13.3		8.0	13.3	
Total Split (s)	10.0	41.0		10.0	41.0		9.0	20.0		9.0	20.0	
Total Split (%)	12.5%	51.3%		12.5%	51.3%		11.3%	25.0%		11.3%	25.0%	
Yellow Time (s)	3.0	4.0		3.0	4.0		3.0	3.3		3.0	3.3	
All-Red Time (s)	1.0	2.6		1.0	2.6		1.0	2.0		1.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	4.0	6.6		4.0	6.6		4.0	5.3		4.0	5.3	
Lead/Lag	Lead	Lag		Lead	Lag		Lead	Lag		Lead	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Recall Mode	None	C-Min		None	C-Min		None	None		None	None	
Act Effct Green (s)	46.8	37.8		46.8	37.8		17.0	13.2		19.6	16.2	
Actuated g/C Ratio	0.58	0.47		0.58	0.47		0.21	0.16		0.24	0.20	
v/c Ratio	0.38	0.58		0.33	0.68		0.11	0.66		0.30	0.46	
Control Delay	10.0	20.2		6.2	15.6		20.8	33.4		23.9	24.1	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	10.0	20.2		6.2	15.6		20.8	33.4		23.9	24.1	
LOS	В	С		Α	В		С	С		С	С	
Approach Delay		17.9			13.6			31.8			24.0	
Approach LOS		В			В			С			С	
Queue Length 50th (ft)	31	195		8	233		10	78		35	47	

111: Main Street #2/North Main Street & Route 66 /Route 66/20 Corridor Conditions- Optimized Lanes, Volumes, Timing Plan: Weekday PM Peak

	۶	-	•	•	•	•	•	†	~	>	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)	55	286		m42	182		30	126		72	118	
Internal Link Dist (ft)		514			517			564			460	
Turn Bay Length (ft)	275			225			225			175		
Base Capacity (vph)	393	855		459	845		278	369		331	426	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.37	0.57		0.32	0.67		0.11	0.55		0.30	0.42	

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:WBTL and 6:EBTL, Start of Yellow

Natural Cycle: 60

Control Type: Actuated-Coordinated


Maximum v/c Ratio: 0.68

Intersection Signal Delay: 18.9 Intersection LOS: B
Intersection Capacity Utilization 70.5% ICU Level of Service C

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 111: Main Street #2/North Main Street & Route 66 /Route 66



112: Eversource Dwy/East Hampton Commons Dwy & Ro**20e26**Corridor Conditions- Optimized Lanes, Volumes, Timing Plan: Weekday PM Peak

Lane Group EB EB EB WB WB WB NB NB NB SB SB SB Traffic Volume (prin) 49 543 1 4 593 116 5 0 2 103 0 78 104 105		•		$\overline{}$		—	4	•	†	→		ı	- /
Lane Configurations		_	-	*	*			,		/	001	*	
Traffic Volume (rph)				EBR			WBR	NBL		NBR	SBL		
Future Volume (vph)		-											
Ideal Flow (ryphp)				•									
Lane Wildlin (f)				•									
Storage Langes		1900			1900		1900	1900		1900			
Storage Lanes		11	12	12	11	12	12	12	12	12	12	12	12
Taper Length (ft)	Storage Length (ft)	225		0	125		0	0		0	0		0
Lane Ulli. Factor	Storage Lanes	1		0	1		0	0		0	0		1
Fith	Taper Length (ft)	75			50			25			25		
Filt Protected 0.950 0.9	Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Satd. Flow (prot)	Frt					0.975			0.961				0.850
Fit Permitted	Flt Protected	0.950			0.950				0.966			0.950	
Satis Flow (perm) Make	Satd. Flow (prot)	1711	1863	0	1711	1816	0	0	1729	0	0	1770	1583
Right Turn on Red Sate Yes Yes Yes No Yes Yes No Yes No No No No No No No N	Flt Permitted	0.270			0.423				0.836			0.753	
Satid. Flow (RTOR)	Satd. Flow (perm)	486	1863	0	762	1816	0	0	1497	0	0	1403	1583
Satid. Flow (RTOR)	Right Turn on Red			Yes			Yes			No			
Link Speed (mph) 30 25 25 Link Distance (ft) 597 1042 185 376 Travel Time (s) 13.6 23.7 5.0 10.3 Peak Hour Factor 0.95						18							102
Link Distance (ft) 597 1042 185 376 Travel Time (s) 13.6 23.7 5.0 10.3 Peak Hour Factor 0.95 0.82 2 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 1 <td></td> <td></td> <td>30</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>25</td> <td></td> <td></td> <td>25</td> <td></td>			30						25			25	
Travel Time (s) 13.6 23.7 5.0 10.3 Peak Hour Factor 0.95 0.96 0.96 0.05 1.08 0.95 0.96 0.05 1.08 0.95 0.95 0.90 0.90 0.90 0.90 0.90 0.90 0.90 0.90 0.90 0.90 0.90 0.90 0.90 0.90 0.													
Peak Hour Factor 0.95 0.96 0.00 2 108 0 82 Shared Lane Traffic (%) Lane Group Flow (wph) 52 573 0 4 746 0 0 0 0 0 0 108 82 Turn Type pm+pt NA pm+pt NA perm NA A 4 4 4 4 4 4													
Adj. Flow (vph) 52 572 1 4 624 122 5 0 2 108 0 82 Shared Lane Traffic (%) Lane Group Flow (vph) 52 573 0 4 746 0 0 7 0 0 108 82 Turn Type pm+pt NA pm+pt NA Perm NA 4 4 4 4 4 4 4 4 4 4 4 4 4 4		0.95		0.95	0.95		0.95	0.95		0.95	0.95		0.95
Shared Lane Traffic (%) Lane Group Flow (vph) 52 573 0 4 746 0 0 7 0 0 108 82 Turn Type													
Lane Group Flow (vph) 52 573 0 4 746 0 0 0 7 0 0 108 82													
Turn Type pm+pt NA pm+pt NA Perm NA Perm NA Perm Protected Phases 1 6 5 2 4 4 4 4 Detector Phase 1 6 5 2 4 4 4 4 4 Switch Phase 3 1 6 5 2 4 4 4 4 4 Minimum Initial (s) 5.0 18.0 5.0 18.0 9.0 13.0 13.0 13.0 13.0 13.0 13.0 13.	• •	52	573	0	4	746	0	0	7	0	0	108	82
Protected Phases 1					pm+pt	NA		Perm	NA		Perm		
Permitted Phases 1						2						4	
Switch Phase Minimum Initial (s) 5.0 18.0 5.0 18.0 9.0 3.0 13.0 13.0 13.0 13.0 13.0 13.0 3.0	Permitted Phases	6						4			4		4
Minimum Initial (s) 5.0 18.0 5.0 18.0 9.0 13.0 13.0 13.0 13.0 13.0 13.0 13.0 3.0	Detector Phase	1	6		5	2		4	4		4	4	4
Minimum Split (s) 9.0 24.5 9.0 24.5 13.0 13.0 13.0 13.0 13.0 24.0	Switch Phase												
Total Split (s) 9.0 48.0 9.0 48.0 23.0 23.0 23.0 23.0 23.0 23.0 23.0 23	Minimum Initial (s)	5.0	18.0		5.0	18.0		9.0	9.0		9.0	9.0	9.0
Total Split (s) 9.0 48.0 9.0 48.0 23.0 28.8% </td <td>Minimum Split (s)</td> <td>9.0</td> <td>24.5</td> <td></td> <td>9.0</td> <td>24.5</td> <td></td> <td>13.0</td> <td>13.0</td> <td></td> <td>13.0</td> <td>13.0</td> <td>13.0</td>	Minimum Split (s)	9.0	24.5		9.0	24.5		13.0	13.0		13.0	13.0	13.0
Total Split (%) 11.3% 60.0% 11.3% 60.0% 28.8% 28.2% 28.8% 28.8% 28.2% 28.8%		9.0	48.0		9.0	48.0		23.0	23.0		23.0	23.0	23.0
All-Red Time (s) 1.0 1.3 1.0 1.3 1.0 0.0 <td></td> <td>11.3%</td> <td>60.0%</td> <td></td> <td>11.3%</td> <td>60.0%</td> <td></td> <td>28.8%</td> <td>28.8%</td> <td></td> <td>28.8%</td> <td>28.8%</td> <td>28.8%</td>		11.3%	60.0%		11.3%	60.0%		28.8%	28.8%		28.8%	28.8%	28.8%
Lost Time Adjust (s) 0.0 4.0 8.0 4.0 8.0 4.0 8.0 4.0 8.0 4.0 8.0 4.0 8.0 4.0 4.0 4.0 4.0	Yellow Time (s)	3.0	5.2		3.0	5.2		3.0	3.0		3.0	3.0	3.0
Lost Time Adjust (s) 0.0 4.0 8.0 4.0 8.0 4.0 8.0 4.0 8.0 4.0 8.0 4.0 8.0 4.0 4.0 4.0 4.0	All-Red Time (s)	1.0	1.3		1.0	1.3		1.0	1.0		1.0	1.0	1.0
Total Lost Time (s) 4.0 6.5 4.0 6.5 4.0 4.0 4.0 Lead/Lag Lead Lag Lead Lag Lead-Lag Optimize? Yes Yes Yes Recall Mode None C-Min None N		0.0	0.0		0.0	0.0			0.0			0.0	
Lead-Lag Optimize? Yes Yes Yes Yes Recall Mode None C-Min None None </td <td></td> <td>4.0</td> <td>6.5</td> <td></td> <td>4.0</td> <td>6.5</td> <td></td> <td></td> <td>4.0</td> <td></td> <td></td> <td>4.0</td> <td>4.0</td>		4.0	6.5		4.0	6.5			4.0			4.0	4.0
Lead-Lag Optimize? Yes Yes Yes Yes Recall Mode None C-Min None 12.0 </td <td>Lead/Lag</td> <td>Lead</td> <td>Lag</td> <td></td> <td>Lead</td> <td>Lag</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	Lead/Lag	Lead	Lag		Lead	Lag							
Act Effct Green (s) 62.1 59.6 59.7 55.5 12.0 12.0 12.0 Actuated g/C Ratio 0.78 0.74 0.75 0.69 0.15 0.15 0.15 V/c Ratio 0.11 0.41 0.01 0.59 0.03 0.51 0.25 Control Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 Queue Delay 0.0 0.0 0.0 0.0 0.0 0.0 0.0 Total Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 LOS A A A B C D A Approach Delay 7.9 12.4 27.1 25.2 Approach LOS A B C C	Lead-Lag Optimize?	Yes			Yes								
Actuated g/C Ratio 0.78 0.74 0.75 0.69 0.15 0.15 0.15 0.15 v/c Ratio 0.11 0.41 0.01 0.59 0.03 0.51 0.25 Control Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 Queue Delay 0.0 0.0 0.0 0.0 0.0 0.0 0.0 Total Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 LOS A A A B C D A Approach Delay 7.9 12.4 27.1 25.2 Approach LOS A B C C								None	None		None	None	None
Actuated g/C Ratio 0.78 0.74 0.75 0.69 0.15 0.15 0.15 0.15 v/c Ratio 0.11 0.41 0.01 0.59 0.03 0.51 0.25 Control Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 Queue Delay 0.0 0.0 0.0 0.0 0.0 0.0 0.0 Total Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 LOS A A A B C D A Approach Delay 7.9 12.4 27.1 25.2 Approach LOS A B C C	Act Effct Green (s)												
V/c Ratio 0.11 0.41 0.01 0.59 0.03 0.51 0.25 Control Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 Queue Delay 0.0 0.0 0.0 0.0 0.0 0.0 0.0 Total Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 LOS A A A B C D A Approach Delay 7.9 12.4 27.1 25.2 Approach LOS A B C C		0.78	0.74		0.75	0.69			0.15			0.15	0.15
Control Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 Queue Delay 0.0 <td< td=""><td></td><td>0.11</td><td>0.41</td><td></td><td>0.01</td><td>0.59</td><td></td><td></td><td>0.03</td><td></td><td></td><td>0.51</td><td>0.25</td></td<>		0.11	0.41		0.01	0.59			0.03			0.51	0.25
Queue Delay 0.0 <th< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></th<>													
Total Delay 4.3 8.2 3.5 12.4 27.1 39.5 6.4 LOS A A A B C D A Approach Delay 7.9 12.4 27.1 25.2 Approach LOS A B C C													
LOS A A A B C D A Approach Delay 7.9 12.4 27.1 25.2 Approach LOS A B C C													
Approach Delay 7.9 12.4 27.1 25.2 Approach LOS A B C C													
Approach LOS A B C C													
		7			1								0

112: Eversource Dwy/East Hampton Commons Dwy & Ro@@266Corridor Conditions- Optimized Timing Plan: Weekday PM Peak Lanes, Volumes, Timings

	۶	-	•	•	←	•	•	†	/	>	ţ	4
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Queue Length 95th (ft)	m12	215		3	416			13			94	26
Internal Link Dist (ft)		517			962			105			296	
Turn Bay Length (ft)	225			125								
Base Capacity (vph)	461	1387		628	1265			355			333	453
Starvation Cap Reductn	0	0		0	0			0			0	0
Spillback Cap Reductn	0	0		0	0			0			0	0
Storage Cap Reductn	0	0		0	0			0			0	0
Reduced v/c Ratio	0.11	0.41		0.01	0.59			0.02			0.32	0.18

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 80

Offset: 0 (0%), Referenced to phase 2:WBTL and 6:EBTL, Start of Yellow

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.59


Intersection Signal Delay: 12.2

Intersection LOS: B Intersection Capacity Utilization 65.3% ICU Level of Service C

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 112: Eversource Dwy/East Hampton Commons Dwy & Route 66



Lane Group EBT EBR WBL WBT NBL NBR Lane Configurations ↑
Lane Configurations Parent
Traffic Volume (vph)
Future Volume (vph) 499 93 257 563 87 135 Ideal Flow (vphpl) 1900 190
Ideal Flow (vphpl) 1900 1900 1900 1900 1900 1900 Lane Width (ft) 12 12 11 11 11 12 Storage Length (ft) 0 250 0 0 0 Storage Lanes 0 1 1 1 1 Taper Length (ft) 40 25 Lane Util. Factor 1.00 1.
Lane Width (ft)
Storage Length (ff) 0 250 0 0 Storage Lanes 0 1 1 1 Taper Length (ff) 40 25 Lane Utili. Factor 1.00 1.00 1.00 1.00 1.00 Fit Protected 0.979 0.950 0.950 Sald. Flow (prot) 1824 0 1711 1801 1711 1583 Fit Permitted 0.244 0.950 0.950 Satd. Flow (perm) 1824 0 1711 1801 1711 1583 Right Turn on Red Yes Yes Yes Yes Yes 142 1142
Storage Lanes
Taper Length (ft)
Lane Util. Factor
Fit 0.979 0.950 0.950 Sald. Flow (prot) 1824 0 1711 1801 1711 1583 Flt Permitted 0.244 0.950 0.950 Satd. Flow (perm) 1824 0 439 1801 1711 1583 Right Turn on Red Yes Yes Yes Yes Yes Satd. Flow (RTOR) 20 142 <t< td=""></t<>
Fit Protected 1824 0 1711 1801 1711 1583 1711 1583 1711 1
Satd. Flow (prot) 1824 0 1711 1801 1711 1583 FIt Permitted 0.244 0.950 Satd. Flow (perm) 1824 0 439 1801 1711 1583 Right Turn on Red Yes Yes Yes Yes 142 Link Speed (mph) 30 30 25 142 Link Distance (ft) 628 459 953 Travel Time (s) 14.3 10.4 26.0 Peak Hour Factor 0.95 0.95 0.95 0.95 0.95 Adj. Flow (vph) 525 98 271 593 92 142 Shared Lane Traffic (%) 2 2 7 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 12
Fit Permitted
Satd. Flow (perm) 1824 0 439 1801 1711 1583 Right Turn on Red Yes Yes Yes Satd. Flow (RTOR) 20 142 Link Speed (mph) 30 30 25 Link Distance (ft) 628 459 953 Travel Time (s) 14.3 10.4 26.0 Peak Hour Factor 0.95
Right Turn on Red Yes Yes Satd. Flow (RTOR) 20 142 Link Speed (mph) 30 30 25 Link Distance (ft) 628 459 953 Travel Time (s) 14.3 10.4 26.0 Peak Hour Factor 0.95 0.95 0.95 0.95 0.95 Adj. Flow (vph) 525 98 271 593 92 142 Shared Lane Traffic (%) Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 12 4 4 Switch Phase <t< td=""></t<>
Satd. Flow (RTOR) 20 142 Link Speed (mph) 30 30 25 Link Distance (ft) 628 459 953 Travel Time (s) 14.3 10.4 26.0 Peak Hour Factor 0.95 0.95 0.95 0.95 0.95 Adj. Flow (vph) 525 98 271 593 92 142 Shared Lane Traffic (%) Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 12 4 4 Switch Phase 2 1 12 4 4 Switch Phase 2 1 12 4 4 Minimum Initial (s) 15.0 5.0 9.0 9.0
Link Speed (mph) 30 30 25 Link Distance (ft) 628 459 953 Travel Time (s) 14.3 10.4 26.0 Peak Hour Factor 0.95 0.95 0.95 0.95 0.95 0.95 Adj. Flow (vph) 525 98 271 593 92 142 Shared Lane Traffic (%) Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 12 4 4 Switch Phase 3 1 12 4 4 Switch Phase 4 4 Switch Phase 5 1 12 4 4 Switch Phase 6 1 12 12 1 12 1 12 1 12 1 12 1 12 1 1
Link Distance (ft) 628
Link Distance (ft) 628 459 953 Travel Time (s) 14.3 10.4 26.0 Peak Hour Factor 0.95 0.95 0.95 0.95 0.95 Adj. Flow (vph) 525 98 271 593 92 142 Shared Lane Traffic (%) Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 12 4 4 Switch Phase
Travel Time (s) 14.3 10.4 26.0 Peak Hour Factor 0.95 0.95 0.95 0.95 0.95 Adj. Flow (vph) 525 98 271 593 92 142 Shared Lane Traffic (%) Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Permitted Phases 2 1 1 2 4 4
Peak Hour Factor 0.95 0.95 0.95 0.95 0.95 Adj. Flow (vph) 525 98 271 593 92 142 Shared Lane Traffic (%) Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 1 1 1 1
Adj. Flow (vph) 525 98 271 593 92 142 Shared Lane Traffic (%) Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase Minimum Initial (s) 15.0 5.0 9.0 9.0 Minimum Split (s) 21.5 9.5 13.4 13.4 Total Split (s) 32.1 14.5 13.4 13.4 Total Split (%) 53.5% 24.2% 22.3% 22.3% Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead-Lag Optimize? Yes Yes Recall Mode Min Non
Shared Lane Traffic (%) Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 1 13 4 13.4 13.4 13.4 13.4 13.4 13.4 13.4 13.4 13.4 13.4
Lane Group Flow (vph) 623 0 271 593 92 142 Turn Type NA D.P+P NA Prot Prot Protected Phases 2 1 12 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 12 4 4 Switch Phase 2 1 12 4 4 Switch Phase 2 1 12 4 4 Minimum Initial (s) 15.0 5.0 9.0 9.0 Minimum Initial (s) 21.5 9.5 13.4 13.4 Total Split (s) 32.1 14.5 13.4 13.4 Total Split (s) 32.1 14.5 13.4 13.4 Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0
Turn Type NA D.P+P NA Prot Protected Phases Protected Phases
Protected Phases 2 1 1 2 4 4 Permitted Phases 2 1 12 4 4 Switch Phase 2 1 12 4 4 Switch Phase 8 8 8 8 8 9 9.0 9.0 Minimum Initial (s) 15.0 5.0 9.0 9.0 9.0 Minimum Initial (s) 15.0 5.0 9.0 9.0 9.0 Minimum Initial (s) 15.0 9.5 13.4 13
Permitted Phases 2 Detector Phase 2 1 1 2 4 4 Switch Phase 8 8 8 8 9 9.0 9.0 9.0 Minimum Initial (s) 15.0 5.0 9.0<
Detector Phase 2 1 1 2 4 4 Switch Phase Minimum Initial (s) 15.0 5.0 9.0 9.0 Minimum Split (s) 21.5 9.5 13.4 13.4 Total Split (s) 32.1 14.5 13.4 13.4 Total Split (%) 53.5% 24.2% 22.3% 22.3% Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effect Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55
Switch Phase Minimum Initial (s) 15.0 5.0 9.0 9.0 Minimum Initial (s) 21.5 9.5 13.4 13.4 Total Split (s) 32.1 14.5 13.4 13.4 Total Split (%) 53.5% 24.2% 22.3% 22.3% Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effect Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2
Minimum Initial (s) 15.0 5.0 9.0 9.0 Minimum Split (s) 21.5 9.5 13.4 13.4 Total Split (s) 32.1 14.5 13.4 13.4 Total Split (%) 53.5% 24.2% 22.3% 22.3% Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.
Minimum Split (s) 21.5 9.5 13.4 13.4 Total Split (s) 32.1 14.5 13.4 13.4 Total Split (%) 53.5% 24.2% 22.3% 22.3% Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0
Total Split (s) 32.1 14.5 13.4 13.4 Total Split (%) 53.5% 24.2% 22.3% 22.3% Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 <t< td=""></t<>
Total Split (%) 53.5% 24.2% 22.3% 22.3% Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 Los C A
Yellow Time (s) 4.5 3.0 3.4 3.4 All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
All-Red Time (s) 2.0 1.5 1.0 1.0 Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Lost Time Adjust (s) 0.0 0.0 0.0 0.0 Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Total Lost Time (s) 6.5 4.5 4.4 4.4 Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Lead/Lag Lag Lead Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Lead-Lag Optimize? Yes Yes Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Recall Mode Min None None None Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Act Effct Green (s) 22.9 34.1 40.4 9.6 9.6 Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Actuated g/C Ratio 0.43 0.64 0.76 0.18 0.18 v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
v/c Ratio 0.78 0.55 0.44 0.30 0.35 Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Control Delay 23.1 9.2 4.9 25.8 8.1 Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Queue Delay 0.0 0.0 0.0 0.0 0.0 Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
Total Delay 23.1 9.2 4.9 25.8 8.1 LOS C A A C A
LOS C A A C A
Approach Delay 23.1 6.3 15.0
Approach LOS C A B
Queue Length 50th (ft) 179 27 73 30 0

	-	•	•	←	1	~
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Queue Length 95th (ft)	#349		59	123	68	42
Internal Link Dist (ft)	548			379	873	
Turn Bay Length (ft)			250			
Base Capacity (vph)	944		547	1389	308	402
Starvation Cap Reductn	0		0	0	0	0
Spillback Cap Reductn	0		0	0	0	0
Storage Cap Reductn	0		0	0	0	0
Reduced v/c Ratio	0.66		0.50	0.43	0.30	0.35

Area Type: Other

Cycle Length: 60

Actuated Cycle Length: 53.4

Natural Cycle: 60

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.78

Intersection Signal Delay: 13.5 Intersection LOS: B
Intersection Capacity Utilization 66.5% ICU Level of Service C

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 113: Lakeview Street (Route 196) & Route 66

★ ø1		₩ Ø4
14.5 s	32.1 s	13.4 s

APPENDIX H Level of Service Comparison Table	
Tighe&Bond	

TABLE X
Intersection Operation Summary - Vehicular Levels of Service / Average Delay (sec/veh)

		Pea	ıy Morning k Hour	Peal	y Afternoon k Hour	
	Lane	2020	2020	2020	2020	
	Use	Corridor	Optimized	Corridor	Optimized	
Traffic Signal - Route 6	6 at Ro	ute 17A (M	lain Street)			
Overall		B / 18.1	B / 17.4	B / 17.8	B / 17.9	
Doute 44	WB	B / 19.8	B / 19.1	C / 20.7	C / 29.6	
Route 66	WBT	/ /	/	/ /	/	
	WBR NBL	/	/ /	/	/ /	
Route 17A	NB	C / 27.2	C / 29.3	D / 39.2	C / 29.5	
toute 1771	NBR	A / 0.7	A / 0.7	A / 7.6	A / 7.6	
	SBL	/	/	/	/	
Route 17A	SB	C / 24.9	C / 22.4	B / 10.6	B / 10.3	
	SBR	/	/	/	/	
Froffic Cianal Doute 4	(/N/or	lhanaiiah Ci	raat) at Himb (Street		
Traffic Signal - Route 6 Overall	o (iviar	A / 7.3	A / 6.4	B / 10.6	B / 11.9	
overall	EBL	A / 6.1	A / 6.4	A / 4.2	A / 4.2	
Route 66	EBT	A / 7.7	A / 7.5	B / 11.7	B / 12.2	
	EBR	/	/	/	/	
	WBL	/	/	/	/	
Route 66	WB	A / 4.7	A / 3.6	A / 2.7	A / 6.0	
	WBR	/	/	/	/	
	SB	C / 25.9	C / 24.2	D / 36.6	D / 35.3	
High Street	SBT	/	/	/	/	
	SBR	/	/	/	/	
Fraffic Signal - Route 6	6 (Mar	lborough St	reet) at Airlin	e Avenue		
Overall		A / 6.3	A / 10.0	A / 5.0	A / 8.3	
	EBL	/	/	/	/	
Route 66	EB	A / 3.9	A / 3.7	A / 4.9	A / 5.1	
	EBR	/	/	/	/	
Doute 44	WBL	A / 1.2	A / 1.5	A / 1.7	A / 7.2	
Route 66	WBT WBR	A / 6.4 /	B / 11.9 /	A / 3.3 /	B / 12.4 /	
Airline Avenue	NB	C / 25.7	C / 25.9	C / 20.3	C / 20.4	
All line Avenue	NBT	/	/	/	/	
	NBR	/	/	/	/	
Traffic Signal - Route 6 Overall	6 (Mar	lborough St A / 5.2	reet) at Portla A / 6.4	ind Shopping (B / 11.2	Center Driv A / 8.9	
Overall	EBL	A / 1.4	A / 4.1	A / 8.6	A / 3.8	
Route 66	EBTR	A / 0.8	A / 3.1	B / 11.5	A / 3.1	
	EBR	/	/	/	/	
	WBL	/	/	/	/	
Route 66	WBTR	A / 6.7	A / 7.5	A / 7.2	B / 14.9	
	WBR	/	/	/	/	
	NBL	/	/	/	/	
	NBT	/	/	/	/	
	NBR	/ C / 22 2	/ C / 22 2	/ D / 37.7	/ D/270	
Portland Shopping Center	SBL SBT	C / 32.3 /	C / 32.3 /	D / 37.7 /	D / 37.9 /	
ortiana Shopping center	SBR	C / 22.3	C / 22.3	B / 10.8	B / 10.7	
Traffic Signal - Route 6 Overall	6 (Mar	lborough St A / 3.6	A / 3.2	oalt Rd) at Gro A / 2.7	ve Street/ A / 7.1	
Sveran	EBL	A / 0.6	A / 0.6	A / 0.7	A / 2.7	
Route 66	EBT	A / 2.0	A / 0.6	A / 2.0	A / 8.9	
	EBR	/	/	/	/	
	WBL	A / 1.7	A / 1.7	A / 1.8	A / 1.8	
Route 66	WBT	A / 4.1	A / 4.1	A / 3.6	A / 3.6	
	WBR	/	/	/	/	
rovo Stroot	NBL	/ ^ / 1 /	/	/ A / 1 E	/ A/15	
Grove Street	NBT	A / 1.4 /	A / 1.4 /	A / 1.5 /	A / 1.5 /	
	NBR SBL	/ /	/ /	/ /	/ /	
Grandview Terrace	SBT	D / 35.3	D / 35.3	B / 19.3	B / 19.3	
	SBR	/	/	/	/	
raffic Signal - Route 6	6 (Port			te 17 (Gospel B / 12.4		
Overall	EBL	B / 11.7 D / 36.5	B / 13.4 C / 27.7	C / 34.8	B / 10.9 C / 27.0	
Route 66	EBTR	A / 3.1	A / 3.7	A / 5.5	A / 5.9	
	EBR	/	/	/	/	
	WBL	/	/	/	/	

WBR A / 2.6

A / 3.3

A / 3.4

A / 4.2

			ry Morning k Hour		y Afternoon k Hour	
	Lane	2020	2020	2020	2020	
	Use	Corridor	Optimized	Corridor	Optimized	
	NBL	/	/	/	/	
		/		/		
		/		/		
	SBL		C / 23.5			
Route 17 (Gospel Lane)	SBT	/	/	/	/	
	SBR	B / 10.3	A / 8.2	B / 10.1	A / 7.4	
Traffic Signal - Route	66 (Port	land-Cobal	t Road) at Mide	dle Haddam R	oad/Pavne	
	66 (Port	land-Cobal A / 9.7	t Road) at Midd	lle Haddam R B / 12.0	oad/Payne B / 12.7	
	66 (Port					
Overall		A / 9.7	B / 10.0	B / 12.0	B / 12.7	
Overall	EBL EBTR	A / 9.7 A / 1.9	B / 10.0 A / 2.1 A / 3.4	B / 12.0 A / 2.6	B / 12.7 A / 2.7 B / 15.6	
Overall	EBL EBTR	A / 9.7 A / 1.9 A / 3.3	B / 10.0 A / 2.1 A / 3.4 /	B / 12.0 A / 2.6 B / 14.6	B / 12.7 A / 2.7 B / 15.6 /	
Overall Route 66	EBL EBTR EBR	A / 9.7 A / 1.9 A / 3.3 /	B / 10.0 A / 2.1 A / 3.4 / A / 1.5	B / 12.0 A / 2.6 B / 14.6 /	B / 12.7 A / 2.7 B / 15.6 / A / 2.0	
Overall Route 66	EBL EBTR EBR WBL WBTR	A / 9.7 A / 1.9 A / 3.3 / A / 1.5 B / 12.5 /	B / 10.0 A / 2.1 A / 3.4 / A / 1.5 B / 13.0 /	B / 12.0 A / 2.6 B / 14.6 / A / 2.0 A / 8.4 /	B / 12.7 A / 2.7 B / 15.6 / A / 2.0 A / 9.0 /	
Overall Route 66 Route 66	EBL EBTR EBR WBL WBTR WBR NBL	A / 9.7 A / 1.9 A / 3.3 / A / 1.5 B / 12.5 / /	B / 10.0 A / 2.1 A / 3.4 / A / 1.5 B / 13.0 / /	B / 12.0 A / 2.6 B / 14.6 / A / 2.0 A / 8.4 /	B / 12.7 A / 2.7 B / 15.6 / A / 2.0 A / 9.0 /	
Overall Route 66 Route 66	EBL EBTR EBR WBL WBTR WBR NBL NB	A / 9.7 A / 1.9 A / 3.3 / A / 1.5 B / 12.5 / / A / 1.6	B / 10.0 A / 2.1 A / 3.4 / A / 1.5 B / 13.0 / / A / 1.0	B / 12.0 A / 2.6 B / 14.6 / A / 2.0 A / 8.4 / D / 39.6	B / 12.7 A / 2.7 B / 15.6 / A / 2.0 A / 9.0 / / D / 36.8	
Overall Route 66 Route 66	EBL EBTR EBR WBL WBTR WBR NBL NB	A / 9.7 A / 1.9 A / 3.3 / A / 1.5 B / 12.5 / A / 1.6 /	B / 10.0 A / 2.1 A / 3.4 / A / 1.5 B / 13.0 / / A / 1.0 /	B / 12.0 A / 2.6 B / 14.6 / A / 2.0 A / 8.4 / D / 39.6 /	B / 12.7 A / 2.7 B / 15.6 / A / 2.0 A / 9.0 / D / 36.8 /	
Overall Route 66 Route 66 Payne Boulevard	EBL EBTR EBR WBL WBTR WBR NBL NB NBR SBL	A / 9.7 A / 1.9 A / 3.3 / A / 1.5 B / 12.5 / A / 1.6 / /	B / 10.0 A / 2.1 A / 3.4 / A / 1.5 B / 13.0 / / A / 1.0 / /	B / 12.0 A / 2.6 B / 14.6 / A / 2.0 A / 8.4 / D / 39.6 /	B / 12.7 A / 2.7 B / 15.6 / A / 2.0 A / 9.0 / D / 36.8 /	
Traffic Signal - Route Overall Route 66 Route 66 Payne Boulevard Middle Haddam Road	EBL EBTR EBR WBL WBTR WBR NBL NB	A / 9.7 A / 1.9 A / 3.3 / A / 1.5 B / 12.5 / / A / 1.6 / / D / 43.7	B / 10.0 A / 2.1 A / 3.4 / A / 1.5 B / 13.0 / / A / 1.0 /	B / 12.0 A / 2.6 B / 14.6 / A / 2.0 A / 8.4 / D / 39.6 /	B / 12.7 A / 2.7 B / 15.6 - / A / 2.0 A / 9.0 / / D / 36.8 / / A / 7.2	

Traffic Signal - Route 6	6 (Port	land-Cobalt	Rd/West Hig	gh St) at Rte. 1!	51 (Middle H
Overall		C / 26.6	C / 31.2	C / 22.0	C / 22.5
'	EBL	/	/	/	/
Route 66	EB	A / 8.7	B / 10.9	C / 24.1	C / 26.6
	EBR	/	/	/	/
	WBL	/	/	/	/
Route 66	WB	C / 24.6	D / 36.6	A / 5.6	A / 6.2
	WBR	/	/	/	/
	NBL	/	/	/	/
Route 151 (Middle Hadda	NBLT	E / 74.1	D / 55.0	E / 69.5	D / 54.8
	NBR	A / 0.0	A / 0.0	A / 0.0	A / 0.0
	SBL	/	/	/	/
Depot Hill Road	SB	D / 45.3	C / 25.6	E / 65.9	D / 46.6
	SBR	/	/	/	/

Traffic Signal - Route 6	6 (Wes	t High Stre	et) at Route	16 (Middletown	Avenue)/Pa
Overall		C / 26.2	C / 27.2	B / 13.4	B / 13.0
	EBL	/	/	/	/
Route 66	EBLT	B / 14.0	B / 15.8	B / 15.6	B / 15.2
	EBR	A / 2.5	A / 3.1	A / 2.5	A / 2.6
	WBL	A / 9.0	B / 11.5	A / 7.7	A / 7.3
Route 66	WBTR	C / 26.8	C / 31.3	B / 10.6	B / 10.2
	WBR	/	/	/	/
	NBL	/	/	/	/
Route 16 (Middletown Av	NBLT	D / 45.8	D / 41.3	C / 33.3	C / 32.0
	NBR	A / 0.0	A / 0.0	A / 0.0	A / 0.0
	SBL	/	/	/	/
Park & Ride Driveway	SB	A / 0.0	A / 0.0	B / 17.3	B / 13.7
	SBR	/	/	/	/

Overall		B / 15.4	B / 14.7	B / 10.1	B / 10.3
	EBL	/	/	/	/
Route 66	EB	B / 12.7	B / 12.3	A / 9.0	A / 9.8
	EBR	/	/	/	/
	WBL	/	/	/	/
Route 66	WB	B / 13.5	B / 13.4	A / 7.7	A / 8.3
Route 66	WBR	0 / 0.0	0 / 0.0	0 / 0.0	0 / 0.0
	WBR2	/	/	/	/
	NBL2	/	/	/	/
Main Street	NBL	0 / 0.0	0 / 0.0	0 / 0.0	0 / 0.0
Main Street	NB	C / 24.6	C / 21.7	C / 21.7	B / 17.4
	NBR	/	/	/	/
	SBL	/	/	/	/
North Main Street	0	0 / 0.0	0 / 0.0	0 / 0.0	0 / 0.0
	0	0 / 0.0	0 / 0.0	0 / 0.0	0 / 0.0
	0	0 / 0.0	0 / 0.0	0 / 0.0	0 / 0.0
Old West High Street	0	0 / 0.0	0 / 0.0	0 / 0.0	0 / 0.0
	0	0 / 0.0	0 / 0.0	0 / 0.0	0 / 0.0
	SB	C / 28.5	C / 25.4	C / 25.1	C / 21.1
	SBR	0 / 0.0	0 / 0.0	0 / 0.0	0 / 0.0
	SEB	C / 29.0	C / 22.0	0 / 0.0	0 / 0.0

TABLE X Intersection Operation Summary - Vehicular Levels of Service / Average Delay (sec/veh)

			ay Morning k Hour	•	/ Afternoon k Hour
	Lane	2020	2020	2020	2020
	Use	Corridor	Optimized	Corridor	
-	030	COLLIGO	Optimized	COTTIGOT	Optimized
	SET	/	/	/	/
Traffic Signal - Rout	e 66 (East	Main St/W	/est Main St)	at Main Street	'North Main S
Overall		B / 18.2	B / 14.8	C / 21.7	B / 18.9
	EBL	A / 6.3	A / 6.6	A / 8.9	B / 10.0
Route 66	EBTR	B / 14.2	B / 15.5	B / 19.3	C / 20.2
	EBR	/	/	/	/
	WBL	A / 7.1	A / 3.3	A / 5.5	A / 6.2
Route 66	WBTR	B / 18.3	B / 12.2	B / 18.9	B / 15.6
	WBR	/	/	/	/
	NBL	C / 29.0	C / 22.8	C / 26.1	C / 20.8
Main Street	NBTR	C / 20.2	B / 15.9	D / 41.4	C / 33.4
	NBR	/	/	/	/
	SBL	C / 32.1	C / 26.1	C / 29.1	C / 23.9
North Main Street	SBTR	C / 22.6	B / 17.5	C / 33.8	C / 24.1
	SBR	/	/	/	/
	•	•			
Traffic Signal - Rout	e 66 (East	High St.) a	at East Hamp	ton Mall Shoppi	ng Center Dw
Overall	•	A / 9.0	A / 8.5	B / 13.9	B / 12.2

Traffic Signal - Route 6	6 (East	High St.) a	t East Hampto	on Mall Shoppir	ng Center Dw
Overall		A / 9.0	A / 8.5	B / 13.9	B / 12.2
	EBL	A / 3.7	A / 3.7	A / 5.0	A / 4.3
Route 66	EBT	A / 9.0	A / 8.5	B / 10.2	A / 8.2
	EBR	/	/	/	/
	WBL	A / 2.0	A / 2.3	A / 3.2	A / 3.5
Route 66	WBT	A / 6.0	A / 6.2	B / 12.7	B / 12.4
	WBR	/	/	/	/
	NBL	/	/	/	/
Eversource Driveway	NBT	D / 40.3	C / 32.9	C / 33.3	C / 27.1
	NBR	/	/	/	/
	SBL	/	/	/	/
East Hampton Mall Shopp	SBT	D / 45.1	D / 36.3	D / 48.9	D / 39.5
	SBR	A / 0.7	A / 0.5	A / 9.8	A / 6.4

Traffic Signal - Route 66 (East High Street) at Route 196 (Lake View Street)							
Overall		B / 13.4	B / 12.6	B / 15.8	B / 13.5		
	EBL	/	/	/	/		
Route 66	EB	C / 22.6	C / 20.8	C / 29.0	C / 23.1		
	EBR	/	/	/	/		
	WBL	A / 4.7	A / 4.9	A / 8.0	A / 9.2		
Route 66	WBTR	A / 5.2	A / 5.3	A / 4.9	A / 4.9		
	WBR	/	/	/	/		
	NBL	C / 26.9	C / 23.5	C / 31.1	C / 25.8		
Lake View Street	NBT	/	/	/	/		
	NBR	A / 8.8	A / 8.4	A / 9.1	A / 8.1		

APPENDIX H Queue Comparison Table
Tighe&Bond

TABLE 2-X Intersection Operation Summary - Vehicular $50^{\rm th}$ / $95^{\rm th}$ Percentile Queue (In Feet)

			Weekday Mori	ning Peak Hour	Weekday After	noon Peak H
	Lane Use	Available Storage	2020 Corridor	2020 Optimized	2020 Corridor	2020 Optimized
raffic Signal - Route 6	6 at Ro	oute 17A (Ma	ain Street)			
Route 66	WB	>500	355 / 444	394 / 357	181 / 196	213 / 150
Route 66	NBT	510	65 / 101	67 / 105	167 / 252	155 / 214
Route 17A	SB	510	132 / 186	128 / 178	56 / 100	55 / 98
raffic Signal - Route 6	6 (Mar	Iborough St				
Route 66	EBL	225	9 / 25	9 / 25	12 / 21	12 / 21
	EBT	>500	44 / 88	43 / 88	193 / 318	193 / 334
Route 66	WBT	150	31 / 67	11 / 40	0 / 25	53 / 59
ligh Street	SB	>500	49 / 106	44 / 101	91 / 151	88 / 148
raffic Signal - Route 6						
Route 66	EB	145	21 / 33	21 / 33	56 / 68	55 / 68
Route 66	WBL	175	1/3	4/0	1/3	2 / 17
Airline Avenue	WBT NB	>500 >500	190 / 71 20 / 52	313 / 2 20 / 52	23 / 39 24 / 60	53 / 196 24 / 60
roffic Signal Doute 4	4 (Mar	lharaugh St	root) at Dartian	d Shonning Cont	or Drivoviou	
raffic Signal - Route 6	EBL	350	1 / 6	1 / 0	35 / 76	9 / 31
Route 66	EBTR	>500	0 / 35	0 / 130	211 / 387	43 / 110
Route 66	WBTR	370	0 / 437	0 / 455	101 / 173	154 / 242
Portland Shopping Center	SBL	155	3 / 15	3 / 15	54 / 98	54 / 98
ortiand Shopping Center	SBR	155	0 / 8	0/8	0 / 27	0 / 27
raffic Signal - Route 6	6 (Mar	lborough St.	/Portland-Coba	It Rd) at Grove S	treet/ Grandviev	v Terrace
Poute 66	EBL	125	1 / 0	0 / 1	1 / 1	3 / 4
	EBTR	370	22 / 35	5 / 10	127 / 55	270 / 357
Route 66	WBL	150	0 / 1	0 / 1	1/3	1/3
	WBTR	>500	95 / 217	95 / 217	41 / 99	41 / 99 0 / 0
Grove Street	NB	>500	0/0	0/0	0/0	
Grandview Terrace	SB	>500	3 / 15	3 / 15	1 / 25	1 / 25
raffic Signal - Route 6						
Route 66	EBL EBT	200 >500	32 / 75 21 / 42	23 / 60 20 / 41	68 / 134 98 / 175	44 / 99 84 / 160
	WBT	>500	138 / 268	131 / 280	95 / 152	76 / 131
Route 66	WBR	200	0 / 33	0 / 34	0 / 29	0 / 29
) 4 - 1 7	SBL	>500	35 / 81	25 / 61	69 / 126	44 / 88
Route 17	SBR	100	0 / 43	0 / 36	0 / 38	0 / 30
Traffic Signal - Route 6	6 (Por	tland-Cobalt	Road) at Middl	e Haddam Road/	Payne Boulevard	I
Route 66	EBL	175	2/5	1/5	11 / 20	11 / 21
	EBTR	>1500	58 / 142	0 / 148	343 / 1002	343 / 977
Route 66	WBL	300	0 / 1	0 / 1	0/2	0/2
Payne Boulevard	WBTR	>1000	307 / 922	0 / 848	156 / 247	156 / 250
Aiddle Haddam Road	NB SB	>500 >500	0 / 0 2 / 11	0 / 0 1 / 10	9 / 34 0 / 24	9 / 32 0 / 19
Traffic Signal - Route 6 Route 66	EB	>1500	142 / 193	121 / 231	Middle Haddam F 612 / 1244	577 / 1067
Route 66	WB	>1000	584 / 789	494 / 923	114 / 201	108 / 198
	NBLT	>500	150 / 270	102 / 171	53 / 102	39 / 82
Middle Haddam Road	NBR	65	0/0	0/0	0/0	0/0
Depot Hill Road	SB	>500	49 / 102	29 / 67	50 / 100	36 / 80
raffic Signal - Route 6	6 (Wes	st High Stree	et) at Route 16	(Middletown Ave	nue)/Park & Rid	e Driveway
oute 66	EBLT	>500	86 / 133	97 / 155	139 / 321	135 / 265
	EBR WBL	250 125	0 / 26 1 / 6	0 / 32 1 / 7	0 / 38 0 / 4	0 / 36 0 / 4
Route 66	WBTR	>500	216 / 318	245 / 385	70 / 165	68 / 134
Route 16	NBLT	>500	167 / 450	183 / 352	66 / 194	62 / 161
	NBR	100	0/0	0/0	0/0	0/0
Park & Ride Driveway	SB	75	0/0	0 / 0	1 / 11	1 / 8
raffic Signal - Route 6	6 (Wes	st High Stree	et) at Maple Stre	eet/North Maple	Street/Old West	High Street
Route 66	EB	>500	74 / 251	72 / 233	99 / 205	99 / 209
Route 66	WB	>500	96 / 312	92 / 306	80 / 163	80 / 164
Maple Street	NB	>500	0/0	0/0	0/0	0/0
lorth Maple Street Old West High Street	SB SEB	>500 >500	30 / 108 0 / 5	0 / 0 0 / 0	0/0 0/0	0 / 0 0 / 0
						370
raffic Signal - Route 6	6 (Eas	t Main St/W 275	est Main St) at 1	Main Street/Nor	th Main Street 28 / 64	31 / 55
Route 66	EBTR	>500	140 / 251	136 / 227	181 / 348	195 / 286
	WBL	225	16 / 25	9/6	25 / 20	8 / 42
		485	245 / 359	162 / 302	282 / 480	233 / 182
Route 66	WBTR					
	NBL	225	16 / 40	13 / 34	14 / 33	10 / 30
					14 / 33 85 / 140	10 / 30 78 / 126
Route 66 Main Street North Main Street	NBL	225	16 / 40	13 / 34		

TABLE 2-X Intersection Operation Summary - Vehicular $50^{\rm th}$ / $95^{\rm th}$ Percentile Queue (In Feet)

			Weekday Morning Peak Hour		Weekday After	noon Peak Hour
	Lane Use	Available Storage	2020 Corridor	2020 Optimized	2020 Corridor	2020 Optimized
Traffic Signal - Route 6	6 (Eas	t High Stree	et) at East Hamp	ton Mall Shoppin	g Center Dwy/E	ersource Dwy
Route 66	EBL	225	2 / 11	1 / 10	7 / 19	7 / 12
Route oo	EBTR	485	135 / 369	69 / 353	126 / 292	112 / 215
Route 66	WBL	125	1 / 4	1 / 4	1 / 3	1 / 3
Route oo	WBTR	>500	79 / 224	78 / 225	228 / 422	216 / 416
Eversource Driveway	NB	260	11 / 32	9 / 27	4 / 16	3 / 13
ton Mall Shanning Contar	SBL	140	24 / 56	20 / 49	62 / 109	51 / 94
oton Mall Shopping Center	SBR	140	0/0	0/0	0 / 37	0 / 26
Traffic Signal - Route 6	6 (Fact	t High Stree	at) at Poute 196	(Lake View Stree	at)	
Route 66	FB	>500	143 / 280	132 / 228	216 / 479	179 / 349
	WBL	250	10 / 28	10 / 23	27 / 82	27 / 59
Route 66	WBTR	>500	50 / 108	50 / 89	74 / 153	73 / 123
5	NBL	170	23 / 69	21 / 59	36 / 80	30 / 68
Route 196	NBR	>500	0 / 59	0 / 54	0 / 46	0 / 42

APPENDIX I Collision Data Summary	
Tighe&Bond	

TABLE X
Intersection Collision History Summary
Intersection: Route 66 (Arrigoni Brid from

TOTAL

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	1	0	0	1	1.7%
Other Non-Collision	1	1	0	2	3.4%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	2	1	0	3	5.1%
Animal	0	0	0	0	0.0%
Fixed Object	5	4	3	12	20.3%
Rear-End	8	11	7	26	44.1%
Head-On	1	1	0	2	3.4%
Angle	1	1	2	4	6.8%
Sideswipe, Same Direction	4	1	3	8	13.6%
Sideswipe, Opposite Direction	0	0	1	1	1.7%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	О	0.0%

Route 17 (St. Johns Sc

SEVERITY

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	1	0	1	1.7%
Property Damage Only (PDO)	23	19	16	58	98.3%
TOTAL	23	20	16	59	100%

20

16

59

100%

23

TABLE X
Intersection Collision History Summary
Intersection: Route 66

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	1	1	3.1%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	1	0	1	3.1%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	0	2	2	4	12.5%
Rear-End	7	5	5	17	53.1%
Head-On	0	0	0	0	0.0%
Angle	2	2	2	6	18.8%
Sideswipe, Same Direction	0	2	1	3	9.4%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTA	L 9	12	11	32	100%

Arrigoni Bridge (East

from

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	9	12	12	33	100.0%
TOTAL	9	12	12	33	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

at

Route 17A (Main Stree

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	1	0	1	2.8%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	O	0.0%
Fixed Object	2	0	2	4	11.1%
Rear-End	2	9	7	18	50.0%
Head-On	0	0	0	0	0.0%
Angle	1	6	2	9	25.0%
Sideswipe, Same Direction	0	2	1	3	8.3%
Sideswipe, Opposite Direction	0	1	0	1	2.8%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	O	0.0%
Other	0	0	0	O	0.0%
TOTA	L 5	19	12	36	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	6	19	12	37	100.0%
TOTAL	6	19	12	37	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

from

Route 17A (Main Stree

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	1	0	1	5.6%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	0	1	0	1	5.6%
Rear-End	5	5	3	13	72.2%
Head-On	0	0	0	0	0.0%
Angle	1	2	0	3	16.7%
Sideswipe, Same Direction	0	0	0	0	0.0%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTA	L 6	9	3	18	100%

	2015	2016	2017	Total	Percent
Fatal	0	1	0	1	5.6%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	6	8	3	17	94.4%
TOTAL	6	9	3	18	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

COLLISION TYPE

	201	5 201	6 2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	O	0.0%
Jacknife	0	0	0	O	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	O	0.0%
Other Non-Fixed Object	0	0	1	1	5.6%
Animal	0	0	0	Ο	0.0%
Fixed Object	0	0	0	0	0.0%
Rear-End	1	2	6	9	50.0%
Head-On	0	0	0	Ο	0.0%
Angle	1	2	3	6	33.3%
Sideswipe, Same Direction	2	0	0	2	11.1%
Sideswipe, Opposite Direction	0	0	0	O	0.0%
Backing	0	0	0	Ο	0.0%
Not Applicable	0	0	0	O	0.0%
Other	0	0	0	0	0.0%
	TOTAL 4	4	10	18	100%

High Street

at

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	1	0	1	5.6%
Property Damage Only (PDO)	4	3	10	17	94.4%
TOTAL	4	4	10	18	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	O	0.0%
Fixed Object	0	1	0	1	7.7%
Rear-End	5	5	2	12	92.3%
Head-On	0	0	0	0	0.0%
Angle	0	0	0	0	0.0%
Sideswipe, Same Direction	0	0	0	O	0.0%
Sideswipe, Opposite Direction	0	0	0	О	0.0%
Backing	0	0	0	O	0.0%
Not Applicable	0	0	0	О	0.0%
Other	0	0	0	О	0.0%
TOTAL	5	6	2	13	100%

Airline Avenue

at

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	6	6	2	14	100.0%
TOTAL	6	6	2	14	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

ntersection: Route 66 from Airline Avenue to Port

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	#DIV/0!
Other Non-Collision	0	0	0	0	#DIV/0!
Jacknife	0	0	0	0	#DIV/0!
Pedestrian	0	0	0	0	#DIV/0!
Bicycle	0	0	0	0	#DIV/0!
Other Non-Fixed Object	0	0	0	0	#DIV/0!
Animal	0	0	0	0	#DIV/0!
Fixed Object	0	0	0	0	#DIV/0!
Rear-End	0	0	0	0	#DIV/0!
Head-On	0	0	0	0	#DIV/0!
Angle	0	0	0	0	#DIV/0!
Sideswipe, Same Direction	0	0	0	0	#DIV/0!
Sideswipe, Opposite Direction	0	0	0	0	#DIV/0!
Backing	0	0	0	0	#DIV/0!
Not Applicable	0	0	0	О	#DIV/0!
Other	0	0	0	О	#DIV/0!
TO	OTAL 0	0	0	0	#DIV/0!

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	#DIV/0!
Injury	0	0	0	0	#DIV/0!
Property Damage Only (PDO)	0	0	0	0	#DIV/0!
TOTAL	0	0	0	0	#DIV/0!

TABLE X
Intersection Collision History Summary
Intersection: Route 66

at

Portland Shopping Ce

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	1	0	0	1	9.1%
Rear-End	1	0	1	2	18.2%
Head-On	0	0	1	1	9.1%
Angle	2	2	3	7	63.6%
Sideswipe, Same Direction	0	0	0	0	0.0%
Sideswipe, Opposite Direction	0	0	0	O	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	O	0.0%
Other	0	0	0	О	0.0%
TOTA	L 4	2	5	11	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	1	0	0	1	9.1%
Property Damage Only (PDO)	3	2	5	10	90.9%
TOTA	L 4	2	5	11	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

at

Grove Street/ Grandy

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	1	0	1	6.7%
Animal	0	0	0	0	0.0%
Fixed Object	2	0	1	3	20.0%
Rear-End	0	3	1	4	26.7%
Head-On	0	0	0	0	0.0%
Angle	2	2	1	5	33.3%
Sideswipe, Same Direction	0	0	1	1	6.7%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	1	1	6.7%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTAL	_ 4	6	5	15	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	1	1	6.7%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	4	6	4	14	93.3%
TOTAL	4	6	5	15	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

from

Grove Street/ Grandv

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	2	2	10.5%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	1	0	1	5.3%
Fixed Object	4	2	3	9	47.4%
Rear-End	2	0	0	2	10.5%
Head-On	0	0	0	0	0.0%
Angle	2	0	2	4	21.1%
Sideswipe, Same Direction	1	0	0	1	5.3%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	О	0.0%
TOTA	L 9	3	7	19	100%

	2015	2016	2017	Total	Percent
Fatal	0	1	0	1	5.3%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	9	2	7	18	94.7%
TOTAL	9	3	7	19	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

at

Route 17 (Gospel Land

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	1	0	1	2	25.0%
Rear-End	3	0	2	5	62.5%
Head-On	0	0	0	0	0.0%
Angle	0	1	0	1	12.5%
Sideswipe, Same Direction	0	0	0	0	0.0%
Sideswipe, Opposite Direction	0	0	0	O	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	O	0.0%
Other	0	0	0	O	0.0%
TOTA	L 4	1	3	8	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	4	1	3	8	100.0%
TOTAL	4	1	3	8	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	O	0.0%
Fixed Object	1	2	2	5	17.9%
Rear-End	4	2	5	11	39.3%
Head-On	0	0	0	0	0.0%
Angle	2	3	1	6	21.4%
Sideswipe, Same Direction	2	3	0	5	17.9%
Sideswipe, Opposite Direction	1	0	0	1	3.6%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	О	0.0%
Other	0	0	0	О	0.0%
TOTA	L 10	10	8	28	100%

from

Route 17 (Gospel Land

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	1	0	1	3.6%
Property Damage Only (PDO)	10	9	8	27	96.4%
TOTAL	10	10	8	28	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

Noute 00

at

Middle Haddam Road/

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	1	0	1	10.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	0	0	0	0	0.0%
Rear-End	2	4	1	7	70.0%
Head-On	0	0	0	0	0.0%
Angle	0	1	0	1	10.0%
Sideswipe, Same Direction	0	1	0	1	10.0%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	O	0.0%
Other	0	0	0	O	0.0%
TOTA	\L 2	7	1	10	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	1	0	1	10.0%
Property Damage Only (PDO)	2	6	1	9	90.0%
TOTAL	2	7	1	10	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

from

Middle Haddam Road/

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	1	0	0	1	2.6%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	1	1	2.6%
Animal	1	0	0	1	2.6%
Fixed Object	2	2	3	7	18.4%
Rear-End	8	5	9	22	57.9%
Head-On	1	0	0	1	2.6%
Angle	2	0	2	4	10.5%
Sideswipe, Same Direction	0	0	1	1	2.6%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTA	AL 15	7	16	38	100%

	2015	2016	2017	Total	Percent
Fatal	1	0	0	1	2.6%
Injury	0	0	3	3	7.9%
Property Damage Only (PDO)	14	7	13	34	89.5%
TOTAL	15	7	16	38	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

at

Route 151 (Middle Ha

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	1	0	1	2	11.8%
Rear-End	7	3	3	13	76.5%
Head-On	0	0	0	0	0.0%
Angle	2	0	0	2	11.8%
Sideswipe, Same Direction	0	0	0	0	0.0%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTA	L 10	3	4	17	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	10	3	4	17	100.0%
TOTAL	10	3	4	17	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

from Route 151 (Middle Ha

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	1	0	1	4.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	2	2	4	16.0%
Fixed Object	3	2	1	6	24.0%
Rear-End	7	5	0	12	48.0%
Head-On	1	0	0	1	4.0%
Angle	0	0	0	0	0.0%
Sideswipe, Same Direction	0	0	0	0	0.0%
Sideswipe, Opposite Direction	1	0	0	1	4.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTA	L 12	10	3	25	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	1	0	0	1	4.0%
Property Damage Only (PDO)	11	10	3	24	96.0%
TOTAL	12	10	3	25	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

at

Route 16 (Middletowr

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	1	1	10.0%
Fixed Object	0	1	0	1	10.0%
Rear-End	1	3	1	5	50.0%
Head-On	0	0	0	0	0.0%
Angle	0	2	0	2	20.0%
Sideswipe, Same Direction	0	0	1	1	10.0%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
ТО	TAL 1	6	3	10	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	1	6	3	10	100.0%
TOTA	L 1	6	3	10	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

rsection: Route 66 from Route 16 (Middletowr

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	1	0	1	2.6%
Animal	0	4	2	6	15.8%
Fixed Object	2	1	2	5	13.2%
Rear-End	4	5	9	18	47.4%
Head-On	0	0	1	1	2.6%
Angle	0	3	0	3	7.9%
Sideswipe, Same Direction	2	0	1	3	7.9%
Sideswipe, Opposite Direction	0	1	0	1	2.6%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TO	TAL 8	15	15	38	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	8	15	15	38	100.0%
TOTAL	8	15	15	38	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	1	0	1	7.7%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	1	0	0	1	7.7%
Rear-End	2	4	3	9	69.2%
Head-On	0	0	0	0	0.0%
Angle	0	2	0	2	15.4%
Sideswipe, Same Direction	0	0	0	0	0.0%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTA	N 3	7	3	13	100%

at

Maple Street/ North N

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	1	0	1	7.7%
Property Damage Only (PDO)	3	6	3	12	92.3%
TOTAL	3	7	3	13	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

from

Maple Street/ North N

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	1	0	1	20.0%
Fixed Object	1	1	0	2	40.0%
Rear-End	1	0	0	1	20.0%
Head-On	0	0	0	0	0.0%
Angle	0	0	0	0	0.0%
Sideswipe, Same Direction	1	0	0	1	20.0%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOT	ΓAL 3	2	0	5	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	3	2	0	5	100.0%
TOTA	L 3	2	0	5	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

at

Main Street/ North Ma

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	1	0	1	5.9%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	0	0	0	0	0.0%
Rear-End	3	6	3	12	70.6%
Head-On	0	0	0	0	0.0%
Angle	1	1	1	3	17.6%
Sideswipe, Same Direction	0	1	0	1	5.9%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTA	N 4	9	4	17	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	4	9	4	17	100.0%
TOTAL	4	9	4	17	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

East Hampton Mall Sh

at

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	0	0	0	0	0.0%
Rear-End	4	4	1	9	60.0%
Head-On	0	0	0	0	0.0%
Angle	1	3	2	6	40.0%
Sideswipe, Same Direction	0	0	0	0	0.0%
Sideswipe, Opposite Direction	0	0	0	O	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	O	0.0%
Other	0	0	0	O	0.0%
TOTA	L 5	7	3	15	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	#DIV/0!
Injury	0	0	0	0	#DIV/0!
Property Damage Only (PDO)	0	0	0	0	#DIV/0!
TOTAL	0	0	0	0	#DIV/0!

TABLE X
Intersection Collision History Summary
Intersection: Route 66

n: Route 66 from East Hampton Mall Sh

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	0	0	0.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	1	0	0	1	7.7%
Other Non-Fixed Object	2	0	0	2	15.4%
Animal	0	0	0	0	0.0%
Fixed Object	0	0	0	0	0.0%
Rear-End	2	1	2	5	38.5%
Head-On	0	0	0	0	0.0%
Angle	2	1	1	4	30.8%
Sideswipe, Same Direction	0	0	0	0	0.0%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	0	0.0%
Other	0	0	1	1	7.7%
TOTA	\L 7	2	4	13	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	7	2	4	13	100.0%
TOTAL	7	2	4	13	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

at

Route 196 (Lake View

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	0	0	1	1	10.0%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	0	0	0	0	0.0%
Fixed Object	0	0	1	1	10.0%
Rear-End	2	2	1	5	50.0%
Head-On	0	0	0	0	0.0%
Angle	0	0	1	1	10.0%
Sideswipe, Same Direction	0	0	2	2	20.0%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	0	0	0	0.0%
Not Applicable	0	0	0	O	0.0%
Other	0	0	0	0	0.0%
TO	TAL 2	2	6	10	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	0	0	0.0%
Property Damage Only (PDO)	2	2	6	10	100.0%
TOTAL	. 2	2	6	10	100%

TABLE X
Intersection Collision History Summary
Intersection: Route 66

from Route 196 (Lake View

COLLISION TYPE

	2015	2016	2017	Total	Percent
Overturn/Rollover	0	0	0	0	0.0%
Other Non-Collision	1	0	0	1	3.3%
Jacknife	0	0	0	0	0.0%
Pedestrian	0	0	0	0	0.0%
Bicycle	0	0	0	0	0.0%
Other Non-Fixed Object	0	0	0	0	0.0%
Animal	1	1	2	4	13.3%
Fixed Object	0	1	3	4	13.3%
Rear-End	2	8	6	16	53.3%
Head-On	0	0	0	0	0.0%
Angle	0	1	2	3	10.0%
Sideswipe, Same Direction	1	0	0	1	3.3%
Sideswipe, Opposite Direction	0	0	0	0	0.0%
Backing	0	1	0	1	3.3%
Not Applicable	0	0	0	0	0.0%
Other	0	0	0	0	0.0%
TOTA	L 5	12	13	30	100%

	2015	2016	2017	Total	Percent
Fatal	0	0	0	0	0.0%
Injury	0	0	1	1	3.3%
Property Damage Only (PDO)	5	12	12	29	96.7%
TOTAL	5	12	13	30	100%

	Connectic
	ut Trail Census 2017
Tighe & Bond	APPENDIX J 7 Counts Report

Connecticut Trail Census

A statewide multi-use trail user study and volunteer data collection program

2017 Adjusted Count Report

February 12, 2018

The following report includes the final adjusted infrared (IR) counter data at 15 count locations for the full 2017 calendar year from Sunday, January 1st, 2017 through Sunday, December 31st, 2017.

Understanding the Data

This count data shows number of uses or trips, not visits or visitors. Infrared counters register warm bodies passing by the IR scope. Trail users who travel out and back on the same route will pass the counter twice and be counted twice. For trails with primarily out and back traffic, trail visits can be estimated at ½ of the count total.

The raw data was adjusted or "calibrated" using manual counts completed by volunteers. Manual count totals that volunteers recorded were compared to the figure registered by the IR counter for that hour. Individual adjustment factors were established by dividing the manual count total by the IR count total for identical time periods. These factors ranged from 1.29 to 2.65. These factors are consistent with factors calculated for other multi-use trails in similar studies. For trails that did not submit manual count forms, the lowest calibration factor (1.29) was applied.

The manual counts showed that the IR counters consistently undercount.

Undercounts are typically due to people travelling side by side or bikes travelling too fast. Manual counts are important to ensure the correction factors applied to each trail are appropriate and reflect the performance of the individual IR counters.

Location	Manual Count	IR Count	Adjustment Factor
Air Line Trail Thompson	X	X	1.29
Air Line Trail East Hampton	46	34	1.35
CTFastrak Trail New Britain	69	26	2.65
Farmington Canal Heritage Trail Cheshire	Х	Х	1.29
Farmington Canal Heritage Trail Hamden	X	Х	1.29
Farmington Canal Heritage Trail New Haven	X	Х	1.29
Hop River Trail Bolton	371	157	2.36
Hop River Trail Vernon	302	187	1.61
Larkin State Bridle Trail Oxford	109	59	1.85
Middlebury Greenway	Х	Х	1.29
Naugatuck River Greenway Derby	550	299	1.84
Norwalk River Valley Trail Wilton	133	103	1.29
Sue Grossman Greenway Torrington	383	248	1.54
Shoreline Greenway Trail Madison	185	102	1.81
Still River Greenway Brookfield	279	180	1.55

Not all trails have complete data for the entire year. The counters in Middlebury, Brookfield and Hamden were added after the beginning of 2017. Counters in New Britain, Madison and New Haven experienced periods of no data due to insects nesting in the IR sensor. The counter in Oxford experienced sensor malfunction at the end of the year. Two days of data in Torrington were also impacted by a counter malfunction. Missing data is indicated with an X in the data sheets. In an attempt to account for missing data, estimated annual totals were calculated by multiplying the average daily use on each trail (for days with data) by 365. All other calculations are based on the adjusted counts.

2017 Adjusted Totals

Location	Adjusted IR Count	Days With Data	Daily Average	Average X 365
Air Line Trail Thompson	4,401	365	12	4,401
Air Line Trail East Hampton	62,415	365	171	62,415
CTFastrak Trail New Britain	40,155	320	125	*45,802
Farmington Canal Heritage Trail Cheshire	64,831	365	178	64,831
Farmington Canal Heritage Trail Hamden	48,035	194	248	*90,372
Farmington Canal Heritage Trail New Haven	73,491	292	252	*91,864
Hop River Trail Bolton	60,943	365	167	60,943
Hop River Trail Vernon	133,016	365	364	133,016
Larkin State Bridle Trail Oxford	31,248	305	102	*37,395
Middlebury Greenway	47,202	311	152	*55,398
Naugatuck River Greenway Derby	303,550	365	832	303,550
Norwalk River Valley Trail Wilton	68,566	365	188	68,566
Sue Grossman Greenway Torrington	83,934	363	231	*84,396
Shoreline Greenway Trail Madison	90,604	329	275	*100,518
Still River Greenway Brookfield	168,660	311	542	*197,945
Total:	1,281,051			*1,401,415

^{*}indicates estimated annual total based on daily average

A total of **1,281,051** uses or trips were recorded across all 15 sites. Using average daily counts to account for missing data, the 15 trails had more than an estimated 1.4 million uses in 2017.


The most heavily used trails during 2017 were the Naugatuck River Greenway in Derby, The Still River Greenway in Brookfield, and the Hop River Trail in Vernon.

Counters on the Air Line Trail in Thompson and the Larkin State Bridle Trail in Oxford recorded the lowest use volumes.

Understanding the Tables

Daily Totals

Pages 1-7 of the attached report detail the adjusted daily totals for each trail. All figures were adjusted using the factors explained above. Weekends and holidays are shaded grey and blue, respectively. Since weather plays a major role in outdoor activities, the table includes daily weather data reported at Bradley International Airport in Windsor Locks. The weather data was downloaded from the National Center for Environmental Information at the National Oceanic and Atmospheric Administration (NOAA) www.ncdc.noaa.gov.

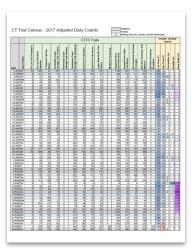


The weather data includes daily high and low temperature, precipitation, snowfall, and snow cover. Data from Bradley Airport was used because it was the most complete dataset available, and it was the only dataset in the state to include snow depth. The data has been conditionally formatted and shaded to to help visually interpret trends.

Some things to look for:

- Weather plays a major role in trail use.
- Trail use lags on very cold days. See March 12th.
- Trail use lags on days with heavy precipitation. Look at May 5th or June 19th.
- Trail use spikes on days in the winter and early spring when temperatures rise, especially on weekends. For instance, see trail use on April 2nd and 9th.
- While people still use snow covered trails, those where snow is removed saw more rapid rebounds in uses following major snowfall. There was a major snow event on March 15th that drastically impacted trail use across all trails, but trail uses in Derby and Torrington, where the trail is plowed, rebounded more quickly.
- Use on trails that have more commuter use and less recreational use, like the FCHT New Haven or CTfastrak Trail in New Britain, may be less impacted by weather.


Monthly Summary

The adjusted monthly totals tables break down the trail use totals by Month. The table at the top of the page details the adjusted count totals by site by month. Cells shaded orange indicate months that count totals were impacted by missing data. The lower table shows the percent of total annual counts by month. Be aware that the percent of total for months with missing data reflect that fact. The cells have been formatted so that cells with higher values are shaded darker red. Both tables show totals for all trails to the right.



Some things to look for:

- The heaviest use occured between the months of April and October when approximately 76% of trail uses across all sites were recorded.
- Use on trails that have more commuter use and less recreational use, like the FCHT New Haven or CTfastrak Trail in New Britain, may have more evenly distributed uses over the year.



Day of Week Summary


The Adjusted Day of Week Summary page breaks down the annual adjusted counts by day of week. Three tables are presented. The first table details total counts by the day of week. The second table shows the calculated daily average by day of week. The third table shows the percent of trail use by day of week for each trail, and is formatted with higher values shaded darker red. All three tables show the totals for all trails to the right.

Some things to look for:


- Generally, heavier use occurred on the weekends than during the week.
- Trails with primarily recreational use tended to have a more pronounced weekend/ weekday discrepancy.
- Use on trails that have more commuter use and less recreational use, like the FCHT New Haven or CTfastrak Trail in New Britain, may have more evenly distributed uses by day of week, and may even have heavier use during the week.

Hourly Summary


The Adjusted Hourly Summary breaks down trail use by hour of day. The top table shows average hourly totals for each site, as well as the average hourly total for all sites. The bottom table shows percent of use by hour of day of the total daily average use for each trail and for all trails combined. The second table is formatted so that cells with higher values are shaded darker red.



- Most trail use (96.6%) took place between 6am and 7pm.
- FCHT New Haven and CTfastrak Trail in New Britain had more uses later at night than other trails, perhaps due to heavier commuter use.

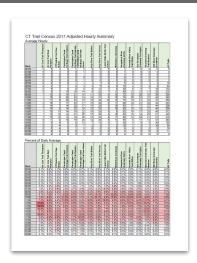

Locations

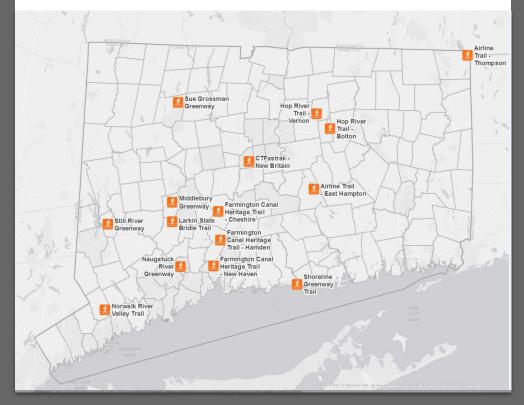

http://cttrailcensus.uconn.edu





This data can be explored interactively on the CT Trail Census Website: http://cttrailcensus.uconn.edu.



The website also contains more information about methods and count procedures and findings. This report was prepared by Laura Brown, Community & Economic Development Educator, University of Connecticut Extension, Aaron Budris, Naugatuck Valley Council of Governments and Kristina Kelly, Connecticut Trail Census, Coordinator, February, 2018.

												X	Missing D	Data (No C	Counter/ C	ounter M	lalfund	ction)			
								СТ	ΓC Tra	ails							(E		eathe)
Date	Day Of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	Low Temp (F)	High Temp (F)	Precipitation (in)	Snowfall (in)	Snow Depth (in)
1-Jan		32	256	61	297	X	107	54	310	135	X	1,100	501	117	735	X	25	44	0	0	0
2-Jan 3-Jan		8	141 31	61 58	81 6	X	116 85	87 9	263	91	X	408 127	118 54	111 53	267 60	X	21 34	35 39	0.9	0	0
4-Jan		3	72	98	121	X	150	50	147	42	X	686	177	179	272	X	31	49	0.9	0	0
5-Jan		6	85	90	52	X	155	31	158	35	X	399	118	201	140	X	22	34	0	0	0
6-Jan		9	49	80	13	Х	105	19	84	44	Х	235	111	159	73	Х	21	31	0	0.8	0
7-Jan		8	43	165	17	Х	70	43	65	83	Х	175	48	66	85	Х	18	21	0.2	3.3	3
8-Jan		6	106	48	15	X	37	33	95	109	X	140	72	42	91	X	9	23	0	0	3
9-Jan 10-Jan		0	43 43	85 122	14 21	X	81 85	33 19	52 53	46 63	X	250 449	40 58	134 130	38	X	4	20 36	0	0	3
11-Jan	_	1	73	130	52	X	129	73	132	48	X	868	152	252	161	X	35	54	0.3	0	3
12-Jan	-	8	53	122	59	X	141	59	97	39	X	521	154	156	185	X	39	56	0.2	0	0
13-Jan	Fri	0	88	143	93	Х	178	61	176	87	Х	613	167	205	189	Х	25	50	0	0	0
14-Jan		6	115	80	92	Х	111	128	226	205	Х	436	200	144	227	Х	17	29	0	0	0
15-Jan		15	192	106	114	Х	163	203	315	127	Х	572	306	167	297	Х	19	40	\rightarrow	0	0
16-Jan		6	180	130	124	X	132	113	297	116	X	765	285	269	332	X	16	43	0	0	0
17-Jan 18-Jan		3	62 31	96 96	21 34	X	136 143	17 64	57 141	30	X	315 322	67 90	184 119	44 111	X	26 34	40 37	0.3	0	0
19-Jan	$\overline{}$	4	108	109	59	X	163	57	134	39	X	697	191	235	296	X	33	49	0.1	0	0
20-Jan	_	8	83	202	62	X	143	47	163	113	X	487	143	232	105	X	35	42	0	0	0
21-Jan		15	302	194	351	Х	187	336	546	137	Х	1,289	362	530	446	Х	35	55	0	0	0
22-Jan		18	453	104	329	X	185	229	413	137	X	1,146	385	385	669	Х	35	53	0	0	0
23-Jan		4	49	143	30	Х	106	33	74	28	X	285	118	144	58	Х	33	40	0.4	0.6	0
24-Jan 25-Jan		6	20	119 117	26	X	108 181	28 90	8 82	0	X	55 706	36 195	59	29	X	33 32	38 42	0.9	1.4	2
26-Jan		4	61 92	196	44	X	204	69	113	30	X	508	136	168 182	169	X	34	52	0	0	1
27-Jan		5	66	130	90	X	198	78	124	50	X	412	177	141	87	X	32	43	0	0	0
28-Jan		28	177	109	178	Х	221	111	297	111	Х	660	218	193	288	Х	27	40	0	0	0
29-Jan	Sun	40	306	66	187	Х	225	154	363	135	Х	898	341	213	586	Х	28	43	0	0	0
30-Jan	_	6	81	135	44	Х	204	90	173	33	X	438	118	167	107	Х	21	34	0	0	0
31-Jan		9	45	149	30	X	154	28	113	15	X	245	74	110	40	X	14	25	0.1	2.3	2
1-Feb 2-Feb		8	46 88	111 96	31	X	159 185	31	94	7 50	X	410 602	112 160	159 116	58 100	X	21 19	42 38	0	0.7	2 1
3-Feb	_	9	72	125	50	X	254	38	100	33	X	476	133	158	73	X	21	34	0	0	1
4-Feb		14	122	130	101	X	205	109	220	76	X	703	192	170	299	X	17	34	-	0	1
5-Feb		6	149	50	159	Х	198	144	170	118	Х	647	248	119	337	Χ	24	42	-	0	1
6-Feb		5	99	141	65	Х	251	102	137	78	Х	686	189	202	190	Х	28	40	-	0	0
7-Feb	$\overline{}$	0	16	93	19	X	177	9	6	11	X	120	41	57	31	X	29	33	\rightarrow	0	0
8-Feb 9-Feb		9 5	141	165 19	172 0	X	340 15	59 19	166	59 9	X	1,109 13	303	287	234	X	30 11	50 34		0 16	12
10-Feb		8	35	48	0	X	22	0	42	42	X	219	34	12	11	X	4	27	0	0.7	13 12
11-Feb		0	73	82	10	X	46	17	128	37	X	603	58	40	87	X	20	30		0.6	13
12-Feb	$\overline{}$	0	41	29	6	X	54	52	34	22	X	101	36	25	25	Х	20	29		5	17
13-Feb		0	15	77	13	Х	62	24	23	7	Х	291	18	37	9	Х	21	34	-	0.1	13
14-Feb		0	34	106	8	X	94	69	58	18	X	723	62	119	27	X	11	37	0	0	12
15-Feb		0	15	104	21	X	84	19	136	55	X	646	68	114	44	X	20	44	-	0	10
16-Feb 17-Feb		9	674 28	111	15 19	X	75 72	64 40	23	24	X	636 659	43 81	93 117	31	X	24 21	35 37	0	0	10 9
18-Feb		0	39	101	70	X	137	161	100	146	X	1,554	124	434	190	X	17	53	0	0	9
19-Feb		0	183	119	81	X	387	137	123	87	X	2,868	276	646	430	X	31	58	0	0	7
20-Feb		0	69	149	59	Х	213	64	87	48	Х	1,490	227	408	341	Х	27	46	0	0	3
21-Feb		0	61	157	27	Х	239	31	36	33	Х	929	143	289	205	Х	22	45	-	0	2
22-Feb		12	74	106	81	X	243	52	103	22	X	822	116	318	136	X	35	55	0	0	1
23-Feb 24-Feb		13	87 164	212 385	192 199	X	271 449	106	216 312	72 100	X 243	1,422	253	658	239	X 010	34	66	-	0	1
24-Feb 25-Feb		13	235	133	240	X	285	158 158	539	100	257	1,716 1,113	319 296	534 406	370 497	910 922	42 41	72 70	\rightarrow	0	0
zo-reb	Sal	13	233	133	240	^	200	100	339	101	257	1,113	290	400	497	922	41	70	0.4		U

											Į.	X	Missing D	Data (No C	Counter/ C	ounter M	alfund	ction)			
								СТ	TC Tra	ails							(1		eathe)
Date	Day Of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	Low Temp (F)	High Temp (F)	Precipitation (in)	Snowfall (in)	Snow Depth (in)
26-Feb	$\overline{}$	23	260	93	220	X	312	180	268	144	136	1,104	281	165	463	649	27	42	0	0	0
27-Feb 28-Feb	-	8	129 146	157 133	101 177	X	287 314	73 92	255 266	79 50	136 146	977 980	173 236	360 405	183 147	336 513	24 35	55 61	0	0	0
1-Mar		5	58	101	66	X	210	45	105	24	63	359	92	164	71	169	49	61	0.1	0	0
2-Mar	-	0	81	96	54	Х	199	45	123	48	44	449	118	176	161	180	28	59	0	0	0
3-Mar	\rightarrow	1	69	109	65	Χ	283	50	158	103	77	482	102	219	129	198	19	39	0	0	0
4-Mar	\rightarrow	6	76	72	57	X	147	71	137	72	32	296	80	127	69	122	11	26	0	0	0
5-Mar	$\overline{}$	3	78	64	99	X	186	111	187	113	62	447	159	102	141	135	7	32	0	0	0
6-Mar 7-Mar	-	5	124 49	119 106	90 40	X	271	80 40	215 71	70 39	94 39	673 250	146 71	347 93	122 40	274 110	34	45 47	0	0	0
8-Mar	-	4	119	146	150	X	380	90	308	52	161	1,260	213	426	305	501	44	59	0.1	0	0
9-Mar		9	143	151	80	X	300	85	176	63	75	806	167	318	232	304	38	54	0.1	0	0
10-Mar	Fri	6	39	72	43	Χ	158	24	52	44	25	143	40	83	34	37	19	38	0.1	2.3	2
11-Mar		13	22	56	41	Х	168	85	58	31	39	399	62	60	54	76	10	22	0	0	1
12-Mar	$\overline{}$	5	68	37	85	Х	225	90	78	81	27	425	121	88	127	149	9	27	0	0	0
13-Mar		12	50	104	53	X	367	99	110	44	59	482	107	219	93	132	12	35	0	0	0
14-Mar 15-Mar		0	7 57	5 13	0	X	22 48	0	27	0	1 0	13 33	5 18	9	7 13	3	20 15	30 28	1.5	16 0	16 12
16-Mar		0	18	56	3	X	102	19	18	61	1	787	4	19	29	0	19	35	0	0	12
17-Mar		0	28	109	3	X	209	0	27	41	0	1,437	14	42	149	0	20	43	0	0	11
18-Mar	\rightarrow	0	83	64	14	Χ	92	45	58	48	1	813	37	45	178	14	15	42	0	0	9
19-Mar		0	70	98	19	Χ	186	83	65	72	8	1,641	80	49	303	82	29	41	0	0	7
20-Mar		0	60	146	19	X	227	43	102	44	9	1,869	32	185	268	48	27	54	0	0	6
21-Mar		5	60 24	167 72	48 21	X	657 196	54 9	47 24	17 22	5 1	1,828	83	340	236 56	180 53	33 19	54	0	0	3
22-Mar 23-Mar		0	20	127	14	X	359	31	40	37	0	366 774	43 49	134 236	132	150	14	38 38	0	0	2
24-Mar		0	20	141	32	X	473	5	34	31	5	441	87	151	120	158	23	45	0	0	1
25-Mar	\rightarrow	3	101	90	112	Х	252	97	144	30	21	712	178	202	363	660	31	44	0.1	0	1
26-Mar	Sun	4	65	77	118	Χ	272	83	97	94	15	532	134	130	267	271	28	41	0	0	0
27-Mar		0	39	85	32	Χ	297	17	42	24	23	235	56	125	69	126	33	42	0.4	0	0
28-Mar	-	3	26	90	26	X	205	31	37	28	27	223	52	161	56	56	37	44	0.5	0	0
29-Mar 30-Mar		1	173 154	106 149	244 156	X	422 448	116 104	231 354	102 59	145 200	1,508 1,155	214 194	429 508	354 336	572 432	33	53 54	0	0	0
31-Mar		0	9	98	19	X	154	21	31	28	6	57	21	54	4	19	33	40	1	1	0
1-Apr		0	46	48	99	X	187	45	78	113	43	510	159	420	136	219	33	39	$\overline{}$	0.5	1
2-Apr	$\overline{}$	43	432	133	510	X	460	345	859	227	384	2,583	562	641	901	1,764	32	60	0	0	0
3-Apr	-	15	267	127	172	Х	294	83	457	103	214	1,161	272	527	281	561	32	64		0	0
4-Apr		9	22	77	23	X	132	19	50	30	15	191	27	88	18	84	39	46		0	0
5-Apr	-	3	179	141	176	X	495	102	281	65	195	1,229	222	528	254	504	39	55	0	0	0
6-Apr 7-Apr	-	17	23 89	64 141	21 83	X	152 312	12 80	32 173	33 63	8 67	96 541	22 115	74 241	27 176	14 192	38	44 52	0.9	0	0
8-Apr	\rightarrow	9	226	138	198	X	511	201	420	118	148	1,301	218	283	326	791	37	52	0	0	0
9-Apr	\rightarrow	44	543	180	563	X	591	544	996	155	405	3,006	111	774	941	1,663	30	70		0	0
10-Apr		10	421	244	241	Х	488	302	659	148	263	2,235	67	636	424	1,195	42	79	0	0	0
11-Apr		23	487	231	236	Х	571	392	664	166	252	2,266	163	593	700	1,052	50	88	0	0	0
12-Apr		12	227	135	155	X	527	121	370	89	216	1,440	125	351	355	611	48	67	0.1	0	0
13-Apr	-	9	269	173	204	X	537	180	509	137	142	1,519	187	397	355	742	41	62	0	0	0
14-Apr 15-Apr	\rightarrow	10 19	441 428	244 127	350 293	X	664 371	300 352	945 837	148 209	261 227	2,401 1,358	281 270	547 403	595 609	1,057 800	36 33	65 69	0	0	0
16-Apr	\rightarrow	13	428	114	248	X	558	319	1,003	142	191	1,225	294	403	823	1,097	51	88	\rightarrow	0	0
17-Apr		17	336	130	192	X	353	123	591	85	248	1,939	245	534	428	685	50	73	0.1	0	0
18-Apr		23	318	159	205	Х	314	203	560	126	276	2,309	253	627	310	725	39	62	0	0	0
19-Apr		9	114	114	89	Х	316	83	347	68	99	574	154	284	178	276	39	54	0.1	0	0
20-Apr		1	138	146	136	X	355	76	373	83	137	1,001	116	397	180	419	45	70	0.1	0	0
21-Apr	\rightarrow	0	45	101	36	X	241	40	126	15	59	166	74	113	33	180	46	52	0.3	0	0
22-Apr	Sat	5	137	101	176	Χ	577	222	430	85	146	708	182	287	221	282	44	56	0	0	0

								CT	TC Tra	ails	<u> </u>	X		ata (No C				W	eathe		
							c	<u> </u>						>	=		(1	3radl	ley Aiı	(port)
Date 23-Apr	Day Of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	× Farmington Canal Heritage Trail Hamden	Farmington Canal Weritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail	Still River Greenway Brookfield	Cow Temp (F)	High Temp (F)	O Precipitation (in)	O Snowfall (in)	O Snow Depth (in)
24-Apr		23	241	130	200	X	483	92	510	35	218	857	220	544	53	567	38	72	0	0	0
25-Apr		3	45	101	43	X	183	40	100	17	18	75	41	117	11	73	48	56	0.5	0	0
26-Apr	_	0	74	135	68	Х	408	43	191	35	85	649	99	218	49	374	48	62	0.3	0	0
27-Apr	_	6	176	130	220	X	567	175	388	37	108	725	146	361	47	442	56	68	0	0	0
28-Apr 29-Apr		31 21	244 529	202 98	107 143	X	1,007 810	154 142	407 594	59 98	190 209	1,571 1,459	261 217	460 371	71 274	521 707	57 59	86 84	0	0	0
30-Apr		9	415	117	296	X	280	326	654	163	263	1,210	327	338	477	688	49	61	0.1	0	0
1-May	Mon	3	181	101	137	Χ	376	85	420	83	196	1,109	187	391	287	482	45	70	0	0	0
2-May		1	191	125	112	X	394	154	428	103	186	1,510	301	426	225	744	53	77	0	0	0
3-May 4-May		14 22	245 242	212 220	170 199	X	554 542	161 201	514 577	83 107	218 216	1,626 1,694	217 198	378 422	310 323	600 586	43 35	64 68	0	0	0
5-May		0	34	85	28	X	172	50	65	107	17	1,094	186	32	58	39	46	52	1.5	0	0
6-May	_	12	257	114	225	X	674	274	573	107	172	1,299	294	386	580	866	50	71	0.3	0	0
7-May	$\overline{}$	19	406	90	358	Χ	390	371	741	187	252	1,245	291	289	669	614	42	63	0	0	0
8-May	_	4	123	119	160	X	551	158	378	68	191	1,152	203	295	272	450	39	54	0	0	0
9-May 10-May		12	135 199	141 199	161 176	X	492 464	106 215	352 410	57 107	163 183	1,004 1,315	230 262	332 324	218 223	465 736	36 42	56 58	0	0	0
11-May		0	193	228	213	X	544	276	463	78	198	1,427	214	402	312	580	40	65	0	0	0
12-May		3	223	196	187	X	549	180	455	131	178	1,310	239	330	285	600	48	67	0	0	0
13-May	Sat	3	153	85	81	Х	181	191	355	57	39	237	59	120	194	76	44	54	0.8	0	0
14-May		3	329	146	346	Х	353	187	346	146	263	1,341	500	364	727	1,372	39	61	0.4	0	0
15-May 16-May		3	101 317	125 252	160 261	X	341 514	59 215	286 767	107 89	129 342	1,197 2,252	245 279	284 567	156 370	493 933	51 48	67 81	0	0	0
17-May		6	262	183	164	X	167	165	504	109	208	1,378	240	381	375	772	55	94	0	0	0
18-May		5	189	151	92	Х	63	118	287	48	110	355	167	225	236	403	67	96	0	0	0
19-May	Fri	12	191	207	84	Χ	75	106	396	79	182	445	121	249	259	377	58	92	0	0	0
20-May		37	421	119	323	X	129	423	743	172	207	1,694	281	368	410	744	50	73	0	0	0
21-May 22-May		10	555 83	199 119	435 83	X	185 141	449 83	762 212	307 57	296 65	2,297 357	338 67	429 153	867 85	1,088 178	42 51	72 59	0.1	0	0
23-May		0	345	173	230	X	269	222	531	87	236	1,782	292	465	317	674	49	72	0.1	0	0
24-May		3	179	202	133	X	249	156	496	67	208	546	213	368	279	756	54	75	0	0	0
25-May	Thu	0	27	77	41	Х	96	40	128	35	22	94	32	51	53	53	51	58	0.6	0	0
26-May		3	149	104	111	X	218	99	207	78	114	809	210	190	214	446	50	64	0.5	0	0
27-May		22	467	143	322	X	289	409	673	216	300	1,444	261	357	920	1,023	52	69	0	0	0
28-May 29-May		17 8	666 126	151 88	260 99	X	159 191	406 144	749 396	218 96	270 88	1,286 480	380 183	392 83	1,163	992 307	55 53	72 59	0	0	0
30-May		15	212	135	130	X	130	128	391	68	124	723	158	247	229	425	52	63	0	0	0
31-May		3	162	159	154	Χ	208	180	439	79	178	929	217	340	278	595	54	74		0	0
1-Jun		8	276	215	263	X	240	177	664	177	275	1,889	254	389	531	938	53	79	0	0	0
2-Jun 3-Jun		6 22	172 479	154 191	229 322	X	266 324	161 378	544	190 212	239 270	1,418	231	307 389	470 611	773	49 45	73 73	0	0	0
4-Jun	$\overline{}$	13	479	72	322	X	207	302	675 887	137	263	1,779 1,418	345 289	290	611 620	1,048 694	48	73	0.2	0	0
5-Jun		0	141	109	163	X	185	85	245	81	92	649	124	190	181	386	53	63	0.3	0	0
6-Jun		3	74	127	56	Х	Х	26	111	50	44	372	90	85	85	192	49	53	0.6	0	0
7-Jun		8	310	183	284	X	X	262	623	103	287	1,764	239	516	421	806	49	75	0	0	0
8-Jun 9-Jun	$\overline{}$	12	325	61 90	262 218	X	X	163	538	102	257	526	226 243	388 405	397	696 670	46 44	78	0	0	0
9-Jun 10-Jun		21	265 497	X X	265	X	X	80 326	593 819	157 220	252 263	1,415 1,358	258	341	468 633	631	55	81 86	0	0	0
11-Jun		9	468	X	179	X	X	175	623	140	186	1,036	263	258	689	732	63	94	0	0	0
12-Jun		4	185	Х	101	Х	Х	156	347	74	108	739	160	222	274	411	64	96	0	0	0
13-Jun	$\overline{}$	3	122	X	61	Х	Х	73	263	74	103	583	110	190	207	321	69	95	0	0	0
14-Jun		3	206	X	190	X	X	222	549	126	209	1,573	208	477	368	711	60	84		0	0
15-Jun 16-Jun		10 5	295 97	X	257 141	X	X	109 113	703 275	81 76	232 132	1,383 419	223 141	324 145	203	705 296	52 59	78 73	0.1	0	0
17-Jun		9	265	X	155	X	X	222	594	179	179	579	194	249	715	463	62	76	0.1	0	
. 7 Juil	Jui		200	,	,50		,		007	110	.73	010	.04		, 10	,00	UZ	. 0			

												XI	Missing E	Data (No C	Counter/ C	Counter M	alfund	ction)			
								СТ	TC Tra	ails							(1		eathe)
Date	Day Of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	Low Temp (F)	High Temp (F)	Precipitation (in)	Snowfall (in)	Snow Depth (in)
18-Jun	_	14	306	X	172	X	X	170	575	164	183	556	247	221	602	718	68	86	0	0	0
19-Jun 20-Jun	\rightarrow	12	143 307	X	50 223	X	X	66 194	354 593	100	105 288	366 1,297	176 251	136 477	X	208 856	69 66	87 85	1.5	0	0
21-Jun		4	250	X	223	280	X	187	505	116	214	1,240	231	347	X	744	61	84	0	0	0
22-Jun	_	18	269	X	305	241	X	217	497	107	232	1,122	198	426	X	857	55	85	0	0	0
23-Jun		1	173	Х	110	163	Х	83	218	100	125	521	160	134	Х	374	67	90	0	0	0
24-Jun		4	216	Х	138	377	Х	116	541	126	128	859	190	185	Х	657	69	86	0	0	0
25-Jun		21	556	X	333	526	X	276	772	164	280	1,453	269	202	X	973	58	84	0	0	0
26-Jun	_	5	291	X	272	302	X	187 69	589 257	76 126	314	1,659	276 177	419	X	998	53 53	80 75	0 3	0	0
27-Jun 28-Jun		13	188 345	X	300	239 434	X	250	549	126 135	227 311	1,152 1,920	256	284 366	X	1,000	50	75 79	0.3	0	0
29-Jun	$\overline{}$	12	284	X	227	195	X	194	333	127	227	1,003	203	235	X	634	59	80	0	0	0
30-Jun		13	162	X	116	134	X	85	212	44	133	511	183	111	X	326	65	88	0.5	0	0
1-Jul		1	303	Х	216	318	X	144	572	153	179	725	195	120	X	484	68	86	0.1	0	0
2-Jul	Sun	14	311	Х	236	484	Х	189	646	163	208	1,039	223	219	Х	676	69	90	0.2	0	0
3-Jul		18	273	Х	194	424	Х	173	690	118	225	1,838	169	242	Х	696	63	86	0	0	0
4-Jul		15	524	Х	409	684	Х	380	900	212	319	1,481	329	307	Х	1,091	58	85	0	0	0
5-Jul		10	242	X	210	307	X	187	497	92	243	1,350	159	275	X	612	58	86	0	0	0
6-Jul		111	346	X	226	389	X	222	514	124	225	728	165	261	X	665	60	81	0	0	0
7-Jul 8-Jul	-	6 27	60 275	X	210	123 762	X	54 213	200 696	26 151	97 170	443 883	103 225	54 150	X	391 642	63 65	73 87	0.8	0	0
9-Jul		150	559	X	535	1,061	X	416	1,093	262	368	1,935	376	304	X	1,102	59	82	0.1	0	0
10-Jul		239	283	X	213	364	X	142	551	92	235	1,126	183	255	X	629	60	86	0	0	0
11-Jul		23	133	Х	119	312	Х	76	313	81	164	646	159	150	Х	550	68	85	1.1	0	0
12-Jul	Wed	77	143	Х	102	281	Х	50	278	70	133	552	181	150	Х	346	69	87	1.5	0	0
13-Jul		14	124	Х	79	179	Х	59	244	46	101	416	83	73	Х	257	59	89	0.8	0	0
14-Jul		1	100	Х	76	129	Х	69	199	50	43	210	40	15	Х	160	59	65	0.1	0	0
15-Jul		5	346	X	262	706	X	255	724	177	252	1,019	229	86	X	818	63	85	0	0	0
16-Jul 17-Jul		32 40	429 229	X	338	803	X	284 147	736	209 70	303 221	1,269 802	296	281	X	871	62	88	0	0	0
17-Jul 18-Jul		34	172	X	150 89	367 303	X	83	441 341	76	176	636	178 201	517 280	X	694 450	64 71	88 90	0	0	0
19-Jul		30	96	X	116	280	X	191	320	81	142	688	137	221	X	468	71	93	0	0	0
20-Jul	\rightarrow	25	120	X	102	244	X	161	239	61	105	493	125	131	X	372	70	93	0.5	0	0
21-Jul		43	108	Х	128	245	Х	234	438	94	152	708	130	139	Х	508	68	90	0	0	0
22-Jul		8	257	Х	169	479	Х	444	701	214	177	769	169	173	Х	677	65	85	0	0	0
23-Jul		94	457	Х	289	606	Х	889	1,027	242	240	1,071	274	431	X	834	68	82	0	0	0
24-Jul		1	77	X	80	116	X	43	152	54	72	449	89	63	X	451	56	68	$\overline{}$	0	0
25-Jul		10	187	5	178	439	X	272	493	85	238	1,023	218	108	127	835	57	68	0	0	0
26-Jul 27-Jul	$\overline{}$	18	276 187	88	303 196	573 346	X	376 137	736 375	107 78	275 160	1,440 587	213 129	317 170	247 60	959 648	53 61	81 73	0	0	0
28-Jul		0	166	19	232	333	X	336	547	124	170	758	177	247	87	632	62	84	\rightarrow	0	0
29-Jul		12	432	24	433	538	X	595	890	244	247	793	291	241	131	1,124	58	78	0	0	0
30-Jul		13	536	50	781	963	Х	846	975	255	409	1,571	296	304	354	1,302	53	83	-	0	0
31-Jul	_	8	211	37	240	364	Х	274	551	92	194	1,177	179	337	297	798	55	88	-	0	0
1-Aug		52	166	37	297	487	Х	220	564	76	213	916	156	204	419	632	62	89	0	0	0
2-Aug	_	14	89	0	118	148	X	59	338	54	143	681	101	127	167	406	65	90	\rightarrow	0	0
3-Aug	-	39	131	45	227	434	X	113	451	111	174	929	134 137	190 176	357	770 574	65	86	0	0	0
4-Aug 5-Aug	\rightarrow	67	139 165	135 109	150 179	319 347	X	196 210	401 384	103 115	143 151	666 519	194	176	200 174	574 794	68 64	87 82	1.5	0	0
6-Aug	_	46	483	154	833	1,042	X	879	1,181	222	359	1,670	333	439	666	1,273	59	79	0	0	0
7-Aug	_	4	92	90	85	107	X	106	312	46	85	241	71	103	105	198	58	71	0	0	0
8-Aug		1	237	249	391	470	X	265	628	92	256	1,153	199	324	232	839	62	80	-	0	0
9-Aug	$\overline{}$	13	258	220	331	390	Х	298	620	102	272	1,212	217	330	544	916	53	86	\rightarrow	0	0
10-Aug	_	13	218	143	288	300	Х	269	504	98	222	1,014	160	334	355	736	59	88	0	0	0
11-Aug	_	9	212	215	231	389	X	276	514	122	210	883	187	241	433	649	61	85	-	0	0
12-Aug	Sat	9	394	141	502	590	X	430	732	181	217	1,131	269	256	341	919	63	81	0.2	0	0

												X	iviissiiig L	Data (No C	Journel C	Journer W	iaiiuii				
								CT	TC Tra	ails							(1		eathe	er rport)	
Date	Day Of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	Low Temp (F)	High Temp (F)	Precipitation (in)	Snowfall (in)	Snow Depth (in)
13-Aug	_	25	386	146	449	766	X	730	1,067	248	328	1,036	336	252	530	1,018	67	85	0	0	0
14-Aug 15-Aug		3	166 158	141 93	207 161	276 226	X	255 161	593 399	109 100	278 185	796 316	189 148	270 196	225 163	722 752	58 67	82 79	0.1	0	0
16-Aug		22	233	173	214	356	X	347	606	109	216	942	145	310	323	739	62	86	0.1	0	0
17-Aug	Thu	10	267	154	302	307	Х	248	577	111	201	785	142	275	225	911	56	82	0	0	0
18-Aug		5	92	58	71	114	196	59	231	24	67	107	46	51	27	245	68	81	0.1	0	0
19-Aug		1 1 5	222	141	294	482	438	376 551	677	153	185	806	257	216	198	654	69	89	0	0	0
20-Aug 21-Aug		15	337 175	93 191	407 185	526 222	346 298	210	967 434	231 107	269 204	1,137 636	261 185	284 269	374 671	990 699	65 60	84 87	0	0	0
22-Aug		4	115	135	79	145	284	208	380	65	132	451	139	141	383	584	69	91	0.4	0	0
23-Aug	Wed	4	222	133	249	318	371	279	638	133	256	960	210	335	441	795	60	81	0	0	0
24-Aug	_	18	204	210	276	343	444	258	606	83	218	1,150	248	298	515	791	54	80	0	0	0
25-Aug 26-Aug		17	199 390	180 180	310 590	285 600	346 523	222 780	593 1,037	94 292	205 336	942 1,646	201 331	340 309	573 954	885 1,037	56 50	77 76	0	0	0
27-Aug	-	17	398	173	688	746	546	775	1,037	292	338	1,808	380	357	1,047	1,324	51	77	0	0	0
28-Aug	_	13	215	170	356	340	466	312	583	83	265	1,470	281	343	492	975	51	78	0	0	0
29-Aug	_	10	112	135	204	252	315	213	493	72	174	769	137	276	308	603	52	67	0	0	0
30-Aug		8	206	146	263	372	416	220	599	188	247	1,527	196	369	428	927	57	77	0	0	0
31-Aug 1-Sep		6	165 267	143 199	287 306	284 279	329 405	187 321	515 635	124 159	230 212	1,146 1,617	181 260	264 312	426 631	764 750	53 47	79 70	0	0	0
2-Sep		14	491	127	571	557	422	768	1,101	224	279	1,507	303	385	988	1,039	41	69	0	0	0
3-Sep		1	77	29	98	105	190	109	176	55	89	399	110	53	394	274	52	62	0.9	0	0
4-Sep	-	39	579	178	877	1,029	222	886	1,171	253	443	1,871	527	522	1,389	1,685	56	82	0	0	0
5-Sep	_	0	184	175	138	172	340	213	423	107	168	441	189	145	307	411	64	87	0.1	0	0
6-Sep 7-Sep		10	43 184	88 125	75 276	93 311	267 487	21 236	126 463	24 103	50 214	315 1,056	93 249	76 388	93 343	115 707	59 55	69 75	0.9	0	0
8-Sep		17	193	125	249	310	407	234	463	102	223	1,266	309	295	370	676	51	72	0.1	0	0
9-Sep		39	505	276	489	542	554	607	883	264	309	1,429	351	335	602	986	47	71	0	0	0
10-Sep	_	27	495	178	617	581	607	813	922	338	296	1,576	408	428	860	1,212	49	75	0	0	0
11-Sep 12-Sep	_	37	265	191 191	253 256	241 234	389 456	255 229	556 426	87	256	1,472	276 274	364	297 270	808	47	79	0	0	0
12-Sep		14	230 249	207	243	240	350	234	577	81 70	227 195	1,146 940	262	371 381	279	766 725	50 50	86 83	0	0	0
14-Sep		0	124	135	186	189	210	189	384	94	177	344	182	222	118	445	67	79	0.1	0	0
15-Sep		4	154	170	165	198	254	177	376	111	167	671	265	249	209	508	64	84	0	0	0
16-Sep	-	15	250	287	274	408	294	487	589	133	201	258	294	249	403	817	61	83	0	0	0
17-Sep 18-Sep	_	25 28	242 123	101	336 151	487 177	249 263	534 170	883 407	190 107	254 214	653 412	311 249	303 290	586 187	1,011	62 63	84 76	0	0	0
19-Sep	_	5	89	85	70	102	192	106	333	59	139	186	160	210	53	392	66	75	0	0	0
20-Sep	_	0	108	127	150	154	155	132	388	59	130	63	231	338	98	606	69	78	0	0	0
21-Sep	_	3	147	125	203	239	178	243	423	67	225	311	247	306	259	837	65	77	0	0	0
22-Sep		13	173	157	287	181	298	229	433	94	194	528	263	309	325	812	62	78	0	0	0
23-Sep 24-Sep		18 13	321 321	183 119	402 445	363 358	150 178	579 508	837 790	209	244 187	831 701	358 362	272 306	546 620	984 887	62 60	87 92	0	0	0
25-Sep		5	176	66	179	107	203	78	359	57	156	609	244	238	283	479	65	91	0	0	0
26-Sep	Tue	10	160	127	186	139	216	125	367	79	172	655	226	289	287	493	65	89	0	0	0
27-Sep	_	5	126	106	150	127	217	85	333	129	151	458	253	314	348	536	64	89	0	0	0
28-Sep		21	147	149	283	164	133	118	531	155	201	1,115	294	358	310	735	53	78	0	0	0
29-Sep 30-Sep		21 34	200 242	196 122	284 302	220 293	314 311	196 265	541 549	115 220	231 161	1,131 629	244 270	301 168	337 245	677 555	44 48	70 58	0.1	0	0
1-Oct	_	30	566	157	617	460	399	444	917	233	281	1,352	356	323	758	1,423	41	69	0.1	0	0
2-Oct	_	46	192	175	275	179	345	158	570	81	208	1,299	288	343	343	687	38	72	0	0	0
3-Oct		6	202	183	297	178	336	144	470	148	225	1,150	292	334	354	690	41	72	0	0	0
	Wed	4	195	165	283	168	251	128	556	91	214	1,076	263	326	348	730	46	79	0	0	0
5-Oct	_	15 26	152 199	146 188	265 232	173 158	241 336	144 132	334 433	105 94	199 192	572 647	216 251	303 258	325 303	578 840	59 52	83 78	0	0	0
7-Oct		28	242	77	365	265	179	250	606	181	182	517	280	256	513	901	57	80	0	0	0

											Ĺ	X	Missing D	ata (No C	Counter/ C	Counter M	lalfund	ction)			
								СТ	TC Tra	ails							(1		eathe	er rport))
Date	Day Of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	Low Temp (F)	High Temp (F)	Precipitation (in)	Snowfall (in)	Snow Depth (in)
8-Oct		22	114	66	141	103	156	118	357	144	83	116	158	133	276	459	69	78	0.5	0	0
9-Oct		19	41 187	77	79	45 238	107 128	130	147 444	30 120	50 216	75 1,107	72	53 436	122 368	198	69	74	0.3	0	0
10-Oct 11-Oct		5 8	198	146 119	319 243	150	132	66	386	120	155	252	238 185	239	272	688 521	55 53	78 73		0	0
12-Oct		6	161	165	247	190	174	170	405	164	154	964	245	309	352	663	40	64		0	0
13-Oct		3	223	191	223	201	176	130	407	89	159	747	248	222	334	577	37	68	0	0	0
14-Oct		8	225	117	254	267	128	173	426	279	170	465	221	293	239	715	57	75		0	0
15-Oct		23	322	77	338	241	111	243	507	218	212	338	319	327	548	1,035	58	76		0	0
16-Oct		14	147	104	192 190	116 106	116 130	149 106	284 355	79 127	116 177	679	194	208 252	227 268	457 597	41 35	66 59	-	0	0
17-Oct 18-Oct		142	181 192	173 218	236	133	161	151	480	137 79	163	1,023 1,017	252 254	327	406	587 691	39	73	0	0	0
19-Oct		18	193	133	325	191	105	189	478	94	198	990	284	287	386	770	40	74		0	0
20-Oct		31	234	188	312	172	106	137	499	113	176	1,106	285	289	399	715	47	72	0	0	0
21-Oct	Sat	17	402	196	482	336	103	376	686	235	201	1,111	353	293	519	870	40	81	0	0	0
22-Oct		65	476	109	620	400	106	579	925	488	244	649	458	337	858	1,455	43	76	-	0	0
23-Oct		101	196	135	200	128	90	173	504	133	168	627	244	232	310	569	45	74		0	0
24-Oct 25-Oct		10	61 60	93 138	22	36	43 93	35 73	108 247	52	22 56	85 546	128	68 179	114 147	110	64	75		0	0
26-Oct		8	54	111	123 102	101 84	123	52	95	107 85	61	493	220 229	179	147	574 360	58 48	69 58	$\overline{}$	0	0
27-Oct		26	173	157	196	189	137	170	394	85	150	1,089	297	212	325	667	41	64	0.4	0	0
28-Oct	-	17	338	191	442	263	138	470	644	260	134	791	320	286	580	845	37	69	0	0	0
29-Oct		8	23	40	39	18	18	50	113	20	8	9	27	28	58	19	57	68	2.6	0	0
30-Oct		15	38	88	120	98	130	50	158	42	75	598	102	120	154	431	47	68		0	0
31-Oct	-	3	154	167	136	142	121	116	342	24	125	931	178	249	210	448	37	57	0	0	0
1-Nov 2-Nov		10	95 83	159 141	137 253	88 152	150 338	73 163	195 392	22 X	61 158	458 728	169 248	31 X	134 278	257 570	30 46	46 72	0	0	0
3-Nov		13	7	162	234	176	272	130	329	X	127	800	287	X	343	584	46	77	0	0	0
4-Nov	-	13	24	170	354	324	342	395	578	X	169	1,251	327	590	473	722	38	57	0	0	0
5-Nov		19	3	109	150	128	205	232	412	Х	81	379	141	6	287	366	41	52	_	0	0
6-Nov	Mon	15	0	138	137	84	207	45	131	Х	61	361	133	2	123	245	45	66	-	0	0
7-Nov	_	0	3	162	130	84	254	161	245	Х	108	600	167	6	200	366	35	48	-	0	0
8-Nov	-	3	1	154	151	123	285	85	234	X	93	728	150	0	205	324	28	48	-	0	0
9-Nov 10-Nov	-	6	19	143 101	151 75	148 65	301 154	156 180	254 152	X	110 41	743 416	214 94	22	185 94	338 183	24	51 48	0	0	0
11-Nov		6	5	149	143	136	182	165	218	X	71	616	182	164	145	305	19	38	-	0	-0
12-Nov		6	14	93	287	196	230	224	357	X	101	929	296	45	334	558	21	46		0	0
13-Nov	_	5	1	119	96	45	236	50	137	Х	43	311	92	0	76	177	29	42		0	0
14-Nov		0	4	114	94	43	223	26	202	Х	44	434	139	0	53	186	29	40		0	0
15-Nov	-	8	4	149	178	137	267	85	300	X	116	828	185	0	276	341	24	47	-	0	0
16-Nov		4	1	109	92	81	209	33	121	X	50	375	124	17	85	167	36	47		0	0
17-Nov 18-Nov		5	1	109 77	120 127	106 137	243 185	66 210	176 346	X	84 80	699 441	167 151	0	152 203	276 202	24	43 39	-	0	0
19-Nov	$\overline{}$	6	7	88	203	137	210	170	241	X	85	616	181	0	203	369	35	57	0.1	0	0
20-Nov	_	6	1	138	90	63	204	52	182	X	72	657	142	60	160	245	31	44		0	0
21-Nov		0	5	122	773	88	210	161	279	Х	101	863	186	204	198	369	30	58	0	0	0
22-Nov	Wed	4	0	135	83	49	169	24	76	Х	50	184	72	65	38	172	34	47		0	0
23-Nov	_	12	9	72	178	94	174	111	291	X	80	887	373	148	219	403	27	44		0	0
24-Nov		23	31	170	230	164	178	260	422	X	173	1,074	367	219	450	769	24	50		0	0
25-Nov 26-Nov		17	27	135 85	400 205	218 137	232	390 189	470 342	X	146 146	1,067 863	408 287	312 139	546 394	865 491	30	58 49		0	0
27-Nov		0	3	114	120		230	76	242	X	83	782	174	190	185	310	27	48		0	0
28-Nov		0	3	119	103	92	262	71	189	X	112	620	185	162	136	336	21	45	-	0	0
29-Nov		17	4	154	187	160	276	156	331	X	116	1,001	258	239	185	494	34	62		0	0
30-Nov	-	6	60	119	89	71	214	54	197	Х	52	556	156	144	89	253	26	44	-	0	0
1-Dec		1	101	186	199	92	275	118	249	X	84	557	201	134	214	264	32	50		0	0
2-Dec	Sat	12	184	106	226	176	203	206	331	X	108	765	266	154	294	425	25	43	0	0	0

Weekend
Holiday
X Missing Data (No Counter/ Counter Malfunction)

												X	iviissing L	Jata (No C	Jounter/ (Counter M	airund	ction)			
								СТ	TC Tr	ails							(I		eathe ey Air		
Date	Day Of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	Low Temp (F)	High Temp (F)	Precipitation (in)	Snowfall (in)	Snow Depth (in)
3-Dec		4	172	85	201	121	186	137	287	Х	116	603	252	158	178	344	28	40	0	0	0
4-Dec		1	91	183	118	123	260	165	249	Х	93	736	191	153	151	312	24	48	0	0	0
5-Dec		0	38	122	44	41	205	43	92	X	50	246	72	56	53	102	36	59	0.5	0	0
6-Dec		0	84	130	90	84	265	66	203	X	66	579	125	158	111	250	33	57	0	0	0
7-Dec		3	91	117	106	121	267	76	178	X	85	541	169	161	125	330	28	46	0	0	0
8-Dec	_	3	68	157	87	70	229	52	150	X	66	372	133	105	93	198	24	38	0	0	0
9-Dec		3	87	159	77	66	134	85	165	X	36	155	56	97	96	107	29	33	0.5	5.5	0
10-Dec		6	72 26	56 114	54 23	32 49	159 234	40 9	100 86	X	14 17	338 546	71 67	46 80	96 71	51 74	25 29	37 39	0	0	6 5
12-Dec		0	23	98	17	49	214	14	31	X	3	162	32	22	27	14	29	36	0.2	0	4
13-Dec		0	38	93	35	37	195	14	42	X	5	162	59	32	56	20	18	27	0.2	0	2
14-Dec		12	26	130	25	30	185	7	31	X	3	223	50	34	27	33	16	27	0	0.4	2
15-Dec		0	22	154	18	39	150	7	23	X	5	213	35	36	22	25	9	23	0	0.4	2
16-Dec		0	89	96	31	45	142	33	90	X	12	285	102	51	31	48	13	32	0	0.5	2
17-Dec	_	3	104	61	41	77	145	102	97	X	9	338	108	46	69	104	11	29	0	0	2
18-Dec	_	0	34	93	21	54	176	17	86	X	14	324	83	46	34	84	25	35	0	0	1
19-Dec		0	76	125	94	120	249	50	81	X	39	603	119	86	170	257	32	52	0	0	1
20-Dec		0	45	104	92	70	258	31	120	X	32	524	115	108	109	234	32	46	0	0	0
21-Dec		0	91	109	68	53	229	40	131	Х	62	495	174	100	100	215	26	37	0	0	0
22-Dec	Fri	0	50	104	66	31	187	26	113	Х	48	318	124	153	71	119	25	30	0	0	0
23-Dec	Sat	0	26	58	3	8	75	31	5	Х	1	61	61	3	20	14	25	37	0.7	0	0
24-Dec	Sun	0	100	48	103	107	138	40	82	Х	41	495	261	69	247	380	30	37	0	0	0
25-Dec	Mon	0	81	61	14	26	102	24	42	Х	15	188	165	3	93	31	22	36	0.4	3.3	1
26-Dec	Tue	14	72	96	39	46	179	61	97	Х	9	471	96	56	132	121	7	25	0	0	3
27-Dec	Wed	3	51	117	48	28	125	59	53	X	13	322	107	34	76	28	-2	21	0	0	3
28-Dec	Thu	0	22	88	6	17	110	52	21	X	4	145	41	26	45	28	2	11	0	0	3
29-Dec	_	0	30	74	22	21	130	28	36	Х	3		50	51	63		0	16	0	0	2
30-Dec		0	38	53	32	13	129	21	45	X	18	118	53	26	38	34	-1	17	0	0.3	2
31-Dec	Sun	3	50	48	9	22	137	9	53	Х	0	101	66	22	47	26	-3	11	0	0	0
Total Co		4,401	62,415	40,155	64,831	48,035	73,491	60,943	133,016	31,248	47,202	303,550	68,566	83,934	90,604	168,660	٦	Γotal	1,	,281,0)51
Data Da	-	365	365	320	365	194	292	365	365	305	311	365	365	363	329	311					
Daily Av	_	12	171	125	178	248	252	167	364	102	152	832	188	231	275	542	_	r_4_'	*4	101 -	115
Avg. x 3	565	4,401	62,415	*45,802	64,831	*90,372	*91,864	60,943	133,016	*37,395	*55,398	303,550	68,566	*84,396	*100,518	*197,945	Ī	Γotal	^1,	401,4	15

^{*} Indicates an estimated annual total for trails with incomplete data.

All figures are counts or trips, not visitors. For most trails with visitors passing a counter twice per visit, a good estimate of visits is 1/2 of the count total.

All counts were adjusted to account for inherent undercounts typical of IR Counters.

Adjustment factors were applied based on comparisons between the IR counts and manual counts.

CT Trail Census 2017 Adjusted Monthly Summary

Impacted by Missing Data

Count Totals

Ocurr Total																
Month	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire		Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	All Trails
January	258	3,506	3,544	2,660	0	4,403	2,446	5,302	2,204	0	16,207	5,447	5,212	6,421	0	57,610
February	146	3,096	3,346	2,168	0	5,430	2,046	3,738	1,630	918	23,619	6,450	4,228	4,794	3,330	64,939
March	90	1,990	2,926	1,807	0	7,733	1,673	3,158	1,522	1,265	20,895	5,243	2,779	4,518	5,211	60,810
April	407	8,042	4,185	6,130	0	13,381	5,657	14,867	3,070	5,464	39,285	12,274	5,863	10,182	19,764	148,571
May	248	7,363	4,648	5,635	0	9,660	6,011	14,044	3,243	5,551	34,442	9,640	6,897	11,126	18,469	136,977
June	281	8,100	1,202	6,217	2,891	1,222	5,124	15,048	3,632	6,158	32,559	8,708	6,415	7,918	19,650	125,125
July	1,071	7,962	223	6,995	13,522	0	7,941	17,079	3,903	6,243	28,625	6,621	5,921	1,303	20,742	128,151
August	465	6,846	4,333	9,224	11,983	5,318	9,712	18,648	3,940	6,779	29,445	8,052	6,171	12,296	24,121	157,333
September	431	6,865	4,424	8,501	8,600	8,911	9,147	16,445	3,945	6,165	24,590	8,777	8,064	12,037	21,537	148,439
October	727	6,141	4,290	7,915	5,529	4,919	5,330	13,277	4,137	4,774	22,421	7,649	7,457	10,563	20,273	125,402
November	209	422	3,809	5,570	3,642	6,842	4,193	8,041	22	2,814	20,267	2,767	6,055	6,487	11,243	82,383
December	68	2,082	3,225	2,009	1,868	5,672	1,663	3,369	0	1,071	11,195	2,306	3,504	2,959	4,320	45,311
Totals:	4,401	62,415	40,155	64,831	48,035	73,491	60,943	133,016	31,248	47,202	303,550	83,934	68,566	90,604	168,660	1,281,051

Percent of Total Annual Count

Month	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	All Trails
January	6%	6%	9%	4%	0%	6%	4%	4%	7%	0%	5%	6%	8%	7%	0%	4%
February	3%	5%	8%	3%	0%	7%	3%	3%	5%	2%	8%	8%	6%	5%	2%	5%
March	2%	3%	7%	3%	0%	11%	3%	2%	5%	3%	7%	6%	4%	5%	3%	5%
April	9%	13%	10%	9%	0%	18%	9%	11%	10%	12%	13%	15%	9%	11%	12%	12%
May	6%	12%	12%	9%	0%	13%	10%	11%	10%	12%	11%	11%	10%	12%	11%	11%
June	6%	13%	3%	10%	6%	2%	8%	11%	12%	13%	11%	10%	9%	9%	12%	10%
July	24%	13%	1%	11%	28%	0%	13%	13%	12%	13%	9%	8%	9%	1%	12%	10%
August	11%	11%	11%	14%	25%	7%	16%	14%	13%	14%	10%	10%	9%	14%	14%	12%
September	10%	11%	11%	13%	18%	12%	15%	12%	13%	13%	8%	10%	12%	13%	13%	12%
October	17%	10%	11%	12%	12%	7%	9%	10%	13%	10%	7%	9%	11%	12%	12%	10%
November	5%	1%	9%	9%	8%	9%	7%	6%	0%	6%	7%	3%	9%	7%	7%	6%
December	2%	3%	8%	3%	4%	8%	3%	3%	0%	2%	4%	3%	5%	3%	3%	4%

CT Trail Census 2017 Adjusted Day of Week Summary Counts

Ocarico																
Day of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	Totals
Sun	1,058	15,523	4,523	15,517	11,229	10,873	16,064	29,025	7,752	8,930	56,248	14,191	13,206	23,701	35,014	262,854
Mon	806	7,433	5,507	7,410	5,566	10,295	6,524	16,892	3,429	6,415	42,831	8,819	12,425	10,745	21,100	166,197
Tue	332	6,839	5,874	7,228	5,467	9,850	5,937	14,847	3,074	6,286	39,887	7,973	11,439	8,477	20,910	154,420
Wed	559	6,954	6,151	7,711	5,681	10,476	6,335	16,753	3,324	6,574	44,090	9,036	12,910	10,437	22,566	169,557
Thu	528	7,636	5,811	8,038	5,570	10,164	6,352	15,770	3,421	6,153	39,389	8,641	11,919	10,289	21,481	161,162
Fri	498	6,238	6,675	7,075	4,906	10,995	6,111	14,897	3,494	5,727	37,179	8,607	9,801	10,264	19,905	152,372
Sat	620	11,792	5,614	11,852	9,616	10,838	13,620	24,832	6,754	7,117	43,926	11,299	12,234	16,691	27,684	214,489
Total	4,401	62,415	40,155	64,831	48,035	73,491	60,943	133,016	31,248	47,202	303,550	68,566	83,934	90,604	168,660	1,281,051

Average Daily

Averag	<u> </u>															
Day of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	Totals
Sun	20	293	98	293	401	253	303	548	176	198	1,061	268	249	494	778	5,433
Mon	16	143	122	143	206	245	125	325	78	146	824	170	239	234	480	3,494
Tue	6	132	128	139	202	240	114	286	70	143	767	153	220	180	475	3,256
Wed	11	134	134	148	203	256	122	322	76	149	848	174	248	222	513	3,559
Thu	10	147	126	155	199	248	122	303	80	140	757	166	234	219	488	3,394
Fri	10	120	145	136	175	262	118	286	81	127	715	166	192	218	442	3,194
Sat	12	227	125	228	343	258	262	478	157	158	845	217	235	355	615	4,515
Weekly Average	84	1,195	878	1,241	1,730	1,761	1,166	2,547	717	1,062	5,817	1,313	1,618	1,922	3,791	26,844

Percent of Average Weekly

Day of Week	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire	Farmington Canal Heritage Trail Hamden	Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	All Trails
Sun	24%	25%	11%	24%	23%	14%	26%	22%	25%	19%	18%	20%	15%	26%	21%	20%
Mon	18%	12%	14%	11%	12%	14%	11%	13%	11%	14%	14%	13%	15%	12%	13%	13%
Tue	8%	11%	15%	11%	12%	14%	10%	11%	10%	13%	13%	12%	14%	9%	13%	12%
Wed	13%	11%	15%	12%	12%	15%	10%	13%	11%	14%	15%	13%	15%	12%	14%	13%
Thu	12%	12%	14%	12%	11%	14%	10%	12%	11%	13%	13%	13%	14%	11%	13%	13%
Fri	11%	10%	17%	11%	10%	15%	10%	11%	11%	12%	12%	13%	12%	11%	12%	12%
Sat	14%	19%	14%	18%	20%	15%	22%	19%	22%	15%	15%	17%	15%	18%	16%	17%

CT Trail Census 2017 Adjusted Hourly Summary Average Hourly

Hour	Air Line Trail Thompson	Air Line Trail East Hampton	CTFastrak Trail New Britain	Farmington Canal Heritage Trail Cheshire		Farmington Canal Heritage Trail New Haven	Hop River Trail Bolton	Hop River Trail Vernon	Larkin State Bridle Trail Oxford	Middlebury Greenway	Naugatuck River Greenway Derby	Norwalk River Valley Trail Wilton	Sue Grossman Greenway Torrington	Shoreline Greenway Trail Madison	Still River Greenway Brookfield	All Trails
00:00	0	0	1	0	1	2	0	0	0	0	1	0	0	0	0	6
01:00	0	0	1	0	0	1	0	0	0	0	1	0	0	0	0	4
02:00	0	0	0	0	0	1	0	0	0	0	1	0	0	0	0	2
03:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2 2 2
04:00	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	2
05:00	0	0	2	0	1	1	1	1	0	1	6	0	2	1	2	18
06:00	0	2	5	1	3	3	2	5	2	6	16	2	5	3	6	62
07:00	0	4	7	5	9	9	4	12	7	9	30	6	8	7	16	132
08:00	0	9	7	10	16	14	9	22	7	11	49	12	13	11	28	218
09:00	1	13	5	16	21	15	11	33	8	15	72	18	20	19	39	305
10:00	1	15	6	20	23	14	14	37	9	15	79	20	22	27	44	346
11:00	1	17	6	20	23	16	16	34	10	13	75	19	21	32	47	350
12:00	2	16	7	17	23	17	15	29	9	11	69	19	21	28	42	323
13:00	2	14	7	14	20	17	15	28	8	10	65	17	17	27	44	306
14:00	1	15	8	14	20	19	15	29	8	10	60	15	16	27	44	300
15:00	1	15	11	14	19	22	16	29	9	9	62	16	17	28	45	312
16:00	1	16	12	14	21	25	15	30	8	10	63	16	18	25	51	324
17:00	1	15	12	14	19	26	14	32	8	11	60	14	20	21	51	319
18:00	0	11	9	10	16	20	12	26	6	11	56	8	17	13	47	263
19:00	0	6	6	6	9	13	7	13	3	7	38	3	9	5	30	155
20:00	0	2	4	2	3	7	2	3	1	2	18	1	3	1	10	58
21:00	0	0	4	0	1	5	0	0	0	0	6	0	0	0	0	18
22:00	0	0	3	0	0	3	0	0	0	0	3	0	0	0	0	11
23:00	0	0	2	0	0	2	0	0	0	0	2	0	0	0	0	8

Percent of Daily Average

01:00 0.1% 0.0% 0.7% 0.0% 0.1% 0.4% 0.1% 0.0% 0.1% 0.0% 0.1% 0.0% 0.1% 0.0% 0.1% 0.0% 0.1% 0.0% <t< th=""><th>0.2% 0.1% 0.00% 0.1% 0.05%</th></t<>	0.2% 0.1% 0.00% 0.1% 0.05%
00:00 0.1% 0.0% 1.1% 0.0% 0.2% 0.7% 0.1% 0.0% 0.1% 0.0% 0.2% 0.0% 0.1% 0.0% 0.1% 0.0% 0.1% 0.0% 0.1% 0.0% <t< th=""><th>0.1% 0.1% 0.0% 0.1%</th></t<>	0.1% 0.1% 0.0% 0.1%
02:00 0.1% 0.0% 0.3% 0.0% 0.3% 0.0% 0.0% 0.1% 0.0% 0.1% 0.0% 0.1% 0.0% 0.0% 0.0% 03:00 0.1% 0.0% 0.3% 0.0% 0.2% 0.0%	0.1% 0.0% 0.1%
03:00 0.1% 0.0% 0.3% 0.0% 0.2% 0.0% <t< td=""><td>0.0% 0.1%</td></t<>	0.0% 0.1%
04:00 0.2% 0.0% 0.4% 0.0% <t< td=""><td>0.1%</td></t<>	0.1%
05:00 0.1% 0.1% 1.5% 0.1% 0.4% 0.3% 0.7% 0.3% 0.4% 0.7% 0.2% 0.4% 0.7% 0.2% 1.0% 0.3% 0.3% 0.3% 0.3% 0.3% 0.3% 0.2% 0.4% 0.7% 0.2% 1.0% 0.2% 1.0% 0.3% 0.3% 0.3% 0.3% 0.3% 0.3% 0.2% 1.4% 1.6% 3.9% 2.0% 1.1% 2.4% 1.2% <t< td=""><td></td></t<>	
06:00 0.3% 0.9% 3.8% 0.8% 1.4% 1.1% 1.2% 1.4% 1.6% 3.9% 2.0% 1.1% 2.4% 1.2% 1.2% 07:00 1.0% 2.5% 5.4% 2.8% 3.7% 3.4% 2.6% 3.2% 6.7% 5.8% 3.6% 3.0% 3.5% 2.5% 2.9% 08:00 3.8% 5.2% 5.2% 5.5% 6.2% 5.7% 5.2% 5.9% 6.6% 7.5% 5.9% 6.6% 5.8% 4.0% 5.1%	0.5%
07:00 1.0% 2.5% 5.4% 2.8% 3.7% 3.4% 2.6% 3.2% 6.7% 5.8% 3.6% 3.0% 3.5% 2.5% 2.9% 08:00 3.8% 5.2% 5.2% 5.5% 6.2% 5.7% 5.2% 5.9% 6.6% 7.5% 5.9% 6.6% 5.8% 4.0% 5.1%	
08:00 3.8% 5.2% 5.2% 5.5% 6.2% 5.7% 5.2% 5.9% 6.6% 7.5% 5.9% 6.6% 5.8% 4.0% 5.1%	1.6%
	3.4%
09:00 4.1% 7.8% 4.1% 9.2% 8.3% 5.8% 6.4% 9.1% 7.4% 10.0% 8.7% 9.6% 8.5% 6.8% 7.2%	5.7%
	7.9%
10:00 7.2% 8.9% 4.6% 11.2% 9.3% 5.6% 8.1% 10.1% 8.9% 10.0% 9.5% 10.8% 9.3% 9.8% 8.2%	9.0%
11:00 7.2% 9.8% 4.9% 11.0% 9.2% 6.4% 9.6% 9.3% 10.0% 8.6% 9.0% 10.1% 9.2% 11.7% 8.6%	9.1%
12:00 17.6% 9.2% 5.6% 9.7% 9.0% 6.6% 8.9% 8.0% 8.4% 7.2% 8.3% 10.0% 8.9% 10.2% 7.7%	8.4%
13:00 18.0% 8.5% 5.7% 8.0% 8.2% 6.6% 8.7% 7.8% 7.7% 6.4% 7.9% 8.9% 7.5% 9.7% 8.1%	8.0%
14:00 10.8% 9.0% 6.3% 7.8% 8.2% 7.6% 8.8% 7.8% 7.4% 6.3% 7.2% 8.1% 6.8% 9.8% 8.0%	7.8%
15:00 8.1% 9.0% 8.4% 7.8% 7.8% 8.7% 9.4% 8.0% 8.6% 6.0% 7.4% 8.5% 7.4% 10.0% 8.2%	8.1%
16:00 10.4% 9.1% 9.2% 7.8% 8.3% 9.8% 8.9% 8.3% 8.1% 6.6% 7.6% 8.8% 7.7% 9.2% 9.3%	8.4%
17:00 5.0% 8.9% 9.8% 7.9% 7.7% 10.3% 8.5% 8.9% 7.5% 7.4% 7.2% 7.5% 8.5% 7.8% 9.3%	8.3%
18:00 3.3% 6.6% 7.2% 5.9% 6.5% 8.0% 7.3% 7.0% 6.3% 7.3% 6.7% 4.5% 7.3% 4.6% 8.6%	6.8%
19:00 1.4% 3.2% 4.6% 3.4% 3.7% 5.2% 4.0% 3.7% 3.0% 4.6% 4.5% 1.9% 3.9% 1.7% 5.5%	4.0%
20:00 0.4% 0.9% 3.4% 0.9% 1.3% 2.9% 0.9% 0.9% 1.0% 1.4% 2.1% 0.4% 1.2% 0.4% 1.8%	1.5%
21:00 0.2% 0.1% 2.9% 0.1% 0.3% 1.9% 0.3% 0.1% 0.2% 0.3% 0.7% 0.1% 0.2% 0.1% 0.1%	0.5%
22:00 0.1% 0.1% 0.1% 0.0% 0.1% 1.3% 0.2% 0.1% 0.1% 0.1% 0.3% 0.0% 0.1% 0.1% 0.0%	
23:00 0.1% 0.0% 1.7% 0.0% 0.1% 1.0% 0.1% 0.0% 0.2% 0.1% 0.2% 0.0% 0.1% 0.0% 0.0%	0.3%

	Mid
	dletown A
	nsit (MA
Tighe&Bon	PENDIX I T) Route er Survey
d	F



1.	How many days per week do you utilize bus service on The F Route
	1-2 day3-4 days5 days6-7 days
2	Where are you picked up and going to? (the stops, provide street names or landmarks)
د.	Route 660 + N. Maple St East Hampton
	Drop off Location: TERMINAL MIDDLE TOWN
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
	WORK
4.	What times do you normally ride (please provide time and reason for riding)?
	Morning Ride: 7 am of 8 am WORK
	Afternoon Ride: 3:45 - home
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my own car; Rode a different bus; Carpooled with someone else; Other)
	Walked
6.	How long is your total trip? (please check your answer)
	less than 15 min16-30 mingreater than 30 min.
7	. How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied
8	. What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
-	



1.	How many days per week do you utilize bus service on The F Route
	1-2 day3-4 days5 days6-7 days
2.	Where are you picked up and going to? (the stops, provide street names or landmarks)
	Pickup Location: 227 Main St Portland
	Drop off Location: 140 East Highst E. Hampton
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
	Nock
4.	What times do you normally ride (please provide time and reason for riding)?
	Morning Ride: 545AM- to work
	Morning Ride: 545AM- to work Afternoon Ride: 415pm - to home
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my own car; Rode a different bus; Carpooled with someone else; Other)
6.	How long is your total trip? (please check your answer)
	less than 15 min16-30 mingreater than 30 min.
7.	How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied
8	. What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
10	Continued Ovarlability - I depend solely on
1	MAT to get to and from Nork - #
2.	Increased trips would allow me to go to Des.
_	appointments without having to take the day of proper
3.	Increased trips would mean it would no brigger
	he a 12 Hours day for me.



1.	How many days per week do you utilize bus service on The F Route
	1-2 day3-4 days5 days6-7 days
2.	Where are you picked up and going to? (the stops, provide street names or landmarks)
	Pickup Location: FERRUST
	Drop off Location: Total Cenab
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
4.	What times do you normally ride (please provide time and reason for riding)?
	Morning Ride: 5.45
	Afternoon Ride: 3:05
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my own car; Rode a different bus; Carpooled with someone else; Other)
6.	How long is your total trip? (please check your answer)
	less than 15 min16-30 mingreater than 30 min.
7.	How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied
8.	What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
_	C06+
_	



1.	How many days per week do you utilize bus service on The F Route
	1-2 day3-4 days5 days6-7 days
2.	Where are you picked up and going to? (the stops, provide street names or landmarks)
	Pickup Location: Riverdale Matel in Portland
	Drop off Location: Dunkin Danis in East Hampson or middletein
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
	work or shapping or other appointments.
4.	What times do you normally ride (please provide time and reason for riding)?
	Morning Ride: 5:45 Am to work 6:45 Am 7:45 AM Car other reasons
	Afternoon Ride: 1d 1m or 3:45PM to get home to Porpland
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my own car; Rode a different bus; Carpooled with someone else; Other)
	picked up at Rivertale metal, Dunkin Dants, or at terminal
6.	How long is your total trip? (please check your answer)
	less than 15 min16-30 min. <u>offer greater than 30 min.</u>
7.	How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied
8	 What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
_	Access to intermedia
	Bus stop facilities
	en board comfort



1.	How many days per week do you utilize bus service on The F Route	
	1-2 day	ys.
2.	Where are you picked up and going to? (the stops, provide street names or landman Pickup Location: Fost Hampton, West High St. Drop off Location: Mddletown, Mah St.	arks)
	Drop off Location: Middle form Main St.	
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)	
	Offred	
4	What times do you pormally ride (please provide time and reason for riding)?	
4.		
	Morning Ride: NA Afternoon Ride: Noon, 3:45PM	
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parketown car; Rode a different bus; Carpooled with someone else; Other)	d my
6.	How long is your total trip? (please check your answer)	
	less than 15 min16-30 mingreater than 30 min.	
7.	. How satisfied are you with the bus service on the F Route? (circle one answer)	
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied	
8	 What aspects of bus services on the F Route, in order of importance, should be in pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comf Security; Access to Information; Other) 	nproved, ort;
	Very burger during top (on small bus)	
_		
_		



1.	How many days per week do you utilize bus service on The F Route
	1-2 day3-4 days5 days6-7 days
2.	Where are you picked up and going to? (the stops, provide street names or landmarks)
	Pickup Location:
	Drop off Location:
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
_	What times do you normally ride (please provide time and reason for riding)?
4.	
	Morning Ride:
	Afternoon Ride:
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my own car; Rode a different bus; Carpooled with someone else; Other)
	NONE
6.	How long is your total trip? (please check your answer)
	less than 15 min16-30 mingreater than 30 min.
7	How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Neutral Dissatisfied Very Dissatisfied
8	What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
-	
_	



1.	How many days per week do you utilize bus service on The F Route
2.	Where are you picked up and going to? (the stops, provide street names or landmarks)
	Pickup Location: Termial
	Drop off Location: Food Bag ON BT 16
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
	OTher
4.	What times do you normally ride (please provide time and reason for riding)?
	Morning Ride:
	Afternoon Ride: 3-45 PM
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my own car; Rode a different bus; Carpooled with someone else; Other)
	Drop of by CT. Transet
6	. How long is your total trip? (please check your answer)
	less than 15 min16-30 mingreater than 30 min.
7	. How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied
8	What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
_	Bus Stap Facilities
	Frequency
-	COST



1.	How many days per week do you utilize bus service on The F Route
	1-2 day3-4 days5 days6-7 days
2.	Where are you picked up and going to? (the stops, provide street names or landmarks) Pickup Location: Riserdale Mote 1503 Portande Cobatt R Dran off Location: Mcdahalas 38 E. Highst, East Ha
	Pickup Location: Con Con Con Con Con Con Con Con Con Con
	Drop on Location.
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
	Work
4.	What times do you normally ride (please provide time and reason for riding)?
	Morning Ride: 8,45 an + 5,45 am
	Afternoon Ride: 345 pm
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my own car; Rode a different bus; Carpooled with someone else; Other)
	Walked
6.	How long is your total trip? (please check your answer)
	less than 15 min16-30 mingreater than 30 min.
7	How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied
8	 What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
_	more Bus Frequency
_	



	/ /
1.	How many days per week do you utilize bus service on The F Route
•	Where are you picked up and going to? (the stops, provide street names or landmarks)
2.	Where are you picked up and going or the first and the fir
	Pickup Location: 208 Main St Portland CT 06480
	Drop off Location: Soup Kitchen
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
	Medical Services, & other
4.	" /
	Morning Ride: 1:30 Am Tues Coy
	Afternoon Ride:
5	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my own car; Rode a different bus; Carpooled with someone else; Other)
	Walk
6	. How long is your total trip? (please check your answer)
	less than 15 min16-30 mingreater than 30 min.
7	. How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied
8	3. What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
	T Think we need someone on Bus to help us
	on or off, speculy Old people with strollers + Fore
	Carrages

MIDDLETOWN AREA TRANSIT RIDER SURVEY



1.	How many days per week do you utilize bus service on The F Route
	1-2 day3-4 days5 days6-7 days
2.	Where are you picked up and going to? (the stops, provide street names or landmarks)
	Pickup Location: Middletown Bus Station
	Drop off Location: Butler constrution Portland
3.	What is the purpose of your trip? (Work/Work Related; Home; Shopping; Medical Services; Social or Religious Worship; Other)
	WOYK
4.	What times do you normally ride (please provide time and reason for riding)?
	Morning Ride: 6:25 Am
	Afternoon Ride: 4:30 PM
5.	How did you get to this bus? (Walked; Dropped off by someone; Drove and Parked my
	own car; Rode a different bus; Carpooled with someone else; Other)
	roce a different lous
6.	How long is your total trip? (please check your answer)
	less than 15 min16-30 mingreater than 30 min.
7.	How satisfied are you with the bus service on the F Route? (circle one answer)
	Very Satisfied Satisfied Neutral Dissatisfied Very Dissatisfied
8	What aspects of bus services on the F Route, in order of importance, should be improved, pick up to three (Bus Stop Facilities; Frequency; Punctuality; Cost; Onboard Comfort; Security; Access to Information; Other)
-	because nothing, it is great service
y 	

APPENDIX L Route 66 Corridor Study Demographic and Economic Baseline (RKG Associates)
Tighe&Bond

August 2018

ROUTE 66 CORRIDOR STUDY DEMOGRAPHIC AND ECONOMIC BASELINE

Towns of East Hampton & Portland, Connecticut





Table of Contents

1.	EXECUTIVE SUMMARY	1
	Summary of Findings	1
2.	BASELINE CONDITIONS	Э
	Introduction and Purpose	3
	Demographic Profile	3
	Population and Population By Age	
	Educational Attainment	<i>є</i>
	Housing and Households	7
	Income	9
	Economic Profile	10
	Employment Patterns	10
	Commuting Patterns	14
	Market Trends	15
	Corridor Development Patterns	15
	Residential Market Trends	16
	Land Use and Zoning	24
	Land Use Composition	25
	Zoning Districts	
3	APPENDIX	20

1. EXECUTIVE SUMMARY

SUMMARY OF FINDINGS

This section presents the summary key findings from this analysis. The research and findings on which these are based are presented in greater detail throughout other sections of this report.

- Portland and East Hampton had a combined population of over 22,000 in 2017. The combined population growth rate between the two towns from 2000 to 2017 was just 2.4 percent. Both towns are home to an ageing population, with a combined 60 percent increase in citizens over the age of 65 between 2000 and 2017. This growth is in stark contrast to the combined 20 percent decrease in residents aged 25 to 44 over the same period. Similar patterns have taken shape in Middlesex County overall.
- Both towns boast a large number of highly-educated and high-income households when compared with the County and State. Median Household Incomes have grown significantly since 2000 in both communities: \$93,392 in East Hampton (+10 percent vs 2010, +41 percent vs 2000), and \$88,624 in Portland (+7 percent vs 2010, +41 percent vs 2000).
- Unemployment in the two towns is low, less than 5 percent in May 2018. 82 percent of
 resident workers commute outside the towns for work, mostly to nearby commercial centers
 like Hartford and New Haven. Jobs in East Hampton and Portland are concentrated in the
 service industries and retail, which together comprise over 60 percent of the towns' total
 jobs.
- Land use patterns along the Route 66 corridor in East Hampton and Portland vary significantly. A vast majority of all parcels in East Hampton along the corridor are designated as either residential or vacant, while Portland's have a wider variety of industrial, commercial, institutional, and residential uses. Planned developments of mixeduse and multi-family projects in both towns can provide additional diversity.
- The housing stock in both towns largely consists of single-family homes, accounting for over 80 percent of the total in each. Home prices have been volatile, but overall mostly flat since the 2008 financial crisis. Median sale prices for single-family homes in East Hampton have been higher than Portland's since 2013, reaching 2017 medians of \$248,250 and \$240,250, respectively.
- Likely due to a small and aging rental housing stock, asking rents in Portland and East Hampton are lower than in neighboring Middletown, which has seen substantial investment in new and refurbished multi-family rental projects. A survey of current rental listings

revealed an average 1-bedroom asking rent of \$1.23 per square foot in Portland and \$1.35 per square foot in East Hampton.

• The commercial market (office and retail) is fairly strong with little vacancy across the Corridor. Buildings that are vacant today are either actively being considered for redevelopment or have property owners who are considering what actions to take to sell or redevelop. Industrial space continues to build out in smaller quantities along the Corridor, but remains a strong market. The Brownstone Industrial Park in Portland has very few, if any, vacancies. Discussions with Town officials indicated that demand for industrial space there and elsewhere along the corridor exists, but access to utilities is a major hurdle, costly to overcome, and constrains the build-out of future industrial space.

2. BASELINE CONDITIONS

INTRODUCTION AND PURPOSE

The following presents a summary of existing demographic, economic, real estate and market conditions, and land use and zoning regulations in the Towns of East Hampton and Portland, as well as in Middlesex County, Connecticut. This analysis and the findings form the basis of potential development opportunities that may be tied in with potential transportation improvements between the two communities along Route 66.

DEMOGRAPHIC PROFILE

Selected trends and projections in population, housing/households, and income are presented for the Town of East Hampton, the Town of Portland, and Middlesex County.

POPULATION AND POPULATION BY AGE

Between the years 2000 and 2010, the population of the Town of East Hampton decreased by approximately 400 people, or three percent. However, during the same period the population ages 65 and older increased by more than 500 people, representing nearly a 50 percent increase. This growth in the older generation caused a sharp increase in the median age of residents in town, going from 32.3 years to 42.9 years.

The estimated population of East Hampton in 2017 was 13,104, slightly lower than the population in 2000. Between 2017 and 2022, the population is expected to increase by eight percent to a total of 14,137. From an age perspective, East Hampton is projected to see some growth in residents ages 25 to 44 years (typically family formation and home buying years), and a nominal growth is projected for the population aged 20 or less. As in the prior decade, the population ages 65 and older is projected to increase the most. This population group is projected to grow by nearly 28 percent, and comprise 18 percent of East Hampton's total population.¹

By comparison, the Portland population increased by nearly nine percent from 2000 to 2010 with a modest decline in the population under 20 years of age. Population growth occurred for those over the age of 65, but at a slower rate than what was seen in East Hampton. Portland's population of 65 and over residents increased 15 percent, compared with 50 percent in East Hampton. Portland's total population continued to grow through 2017 to a total of 9,545 residents. This trend is projected to continue through at least 2022, when the town's population is expected to reach just over 10,000 residents. Similar to East Hampton, the number of residents over the age of 65 is projected to grow by 15 percent, while other age cohorts may see minimal growth and in the case of residents under 20, a decline. The population changes in both East Hampton and Portland trend

¹ As a reference check, data offered by the Connecticut Economic Resource Center (CERC) indicated the population aged 65 and older accounted for approximately 15 percent of the East Hampton population in 2015.

closely with Middlesex County where residents over the age of 65 are projected to increase, and residents under 44 are projected to decrease.

Both East Hampton and Portland function as small towns, largely residential in character with good schools, quality services, and a large array of open land. These two communities are in the middle of a triangle of cities (Hartford, New Haven, and New London) which are between 20 and 40 minutes away and provide access to jobs and amenities at a much greater scale than what is desired in either town. This creates a setting where households in family formation years, prime earning years, and retirement years come to settle down, raise a family, and eventually retire. These factors are driving the population changes through the year 2022 and are creating interesting market dynamics for both jobs and housing.

One issue both towns may face in the coming years is the slow growth in households ages 25-44, anemic compared with the substantial growth of the senior population. If seniors sell their homes and either move elsewhere in the community, or to another community altogether, will there be enough younger households to back fill vacancies in the single-family market?

							į
Selected Summary Demographics -	Census	Census	Cha	nge	Estimated	Projected	% Δ 2017 to
Population	2000	2010	#	# %		2022	2022
East Hampton, CT	ļ						
Total Population	13,356	12,959	(397)		13,104	14,137	7.9%
Population > 65 years	1,032	1,547	515	49.9%	1,942	2,484	27.9%
Population 25 to 44 years	3,616	3,232	(384)	-10.6%	2,959	3,170	7.1%
Population < 20 years	4,067	3,233	(834)	-20.5%	2,960	3,016	1.9%
Median Age	32.3	42.9	10.6	32.7%	44.9	45.7	1.8%
Portland, CT							
Total Population	8,747	9,508	761	8.7%	9,545	10,024	5.0%
Population > 65 years	1,274	1,465	191	15.0%	1,748	2,019	15.5%
Population 25 to 44 years	2,693	2,339	(354)	-13.1%	2,114	2,185	3.4%
Population < 20 years	2,398	2,335	(63)	-2.6%	2,151	2,140	-0.5%
Median Age	38.6	43.1	4.5	11.7%	45.4	46.2	1.8%
Middlesex County, CT							
Total Population	155,118	165,676	10,558	6.8%	165,641	171,997	3.8%
Population > 65 years	21,063	25,621	4,558	21.6%	30,166	35,121	16.4%
Population 25 to 44 years	48,558	40,082	(8,476)	-17.5%	36,935	38,692	4.8%
Population < 20 years	39,463	39,079	(384)	-1.0%	35,782	35,327	-1.3%
Median Age	38.6	43.1	4.5	11.6%	45.0	45.7	1.6%
East Hampton as % of County							
Total Population	8.6%	7.8%	(0.008)	-9.2%	7.9%	8.2%	3.9%
Population > 65 years	4.9%	6.0%	0.011	23.2%	6.4%	7.1%	9.9%
Population 25 to 44 years	7.4%	8.1%	0.006	8.3%	8.0%	8.2%	2.3%
Population < 20 years	10.3%	8.3%	(0.020)	-19.7%	8.3%	8.5%	3.2%
Total	83.7%	99.5%	0.158	18.9%	99.7%	100.0%	0.2%
Portland as % of County							
Total Population	5.6%	5.7%	0.001	1.8%	5.8%	5.8%	1.1%
Population > 65 years	6.0%	5.7%	(0.003)	-5.5%	5.8%	5.7%	1
Population 25 to 44 years	5.5%	5.8%	0.003	5.2%	5.7%	5.6%	-1.3%
Population < 20 years	6.1%	6.0%	(0.001)	-1.7%	6.0%	6.1%	
Total	100.0%	100.1%	0.001	0.1%	100.9%	101.1%	0.2%

RACE AND ETHNICITY

Like many other places across New England, the racial and ethnic population composition of East Hampton and Portland is becoming more diverse. While both communities are over 90 percent white, the share of black, Hispanic, and residents of other races is expected to increase through the year 2022. Middlesex County is projected to follow a very similar pattern of racial and ethnic diversification as well. Based on interviews with Town of Portland staff, some of the changes in population diversity stem from new Asian and Latino residents who are working in strong employment sectors like healthcare, insurance, and advanced manufacturing.

Selected Summary		Census	Census	Chai	nge	Estimated	Projected	% Δ 2017
Demographics - Race/Eth	2000	2010	#	%	2017	2022	to 2022	
East Hampton, CT								
Total Population		13,356	12,959	(397)	-3.0%	13,104	14,137	7.9%
	White	12,407	12,361	(46)	-0.4%	12,390	13,283	7.2%
	Black	291	137	(154)	-52.9%	158	177	12.0%
	Other	658	461	(197)	-29.9%	556	677	21.8%
Hispanic Origin		199	344	145	72.9%	465	583	25.4%
Portland, CT								
Total Population		8,747	9,508	761	8.7%	9,545	10,024	5.0%
	White	8,329	8,957	628	7.5%	8,901	9,290	4.4%
	Black	166	207	41	24.7%	227	241	6.2%
	Other	252	344	92	36.5%	417	493	18.2%
Hispanic Origin		230	310	80	34.8%	425	508	19.5%
Middlesex County, CT								
Total Population		155,118	165,676	10,558	6.8%	165,641	171,997	3.8%
	White	141,633	147,823	6,190	4.4%	144,342	148,348	2.8%
	Black	6,603	7,727	1,124	17.0%	8,785	9,276	5.6%
	Other	6,882	10,126	3,244	47.1%	12,514	14,373	14.9%
Hispanic Origin		4,561	7,834	3,273	71.8%	10,683	12,465	16.7%
East Hampton as % of Co	unty							
Total Population		8.6%	7.8%	(0.008)	-9.2%	7.9%	8.2%	3.9%
	White	8.8%	8.4%	(0.004)	-4.5%	8.6%	9.0%	4.3%
	Black	4.4%	1.8%	(0.026)	-59.8%	1.8%	1.9%	6.1%
	Other	9.6%	4.6%	(0.050)	-52.4%	4.4%	4.7%	6.0%
Hispanic Origin		4.4%	4.4%	0.000	0.6%	4.4%	4.7%	7.5%
Portland as % of County								
Total Population		5.6%	5.7%	0.001	1.8%	5.8%	5.8%	1.1%
	White	5.9%	6.1%	0.002	3.0%	6.2%	6.3%	1.6%
	Black	2.5%	2.7%	0.002	6.6%	2.6%	2.6%	0.5%
	Other	3.7%	3.4%	(0.003)	-7.2%	3.3%	3.4%	2.9%
Hispanic Origin		5.0%	4.0%	(0.011)	-21.5%	4.0%	4.1%	2.4%

EDUCATIONAL ATTAINMENT

The educational attainment of residents in both communities grew substantially between 2010 and 2017. Residents with a bachelor's degree or higher grew by close to 30 percent in both East Hampton and Portland. This far outpaced the County, which only increased by 13.5 percent. Looking forward, educational attainment rates through the year 2022 are expected to stabilize, with the number of residents with bachelor's degrees projected to increase by about 7 percent. This too follows a very similar pattern to that of the residents in Middlesex County.

Selected Summary Demographics -	Census	Census	Chai	nge	Estimated	Projected	% Δ 2017
Education	2000	2010	#	%	2017	2022	to 2022
East Hampton, CT							
Population Aged 25+	7,442	9,225	1,783	24.0%	9,489	10,371	9.3%
High school graduate	2,381	2,827	446	18.7%	2,672	2,883	7.9%
Some college/Associate degree	2,167	2,909	742	34.2%	2,852	3,102	8.8%
Bachelor/Graduate degree(s)	2,247	2,937	690	30.7%	3,435	3,814	11.0%
No School / < High School Graduate	647	552	(95)	-14.7%	530	572	7.9%
Portland, CT							
Population Aged 25+	6,103	6,791	688	11.3%	6,945	7,368	6.1%
High school graduate	1,851	2,179	328	17.7%	2,087	2,190	4.9%
Some college/Associate degree	1,549	1,717	168	10.8%	1,723	1,824	5.9%
Bachelor/Graduate degree(s)	1,976	2,549	573	29.0%	2,789	2,997	7.5%
No School / < High School Graduate	727	346	(381)	-52.4%	346	357	3.2%
Middlesex County, CT		İ					
Population Aged 25+	108,138	117,752	9,614	8.9%	119,748	126,248	5.4%
High school graduate	30,874	35,881	5,007	16.2%	33,941	35,335	4.1%
Some college/Associate degree	28,514	31,862	3,348	11.7%	31,535	33,168	5.2%
Bachelor/Graduate degree(s)	36,568	41,522	4,954	13.5%	46,060	49,215	6.8%
No School / < High School Graduate	12,182	8,487	(3,695)	-30.3%	8,212	8,530	3.9%
East Hampton as % of County							
Population Aged 25+	6.9%	7.8%	0.010	13.8%	7.9%	8.2%	3.7%
High school graduate	7.7%	7.9%	0.002	2.2%	7.9%	8.2%	3.6%
Some college/Associate degree	7.6%	9.1%	0.015	20.1%	9.0%	9.4%	3.4%
Bachelor/Graduate degree(s)	6.1%	7.1%	0.009	15.1%	7.5%	7.7%	3.9%
No School / < High School Graduate	5.3%	6.5%	0.012	22.5%	6.5%	6.7%	3.9%
Portland as % of County							
Population Aged 25+	5.6%	5.8%	0.001	2.2%	5.8%	5.8%	0.6%
High school graduate	6.0%	6.1%	0.001	1.3%	6.1%	6.2%	0.8%
Some college/Associate degree	5.4%	5.4%	(0.000)	-0.8%	5.5%	5.5%	0.6%
Bachelor/Graduate degree(s)	5.4%	6.1%	0.007	13.6%	6.1%	6.1%	0.6%
No School / < High School Graduate	6.0%	4.1%	(0.019)	-31.7%	4.2%	4.2%	-0.7%

HOUSING AND HOUSEHOLDS

From 2000 to 2010, the number of housing units in East Hampton increased by more than 1,000. Owner-occupied housing comprised 990 of those new 1,000 units. The owner-occupancy rate in East Hampton exceeds 80 percent, well above the national average of around 65 percent and greater than the county average of 74 percent. Despite a loss of population in East Hampton there was growth in housing units from 2000 to 2010, despite a nominal loss of rental housing. Since 2010, housing unit growth slowed substantially with the town only adding about 115 total units. Between 2017 and 2022, it is projected that East Hampton will add another 479 housing units, most of which will be owner-occupied. If current market projections prove accurate, the Edgewater project and the potential 250-unit townhome project near the Marlborough line will absorb nearly all of the projected growth in housing units.

Similar to East Hampton, the number of housing units in Portland also increased between 2000 and 2010. Portland added about 540 housing units over that ten-year period, about half of what East Hampton produced over that same time period. Since 2010, the Town has not seen much in the way of new housing units produced, with just over 40 units added in the last seven years.

Housing unit projections through the year 2022 show an expected increase of about 250 units, which is just a bit more than the planned 240-unit Brainard Place development at the former Elmcrest site in Downtown Portland.

Selected Summary	Census	Census	Change		Estimated	Projected	% Δ 2017
Demographics - Housing	2000	2010	#	%	2017	2022	to 2022
East Hampton, CT							
Total Housing Units	4,418	5,485	1,067	24.2%	5,600	6,079	8.6%
Occupied Units	4,129	5,060	931	22.5%	5,102	5,531	8.4%
Owner Households (% of Occ)	3,329	4,316	987	29.6%	4,371	4,748	8.6%
Renter Households (% of Occ)	800	744	(56)	-7.0%	731	783	7.1%
Vacant Units	289	425	136	47.1%	506	548	8.3%
Average HH Size	2.63	2.55	(0.08)	-3.0%	2.56	2.54	-0.8%
Portland, CT							
Total Housing Units	3,534	4,077	543	15.4%	4,118	4,370	6.1%
Occupied Units	3,394	3,822	428	12.6%	3,810	4,026	5.7%
Owner Households (% of Occ)	2,637	3,085	448	17.0%	3,069	3,259	6.2%
Renter Household (% of Occ)	757	737	(20)	-2.6%	741	767	3.5%
Vacant Units	140	255	115	82.1%	314	344	9.6%
Average HH Size	2.52	2.46	(0.06)	-2.4%	2.48	2.46	-0.8%
Middlesex County, CT							
Total Housing Units	67,309	74,837	7,528	11.2%	75,266	78,904	4.8%
Occupied Units	61,362	67,202	5,840	9.5%	66,797	69,847	4.6%
Owner Households (% of Occ)	44,272	49,976	5,704	12.9%	49,549	51,939	4.8%
Renter Household (% of Occ)	17,090	17,226	136	0.8%	17,248	17,908	3.8%
Vacant Units	5,947	7,635	1,688	28.4%	8,588	9,057	5.5%
Average HH Size	2.43	2.39	(0.04)	-1.6%	2.41	2.40	-0.4%
East Hampton as % of County							
Total Housing Units	6.6%	7.3%	0.008	11.7%	7.4%	7.7%	3.5%
Occupied Units	6.7%	7.5%	0.008	11.9%	7.6%	7.9%	3.7%
Owner Households (% of Occ)	7.5%	8.6%	0.011	14.9%	8.8%	9.1%	3.6%
Renter Household (% of Occ)	4.7%	4.3%	(0.004)	-7.7%	4.2%	4.4%	3.2%
Vacant Units	4.9%	5.6%	0.007	14.5%	5.9%	6.1%	2.7%
Average HH Size	108.2%	106.7%	(0.015)	-1.4%	106.2%	105.8%	-0.4%
Portland as % of County							
Total Housing Units	5.3%	5.4%	0.002	3.8%	5.5%	5.5%	1.2%
Renter Households (% of Occ)	5.5%	5.7%	0.002	2.8%	5.7%	5.8%	1.1%
Owner Households (% of Occ)	6.0%	6.2%	0.002	3.6%	6.2%	6.3%	1.3%
Renter Household (% of Occ)	4.4%	4.3%	(0.002)	-3.4%	4.3%	4.3%	-0.3%
Vacant Units	2.4%	3.3%	0.010	41.9%	3.7%	3.8%	3.9%
Average HH Size	103.7%	102.9%	(0.008)	-0.7%	102.9%	102.5%	-0.4%

Source: US Census; Alteryx & RKG Associates, Inc. (2018)

INCOME

Median household income in East Hampton increased by a near 28 percent from 2000 to 2010, marginally less than the estimated rate of inflation. The number of households earning \$100,000 or more doubled. Growth is projected for households at or above this income level, while the number of households earning less is projected to decline. The median home value in East Hampton increased by nearly \$129,300 or by 86.6 percent, well above the estimated increase in median household income. The projected growth in median home value and median household income are in closer parity.

For Portland, the median household income increased by \$20,000 (2000 to 2010) or by nearly 32 percent, exceeding the rate of inflation. Households earning \$100,000 or more increased while those earning less decreased. Continued growth is projected for the \$100,000+ households and declines for those earning less. While the median household income in Portland generally lags that for East Hampton, the median home values generally exceed those in East Hampton.

Median household income in the county increased by 23.4 percent, less than the rate of inflation, and is less than either of the two towns. By contrast median home values countywide exceeded those for either of the two towns. In the county the growth, and projected growth, in households earning \$100,000 or more dominates as is the case for the two towns.

				Inflation pe	r US bls.gov					
Selected Summary Demographics -			(28.4%)	- Change	ı	Estimated		Projected	% Δ 2017	
Income	Cei	nsus 2010	#	<u>%</u>		2017		2022	to 2022	
East Hampton, CT										
Total Households	4,129		5,060	931	22.5%		5,102		5,531	8.4%
earning less than \$50,000	1,392		1,211	(181)	-13.0%		1,133		1,072	-5.4%
earning \$50,000 - \$100,000	1,847		1,852	5	0.3%		1,630		1,546	-5.2%
earning more than \$100,000	884		1,997	1,113	125.9%		2,339		2,913	24.5%
Median HH Income	\$ 66,232	\$	84,690	\$ 18,458	27.9%	\$	93,392	\$	103,897	11.2%
Median Home Value	\$ 148,156	\$	276,446	\$ 128,290	86.6%	\$	282,839	\$	312,337	10.4%
Portland, CT										
Total Households	3,394		3,822	428	12.6%		3,810		4,026	5.7%
earning less than \$50,000	1,296		1,110	(186)	-14.4%		997		922	-7.5%
earning \$50,000 - \$100,000	1,403		1,372	(31)	-2.2%		1,224		1,135	-7.3%
earning more than \$100,000	690		1,340	650	94.2%		1,589	<u> </u>	1,969	23.9%
Median HH Income	\$ 62,767	\$	82,759	\$ 19,992	31.9%	\$	88,624	\$	98,356	11.0%
Median Home Value	\$ 152,530	\$	283,005	\$ 130,475	85.5%	\$	290,935	\$	317,784	9.2%
Middlesex County, CT										
Total Households	61,362		67,202	5,840	9.5%		66,797		69,847	4.6%
earning less than \$50,000	25,228		22,184	(3,044)	-12.1%		20,774		19,338	-6.9%
earning \$50,000 - \$100,000	23,432		22,700	(732)	-3.1%		20,144		18,840	-6.5%
earning more than \$100,000	12,657		22,318	9,661	76.3%		25,879	<u> </u>	31,669	22.4%
Median HH Income	\$ 59,299	\$	73,169	\$ 13,870	23.4%	\$	79,370	\$	90,984	14.6%
Median Home Value	\$ 162,962	\$	300,800	\$ 137,838	84.6%	\$	305,556	\$	337,545	10.5%
East Hampton as % of County										
Total Households	6.7%		7.5%	0.008	11.9%		7.6%		7.9%	3.7%
earning less than \$50,000	5.5%		5.5%	(0.001)	-1.1%		5.5%		5.5%	1.6%
earning \$50,000 - \$100,000	7.9%		8.2%	0.003	3.5%		8.1%		8.2%	1.4%
earning more than \$100,000	7.0%		8.9%	0.020	28.1%		9.0%		9.2%	1.8%
Median HH Income	111.7%		115.7%	0.041	3.6%		117.7%		114.2%	-3.0%
Median Home Value	90.9%	Ó	91.9%	0.010	1.1%		92.6%		92.5%	0.0%
Portland as % of County										
Total Households	5.5%	5	5.7%	0.002	2.8%		5.7%		5.8%	1.1%
earning less than \$50,000	5.1%	5	5.0%	(0.001)	-2.6%		4.8%		4.8%	-0.7%
earning \$50,000 - \$100,000	6.0%	5	6.0%	0.001	0.9%		6.1%		6.0%	-0.9%
earning more than \$100,000	5.5%		6.0%	0.006	10.1%		6.1%		6.2%	1.3%
Median HH Income	105.8%	5	113.1%	0.073	6.9%		111.7%	<u> </u>	108.1%	-3.2%
Median Home Value	93.6%		94.1%	ļ	0.5%		95.2%	-	94.1%	-1.1%


ECONOMIC PROFILE

This section presents selected economic indicators for Middlesex County and the Towns of East Hampton and Portland, including employment/employer metrics, establishment data, wage information, and commuting patterns.


EMPLOYMENT PATTERNS

From 2010 through May of 2018, employment of the East Hampton labor force averaged nearly 7,300 employees. Overall, there has not been much fluctuation in the market, which has gone from a low of approximately 7,000 workers in 2013 to a high of nearly 7,500 in 2017. Over the same time

period, average employment of the Portland labor force was just shy of 5,200 employees. This includes a high of 5,300 in 2017 and a low of 5,000 in 2013. By comparison, the average employment of the countywide labor force was nearly 87,400 employees.

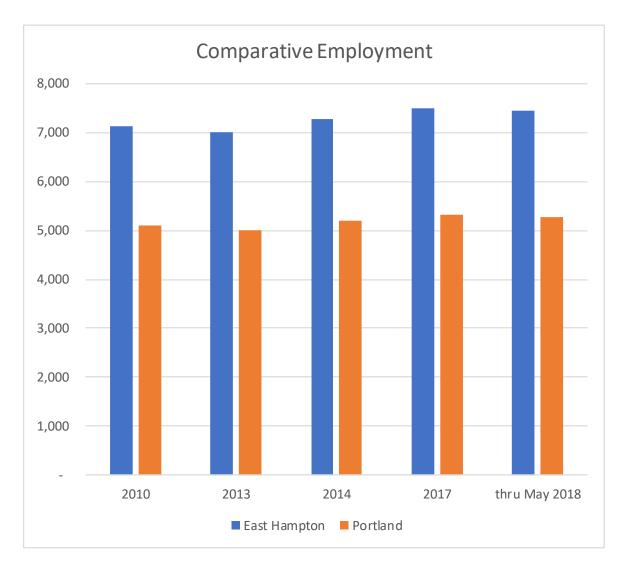

The unemployment rates for the towns and the County exhibited parity for the period between 2010 and May 2018. Unemployment declined from a high of near 8 percent in 2010 to less than 5 percent in May 2018. The fluctuations in total employment and the unemployment rates track closely with national trends through the Great Recession and the subsequent period of economic recovery into mid-2018. Economically, East Hampton is performing a bit better than Portland in terms of total employment and unemployment rates. As of 2017, Portland's unemployment rate exceeded both East Hampton's and the County's.

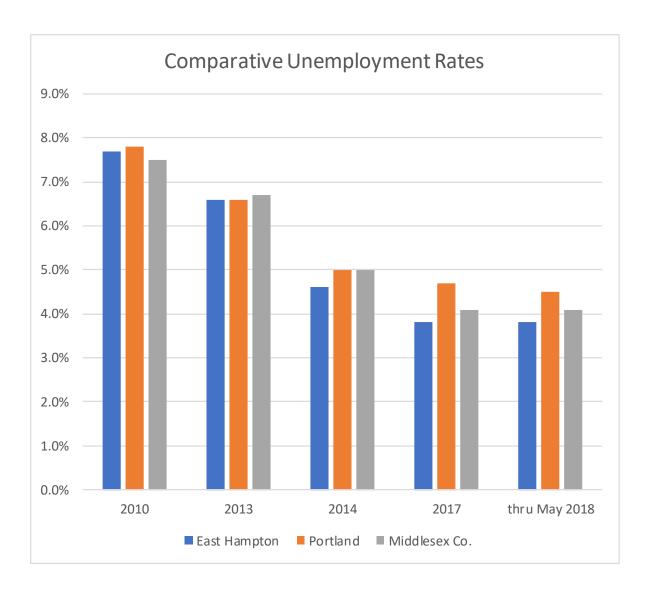

According to 2016 data available from Connecticut Economic Resource Center (CERC), the primary employers in East Hampton include the Town, Stop & Shop supermarket, Cobalt Lodge, American Distilling, and Eversource Energy. For Portland, CERC reports the primary employers to be the YMCA, Standard Knapp Inc., Daniels Propane LLC., Valley Oil and Promold Plastics. In East Hampton, most of the larger employers are located in and around the downtown area, while Portland's larger employers tend to be focused in the Brownstone Industrial Park.

MIDDLESEX COUNTY

More detailed economic data, by the North American Industry Classification System (NAICS) sector and for a trendline, is available at the county level and is presented in the following table, noting the following:

- **Employment** Between 2010 and 2016, employment in Middlesex County increased by 7.5 percent, rising from approximately 64,000 employees to nearly 68,800 employees.
 - The greatest percent growth occurred in the management sector, increasing by nearly 85 percent.
 - o Health care and the government sectors, combined, account for one-third of the countywide employment, both in 2010 and in 2016.
 - o Some industry sector witnessed a loss of employment, notably a 22 percent decline in information services and a 19 percent decline in finance and insurance.
 - o All sectors that realized an increase in employment did so at a rate exceeding the county average with the exception of manufacturing, utilities and real estate.
- **Establishments** Between 2010 and 2016, the county gained 268 establishments representing a 5.4 percent growth from around 4,960 in 2010 to 5,200 in 2016.
 - o The greatest percent growth occurred in the management sector (similar to employment), increasing by 81 percent.
 - The retail sector and other services (excluding public administration), combined, account for nearly one-fourth of the countywide establishments, despite a nominal decline in the former.
 - Not all industry sectors added establishments. In addition to the decline in the retail sector there were losses in construction, manufacturing, the transportation sector and government as examples.
 - With the exception of the health care sector, all sectors that realized a growth in the number of establishments did so at a pace greater than the countywide average.
- Average Annual Wage Between 2010 and 2016, the average annual wage, all sectors, for the county increased by nearly 12 percent, slightly ahead of the estimated rate of inflation at 10.2 percent. Overall wages rose from around \$48,000 to \$53,700 or by \$5,700.
 - Annual wage growth did not keep pace with the estimated inflation across several sectors including construction, transportation, information services and the health care sector and other services. These latter two sectors comprise approximately one-third of the countywide employment.
 - Wages declined in the management and administrative sectors with the former otherwise exhibiting the greatest percent increase in employment and in the number of establishments.

		MIDDLESEX COUNTY, CT									Employment for the South			
	En	nploymen	t	Esta	ablishme	nts	Averag	e Annual W	age	C	entral WDA			
Selected Economic Trends for			Δ%			Δ%			Δ%		Projected	Δ%		
Middlesex County, CT (NAICS codes)	2010	2016	2010	2010	2016	2010	2010	2016	2010	2014	2024	2014		
11 - Agriculture, Forestry, Fishing & Hunting	-	430	0.0%	-	-	0.0%	\$0	\$33,782	0.0%	-	-	0.0%		
21 - Mining	-	-	0.0%	-	-	0.0%	\$0	\$0	0.0%	-	-	0.0%		
23 - Construction	2,584	3,344	29.4%	538	519	-3.5%	\$58,999	\$63,440	7.5%	12,271	14,415	17.5%		
31-33 - Manufacturing	9,271	9,465	2.1%	270	252	-6.7%	\$68,169	\$78,615	15.3%	30,685	30,453	-0.8%		
22 - Utilities	332	350	5.4%	6	6	0.0%	\$100,009	\$108,315	8.3%	1,473	1,737	17.9%		
42 - Wholesale Trade	2,253	2,186	-3.0%	388	451	16.2%	\$57,579	\$77,529	34.6%	13,290	14,225	7.0%		
44-45 - Retail Trade	7,763	8,519	9.7%	644	624	-3.1%	\$27,706	\$30,956	11.7%	38,143	39,387	3.3%		
48-49 - Transportation and Warehousing	981	1,152	17.4%	86	70	-18.6%	\$39,762	\$40,729	2.4%	10,482	10,833	3.3%		
51 - Information	727	565	-22.3%	61	66	8.2%	\$50,754	\$55,224	8.8%	4,691	3,145	-33.0%		
52 - Finance and Insurance	1,926	1,557	-19.2%	199	224	12.6%	\$73,358	\$92,878	26.6%	10,906	10,609	-2.7%		
53 - Real Estate and Rental and Leasing	459	493	7.4%	123	114	-7.3%	\$38,059	\$47,581	25.0%	4,889	5,500	12.5%		
54 - Professional and Technical Services	2,389	2,713	13.6%	473	514	8.7%	\$66,780	\$77,426	15.9%	15,916	16,631	4.5%		
55 - Management of Companies/Enterprises	381	703	84.5%	21	38	81.0%	\$97,081	\$89,085	-8.2%	3,905	4,182	7.1%		
56 - Administrative and Waste Services	2,143	2,880	34.4%	289	335	15.9%	\$33,046	\$32,080	-2.9%	18,831	20,984	11.4%		
61 - Educational Services	1,881	1,838	-2.3%	71	80	12.7%	\$53,647	\$63,632	18.6%	54,912	60,224	9.7%		
62 - Health Care and Social Assistance	10,784	12,288	13.9%	458	479	4.6%	\$44,589	\$48,483	8.7%	68,255	75,528	10.7%		
71 - Arts, Entertainment, and Recreation	1,153	1,258	9.1%	96	104	8.3%	\$30,064	\$33,620	11.8%	4,475	5,066	13.2%		
72 - Accommodation and Food Services	5,487	6,298	14.8%	381	423	11.0%	\$18,519	\$21,876	18.1%	26,646	28,383	6.5%		
81 - Other Services, Ex. Public Admin	2,299	2,595	12.9%	541	625	15.5%	\$28,762	\$28,905	0.5%	15,128	16,727	10.6%		
Government	10,740	10,132	-5.7%	285	260	-8.8%	\$56,543	\$66,220	17.1%	15,118	14,528	-3.9%		
TOTAL	63,979	68,781	7.5%	4,954	5,222	5.4%	\$47,961	\$53,692	11.9%	370,819	395,138	6.6%		
Source: US Census, CT Department of Labor and RKG A	ssociates, Inc	. (2018)		(inflation	10.2%)	for US do	ta.bls.gov	< inflat	ion					

Employment projections developed by the Connecticut Department of Labor, for the South Central Workforce Development Area (WDA), which includes many of the communities in Middlesex County, indicate an overall growth of slightly more than 23,400 jobs between 2014 and 2024. This equates to a growth rate of 6.6 percent. Employment losses are projected for the manufacturing, information services and the finance/insurance sectors. One-third of the WDA employment is concentrated in the education and health services sectors.

COMMUTING PATTERNS

According to data from the American Community Survey (ACS), there were approximately 6,780 employed residents in East Hampton (averaged 2006 through 2010). Slightly more than 17 percent of these resident workers also worked in East Hampton. Slightly more than 21 percent commuted to Middletown as their place of employment and another nine percent to Hartford. In comparisons, the ACS measured approximately 1,990 jobs in East Hampton with more than 58 percent held by resident workers. The remaining employment in East Hampton was filled by workers from neighboring communities, none predominating in terms of the percent of the employment they represented. Overall, East Hampton is a net exporter of employment by a margin of more than three to one.

Commuting information, for 2014, offered by CERC, suggests that the primary employment destinations for East Hampton residents is Middletown (21%) and Hartford (9%), a reshuffling since the ACS data. Primary commuters into town are from Colchester, Middletown and Portland, also a reshuffling since the ACS data.

WORKERS	IN RESI	DENCE & PLACE WHE	RE THEY WOR	K	JOBS IN PLACE & PLACE WHERE WORKERS RESIDE					
Workers in		Workplace of East Hampton, CT -		% of			Jobs in East Hampton, CT - Held by Workers			
Residence	#	Working Residents	#	Residents	Local Jobs	#	from	#	% of Jobs	
East Hampton, CT	6,783	East Hampton, CT	1,161	17.1%	East Hampton, CT	1,993	East Hampton, CT	1,161	58.3%	
		Top Ten	3,544	52.2%			Top Ten	573	28.8%	
		Middletown	1,449	21.4%			Montville	100	5.0%	
		Hartford	590	8.7%			Hebron	90	4.5%	
		East Hartford	274	4.0%			East Haddam	61	3.1%	
		Gastonbury	254	3.7%			Old Saybrook	55	2.8%	
		Portland	193	2.8%			Colchester	52	2.6%	
		New Britain	187	2.8%			Marlborough	48	2.4%	
		Marlborough	167	2.5%			East Hartford	44	2.2%	
		Rocky Hill	158	2.3%			Middletown	43	2.2%	
		Newington	149	2.2%			Portland	43	2.2%	
		Manchester	123	1.8%			Glastonbury	37	1.9%	
		Remainder	2,078	30.6%			Remainder	259	13.0%	

Source: American Community Survey (2006-2010); & RKG Associates, Inc. (2018)

The ACS data reports 4,780 workers in residence in Portland, with 19 percent (or about 900 workers) holding jobs in Portland. In contrast, the ACS data estimates 2,860 jobs in Portland with nearly 32 percent held by Portland residents. Another 15 percent of the Portland employment is comprised of workers commuting from nearby Middletown. Portland is also a net exporter of employment but by a lesser ratio of 1.7 to one.

Commuting information for 2014 offered by CERC, suggests that the primary locations Portland residents commute to for employment are Middletown and Hartford. This is consistent with the most recent ACS data, although the CERC data shows about 250 fewer residents commuting to Middletown. The ACS data shows commuters entering Portland for employment are coming from Middletown and East Hampton. This differs from the earlier CERC data which had commuters coming in from Portland and Middletown, then East Hampton as the third highest point of origin.

	WORKERS IN RESIDENCE & PLACE WHERE THEY WORK					JOBS IN PLACE & PLACE WHERE WORKERS RESIDE				
Workers in		Workplace of Portland, CT -					Jobs in Portland, CT - Held by			
Residence	#	Working Residents	#	% of Residents	Local Jobs	#	Workers from	#	% of Jobs	
Portland, CT	4,781	Portland, CT	912	19.1%	Portland, CT	2,860	Portland, CT	912	31.9%	
		Top Ten	2,693	56.3%			Top Ten	1,297	45.3%	
		Middletown	1,060	22.2%			Middletown	419	14.7%	
		Hartford	569	11.9%			East Hampton	193	6.7%	
		East Hartford	230	4.8%			Meriden	156	5.5%	
		Newington	186	3.9%			New Britain	125	4.4%	
		Glastonbury	149	3.1%			Glastonbury	114	4.0%	
		West Hartford	106	2.2%			Cromwell	72	2.5%	
		Windsor	106	2.2%			Marlborough	69	2.4%	
		Farmington	97	2.0%			Middlefield	62	2.2%	
		Rocky Hill	96	2.0%			Naugatuck	44	1.5%	
		Cromwell	94	2.0%			Haddam	43	1.5%	
		Remainder	1,176	24.6%			Remainder	651	22.8%	

Source: American Community Survey (2006-2010); & RKG Associates, Inc. (2018)

MARKET TRENDS

The following section presents data related to the real estate market and associated land uses in Portland, East Hampton, and in some cases Middletown, Middlesex County, and the State of Connecticut.

CORRIDOR DEVELOPMENT PATTERNS

While detailed assessors' database information is scarce in Portland and East Hampton, analyzing assessors' land use data can offer insights about basic development patterns along the

Route 66 corridor. Having roughly equivalent acreage along Route 66 (East Hampton is about 140 acres larger than Portland), Portland's corridor parcels are far more mixed-use in nature than East Hampton's. Roughly 80 percent of parcels fronting Route 66 in Portland are active, with 26 percent designated as residential, 14 percent commercial, and 5 percent industrial and the rest a mixture of institutional, infrastructural, and other uses.


The East Hampton portion of the corridor, by contrast, is nearly half residential land, with an additional 33 percent classified as vacant. Industrial, commercial, and mixed-use parcels comprise just 10 percent of East Hampton's frontage on Route 66., meaning that significant economic development would likely require changing uses or development on currently vacant parcels.

Acreage by Land Use Designation							
	East	East Hampton			ortland		
	Acres	% of Total		Acres	% of Total		
Residential	641	47%		317	26%		
Commercial	122	9%		170	14%		
Industrial	3	0%		63	5%		
Mixed-Use	1	0%		11	1%		
Vacant Land	452	33%		237	19%		
Other (institutional, open space, etc.)	146	11%		425	35%		
Total	1,365	100%		1,223	100%		
Source: Tighe & Bond, Town Assessors				•			


RESIDENTIAL MARKET TRENDS

HOME SALE PRICES

Portland and East Hampton have seen similar sale prices for single-family homes over the last 20 years, largely mirroring changes in median sale prices for both Middlesex County and the State of Connecticut. Of the two towns, East Hampton has seen higher prices and less volatility in home prices in most of the post-recession years. In 2017, East Hampton's median single-family home sold for \$248,250, a 5 percent increase since 2010. Portland's 2017 median price for a single-family home was \$240,250, 2 percent above its 2010 median. The pricing relationship between the two towns has fluctuated since 2000 (Portland having a higher single-family median in 7 years, East Hampton in 10). Portland was generally the higher-priced town from in the years from 2000 until the 2008 economic recession, while East Hampton has had generally higher median prices since the recession, possibly due to a higher rate of new development activity. Both towns have single-family home values greater than neighboring Middletown, commanding a 9 percent price premium in the average year.

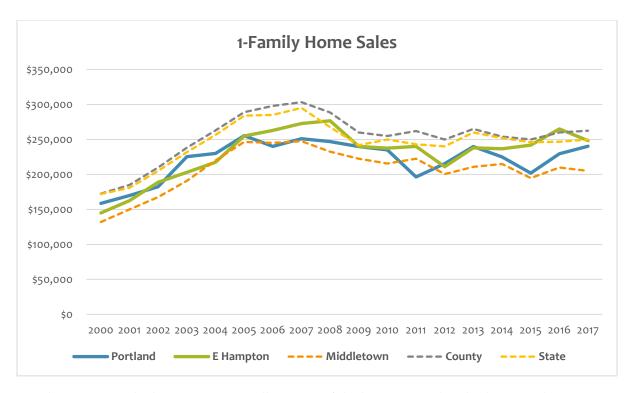

Condominiums, which represent a small portion of the housing stock in both towns, have seen prices struggle to recover from the 2008 recession across the County and State. East Hampton's 2017 median condominium price was \$149,750, 6 percent less than in 2010. Portland's median price was \$139,900, down 31 percent from 2010 despite volatility, due in part to the town's small number of transactions.

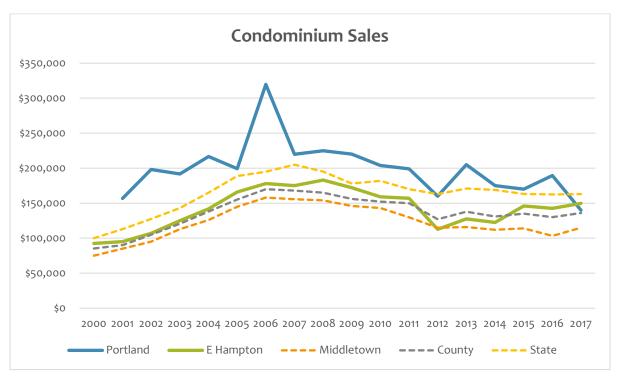

RESIDENTIAL ASKING RENTS

A review of asking rents in June 2018 revealed a different dynamic between the Route 66 corridor municipalities, as new multifamily development and refurbishment has driven rents and rent growth in Middletown to well above those seen in East Hampton & Portland.

Online apartment listing aggregators showed 73 units available for rent in Middletown, compared with 21 in East Hampton and just 4 in Portland. Middletown's 1-bedroom units had asking rents of \$1.64 per square foot, significantly higher than East Hampton's \$1.35 and Portland's \$1.23 (for a lone 1-bedroom listing). Most of Middletown's units are in newly constructed or refurbished multifamily buildings, with updated kitchens and various on-site amenities. East Hampton's existing listings, by contrast are typically older, less centrally located, and in many cases without having been updated with modern kitchens, bathrooms, etc. Most are in ageing multifamily developments, in more car-dependent areas than counterparts in Middletown.

Asking rent disparities are less pronounced in 3-bedroom units, which typically are entire single-family homes for rent. Portland and East Hampton's higher asking rents for 3-bedroom units may indicate a different type of renter than those in 1- and 2-bedroom units: less concerned with amenities, access, or new/refurbished interiors, and more concerned with space.

\$/SF Asking Rents, June 2018								
	Portland	East Hampton	Middletown					
1BR	\$1.23	\$1.35	\$1.64					
2BR	\$1.19	\$1.16	\$1.47					
3BR	\$1.09	\$1.08	\$0.97					
4BR	\$0.61	-	\$1.01					
Sample Size	4	21	73					
Sources: Apartments.com, Trulia, Zillow								

RESIDENTIAL CONTRACT RENTS

Portland's contract rents, while slowly rising, are still relative low compared to the County and State.² Over 70 percent of rental units in Portland were estimated to have cash rent less than \$1,000 per month in 2017, with the largest cohort being units that rent for between \$700 and \$999 per month. 195 units, or 26 percent of the town's rental total, had monthly cash rents of over \$1,000 per month; in Middlesex County overall, 31 percent of units rent for over \$1,000 per month.

_

² US Census, Alteryx, RKG Associates

East Hampton, meanwhile, had higher estimated contract rents in 2017, with nearly 39 percent of all rental units renting for more than \$1,000 a month – a larger share than that seen in the County.

Rental Housing Stock by Cash Rent Range, 2017 Estimates								
	East	Portland	Middlesex					
	Hampton	roitialia	County					
\$ 0 - \$99	0%	3%	2%					
\$ 100 - \$199	1%	0%	3%					
\$ 200 - \$299	0%	6%	3%					
\$ 300 - \$399	0%	0%	0%					
\$ 400 - \$499	1%	1%	3%					
\$ 500 - \$599	6%	4%	3%					
\$ 600 - \$699	6%	14%	11%					
\$ 700 - \$999	42%	42%	40%					
\$1,000+	39%	26%	31%					
No Cash Rent	6%	4%	4%					
Source: Alteryx,	Source: Alteryx, RKG Associates							

UNITS IN STRUCTURE

Both East Hampton and Portland are predominately comprised of owner-occupied residential units, as noted previously, and as reinforced by the high percentages of single-family units as a component of the housing mix, at 85 percent and 81 percent, respectively for 2017. Both exceed the estimated 74 percent for the county. Larger rental properties (those with ten or more units) has increased for both towns, but are projected to account for five percent or less of the residential units, per town, in 2022. This is in contrast to Middlesex County where such units are projected to account ten percent of the residential housing by 2022.

Also of note, by 2022 more than 25 percent of the East Hampton housing stock will have been built post- 2000, suggesting that one-fourth of the housing stock will be comparatively new. This compares with 20 percent for Portland and a little more than 16 percent countywide.

Selected Summary Demographics -			Cha	nge	Estimated	Projected	% Δ 2017	
Housing by Units and	Built Post 2000	Census 2000	Census 2010	#	%	2017	2022	to 2022
East Hampton, CT								
Total Housing Units		4,418	5,485	1,067	24.2%	5,600	6,079	8.6%
	Single Family	3,381	4,631	1,250	37.0%	4,772	5,189	8.7%
	Two family	39	141	102	261.5%	128	140	9.4%
	3 to 9 units	144	323	179	124.3%	339	366	8.0%
	10 units or more	34	328	294	864.7%	297	316	6.4%
Units Built post 2000		-	917	917	0.0%	1,125	1,604	42.6%
Portland, CT								
Total Housing Units		3,534	4,077	543	15.4%	4,118	4,370	6.1%
	Single Family	2,698	3,253	555	20.6%	3,343	3,569	6.8%
	Two family	85	407	322	378.8%	371	383	3.2%
	3 to 9 units	18	284	266	1477.8%	278	283	1.8%
	10 units or more	6	133	127	2116.7%	126	135	7.1%
Units Built post 2000		-	537	537	0.0%	620	872	40.6%
Middlesex County, CT								
Total Housing Units		67,309	74,837	7,528	11.2%	75,266	78,904	4.8%
	Single Family	45,168	54,383	9,215	20.4%	55,562	58,549	5.4%
	Two family	924	5,358	4,434	479.9%	4,935	5,046	2.2%
	3 to 9 units	1,322	5,932	4,610	348.7%	6,110	6,355	4.0%
	10 units or more	2,966	8,383	5,417	182.6%	7,880	8,152	3.5%
Units Built post 2000		-	7,596	7,596	0.0%	9,072	13,134	44.8%
East Hampton as % of	County							
Total Housing Units		6.6%	7.3%	0.008	11.7%	7.4%	7.7%	3.5%
	Single Family	7.5%	8.5%	0.010	13.8%	8.6%	8.9%	3.2%
	Two family	4.2%	2.6%	(0.016)	-37.7%	2.6%	2.8%	7.0%
	3 to 9 units	10.9%	5.4%	(0.054)	-50.0%	5.5%	5.8%	3.8%
	10 units or more	1.1%	3.9%	0.028	241.3%	3.8%	3.9%	2.8%
Units Built post 2000		0.0%	12.1%	0.121	0.0%	12.4%	12.2%	-1.5%
Portland as % of Cour	nty							
Total Housing Units		5.3%	5.4%	0.002	3.8%	5.5%	5.5%	1.2%
	Single Family	6.0%	6.0%	0.000	0.1%	6.0%	6.1%	1.3%
	Two family	9.2%	7.6%	(0.016)	-17.4%	7.5%	7.6%	1.0%
	3 to 9 units	1.4%	4.8%	0.034	251.6%	4.5%	4.5%	-2.1%
	10 units or more	0.2%	1.6%	0.014	684.3%	1.6%	1.7%	3.6%
Units Built post 2000		0.0%	7.1%	0.071	0.0%	6.8%	6.6%	-2.9%

UNIT VALUES

Median Home Values have risen nominally since the 2010 Census, after strong value appreciation in the years from 2000 to 2010. The median home value in Portland in 2017 was estimated to be \$290,935, and in East Hampton, \$282,839. That each town's median value is approximately \$40,000 to \$50,000 greater than 2017 median sale prices would indicate that most recent sales have been in homes below the 50th percentile in terms of value.

Home values are forecasted to increase by 9-10 percent in both towns by 2022, driven by appreciation in units worth \$300,000 or more. The number of lower-value, mostly older units is projected to decrease by at least 8 percent in both Portland and East Hampton by 2022, as more units are updated and redevelopment projects take root.

Selected Summary	Census	Census	Change		Estimated		Projected	% Δ 2017
Demographics - Housing Values	2000	2010	#	%	2017		2022	to 2022
East Hampton, CT								
Total Housing Units	4,418	5,485	1,067	24.2%	5,600		6,079	8.6%
less than \$50,000	67	42	(25)	-37.3%	98		98	0.0%
\$50,000 to \$150,000	1,651	334	(1,317)	-79.8%	396		361	-8.8%
\$150,000 to \$300,000	1,474	2,148	674	45.7%	1,924		1,756	-8.7%
\$300,000 or more	137	1,792	1,655	1208.0%	1,953		2,533	29.7%
Median Home Value	\$148,156	\$ 276,446	\$128,290	86.6%	\$ 282,839	\$	312,337	10.4%
Portland, CT								
Total Housing Units	3,534	4,077	543	15.4%	4,118		4,370	6.1%
less than \$50,000	13	15	2	15.4%	19		19	0.0%
\$50,000 to \$150,000	1,253	76	(1,177)	-93.9%	136		117	-14.0%
\$150,000 to \$300,000	1,255	1,695	440	35.1%	1,482		1,318	-11.1%
\$300,000 or more	116	1,299	1,183	1019.8%	1,432		1,805	26.0%
Median Home Value	\$152,530	\$ 283,005	\$130,475	85.5%	\$ 290,935	\$	317,784	9.2%
Middlesex County, CT								
Total Housing Units	67,309	74,837	7,528	11.2%	75,266		78,904	4.8%
less than \$50,000	1,093	955	(138)	-12.6%	1,331		1,210	-9.1%
\$50,000 to \$150,000	17,213	2,986	(14,227)	-82.7%	3,826		3,422	-10.6%
\$150,000 to \$300,000	21,791	20,930	(861)	-4.0%	18,891		16,687	-11.7%
\$300,000 or more	4,175	25,105	20,930	501.3%	25,501		30,620	20.1%
Median Home Value	\$162,962	\$ 300,800	\$137,838	84.6%	\$ 305,556	\$	337,545	10.5%
East Hampton as % of County								
Total Housing Units	6.6%	7.3%	0.008	11.7%	7.4%		7.7%	3.5%
less than \$50,000	6.1%	4.4%	(0.017)	-28.3%	7.4%		8.1%	10.0%
\$50,000 to \$150,000	9.6%	11.2%	0.016	16.6%	10.4%		10.5%	1.9%
\$150,000 to \$300,000	6.8%	10.3%	0.035	51.7%	10.2%		10.5%	3.3%
\$300,000 or more	3.3%	7.1%	0.039	117.5%	7.7%	<u> </u>	8.3%	8.0%
Median Home Value	90.9%	91.9%	0.010	0.0%	92.6%		92.5%	0.0%
Portland as % of County								
Total Housing Units	5.3%	5.4%	0.002	3.8%	5.5%		5.5%	1.2%
less than \$50,000	1.2%	1.6%	0.004	32.1%	1.4%		1.6%	10.0%
\$50,000 to \$150,000	7.3%	2.5%	(0.047)	-65.0%	3.6%		3.4%	-3.8%
\$150,000 to \$300,000	5.8%	8.1%	0.023	40.6%	7.8%		7.9%	0.7%
\$300,000 or more	2.8%	5.2%	0.024	86.2%	5.6%		5.9%	5.0%
Median Home Value	93.6%	94.1%	0.005	0.0%	95.2%		94.1%	-1.1%

OFFICE & INDUSTRIAL MARKETS

The office markets in both Portland and East Hampton are reported to be extremely limited. Most of the office space along the Corridor can be found in the downtown areas of both communities and are primarily serving local professional offices. Some office spaces are attached to industrial buildings and are integrated into the operations of the entire facility.

Although not within the boundaries of the Route 66 Corridor, one of the few listings found for professional office space was in the Portland Professional Building. The building has limited space for lease between \$6 and \$11 per square foot per year, triple net. This building appears to

have had some basic remodeling done, potentially increasing its competitiveness in the marketplace.³

On the industrial side, most of the industrial space listings found were also in Portland. Much of the industrial development in Portland is located in the Brownstone Industrial Park and along Route 66 in largely undeveloped industrially-zoned land holdings. A small number of industrial spaces were listed for lease as of June 2018. The building at 91 Main Street, located directly adjacent to the Arrigoni Bridge and the river, was offering 5,000 square feet of industrial space in a larger building for \$4.95 per square foot per year, triple net. On the other side of Route 66, 107,000 square feet were available for an undisclosed asking rent. Both listings were in older industrial buildings, and new additions to Portland's industrial inventory have not occurred in a substantial way although much industrial land is available.

Discussions with Portland staff indicate a very low inventory of industrial space and an ever-growing demand. The quality of the community, ease of access, and existing industrial base make Portland an ideal location. With spaces in the existing industrial park built-out and at near full occupancy, the Town is shifting focus to the industrially-zoned land in the IP zoning district along Route 66. The extension of basic utilities is currently limiting these parcels from building out, but plans are in place to extend water services to the site in the future.


East Hampton does not have a large industrial base directly along Route 66, but does have a large industrial cluster along Skinner Street that could intensify over time. New smaller industrial spaces are being constructed in phases by Rand Development to the east of Long Crossing Road, and is expected to build out as a mix of self-storage space, small boutique office/industrial, and contractor storage. These may be the first new industrial spaces to come online in East Hampton in the near future.

RETAIL

Retail Gap Analysis is a method for measuring a geographic area's potential for additional retail development. It forecasts the area's demand for consumer spending based upon residents' demographics, incomes, and geography, and compares it with the retail sales of businesses that operate in the same area. "Leakage" is when an area has a greater demand for retail than the supply provided to it, and residents subsequently go outside the area to spend. All markets experience some sales leakage, and new opportunities are often born out of recapturing the spending of existing residents. The analysis that follows considers the demand and leakage factors within a 10-minute drive of the intersection of Route 66 and Route 151, roughly approximating the study corridor. Given that future retail opportunities in both towns would likely exist primarily along the corridor and in their town centers, this geography should represent their primary catchment area well. The map below shows the catchment areas for the intersection of Route 66 and Route 151, at 5-minute, 10-minute, and 15-minute drive time levels.

-

³ LoopNet, 6/27/2017

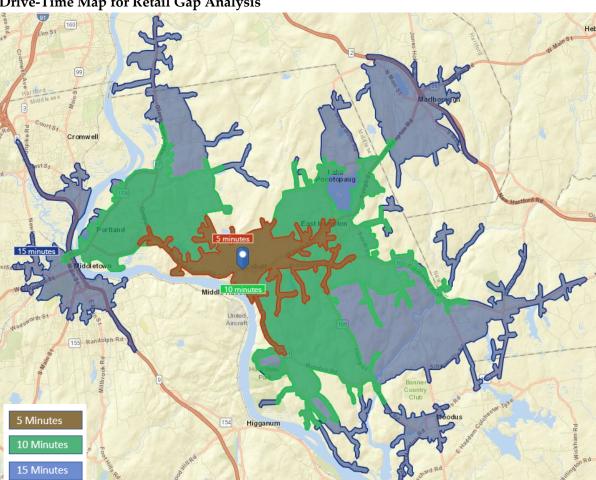

Drive-Time Map for Retail Gap Analysis

The corridor's catchment area, which includes Downtown Middletown's shops and restaurants, shows significant sales leakage in nearly every category, meaning that the area's retail is not meeting locally-generated demand. The model counts 98 retail establishments within the 10minute drive, with a total square footage of 268,200 SF. This equates to just under 18 retail square feet per capita, well below the national average of 25 retail square feet per capita.

The two largest leakage categories are "general merchandise" stores and grocery stores, with demand outpacing supply by at least \$20 million in each. General merchandise stores capture a broad cross-section of retailers that includes big box stores like Target, Wal-Mart and others. Leakage in this category indicates that a significant percentage of corridor residents drive more than 10 minutes - likely to Newington, Cromwell, or elsewhere - to do their shopping at these types of businesses. Likewise, grocery stores present a significant supply shortfall, as Stop & Shop outposts in East Hampton and Middletown are the only large options near the corridor (others like the Adams Hometown Market and small stores in Downtown Middletown play an important role but still leak spending to other communities). Restaurants show nearly \$14 million in leaked

sales, as do clothing stores – two industry sectors that can serve as anchors of walkable, vibrant town centers if done correctly. If one assumes that 20 percent of sales leakage could be recovered through new businesses or the expansion of sales in existing businesses, the corridor could support up to an additional 70,000 square feet of retail or restaurants.⁴

Estimated Retail Demand and Sales,				10-Min	ute Drive Time				
by NAICS Sector - 10 minute drive of Route 66 @ Route 151 - Route 66	NAICS			10-74			Estimated SF	Estimated SF per	Supportabl SF throug
Corridor Study	Code	Demand/HH	Demand	Sales	(Under) /Over	Store Count		Capita	Recaptur
Total		\$37,032	\$222,227,726	\$110,010,292		98	268,223	17.84	70,588
Furniture & Home Furnishings Stores	442	\$1,882	\$11,294,101	\$1,099,370	(\$10,194,731)	4	5,541	0.37	8,421
Furniture Stores	4421	\$954	\$5,723,491	\$0	(\$5,723,491)	0	0	0.00	3,816
Home Furnishings Stores	4422	\$928.28	\$5,570,609	\$1,080,590	(\$4,490,019)	4	5,541	0.37	4,605
Electronics & Appliance Stores	443	\$1,731	\$10,388,106	\$4,873,035	(\$5,515,071)	4	16,519	1.10	3,739
Bldg Materials, Garden Equip. & Supply Stores	444	\$3,119	\$18,714,288	\$9,851,122	(\$8,863,166)	11	28,834	1.33	4,495
Bldg Material & Supplies Dealers	4441	\$2,785	\$16,715,282	\$7,991,656	(\$8,723,626)	8	19,979	1.33	4,362
Lawn & Garden Equip & Supply Stores	4442	\$333	\$1,999,006	\$1,859,466	(\$139,540)	3	8,855	0.59	133
Food & Beverage Stores	445	\$8,641	\$51,853,282	\$30,184,644	(\$21,668,638)	11	50,435	3.35	7,885
Grocery Stores	4451	\$7,385	\$44,319,994	\$22,513,055	(\$21,806,939)	3	40,933	2.72	7,930
Specialty Food Stores	4452	\$349	\$2,095,321	\$2,184,704	\$89,383	2	4,326	0.29	(35
Beer, Wine & Liquor Stores	4453	\$906	\$5,437,967	\$5,486,885	\$48,918	6	5,176	0.34	(9
Health & Personal Care Stores	446,4461	\$3,023	\$18,143,640	\$32,815,651	\$14,672,011	7	85,235	5.67	
Clothing & Clothing Accessories Stores	448	\$3,489	\$20,936,281	\$1,890,607	(\$19,045,674)	6	3,816	0.25	12,180
Clothing Stores	4481	\$2,479	\$14,879,335	\$751,024	(\$14,128,311)	4	2,731	0.18	10,275
Shoe Stores	4482	\$388	\$2,330,490	\$0	(\$2,330,490)	0	0	0.00	1,412
Jewelry, Luggage & Leather Goods Stores	4483	\$621	\$3,726,456	\$1,139,584	(\$2,586,872)	2	1,085	0.07	493
Sporting Goods, Hobby, Book & Music Stores	451	\$1,674	\$10,047,131	\$2,563,997	(\$7,483,134)	3	11,107	0.74	6,469
Sporting Goods/Hobby/Musical Instr Stores	4511	\$1,484	\$8,907,911	\$2,290,260	(\$6,617,651)	2	10,179	0.68	5,882
Book, Periodical & Music Stores	4512	\$190	\$1,139,220	\$273,737	(\$865,483)	1	928	0.06	587
General Merchandise Stores	452	\$6,757	\$40,549,030	\$3,586,470	(\$36,962,560)	3	9,678	0.64	16,034
Department Stores Excluding Leased Depts.	4521	\$4,553	\$27,324,830	\$0	(\$27,324,830)	0	0	0.00	10,822
Other General Merchandise Stores	4529	\$2,204	\$13,224,200	\$3,581,034	(\$9,643,166)	3	9,678	0.64	5,213
Miscellaneous Store Retailers	453	\$1,785	\$10,712,095	\$5,637,900	(\$5,074,195)	14	15,017	1.00	5,109
Florists	4531	\$156	\$933,988	\$70,732	(\$863,256)	1	236	0.02	576
Office Supplies, Stationery & Gift Stores	4532	\$487	\$2,922,997	\$1,056,737	(\$1,866,260)	2	4,803	0.32	1,697
Used Merchandise Stores	4533	\$1 <i>7</i> 6	\$1,055,893	\$2,115,664	\$1,059,771	6	7,984	0.53	
Other Miscellaneous Store Retailers	4539	\$966	\$5,799,217	\$2,394,767	(\$3,404,450)	6	9,978	0.66	2,837
Food Services & Drinking Places	722	\$4,931	\$29,589,772	\$17,507,496	(\$12,082,276)	35	42,039	2.80	6,256
Restaurants	7221	\$4, 7 11	\$28,268,451	\$14,662,522	(\$13,605,929)	31	33,707	2.24	6,256
Special Food Services	7223	\$142	\$853,779	\$1,951,917	\$1,098,138	2	6,100	0.41	
Drinking Places - Alcoholic Beverages	7224	\$78	\$467,542	\$893,057	\$425,515	2	2,233	0.15	

Source: ESRI, Dun & Bradstreet, RKG Associates, Inc. (2018)

LAND USE AND ZONING

The land use and development patterns along the Route 66 Corridor are a diverse mix of land use types ranging from open space and vacant land to town centers and industrial parks. There are wide swaths of the corridor that remain undeveloped providing natural corridors and views between East Hampton and Portland. The downtowns of both East Hampton and Portland are accessed via Route 66. In the case of East Hampton, Route 66 runs through the downtown area providing access to commercial, institutional, and residential properties as well as Pocotopaug Lake. Route 66 also provides access to East Hampton's historic town center to the south side along Main Street.

At the opposite end of the Corridor, Route 66 intersects with Main Street in Downtown Portland. While the project study area terminates at this point along Route 66, this is an important

-

⁴ ESRI Business Analyst

destination and terminus point providing access to the commercial, industrial, civic/institutional, and recreational uses in and around Downtown Portland. Heading further west and over the Arrigoni Bridge, Main Street connects into Downtown Middletown and Wesleyan University with a plethora of restaurants, retail, and institutional uses.

LAND USE COMPOSITION

To understand how parcels fronting Route 66 are being used, RKG Associates aggregated land use data by parcel from data provided by Tighe & Bond and RiverCOG. The parcels that front Route 66 within our study area total 2,583 acres of land. Of that total, 37 percent is currently being used as residential, even more specifically single-family residential. In East Hampton, 47 percent of the land is residential, while only 28 percent is residential on the Portland side. Portland's land use composition is more diverse than East Hampton, with 15 percent of its land fronting Route 66 used as commercial and 6 percent as industrial.⁵

Both communities have frontage parcels with designations of uses other than residential, commercial, and industrial. For example, 27 percent of land along Route 66 is currently listed as vacant and 22 percent split between institutional and designated rights-of-way. In East Hampton, 33 percent of the land along Route 66 is vacant, and 8 percent is comprised of institutional and rights-of-way. In Portland, 12 percent of the land along Route 66 is used for institutional property and right-of-way.

Land Use Category		Hampton	Р	ortland
Land Ose Category	Acres	% of Total	Acres	% of Total
Residential	639	47%	317	28%
Commercial	122	9%	170	15%
Industrial	3	0.2%	63	6%
Mixed-Use	1	0.1%	11	1%
Vacant Land	452	33%	237	21%
Other (institutional, open space, etc.)	146	11%	324	29%
Total	1,363	100%	1,122	100%

ZONING DISTRICTS

Zoning is the primary regulatory tool municipalities have in place to set development policy in their jurisdiction. The Route 66 Corridor is a mix of zoning districts that closely mimic existing land use patterns and includes fourteen different zoning districts between East Hampton (7) and Portland (7). ⁶

⁵ See Appendix for corridor-wide land use map.

⁶ See Appendix for East Hampton and Portland zoning maps.

RESIDENTIAL ZONES

East Hampton has three residential zoning districts that span Route 66. These include:

- Lakeside and Village Residential (R-1)
- Single Family Residential (R-2)
- Resource Residential (R-3)

As one progresses from R-1 to R-3, the intensity of development decreases particularly for those parcels and lots served by sewer. The R-1 district allows a minimum lot size of 20,000 square feet or roughly a half-acre. The R-2 and R-3 zones allow 40,000 and 45,000 square foot lots, respectively. Uses allowed are predominately restricted to single- and two-family homes as-of-right and institutional and active adult residential uses through Special Permit. Although the latter is only allowed in the R-1 zone.

Portland has two residential zoning districts that regulate land along Route 66. These include:

- Rural Residential (RR)
- Residential 10,000 sqft (R-10)

Rural residential zoning is Portland's least dense district which has a one-acre minimum lot size, compared to R-10 which has a 10,000-square foot minimum lot size. These two residential zones, while very different in the density of development allowed, have very similar use regulations. These districts are primarily reserved for the development single-family homes, accessory dwellings, civic and institutional uses, home occupations, and some agricultural uses.

COMMERCIAL ZONES

East Hampton has three commercial zoning districts that span Route 66. These include:

- Commercial (C)
- Professional Office / Residential (PO/R)
- Design Development (DD)

East Hampton's Commercial zone is intended to provide orderly forms of development for areas primarily intended to serve professional and business uses. As such, the Town allows retail stores of less than 25,000 square feet, business offices, professional, office and financial institutions as permitted uses with a site plan. Other large commercial uses such as a theater, hospital, restaurant, hotel/motel, etc. are allowed but by Special Permit. The Town has specific site and building guidelines in the zoning bylaw to help developers navigate the design and approval process. The Town has set a minimum lot size in the C zone at 20,000 square feet.

To encourage commercial development transition areas between the more intense Commercial Zone uses and residential districts, the Town has created the PO/R zone. This zoning district tries to supplement the Commercial Zone (C) while retaining the residential character of the area. As such, developers can build professional offices, financial institution space, and executive and

business offices on 20,000 square foot lots under site plan review. For larger-scale development of business offices, research facilities, schools/colleges, retail development, and light industrial, the Town has created the Design Development (DD) Zone. This zoning district has a minimum lot size of five acres, and encourages larger-scale coordinated development with higher aesthetic and connectivity standards than a smaller 20,000 square foot commercial lot development. To provide the Planning Board with additional control over the development proposal, the Town has made all development in the DD Zone by Special Permit.

On the Portland side of the Corridor, there are three commercial zoning districts which include:

- Designed Business (B-1)
- General Business (B-2)
- Central Business District (B-3)

Along the south side of Route 66 near the border of East Hampton, the Town of Portland designated several parcels with the B-1 Designed Business Zone. The intent of this zoning district was to have specific uses in well-designed buildings to control the limited expansion of commercial enterprise in this location. The rural nature of this section of Route 66 lends itself to a smaller-scale business look and feel that is in concert with surrounding properties and neighborhoods. The Town has included additional site plan standards in this section of the bylaw to direct property owners and developers toward a specific size, scale, and design. Permitted uses in the B-1 Zone are limited, and most development is done through Special Permit. This could include medical offices, personal services, civic buildings, restaurants, gas stations, and retail stores. The minimum lot size for development tin this district is one-acre.

The General Business Zone covers a large portion of the parcels that front along Route 66. Within the B-2 Zone many of the allowable uses are still shown as requiring a Special Permit, and many of the uses that are permitted through site plan only overlap with those in the B-1 Zone. Exceptions to this include hotels/motels, theaters, liquor stores, bowling alleys, and bed and breakfasts. Some of the larger commercial users have a bit more flexibility in the B-2 compared to the B-1. The dimensional regulations are very similar though, with a one-acre minimum lot size.

Finally, the Central Business District (B-3) Zone coves the area of Downtown Portland with parcels abutting Route 66 and Main Street. For the purposes of this corridor study, very few parcels in the B-3 Zone fall within the boundaries of this study except those at the corner of Route 66 and Main Street. The B-3 Zone is intended to permit business that would fit within a traditional town center, and even allows some modest mixed-use with residential units above commercial businesses. Many of the larger-scale business uses that are allowed in the B-2 Zone are not allowed in the B-3, and the Town has reduced the minimum lot size considerable to a 20,000-square foot minimum. This reflects the smaller, more compact parcels along Main Street typical of an older New England downtown setting.

INDUSTRIAL ZONES


East Hampton has one industrial zoning district, Industrial (I) located along Route 66 at Old West High Street. This zoning district is situated between several residential subdivisions and just south of the High School. Within the Industrial Zone most common industrial uses are permitted by site plan review including uses like research, printing, lumber yards, warehousing, and sales rooms. Special Permit requirements are used to permit uses such as manufacturing of noxious products, power plants, kennels, and storage of motor vehicles. The I Zone carries a 40,000-square foot minimum lot size and substantial front and rear setbacks.


Portland has two industrial districts:


- Industrial (I)
- Planned Industrial (IP)

From a use standpoint, the two districts are quite similar in terms of what is allowed by site plan review or Special Permit. The Industrial (I) Zone is a bit more favorable toward smaller construction, contractor, and storage uses and toward the production/manufacturing of plastics, chemicals, and more noxious products. This zoning district covers the entirety of the Brownstone Industrial Park where much of the manufacturing and production-based facilities are currently located in Portland. The IP Zone, which is located between Camp Ingersol Road and Grandview Terrace, is meant to serve as an opportunity for coordinated planning of larger industrial park development. The current IP Zone along Route 66 is challenged by access to water and sewer, and the extension of utilities are critical to the success and build-out of industrial space.


3. APPENDIX

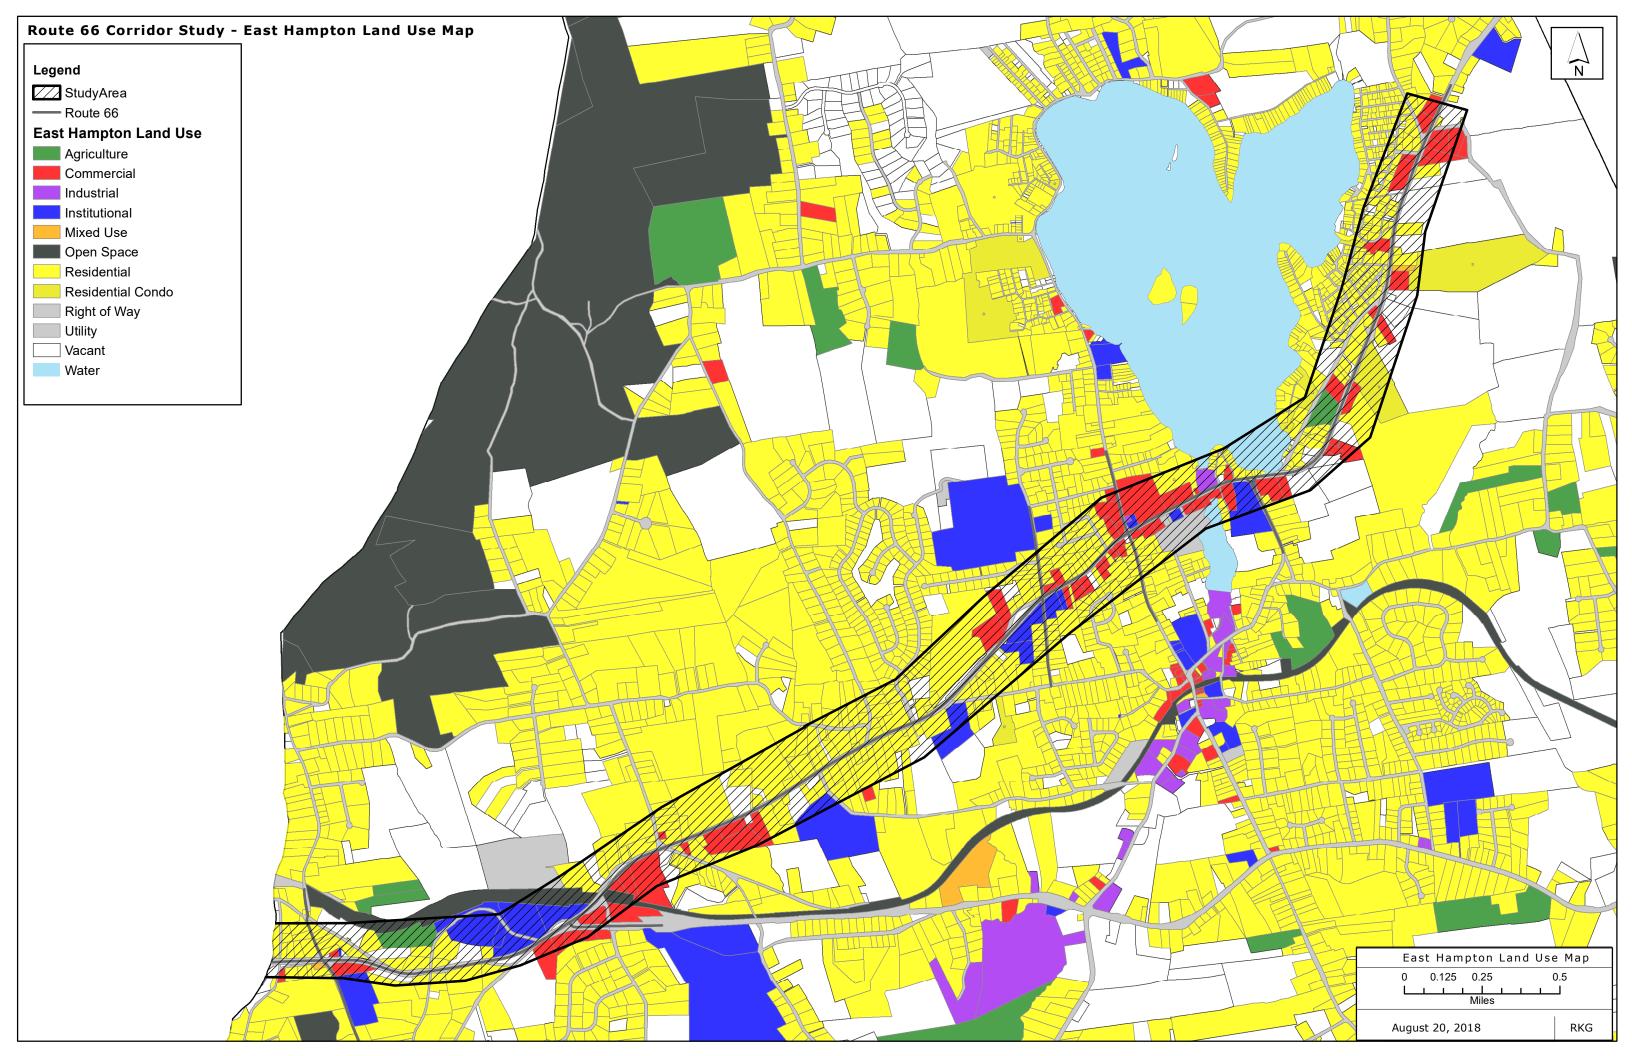


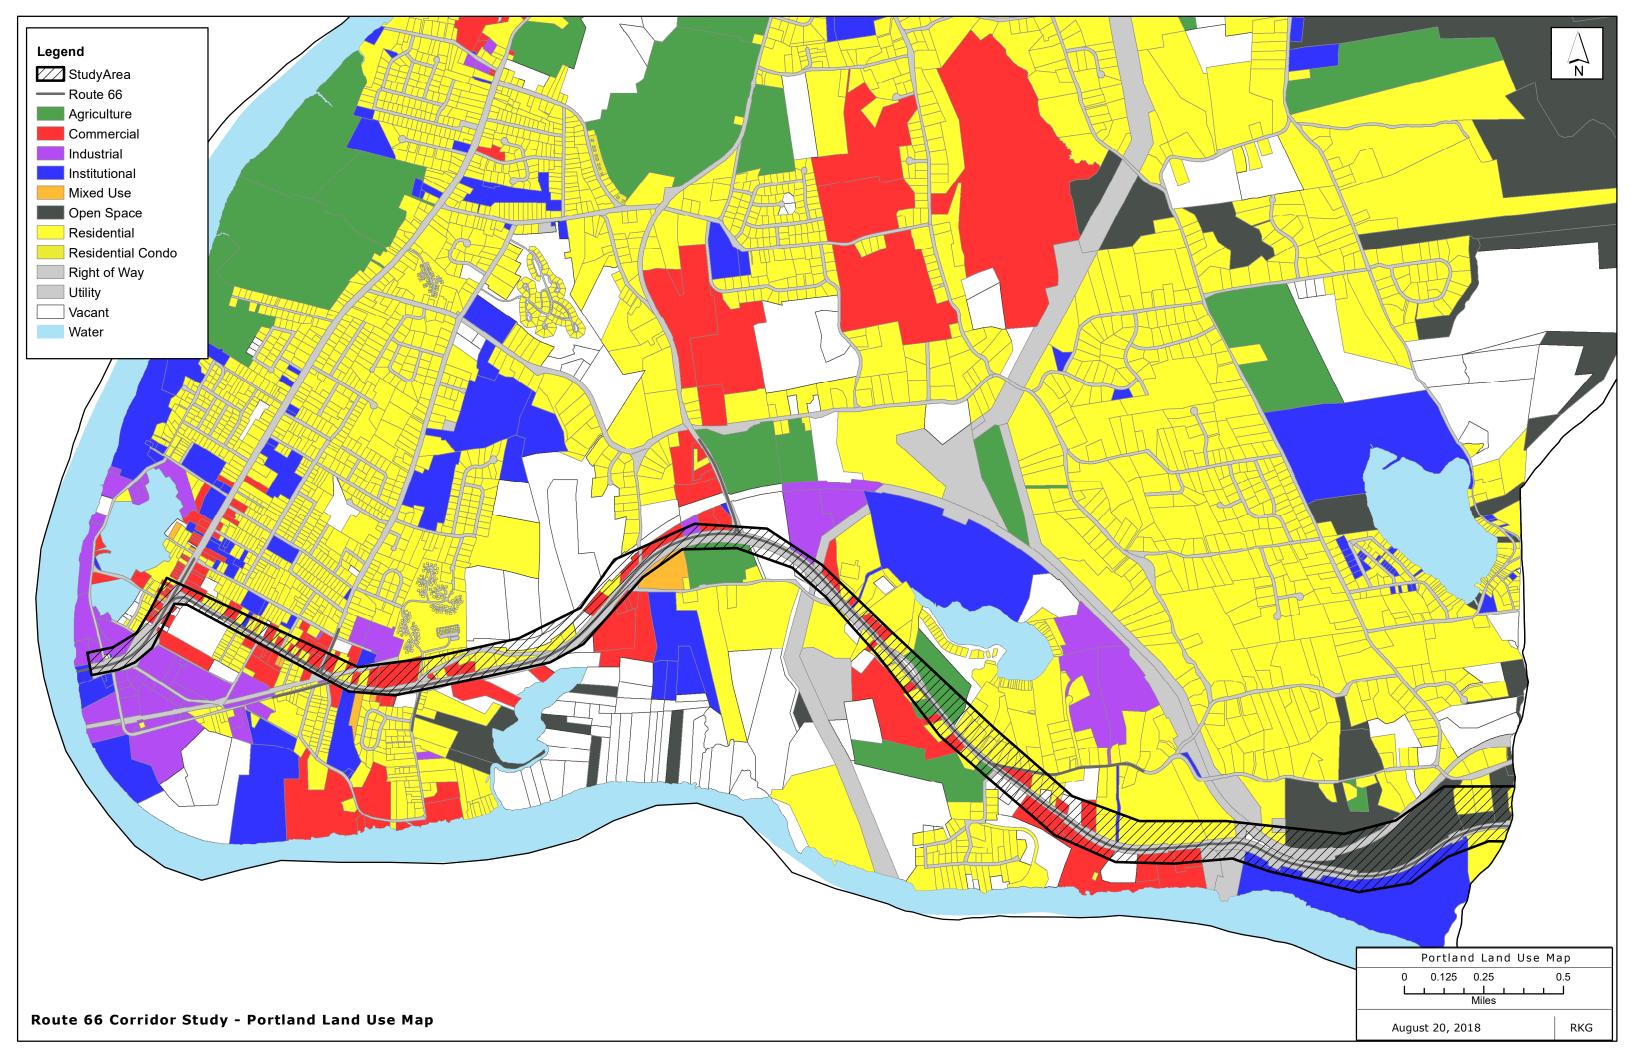

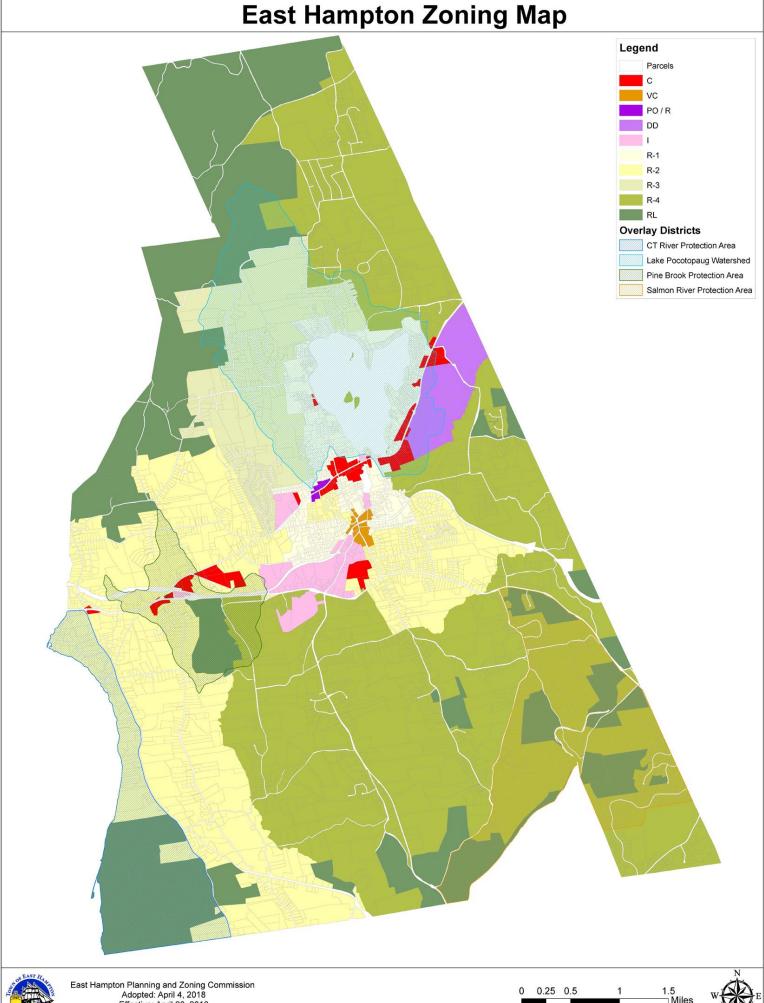





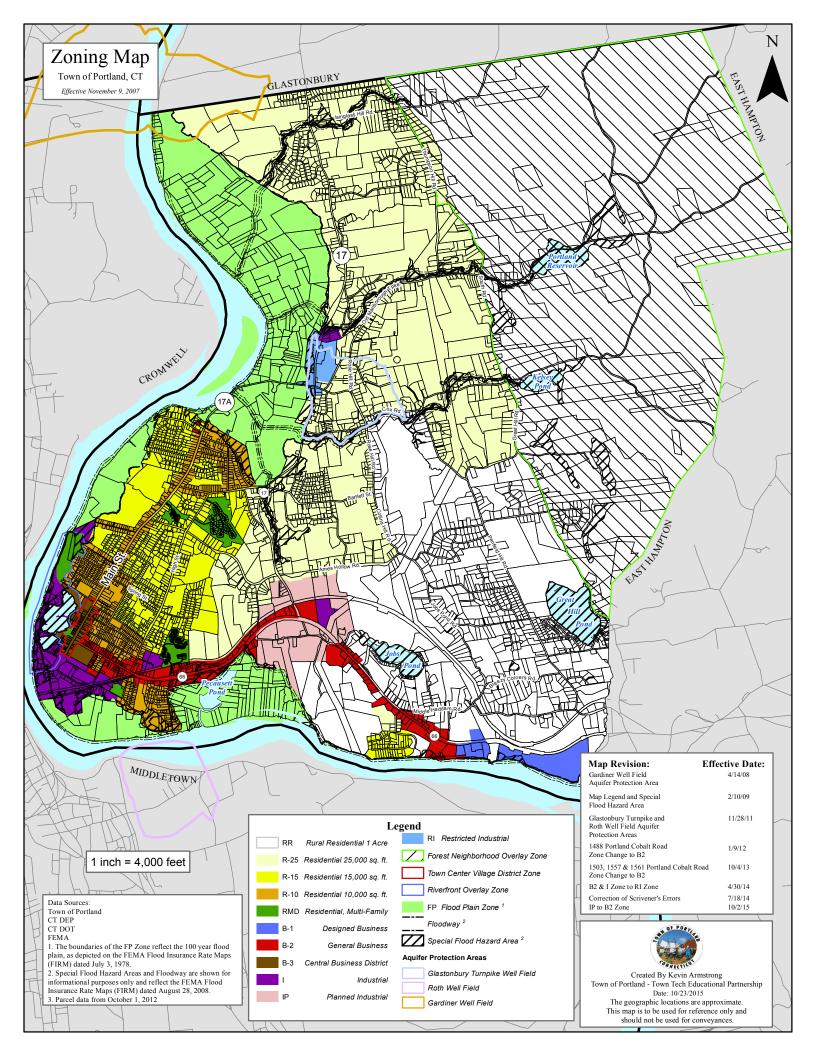


APPENDIX M Online Public Engagement Survey Results (SurveyMonkey)	
Tighe & Bond	

Online Public Engagement Survey Results (SurveyMonkey)

An online-only survey (SurveyMonkey.com) was conducted as part of the Route 66 Engineering Planning Study existing condition assessment. The purpose was to collect additional information from the public on existing deficiencies and possible improvements to consider including in the study recommendations. The survey was active from August 1, 2018 to September 30, 2018, during which time 485 responses were submitted. The public was notified of the online survey through e-mails, social media outlets, and other direct interactions with the public. The following summarized the key results and a comprehensive summary of all the results follows.

Survey Demographics

Seventy percent of respondents reside in East Hampton, 27% live in Portland, and 3% reside in various Towns in the region.

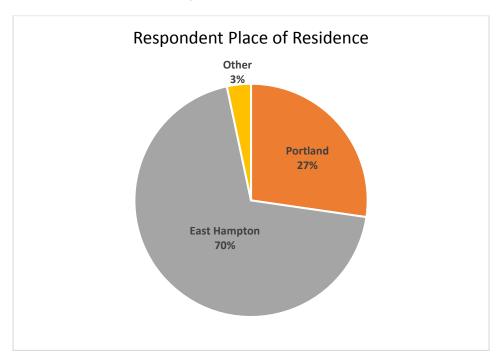

Fifty two percent of respondents live along the Route 66 Corridor. Eighteen percent of respondents work at a business along the corridor. The following percentages denote the Towns in which the respondents work:

- 16% in East Hampton
- 13% are either retired or do not work
- 10% in Middletown
- 9% in Portland
- 9% in Hartford
- 3% in East Hartford
- 2% in Glastonbury
- The remaining respondents work in various Towns through the state

Travel

Route 66 is utilized in a variety of ways. Eighty eight percent of respondents use Route 66 for shopping and local errands. Relating to regional travel, 62% commute to the West towards Middletown, 59% commute towards Marlborough, 72% traveling to Route 2 for regional destinations, and 73% traveling to Route 9 and I-91 for regional destinations. Twenty seven percent of respondents use Route 66 for recreation, 12% use it for walking or biking, 6% for driving to school. Less than 1% of respondents utilize it for waiting for a bus or walking to school.

Of the respondents who commute east toward Marlborough, 60% travel toward Route 2 West, 51% to both Route 2 East and Route 66 East towards Hebron, 31% travel toward I-91 North, 26% to I-91 South, and 25% to Route 3. Only 4% of this group utilize the Park and Ride at Route 2 – Exit 12 and take the commuter bus to Downtown Hartford.

Of the respondents who commute west toward Middletown, 62% continue to Route 9 North, 59% west on Route 66 toward Middlefield, 44% to Route 9 South, 42% to I-91 North, and 37% to I-91 South.

All respondents travel using a personal vehicle to travel on Route 66. Between 7% and 12% of respondents use a motorcycle, work vehicle, bicycle or walk. Less than 2% of respondents travel using a tractor trailer, take the bus or use a rideshare/ carpool program on Route 66.


Fitness and Recreation

Respondents in general do not use Route 66 for fitness or recreation. Sixty percent do not use the roadway at all for fitness, 26% use it 1-3 days per week, and 14% use it 4-7 days per week. Eighty percent walk, 32% bike, and 18% run.

Seventy percent of respondents use the Airline Trail. Forty one percent use it a few times a year, 17% monthly, 11% over twenty times per month, and 8% a few times per month. Over 80% of Airline Trail users drive to a parking lot to access the Airline Trail, while 16% either walk or ride a bicycle to access the trail. Almost 40% of users access the trail at Cranberry Bog in East Hampton. Eleven percent of users access the Airline Trail from Main Street in East Hampton. The remaining trail users access the trail at various locations throughout Portland, East Hampton and surrounding towns.

Respondents expressed their most important concerns and/ or suggested improvements with the Airline Trail. Seventy percent of respondents agree the Airline Trail should be connected through East Hampton to the new segment in Portland. Improvements trail users would like to see on the Airline Trail include:

- Improved connectivity between East Hampton, Portland, and Middletown
- Improved or additional access points (parking facilities, ease in accessing)
- Increased amenities (bathrooms, garbage facilities, wheel chair accessibility)
- Improved trail maintenance (erosion issues, tree trimming, litter)
- Improved safety (illegal motorized vehicles, road crossings, lighting, parking lot theft)
- Increased information and signage (maps, trailhead locations, parking)

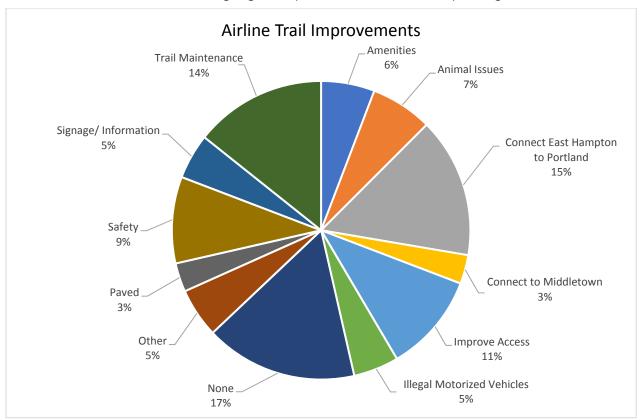

Transit

Almost 80% of respondents are not aware that Middletown Area Transit (MAT) operates bus service between East Hampton and Downtown Middletown. A majority of respondents would not begin to use transit if it were more readily available. However, over half of respondents believe bus stop amenities should be installed along the MAT Route F to encourage more bus travel. Most agree that bus service should be maintained to provide service to residents regardless of the operation cost.

Land Use and Future Development

In Portland, over 70% of respondents would like to see more retail/ restaurants, 30% more professional services, 29% mixed-use development, 17% light manufacturing businesses, 12% corporate offices, 10% single-family homes, and 10% multi-family homes. Twenty percent of respondents would like to see no new development in Portland.

In East Hampton, 68% of respondents would like to see more retail/ restaurants, 31% more professional services, 27% mixed-use development, 19% light manufacturing businesses, 10% corporate offices, 9% single-family homes, and 9% multi-family homes. Twenty-four percent of respondents would like to see no new development in East Hampton.

Outside of the Downtown areas of Portland and East Hampton, 63% of respondents would like to see more retail/ restaurants, 36% more professional services, 23% mixed-use development, 22% light manufacturing businesses, 16% corporate offices, 13% multi-family homes, and 10% single-family homes. Twenty-four percent of respondents would like to see no new development in East Hampton. Twenty percent of respondents would like to see no new development along the corridor.


Q1 What Town do you live in?

Answered: 487 Skipped: 0

Q2 What Town do you work in?


Answered: 487 Skipped: 0

Q3 Do you live along the Route 66 Corridor?

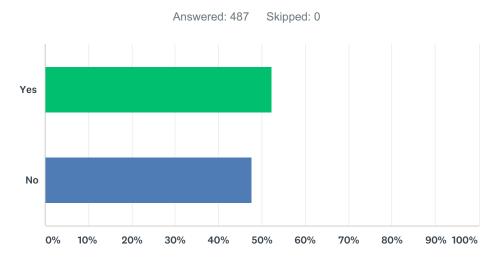

ANSWER CHOICES	RESPONSES	
Yes	52.36%	255
No	47.64%	232
TOTAL		487

Q4 Do you work at a business located along the Route 66 Corridor?

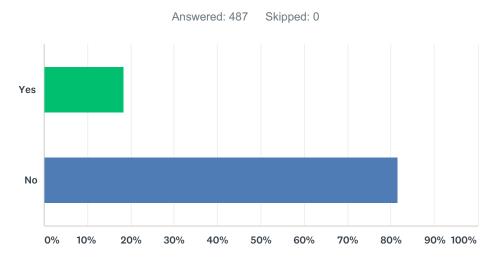


ANSWER CHOICES	RESPONSES	
Yes	18.48%	90
No	81.52%	397
TOTAL		487

Q5 Please provide your e-mail address if you would like to be added to the Study E-mail List to receive periodic study updates.

Answered: 229 Skipped: 258

ANSWER CHOICES	RESPONSES	
Name	0.00%	0
Company	0.00%	0
Address	0.00%	0
Address 2	0.00%	0
City/Town	0.00%	0
State/Province	0.00%	0
ZIP/Postal Code	0.00%	0
Country	0.00%	0
Email Address	100.00%	229
Phone Number	0.00%	0

Q6 How do you use Route 66 in Portland and/or East Hampton (Check all that apply)

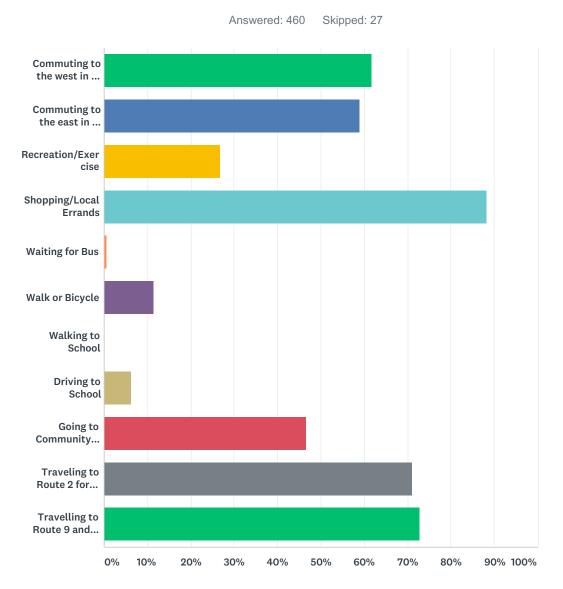


ANSWER CHOICES	RESPONSES	
Commuting to the west in the direction of Middletown	61.74%	284
Commuting to the east in the direction of Marlborough	58.91%	271
Recreation/Exercise	26.74%	123
Shopping/Local Errands	88.26%	406
Waiting for Bus	0.65%	3
Walk or Bicycle	11.52%	53
Walking to School	0.22%	1
Driving to School	6.30%	29
Going to Community Activities	46.74%	215

Route 66 Corridor Study Public Engagement Survey


Traveling to Route 2 for Regional Desitinations	71.09%	327
Travelling to Route 9 and I-91 for Regional Destinations	72.83%	335
Total Respondents: 460		

Q7 How do you travel on Route 66 (Check all that apply)

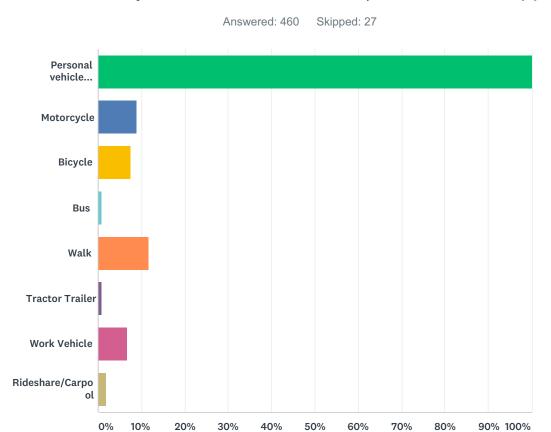


ANSWER CHOICES	RESPONSES	
Personal vehicle (Car/Truck)	100.00%	460
Motorcycle	8.91%	41
Bicycle	7.61%	35
Bus	0.87%	4
Walk	11.74%	54
Tractor Trailer	0.87%	4
Work Vehicle	6.74%	31
Rideshare/Carpool	1.96%	9
Total Respondents: 460		

Q8 If you answered "Commute to the east in the Direction of Marlborough" please check all other State Roads, in addition to Route 66, that you commute on to get to your job.

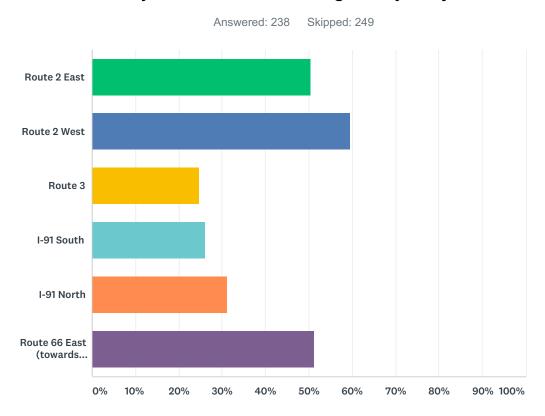


ANSWER CHOICES	RESPONSES	
Route 2 East	50.42%	120
Route 2 West	59.66%	142
Route 3	24.79%	59
I-91 South	26.05%	62
I-91 North	31.09%	74
Route 66 East (towards Hebron)	51.26%	122
Total Respondents: 238		

Q9 If you answered "Commuting to the east in the direction of Marlborough", do you utilize the Park and Ride at Route 2 - Exit 12 and ride the commuter bus to Downtown Hartford

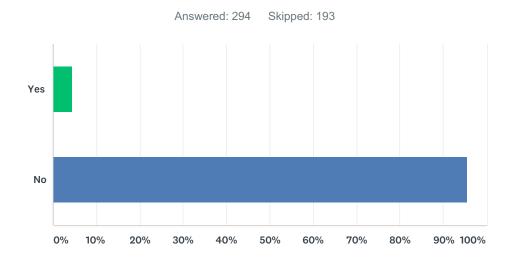


ANSWER CHOICES	RESPONSES	
Yes	4.42%	13
No	95.58%	281
TOTAL		294

Q10 If you answered "Commuting to the west in the direction of Middletown" please check all other State Routes you commute on to get to your job.

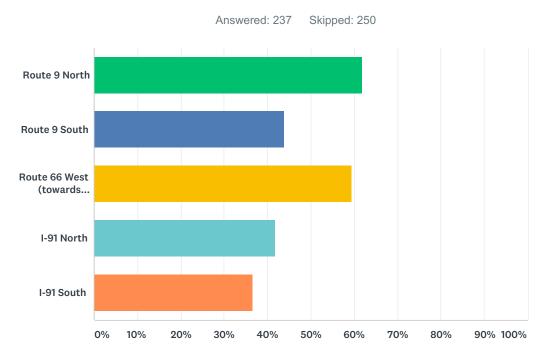


ANSWER CHOICES	RESPONSES	
Route 9 North	62.03%	147
Route 9 South	43.88%	104
Route 66 West (towards Middlefield)	59.49%	141
I-91 North	41.77%	99
I-91 South	36.71%	87
Total Respondents: 237		

Q11 How many days a week do you use Route 66 for Fitness/Recreation

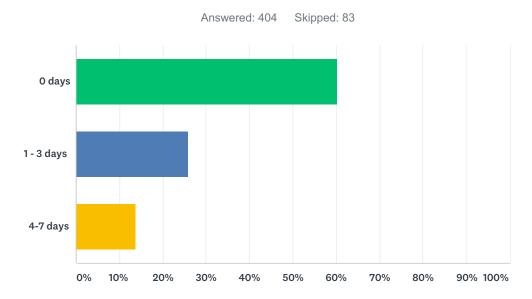


ANSWER CHOICES	RESPONSES	
0 days	60.15%	243
1 - 3 days	25.99%	105
4-7 days	13.86%	56
TOTAL		404

Q12 What forms of exercise? (Check all that apply)

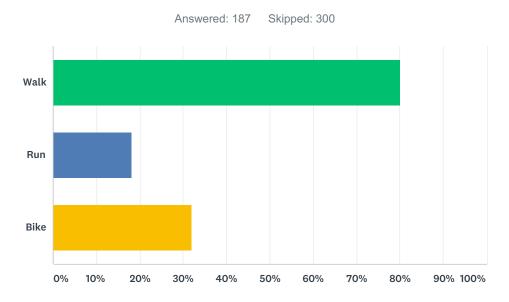


ANSWER CHOICES	RESPONSES	
Walk	80.21%	150
Run	18.18%	34
Bike	32.09%	60
Total Respondents: 187		

Q13 Do you use the Airline Trail?

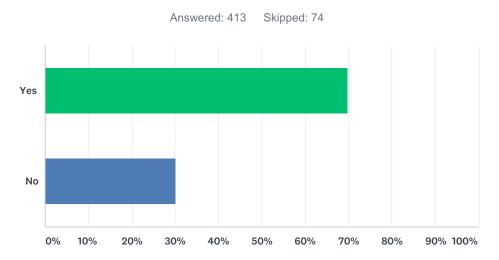


ANSWER CHOICES	RESPONSES	
Yes	69.98%	289
No	30.02%	124
TOTAL		413

Q14 When weather permits I use the Airline Trail

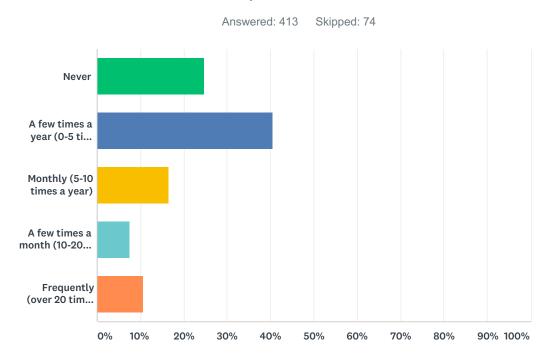

ANSWER CHOICES	RESPONSES	
Never	24.70%	102
A few times a year (0-5 times a year)	40.68%	168
Monthly (5-10 times a year)	16.46%	68
A few times a month (10-20 a year)	7.51%	31
Frequently (over 20 times a year)	10.65%	44
TOTAL		413

Q15 How do you get to the Airline Trail

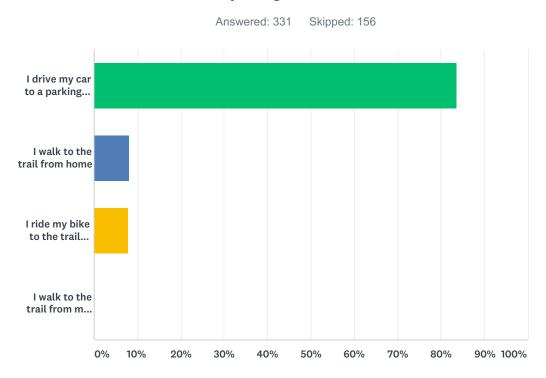

ANSWER CHOICES	RESPONSES	
I drive my car to a parking lot	83.69%	277
I walk to the trail from home	8.16%	27
I ride my bike to the trail from home	7.85%	26
I walk to the trail from my office	0.30%	1
TOTAL		331


Q16 Where do you access the Airline Trail?

Answered: 319 Skipped: 168


Q17 What is the most important issue with the Airline Trail that should be improved?

Answered: 224 Skipped: 263

Q18 Please rank the following statements as they relate to the Airline Trail in the Study Area

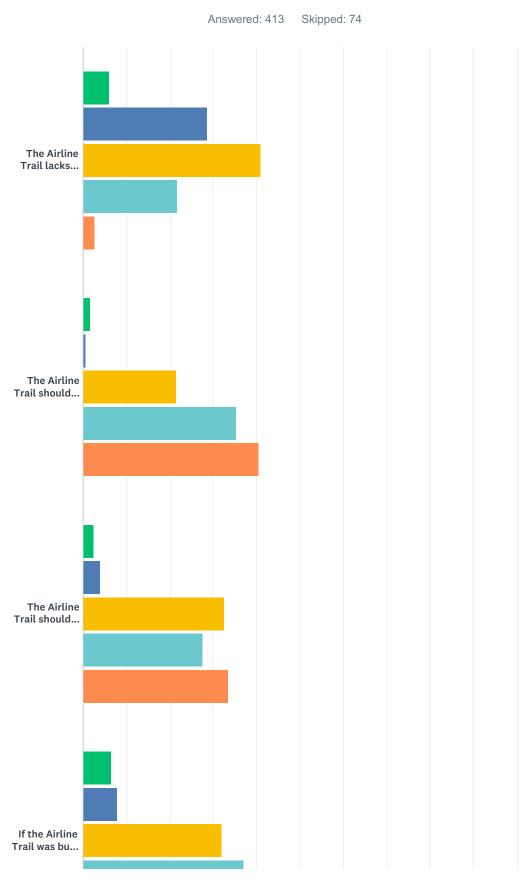


Route 66 Corridor Study Public Engagement Survey

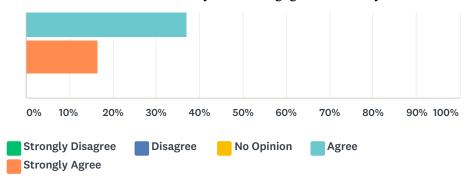


	STRONGLY DISAGREE	DISAGREE	NO OPINION	AGREE	STRONGLY AGREE	TOTAL
The Airline Trail lacks enough parking which discourages use.	6.05% 25	28.57% 118	40.92% 169	21.79% 90	2.66% 11	413
The Airline Trail should be connected through East Hampton to the new segment of the trail in Portland	1.69% 7	0.73% 3	21.55% 89	35.35% 146	40.68% 168	413
The Airline Trail should be extended through Portland and connect to the Arrigoni Bridge	2.42% 10	3.87% 16	32.69% 135	27.60% 114	33.41% 138	413
If the Airline Trail was built as a wide paved path next to the roadway in some sections I would use it.	6.54% 27	7.99% 33	31.96% 132	37.05% 153	16.46% 68	413

Q19 Do you know that Middletown Area Transit operates bus service between East Hampton and Downtown Middletown (F Route)?

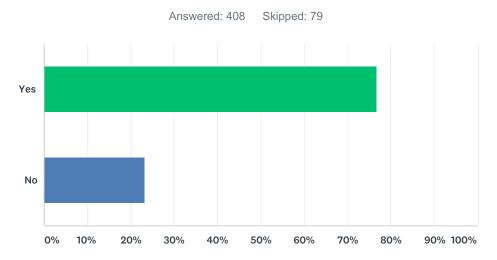


ANSWER CHOICES	RESPONSES	
Yes	76.72%	313
No	23.28%	95
TOTAL		408

Q20 Please rank the following statements as they relate to the Route 66 Corridor Study Area

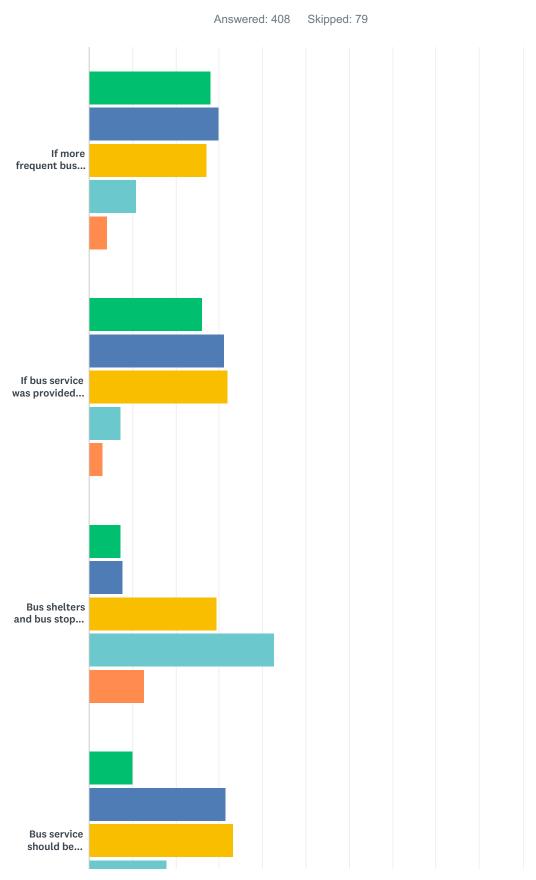


Route 66 Corridor Study Public Engagement Survey

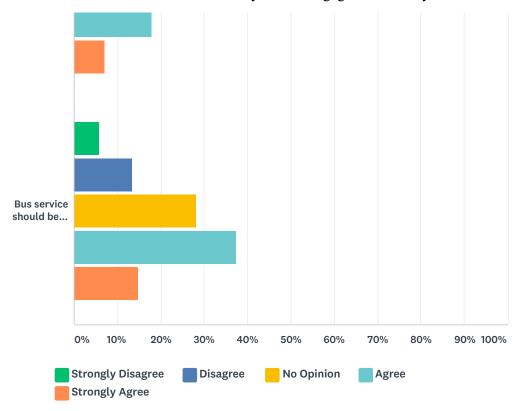


	STRONGLY DISAGREE	DISAGREE	NO OPINION	AGREE	STRONGLY AGREE	TOTAL
If more frequent bus service was provided, I would consider taking the bus towards Downtown Middletown	27.94% 114	29.90% 122	27.21% 111	10.78% 44	4.17% 17	408
If bus service was provided, I would consider taking the bus towards the Park and Ride in Marlborough to commute to Hartford	26.23% 107	31.13% 127	32.11% 131	7.35% 30	3.19% 13	408
Bus shelters and bus stop signs should be installed at marked stops and improved to encourage more bus travel.	7.35% 30	7.84% 32	29.41% 120	42.65% 174	12.75% 52	408
Bus service should be discontinued if it is too expensive to operate	10.05% 41	31.62% 129	33.33% 136	17.89% 73	7.11% 29	408
Bus service should be maintained to serve citizens that rely on it regardless of the cost	5.88% 24	13.48% 55	28.19% 115	37.50% 153	14.95% 61	408

Q21 What types of uses and development would you like to see more along Route 66 in Portland? (Check all that apply)

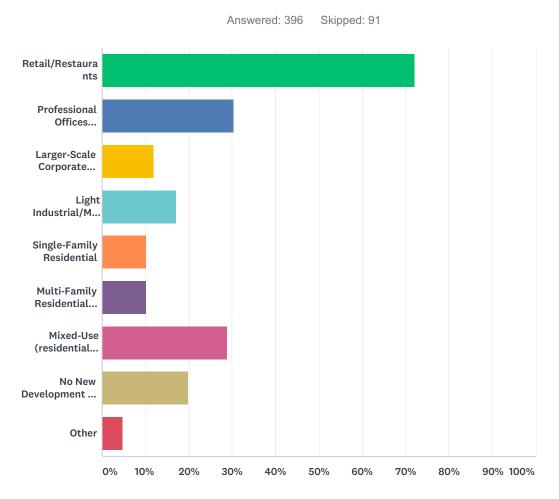


ANSWER CHOICES	RESPONSES	
Retail/Restaurants	72.22%	286
Professional Offices (medical, lawyer, accountant, etc)	30.30%	120
Larger-Scale Corporate Offices	11.87%	47
Light Industrial/Manufacturing	17.17%	68
Single-Family Residential	10.35%	41
Multi-Family Residential (Townhomes, Condos, Apartments)	10.35%	41
Mixed-Use (residential above first floor commercial)	28.79%	114
No New Development in Town	19.95%	79
Other	4.80%	19
Total Respondents: 396		

Q22 What types of development would you like to see/see more of along Route 66 in East Hampton? (Check all that apply)

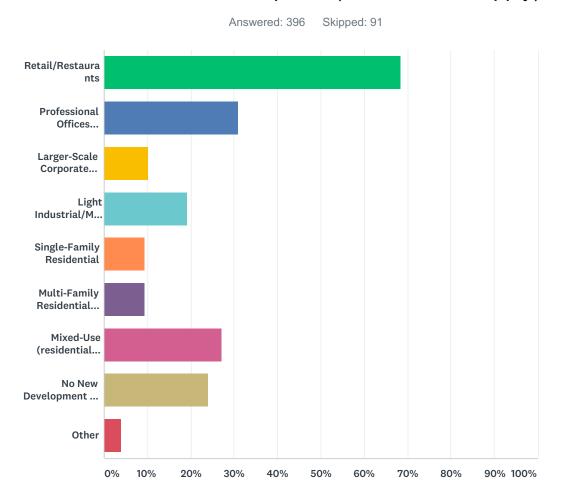

ANSWER CHOICES	RESPONSES	
Retail/Restaurants	68.43%	271
Professional Offices (medical, lawyer, accountant, etc)	31.06%	123
Larger-Scale Corporate Offices	10.35%	41
Light Industrial/Manufacturing	19.19%	76
Single-Family Residential	9.34%	37
Multi-Family Residential (Townhomes, Condos, Apartments)	9.34%	37
Mixed-Use (residential above first floor commercial)	27.27%	108
No New Development in Town	23.99%	95
Other	4.04%	16
Total Respondents: 396		

Q23 What types of uses would you like to see/see more of along the Route 66 Corridor outside of the two downtowns? (Check all that apply)

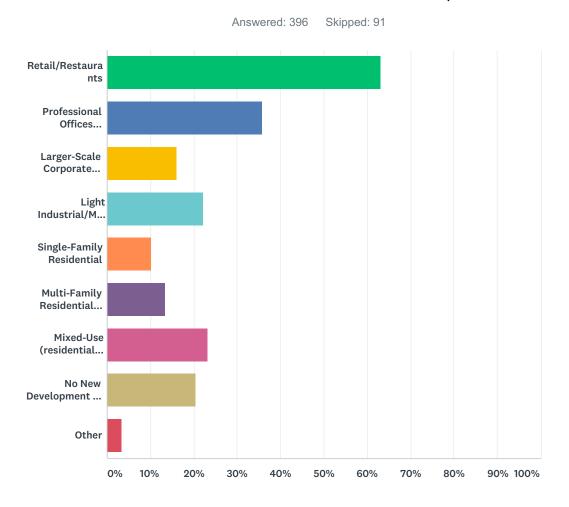

ANSWER CHOICES	RESPONSES	
Retail/Restaurants	63.13%	250
Professional Offices (medical, lawyer, accountant, etc)	35.86%	142
Larger-Scale Corporate Offices	16.16%	64
Light Industrial/Manufacturing	22.22%	88
Single-Family Residential	10.35%	41
Multi-Family Residential (Townhomes, Condos, Apartments)	13.38%	53
Mixed-Use (residential above first floor commercial)	23.23%	92
No New Development in Town	20.45%	81
Other	3.28%	13
Total Respondents: 396		